



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822

Tel: +82-31-323-6008 Fax: +82-31-323-6010

<http://www.ltalab.com>

Dates of Tests: May 11~19, 2011

Test Report S/N: LR500111105C

Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

VSOXM-1000

APPLICANT

Yeonhwa M Tech Co., Ltd.

| | | |
|---------------------------|---|--------------------------|
| Device Category | : | VHF FM Transceiver |
| Manufacturing Description | : | FM TRANSCEIVER |
| Manufacturer | : | Yeonhwa M Tech Co., Ltd. |
| Trade mark | : | Xradio |
| Model name | : | XM-1000 |
| Variant model name | : | XM-1200 |
| Serial number | : | Identical prototype |
| FCC Rule Part(s) | : | §2, §22, §74, §90 |
| Frequency Range | : | 136 ~ 174MHz |
| RF Output Power | : | 50W |
| Channel Separation | : | 12.5kHz |
| Emission Designators: | : | 10K4F3E |
| Data of issue | : | May 20, 2011 |

This test report is issued under the authority of:

The test was supervised by:

Hyun-Chae You, Manager

Il-Shin kim, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

| | |
|-------------------------------------------------------------------|----|
| 1. GENERAL INFORMATION'S | 3 |
| 2. INFORMATION'S ABOUT TEST ITEM | 4 |
| 3. TEST REPORT | 5 |
| 3.1 SUMMARY OF TESTS | 5 |
| 3.2 REQUIREMENTS | 6 |
| 3.2.1 CARRIER OUTPUT POWER (CONDUCTED) | 6 |
| 3.2.2 UNWANTED EMISSIONS (TRANSMITTER CONDUCTED) (CONDUCTED) ---- | 7 |
| 3.2.3 FIELD STRENGTH OF SPURIOUS RADIATION | 10 |
| 3.2.4 EMISSION MASKS (OCCUPIED BANDWIDTH) | 12 |
| 3.2.5 TRANSIENT FREQUENCY BEHAVIOR | 13 |
| 3.2.6 AUDIO FREQUENCY RESPONSE | 14 |
| 3.2.7 MODULATION LIMITING | 15 |
| 3.2.8 FREQUENCY STABILITY (TEMPERATURE VARIATION) | 16 |
| 3.2.9 FREQUENCY STABILITY (VOLTAGE VARIATION) | 17 |
| 3.2.10 NECESSARY BANDWIDTH AND EMISSION BANDWIDTH | 18 |
| APPENDIX | |
| APPENDIX I TEST EQUIPMENT USED FOR TESTS | 19 |
| APPENDIX II TEST PLOTS | 21 |

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No. | Validity | Reference |
|--------|---------|-------------------|------------|---------------------|
| NVLAP | U.S.A | 200723-0 | 2011-09-30 | ECT accredited Lab. |
| KCC | KOREA | KR0049 | 2013-04-24 | EMC accredited Lab. |
| FCC | U.S.A | 610755 | 2014-04-27 | FCC filing |
| FCC | U.S.A | 649054 | 2011-05-26 | FCC CAB |
| VCCI | JAPAN | R-2133, C-2307 | 2011-06-21 | VCCI registration |
| VCCI | JAPAN | T-2009 | 2013-12-23 | VCCI registration |
| IC | CANADA | 5799A | 2012-05-14 | IC filing |

2. Information's about test item

2-1 Client & Manufacturer

Company name : Yeonhwa M Tech Co., Ltd.
 Address : 3F, Yukyong B/D, 544-6, Gasan-dong, Geumcheon-gu, Seoul, Korea
 TEL / FAX : +82-70-7434-7274 / +82-2-3281-7271

2-2 Equipment Under Test (EUT)

Trade name : VHF FM Transceiver
 FCC ID : VSOXM-1000
 Model name : XM-1000
 Variant model name : XM-1200
 Serial number : Identical prototype
 Date of receipt : May 11, 2011
 EUT condition : Pre-production, not damaged
 Frequency Range : 136 ~ 174 MHz
 RF output power : 50W
 Channel Separation : 12.5kHz
 Duty cycle TX power : 5(Tx) : 5(Rx) : 90(Stand-by)
 Speaker Impedance : 16 ohm
 Audio Output Power : 1.0Watt across an 16-ohm load
 Power Source : 13.8V DC

2-3 Tested frequency

| | LOW | MID | HIGH |
|-----------------|---------|---------|---------|
| Frequency (MHz) | 136.025 | 155.025 | 173.975 |

2-4 Ancillary Equipment

| Equipment | Model No. | Serial No. | Manufacturer |
|-------------|-----------|------------|--------------|
| MIC | MM-100 | N/A | N/A |
| CAR BATTERY | BX40R | N/A | ATLASBX |

3. Test Report

3.1 Summary of tests

| FCC Part Section(s) | Parameter | Status (note 1) |
|------------------------|---------------------------------------------|--------------------|
| 2.1046 (a) | Carrier Output Power (Conducted) | C |
| 2.1051 | Unwanted Emissions (Transmitter Conducted) | C |
| 2.1053 (a) | Field Strength of Spurious Radiation | C |
| 2.1049 (c) (1) | Emission Masks (Occupied Bandwidth) | C |
| 90.214 | Transient Frequency Behavior | C |
| 2.1047 (a) | Audio Low Pass Filter (Voice Input) | C |
| 2.1047 (a) | Audio Frequency Response | C |
| 2.1047 (b) | Modulation Limiting | C |
| 2.1055 (a) (1) | Frequency Stability (Temperature Variation) | C |
| 2.1055 (b) (1) | Frequency Stability (Voltage Variation) | C |
| 2.202 (g) | Necessary Bandwidth and Emission Bandwidth | C |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

The sample was tested according to the following specification:

*FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and Part 22, Part 74 Subpart H, Part 90.

*ANSI C63.4

*TIA/EIA 603, Edition C

3.2 Transmitter requirements

3.2.1 Carrier Output Power (Conducted)

Definition:

- The carrier power output for a transmitter for this service is the power available at the output terminals of the transmitter when the output terminals are connected to the standard transmitter load.

Specification : 47 CFR 2.1046 (a)
 Test method : ANSI/TIA/EIA-603-C-2004

Measurement Procedure:

- The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R.F. Power Meter.

| TEST CONDITIONS | | Carrier power(W) | | |
|-------------------------|-----------------------|---------------------|-------------|-------------|
| Power level (W) | Channel Spacing (kHz) | 136.025 MHz | 155.025 MHz | 173.975 MHz |
| 50 | 12.5 | 50.28 | 50.21 | 50.05 |
| Measurement uncertainty | | $\pm 0,45\text{dB}$ | | |

3.2.2 Unwanted Emissions (Transmitter Conducted)

Definition:

- Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies which are outside a band sufficient to ensure transmission of information of required quality for the class of communication desired.

Specification : 47 CFR 2.1051
Test method : ANSI/TIA/EIA-603-C-2004

Measurement Procedure:

- The emissions were measured for the worst case as follows:
 - (1) Within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (2) From the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40GHz, whichever is lower.
- The magnitude of spurious emissions that are attenuated more than 20dB below the permissible value need not be specified.

LIMIT

$$= 43 + 10 \log_{10} (P) \text{ dBc (or -13 dBm)}$$

Measurement Data: 12.5KHzOPERATING FREQUENCY : 136.025 MHzMEASURED OUTPUT POWER : 47.01 dBm = 50.28 W

MODULATION SIGNAL : FM

LIMIT : $43 + 10 \log_{10} (W)$ = 60.01 dBc

| Freq. (MHz) | Level (dBm) | Level (dBc) | Freq. (MHz) | Level (dBm) | Level (dBc) |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 272.15 | -30.34 | 77.35 | | | |
| 408.31 | -36.31 | 83.32 | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Remarks

No other emissions were detected at a level greater than 20dB below limit.

Measurement Data:

OPERATING FREQUENCY : 155.025 MHzMEASURED OUTPUT POWER : 47.01 dBm = 50.21 W

MODULATION SIGNAL : FM

LIMIT : $43 + 10 \log_{10} (W)$ = 60.01 dBc

| Freq. (MHz) | Level (dBm) | Level (dBc) | Freq. (MHz) | Level (dBm) | Level (dBc) |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 310.1 | -30.42 | 77.43 | | | |
| 464.5 | -37.15 | 84.16 | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Remarks

No other emissions were detected at a level greater than 20dB below limit.

Measurement Data: 12.5KHzOPERATING FREQUENCY : 173.975 MHzMEASURED OUTPUT POWER : 46.99 dBm = 50.05 W

MODULATION SIGNAL : FM

LIMIT : $43 + 10 \log_{10} (W)$ = 59.99 dBc

| Freq. (MHz) | Level (dBm) | Level (dBc) | Freq. (MHz) | Level (dBm) | Level (dBc) |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 348.0 | -30.18 | 77.17 | | | |
| 522.0 | -36.25 | 83.24 | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Remarks

No other emissions were detected at a level greater than 20dB below limit.

3.2.3 Field Strength of Spurious Radiation

Definition:

- Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

Specification : 47 CFR 2.1053(a)
Test method : ANSI/TIA/EIA-603-C-2004

Measurement Procedure:

- The test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
- In the field, the test sample was placed on a wooden turntable above ground at three meters away from the search antenna.
- The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
- The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
- The field strength of each emission within 20dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
- From the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40GHz, whichever is lower.
- The worst case for all channels is shown.

LIMIT

$$= 43 + 10 \log_{10} (P) \text{ dBc (or -13 dBm)}$$

Measurement Data: Attached for Worst Case

Measurement Data:

OPERATING FREQUENCY : 173.975 MHz

MEASURED OUTPUT POWER : 46.99 dBm = 50.05 W

MODULATION SIGNAL : FM

LIMIT : $43 + 10 \log_{10} (W)$ = 59.99 dBc

| Freq. (MHz) | Pol. (H/V) | Reading (dBm/m) | C.F (dBm/m) | Level (dBm/m) | Level (dBc) |
|----------------|---------------|--------------------|----------------|------------------|----------------|
| 348.0 | H | -49.87 | 14.3 | -35.57 | 82.56 |
| 522.0 | H | -57.56 | 19.3 | -38.26 | 85.25 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Remarks

No emissions were detected at a level greater than 20dB below limit.

3.2.4 Emission Masks (Occupied Bandwidth)

Definition:

- The term transmitter Sideband Spectrum denotes the sideband energy produced at a discrete frequency separation from the carrier up to the test bandwidth due to all sources of unwanted noise within the transmitter in a modulated condition.

Specification : 47 CFR 2.1049(c)(1)
Test method : ANSI/TIA/EIA-603-C-2004

Measurement Procedure:

- The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
- For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5 / \pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16dB.
- For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.

Measurement Data:

- Refer to the Appendix II.

3.2.5 Transient Frequency Behavior

Definition:

- The transient frequency behavior is a measure of the difference, as a function in time. of the actual transmitter frequency to the assigned transmitter frequency when the transmitted RF output power is switched on or off.

| | |
|---------------|---------------------------|
| Specification | : 47 CFR 90.214 |
| Test method | : ANSI/TIA/EIA-603-C-2004 |

Measurement Procedure:

- The EUT was set up as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a guide.
- The transmitter was turned on.
- Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
- The transmitter was turned off.
- An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
- The oscilloscope was set up using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5ms/div (VHF).
- The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
- The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.
- For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5 / \pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16dB.
- For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.

Measurement Data:

- Refer to the Appendix II.

3.2.6 Audio Low Pass Filter (Voice Input)

Definition:

- The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000Hz.

| | |
|---------------|---------------------------|
| Specification | : 47 CFR 2.1047(a) |
| Test method | : ANSI/TIA/EIA-603-C-2004 |

Measurement Procedure:

- The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
- The audio output was connected at the output to the modulated stage.

Measurement Data:

- Refer to the Appendix II.

3.2.7 Audio Frequency Response

Definition:

- The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

| | |
|---------------|---------------------------|
| Specification | : 47 CFR 2.1047(a) |
| Test method | : ANSI/TIA/EIA-603-C-2004 |

Measurement Procedure:

- The audio signal input was adjusted to obtain 20% modulation at 1kHz, and this point was taken as the 0dB reference level.
- With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 300 Hz to 30 kHz.
- The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.

Measurement Data:

- Refer to the Appendix II.

3.2.8 Modulation Limiting

Definition:

- Modulation limiting refers to the transmitter circuits ability to limit the transmitter from producing deviations due to modulation in excess of a rated system deviation.

| | |
|---------------|---------------------------|
| Specification | : 47 CFR 2.1047(b) |
| Test method | : ANSI/TIA/EIA-603-C-2004 |

Measurement Procedure:

- The signal generator was connected to the input of the EUT as for " Frequency Response of the Modulating Circuit."
- The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
- The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.

Measurement Data:

- Refer to the Appendix II.

3.2.9 Frequency Stability

Definition:

- Modulation limiting refers to the transmitter circuits ability to limit the transmitter from producing deviations due to modulation in excess of a rated system deviation.

| | |
|---------------|---------------------------|
| Specification | : 47 CFR 2.1055 |
| Test method | : ANSI/TIA/EIA-603-C-2004 |

Measurement Procedure:

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -30°C to +60°C using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025(\pm 2.5\text{ppm})$ of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without power applied.
3. After the overnight “soak” at 30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE: The EUT is tested down to the battery endpoint.

Measurement Data:

- Refer to the Appendix II.

3.2.10 Necessary Bandwidth and Emission Bandwidth

Specification : 47 CFR 2.202 (g)

MODULATION = 10K4F3E

NECESSARY BANDWIDTH CALCULATION:

| | |
|-------------------------------|-------------------------|
| MAXIMUM MODULATION (M), kHz | = 3 |
| MAXIMUM DEVIATION (D), kHz | = 2.2 |
| CONSTANT FACTOR (K) | = 1 |
| NECESSARY BANDWIDTH (BN), kHz | = (2 * M) + (2 * D * K) |
| | = 10.4 |

APPENDIX I

TEST EQUIPMENT USED FOR TESTS


| | Description | Model No. | Serial No. | Manufacturer | Interval | Last Cal. Date |
|----|--------------------------------------|------------------|-------------|------------------------|----------|----------------|
| 1 | Spectrum Analyzer (~30GHz) | FSV-30 | 100757 | R&S | 1 year | 2011-01-24 |
| 2 | Spectrum Analyzer (~2.9GHz) | 8594E | 3710A04074 | HP | 2 year | 2009-10-12 |
| 3 | Signal Generator (~3.2GHz) | 8648C | 3623A02597 | HP | 1 year | 2011-03-30 |
| 4 | Signal Generator (1~20GHz) | 83711B | US34490456 | HP | 1 year | 2011-03-30 |
| 5 | Attenuator (3dB) | 8491A | 37822 | HP | 2 year | 2010-10-08 |
| 6 | Attenuator (10dB) | 8491A | 63196 | HP | 2 year | 2010-10-08 |
| 7 | Attenuator (30dB) | 8498A | 3318A10929 | HP | 2 year | 2011-01-05 |
| 8 | Test Receiver (~30MHz) | ESHS10 | 828404/009 | R&S | 1 year | 2011-03-30 |
| 9 | EMI Test Receiver (~1GHz) | ESCI7 | 100722 | R&S | 1 year | 2010-10-08 |
| 10 | RF Amplifier (~1.3GHz) | 8447D | 2439A09058 | HP | 2 year | 2010-10-08 |
| 11 | RF Amplifier (1~18GHz) | 8449B | 3008A02126 | HP | 2 year | 2010-03-29 |
| 12 | Horn Antenna (1~18GHz) | BBHA 9120D | 9120D122 | SCHWARZBECK | 2 year | 2010-12-24 |
| 13 | Horn Antenna (18 ~ 40GHz) | SAS-574 | 154 | Schwarzbeck | 2 year | 2010-11-25 |
| 14 | Horn Antenna (18 ~ 40GHz) | SAS-574 | 155 | Schwarzbeck | 2 year | 2010-11-25 |
| 15 | TRILOG Antenna | VULB 9160 | 9160-3172 | SCHWARZBECK | 2 year | 2010-10-07 |
| 16 | Dipole Antenna | VHA9103 | 2116 | SCHWARZBECK | 2 year | 2010-11-25 |
| 17 | Dipole Antenna | VHA9103 | 2117 | SCHWARZBECK | 2 year | 2010-11-25 |
| 18 | Dipole Antenna | VHA9105 | 2261 | SCHWARZBECK | 2 year | 2010-11-25 |
| 19 | Dipole Antenna | VHA9105 | 2262 | SCHWARZBECK | 2 year | 2010-11-25 |
| 20 | Hygro-Thermograph | THB-36 | 0041557-01 | ISUZU | 2 year | 2010-04-12 |
| 21 | Splitter (SMA) | ZFSC-2-2500 | SF617800326 | Mini-Circuits | - | - |
| 22 | Power Divider | 11636A | 6243 | HP | 2 year | 2010-10-08 |
| 23 | DC Power Supply | 6622A | 3448A03079 | HP | - | - |
| 24 | Frequency Counter | 5342A | 2826A12411 | HP | 1 year | 2011-03-30 |
| 25 | Power Meter | EPM-441A | GB32481702 | HP | 1 year | 2011-03-30 |
| 26 | Power Sensor | 8481A | US41030291 | HP | 1 year | 2010-10-08 |
| 27 | Audio Analyzer | 8903B | 3729A18901 | HP | 1 year | 2010-10-08 |
| 28 | Modulation Analyzer | 8901B | 3749A05878 | HP | 1 year | 2010-10-08 |
| 29 | TEMP & HUMIDITY Chamber | YJ-500 | LTAS06041 | JinYoung Tech | 1 year | 2010-10-08 |
| 30 | Stop Watch | HS-3 | 601Q09R | CASIO | 2 year | 2010-03-31 |
| 31 | LISN | ENV216 | 100408 | R&S | 1 year | 2010-10-08 |
| 32 | UNIVERSAL RADIO COMMUNICATION TESTER | CMU200 | 106243 | R&S | 2 year | 2010-05-13 |
| 33 | Highpass Filter | WHKX1.5/15G-10SS | 74 | Wainwright Instruments | - | - |
| 34 | Highpass Filter | WHKX3.0/18G-10SS | 118 | Wainwright Instruments | - | - |

APPENDIX II


TEST PLOTS

Emission Masks Measurement Data:



OPERATING FREQUENCY : 173.975 MHz
MODULATION : None

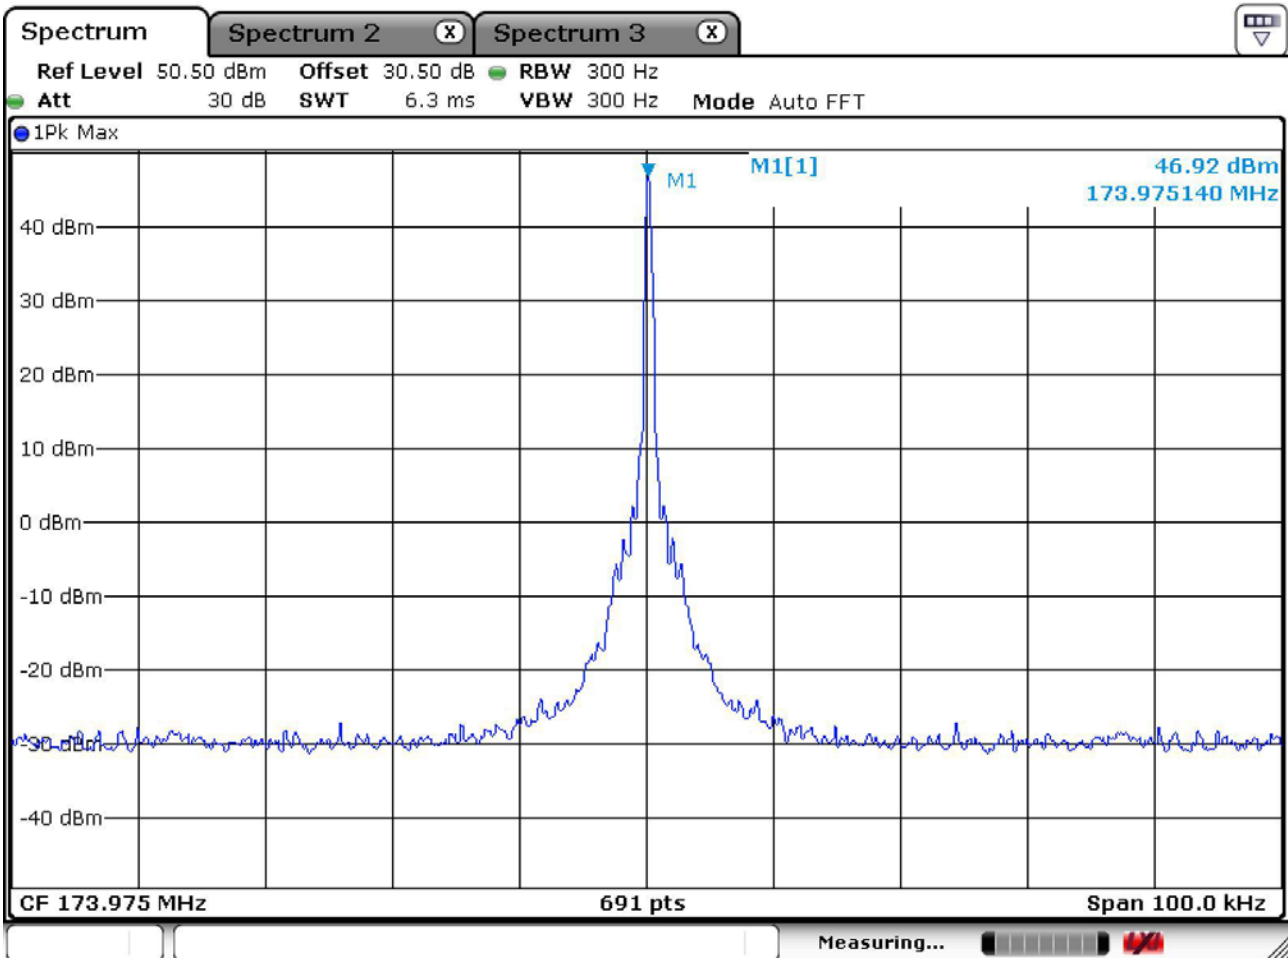



OPERATING FREQUENCY : 173.975 MHz
 MODULATION : Voice: 2500 Hz, Sine Wave
 MASK: D, VHF/UHF 12.5 kHz BW

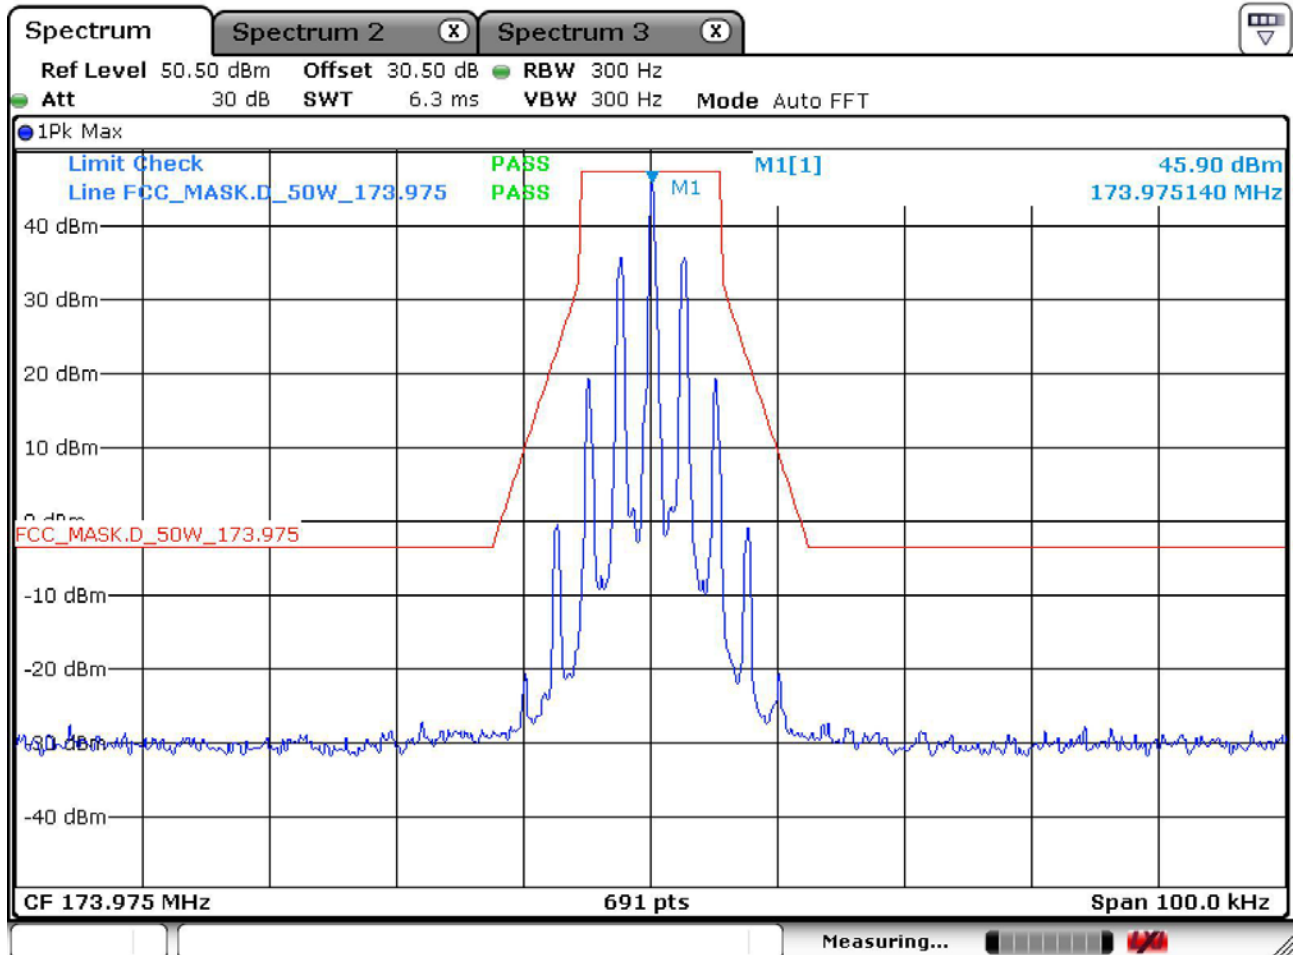



136.025MHz -12.5KHz

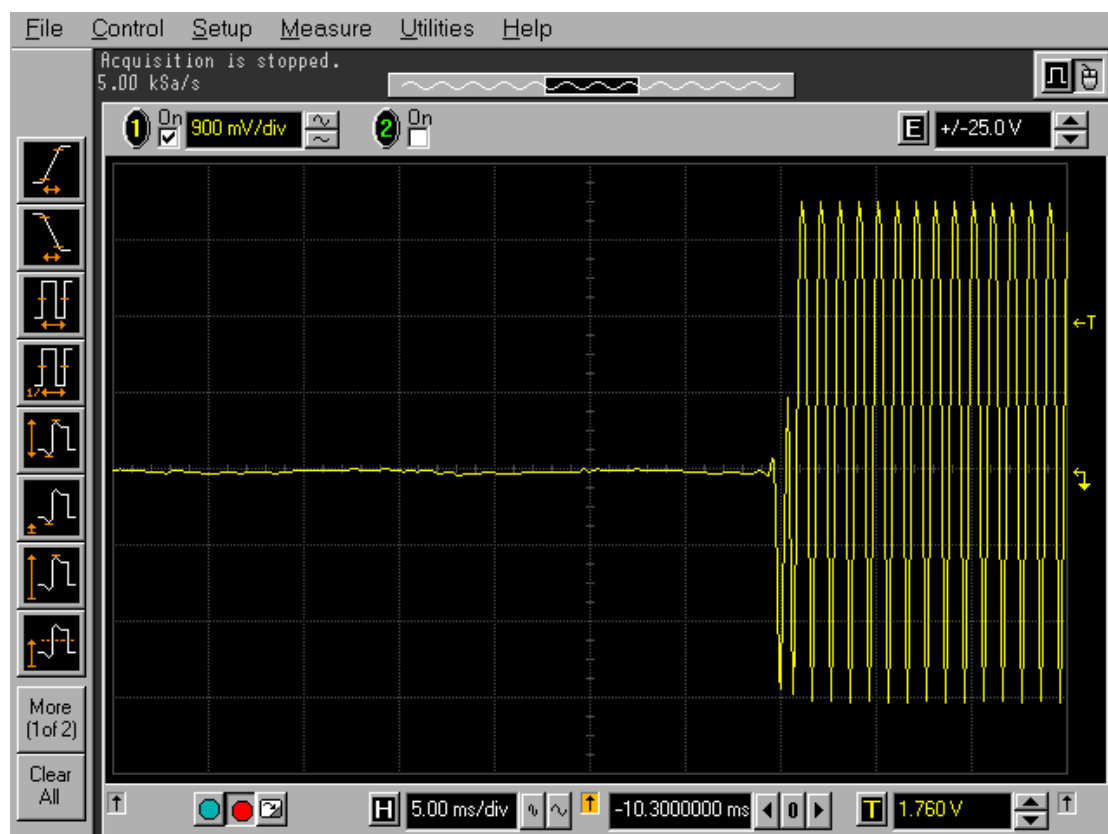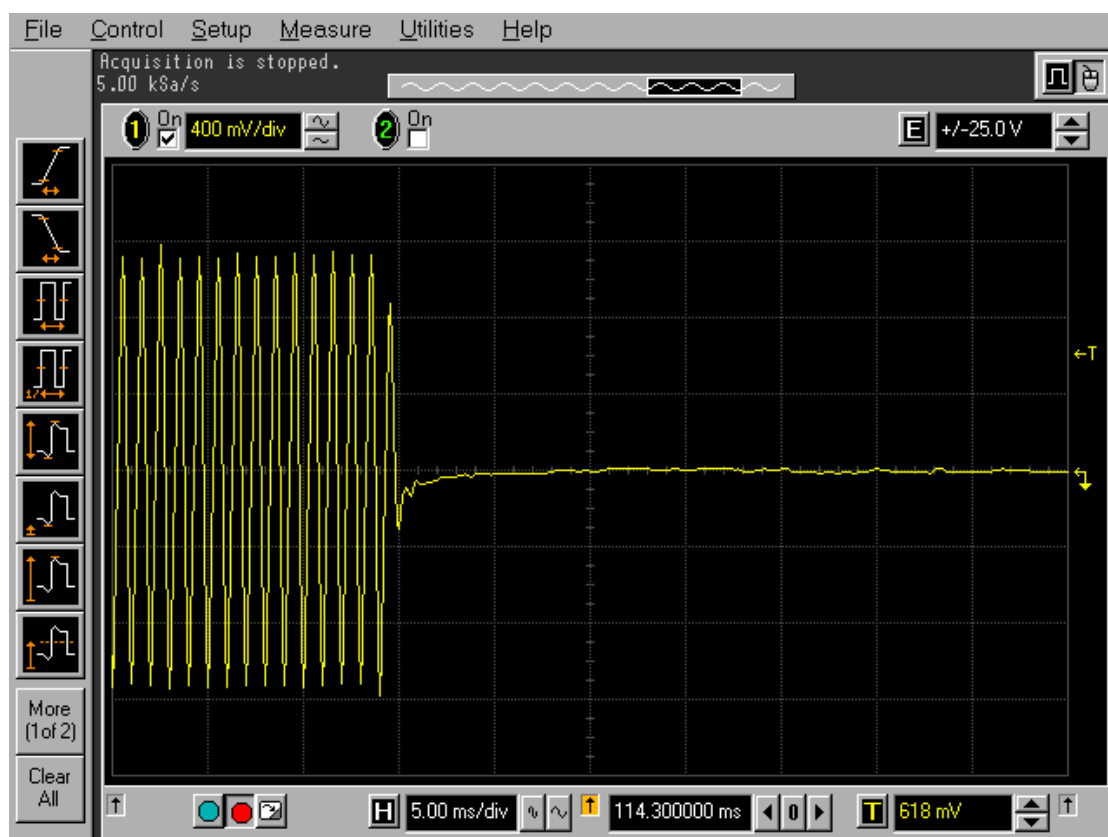

155.025MHz – 12.5KHz

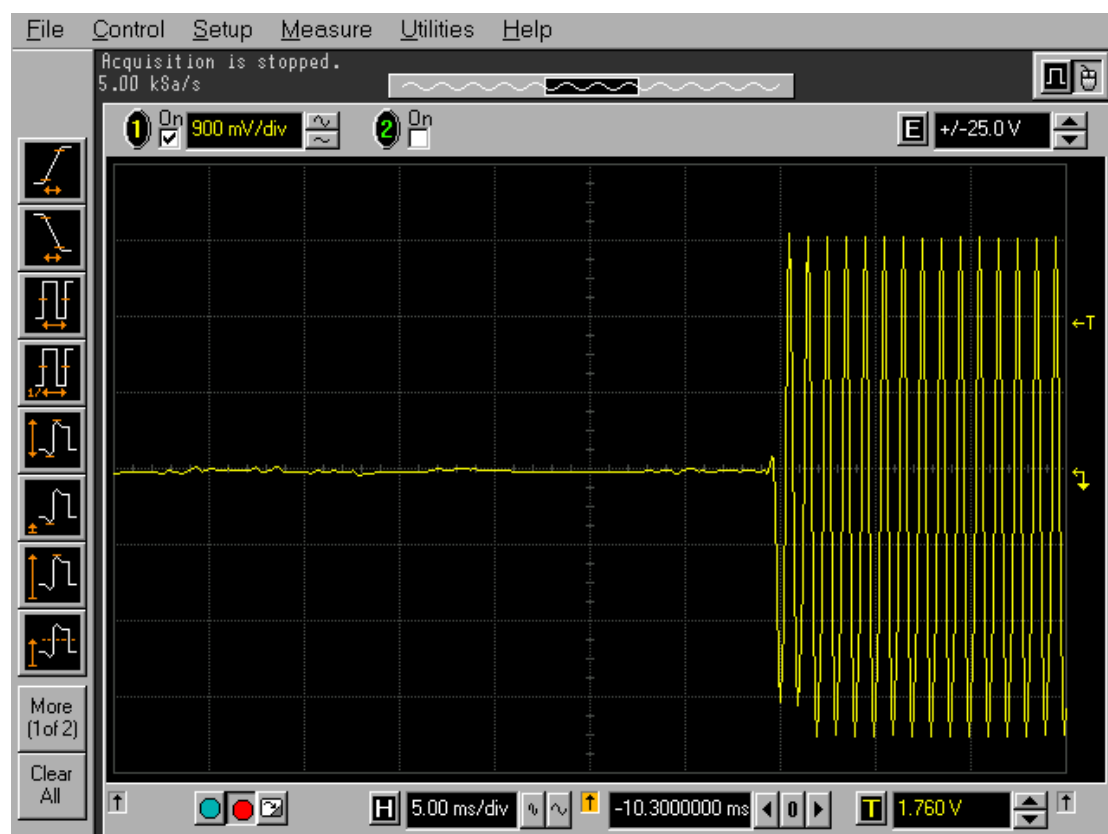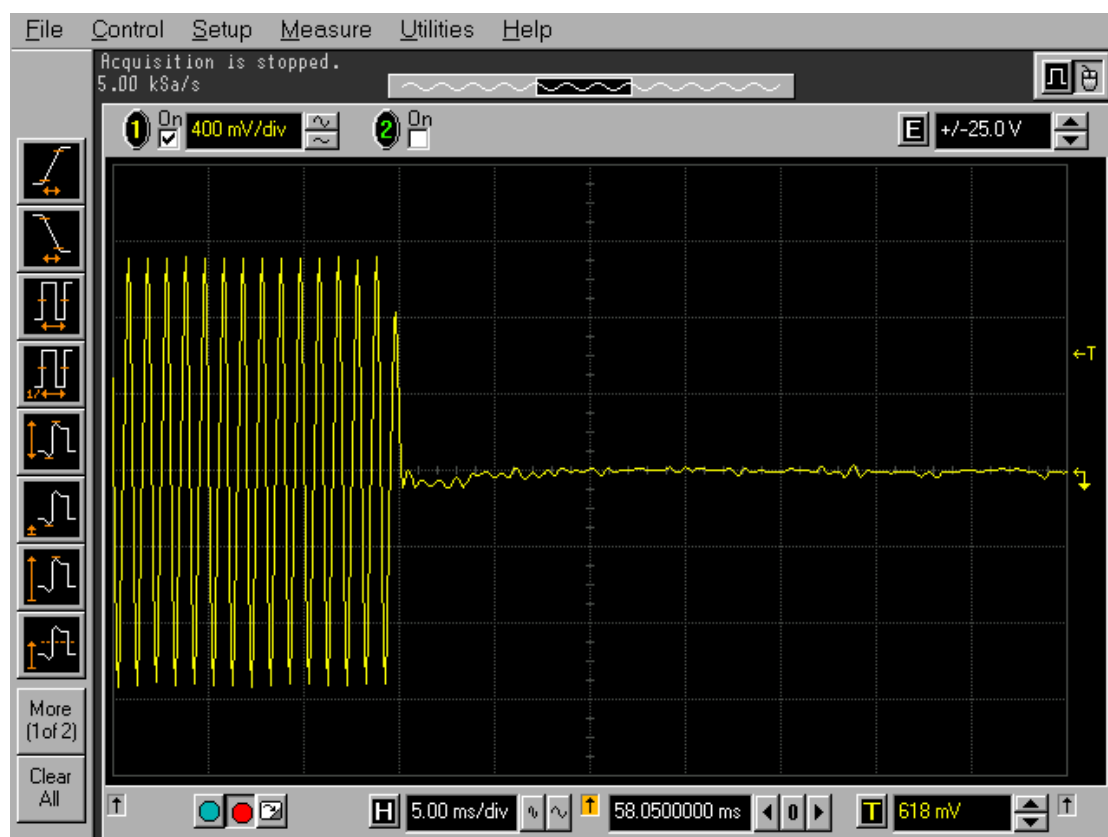

173.975MHz – 12.5KHz

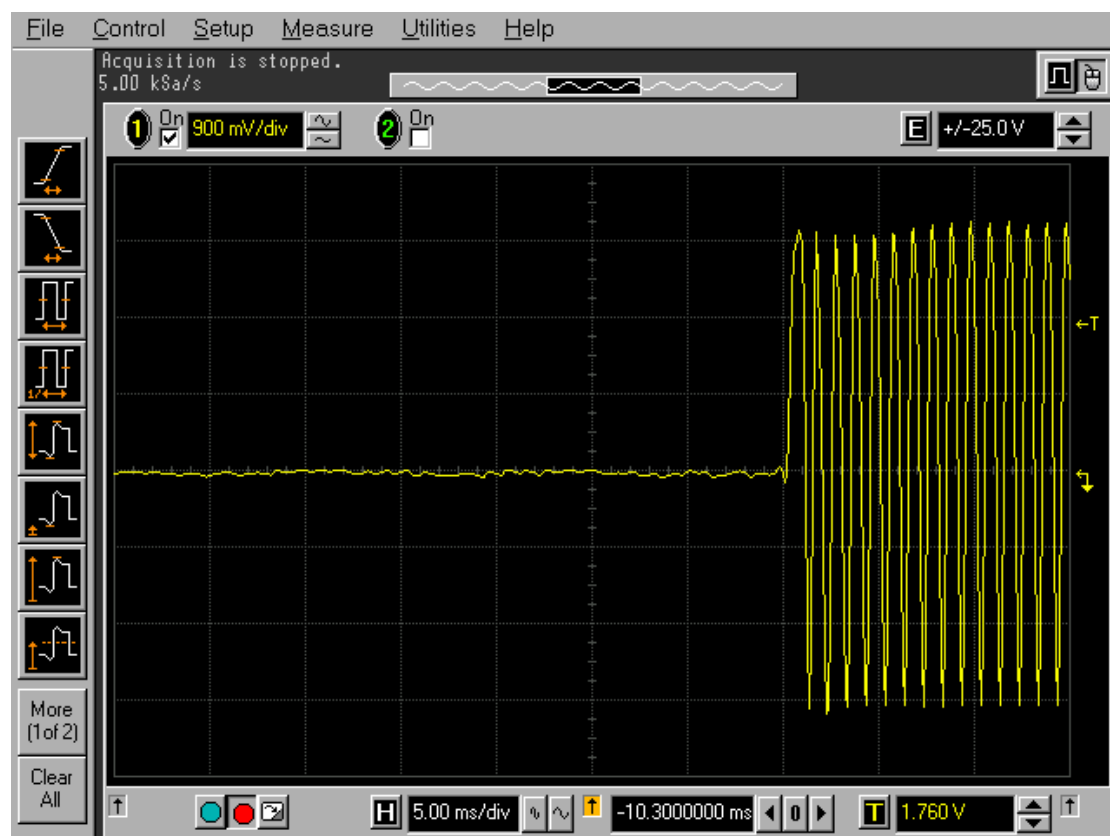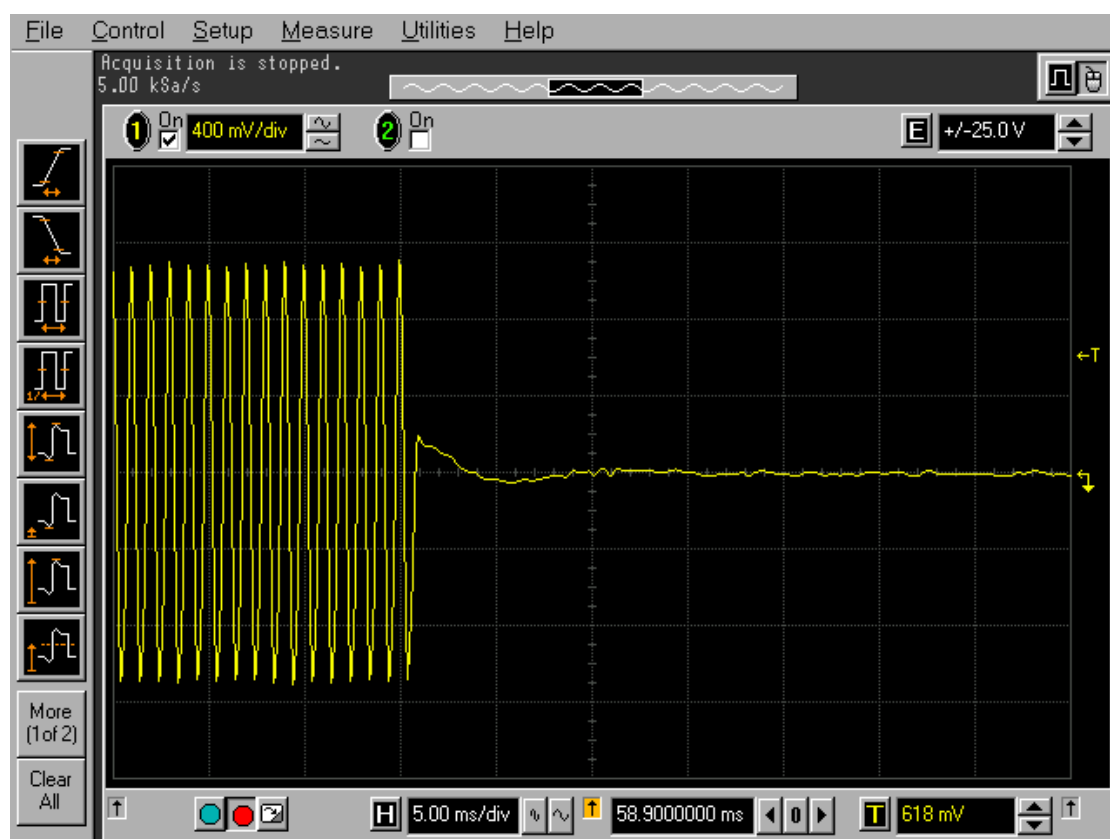


Audio Frequency Response Measurement Data:

OPERATING FREQUENCY : 173.975 MHz

REFERENCE LEVEL : 0dB @ 1kHz

| Audio Frequency Response | | | | | |
|--------------------------|-----------|------------|-----------|------------|-----------|
| Freq., kHz | Level, dB | Freq., kHz | Level, dB | Freq., kHz | Level, dB |
| 0.3 | -3.15 | 2.8 | 4.96 | 5.5 | -33.91 |
| 0.4 | -2.61 | 3.0 | 4.30 | 6.0 | -34.46 |
| 0.5 | -1.68 | 3.3 | -5.47 | 6.5 | -31.51 |
| 0.6 | -1.08 | 3.4 | -7.77 | 7.0 | -36.24 |
| 0.7 | -1.03 | 3.5 | -13.23 | 7.5 | -38.20 |
| 0.8 | -0.17 | 3.6 | -15.30 | 8.0 | -36.18 |
| 1.0 | 0.10 | 3.7 | -17.49 | 9.0 | -35.16 |
| 1.2 | 0.61 | 3.8 | -20.21 | 10.0 | -37.10 |
| 1.5 | 1.08 | 3.9 | -21.67 | 15.0 | -38.29 |
| 1.7 | 1.34 | 4.0 | -25.94 | 20.0 | -35.90 |
| 2.0 | 2.14 | 4.1 | -31.16 | 30.0 | -36.24 |
| 2.3 | 3.02 | 4.2 | -31.30 | | |
| 2.6 | 4.23 | 4.8 | -33.52 | | |


Audio Frequency Response

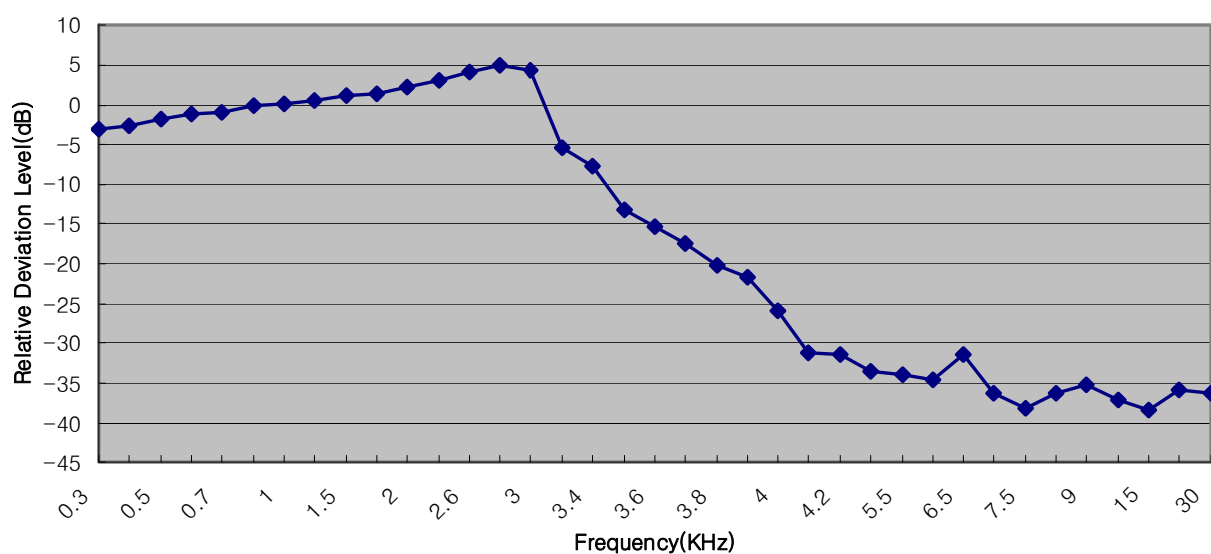

Modulation Limiting Measurement Data:OPERATING FREQUENCY : 173.975 MHzCHANNEL SPACING : 12.5 kHz

| Input Level (mV) | FM Deviation in kHz at Indicated Modulating Frequency | | | |
|---------------------|-------------------------------------------------------|-------|--------|-------|
| | 300Hz | 1KHz | 2.5KHz | 3KHz |
| 2 | 0.078 | 0.252 | 0.609 | 0.465 |
| 5 | 0.123 | 0.598 | 1.401 | 1.155 |
| 7 | 0.155 | 0.815 | 1.556 | 1.369 |
| 10 | 0.215 | 1.164 | 1.623 | 1.454 |
| 15 | 0.268 | 1.715 | 1.624 | 1.522 |
| 20 | 0.334 | 2.061 | 1.652 | 1.531 |
| 30 | 0.515 | 2.125 | 1.667 | 1.538 |
| 40 | 0.625 | 2.125 | 1.662 | 1.529 |
| 50 | 0.867 | 2.121 | 1.669 | 1.525 |
| 100 | 1.281 | 2.129 | 1.662 | 1.532 |
| 120 | 1.758 | 2.134 | 1.664 | 1.534 |
| 150 | 2.035 | 2.138 | 1.665 | 1.549 |
| 200 | 2.092 | 2.132 | 1.669 | 1.532 |
| 250 | 2.115 | 2.136 | 1.672 | 1.548 |
| 300 | 2.111 | 2.131 | 1.675 | 1.545 |

Deviation Limiting

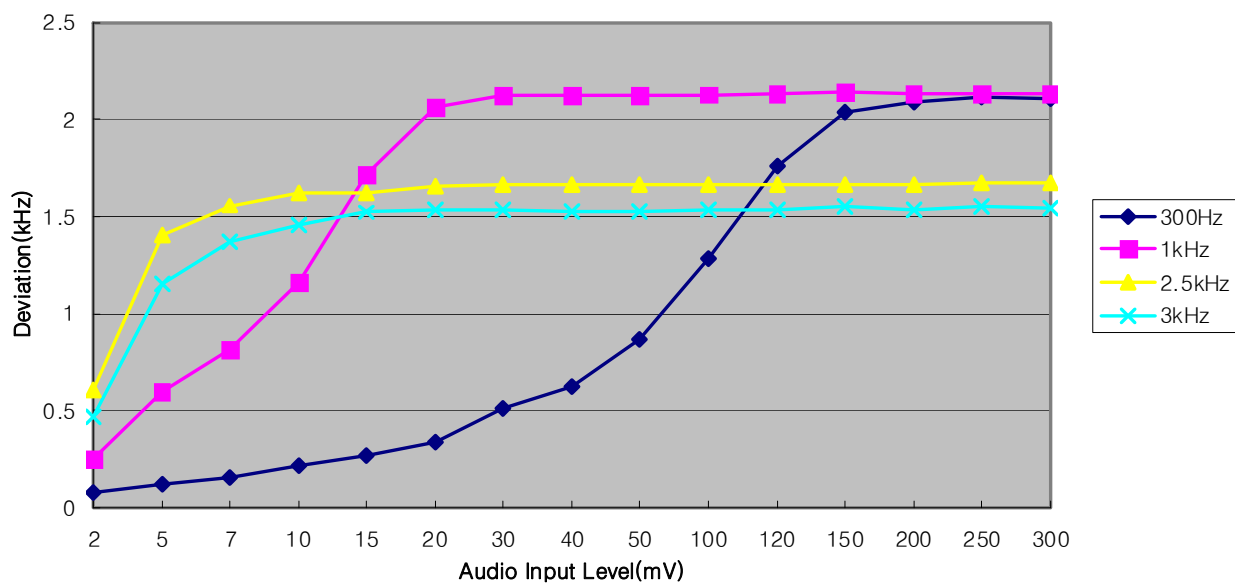

Frequency Stability Measurement Data:OPERATING FREQUENCY : 173.975 MHzREFERENCE VOLTAGE: 13.8 VDC CHANNEL SPACING: 12.5 kHzDEVIATION LIMIT: ± 0.00025% or 2.5ppm

| VOLTAGE (%) | POWER (VDC) | TEMP (dB) | FREQ (Hz) | Deviation (%) |
|---------------|-------------|-----------|-------------|---------------|
| 100% | 13.8 | +20(Ref) | 173,975,038 | 0.000000 |
| 100% | | -30 | 173,975,118 | -0.000044 |
| 100% | | -20 | 173,975,105 | -0.000043 |
| 100% | | -10 | 173,975,087 | -0.000030 |
| 100% | | 0 | 173,975,076 | -0.000022 |
| 100% | | +10 | 173,975,064 | -0.000017 |
| 100% | | +20 | 173,975,038 | 0.000000 |
| 100% | | +25 | 173,975,021 | -0.000005 |
| 100% | | +30 | 173,975,015 | 0.000008 |
| 100% | | +40 | 173,975,005 | 0.000011 |
| 100% | | +50 | 173,974,997 | 0.000017 |
| 100% | | +60 | 173,974,995 | 0.000019 |
| 85% | 11.73 | +20 | 173,975,043 | 0.000004 |
| 115% | 15.87 | +20 | 173,975,034 | 0.000001 |
| BATT.ENDPOINT | 7.2 | +20 | 173,975,021 | 0.000002 |

