







ISO/IEC17025Accredited Lab.

Report No: FCC/IC 08011037 File reference No: 2008-11-26

Applicant: Shenzhen Blueaction Communications Co., Ltd

Product: Bluetooth Handsfree&Headset

Model No: BAC-500

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247, RSS-210 and FCC

Part 15 Subpart B

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.247 regulations and RSS-210 for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Nov. 26.2008

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0811037 Page 2 of 68

Date: 2008-11-26



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-01.



Report No: 0811037 Date: 2008-11-26



Test Report Conclusion Content

1.0	General Details	3
1.1	Test Lab Details	3
1.2	Applicant Details	3
1.3	Description of EUT	3
1.4	Submitted Sample	3
1.5	Test Duration.	4
1.6	Test Uncertainty	4
1.7	Test By	4
2.0	List of Measurement Equipment	4
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit	13
7.0	20dB Bandwidth Measurement	26
8.0	Maximum Peak Output Power	30
9.0	Carrier Frequency Separation	32
10.0	Number of Hopping Channel	34
11.0	Time of Occupancy (Dwell Time)	38
12.0	Out of Band Measurement.	49
13.0	Antenna Requirement	52
14.0	Maximum Permissible Exposure	53
15.0	99% Occupied bandwidth	55
16.0	FCC and IC ID Label.	59
17.0	Photo of Test Setup and EUT View.	60

Report No: 0811037 Page 4 of 68

Date: 2008-11-26



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Blueaction Communications Co., Ltd

Address: Rm2012A, 20/F, Great China International Exchange Square, Jintian South Rd., Futian

District, PC518030, Shenzhen, China

Telephone: 86-755-23997200 Fax: 86-755-23997201

1.3 Description of EUT

Product: Bluetooth Handsfree&Headset

Manufacturer: Shenzhen Blueaction Communications Co., Ltd

Brand Name: N/A

Model Number: BAC-500

Additional Model Name BAC-500F, BAC-200T, BAC-100W, BAE-100, BAE-200, BAE-300, BAE-500,

BAE-800

Additional Trade Name N/A

Rating: Input: DC 5V; 30-40mA

Type of Modulation FHSS

Frequency range 2402-2480MHz

Number of Channel 79

Frequency Selection By software

Antenna type chip dielectric antenna, the antenna gain is 2.0dBi

1.4 Submitted Sample: 2Sample

1.5 Test Duration

2008-11-05 to 2008-11-26

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 68

Report No: 0811037 Date: 2008-11-26



Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0		Test Equ	ipments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2007-12-05	2008-12-04
Absorbing Clamp	ROHDE&SCHWARZ	MDS-21	100126	2007-12-05	2008-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2007-12-05	2008-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2007-12-05	2008-12-04
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2007-12-05	2008-12-04
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2008-04-26	2009-04-25
4-WIRE ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2008-02-18	2009-02-17
GG ENY22 Double 2-Wire ISN	ROHDE&SCHWARZ	ENY22	83066/016	2008-02-18	2009-02-17
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2008-02-18	2009-02-17
System Controller	CT	SC100	-	2008-02-18	2009-02-17
Printer	EPSON	РНОТО ЕХЗ	CFNH234850	2008-02-18	2009-02-17
FM-AM Signal Generator	JUNGJIN	SG-150M	389911177	2008-02-18	2009-02-17
Color TV Pattern Generator	PHILIPS	PM5418	LO621747	2008-02-18	2009-02-17
Computer	IBM	8434	1S8434KCE99BLX LO*	-	-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 6 of 68

Report No: 0811037 Date: 2008-11-26

Oscillator	KENWOOD	AG-203D	3070002	2008-02-18	2009-02-17		
Power meter	Anritsu	ML2487A	6K00003613	2008-02-18	2009-02-17		
Power sensor	Anritsu	MA2491A	32263	2008-02-18	2009-02-17		
Spectrum Analyzer	HAMEG	HM5012	-	2008-04-26	2009-04-25		
Power Supply	LW	APS1502	-	-	-		
5K VA AC Power Source	California Instruments	5001iX	56060	2008-02-18	2009-02-17		
CDN	EM TEST	CDN M2/M3	-	2008-02-18	2009-02-17		
Attenuation	EM TEST	ATT6/75	-	2008-02-18	2009-02-17		
Resistance	EM TEST	R100	-	2008-02-18	2009-02-17		
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2008-02-18	2009-02-17		
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2008-02-18	2009-02-17		
Power Amplifier	AR	150W1000	300999	2008-02-18	2009-02-17		
Field probe	Holaday	HI-6005	105152	2008-02-18	2009-02-17		
Bilog Antenna	Chase	CBL6111C	2576	2008-02-18	2009-02-17		
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2008-02-18	2009-02-17		
3m OATS			N/A	2008-02-18	2009-02-17		
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2008-08-18	2009-08-17		
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2008-04-26	2009-04-25		

Page 7 of 68

Report No: 0811037 Date: 2008-11-26



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4) and RSS-210	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4) and RSS-210	PASS	Complies
Carrier Frequency Separation	15.247(a)(1) And RSS-210	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1) and RSS-210	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii) and RSS-210	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109 and RSS-210	PASS	Complies
Peak Power Spectral Density	15.247(e) and RSS-210	PASS	Complies
Conducted Emissions	15.207(a), 15.107 and RSS-210	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies
99% occupied bandwidth	RSS-210	PASS	Complies

3.2 Test Standards


FCC Part 15 Subpart & Subpart C, Paragraph 15.247,RSS-210 and Part15B

4.0 EUT Modification


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Page 8 of 68

Report No: 0811037



5.1 Schematics of the test

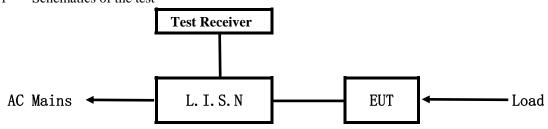


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 -2003.

Block diagram of Test setup

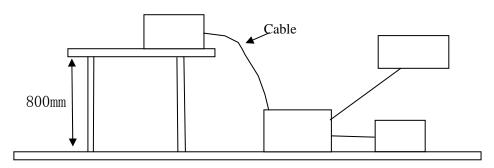

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

Page 9 of 68

Report No: 0811037 Date: 2008-11-26



A. EUT

Device	Manufacturer	Model	IC ID
Bluetooth	Shenzhen Blueaction Communications	BAC-500	VTWBAC-500
Handsfree&Headset	Co., Ltd		

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207 and RSS-210

Frequency	Class A Lim	its (dB \mu V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: the worse cases was selected to conducted the test

Report No: 0811037 Date: 2008-11-26


A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Transmitting mode

Results: Pass

Please refer to following diagram for individual

Conducted Emission Measurement

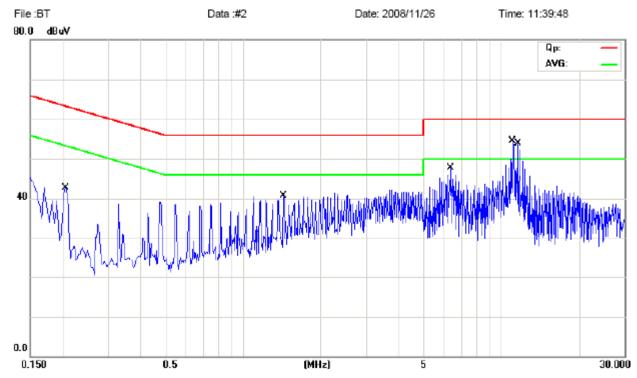

Fraguency		Reading	Limi	t		
Frequency (MHz)	Line		Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.2050	41.75	40.86			63.41	53.41
1.4394	36.68	35.38			56.00	46.00
6.3767	35.82	26.22			60.00	50.00
11.0407	38.58	29.28			60.00	50.00
11.5920	35.72	26.75			60.00	50.00

Report No: 0811037 Date: 2008-11-26


B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Transmitting mode

Results: Pass

Please refer to following diagram for individual

Conducted Emission Measurement

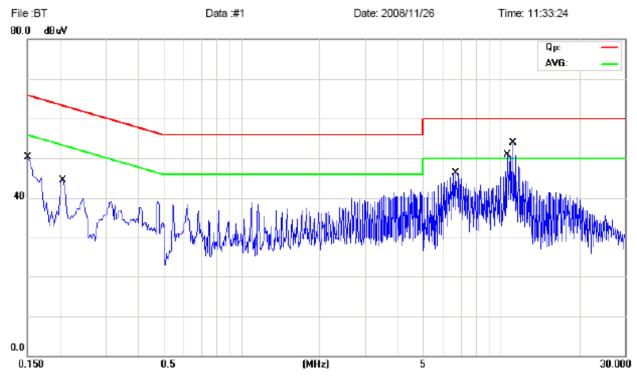

F		Reading	Limi	t		
Frequency (MHz)	Live	;	Neutral		(dB µ V)	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1507			46.10	32.28	65.96	55.96
0.2050			41.86	41.36	63.41	53.41
6.7051			39.08	29.68	60.00	50.00
10.5861			33.89	22.89	60.00	50.00
11.1462			37.48	27.78	60.00	50.00

Page 12 of 68

Report No: 0811037 Date: 2008-11-26



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 0811037 Page 13 of 68

Date: 2008-11-26



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.109. 15.209 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: 0811037 Page 14 of 68

Date: 2008-11-26



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Normal Operation**

Results: Pass


Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
	-	V	
215.96	33.26 (QP)	Н	43.50


Report No: 0811037 Date: 2008-11-26



Test Figure: Transmitting mode

Η

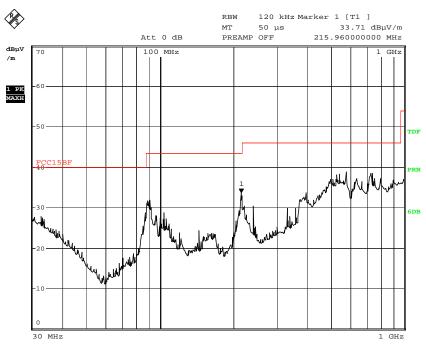

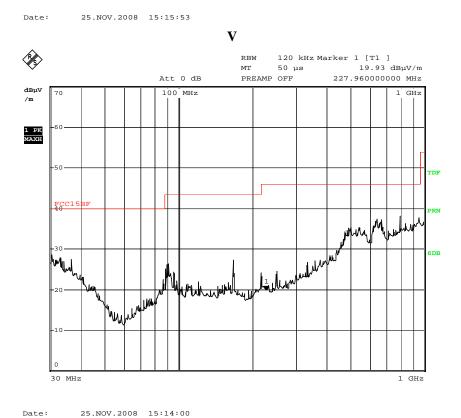

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0811037 Page 16 of 68

Date: 2008-11-26

Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB μ V/m)	
2402	88.2 (PK) /78.6 (AV)	Н	Fundamental Frequency	
2402	92.5 (PK) /82.3 (AV)	V	Tundamental Frequency	
4804		H/V	74(Peak)/ 54(AV)	
7206		H/V	74(Peak)/ 54(AV)	
9608		H/V	74(Peak)/ 54(AV)	
12010		H/V	74(Peak)/ 54(AV)	
14412		H/V	74(Peak)/ 54(AV)	
16814		H/V	74(Peak)/ 54(AV)	
19216		H/V	74(Peak)/ 54(AV)	
21618		H/V	74(Peak)/ 54(AV)	
24020		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB μ V/m)	
2441	88.1 (PK) /76.2 (AV)	V	Fundamental Frequency	
2441	84.3 (PK) /75.7 (AV)	Н	Tundamental Prequency	
4882.		Н	74(Peak)/ 54(AV)	
7323		H/V	74(Peak)/ 54(AV)	
9764	9764		74(Peak)/ 54(AV)	
12205	12205		74(Peak)/ 54(AV)	
14646		H/V	74(Peak)/ 54(AV)	
17087		H/V	74(Peak)/ 54(AV)	
19528		H/V	74(Peak)/ 54(AV)	
21969		H/V	74(Peak)/ 54(AV)	
24410		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: 0811037 Page 17 of 68

Date: 2008-11-26

Operation Mode: Transmitting under High Channel

Frequency (MHz)	Level@3m (dB \mu V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2480	82.1 (PK) /72.3 (AV)	Н	Fundamental Frequency
2480	84.5 (PK) /73.8 (AV)	V	Tundamental Trequency
4960		H/V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


^{2.} Remark "---" means that the emissions level is too low to be measured

Report No: 0811037 Date: 2008-11-26



Please refer to the following test plots for details

Low Channel: Vertical

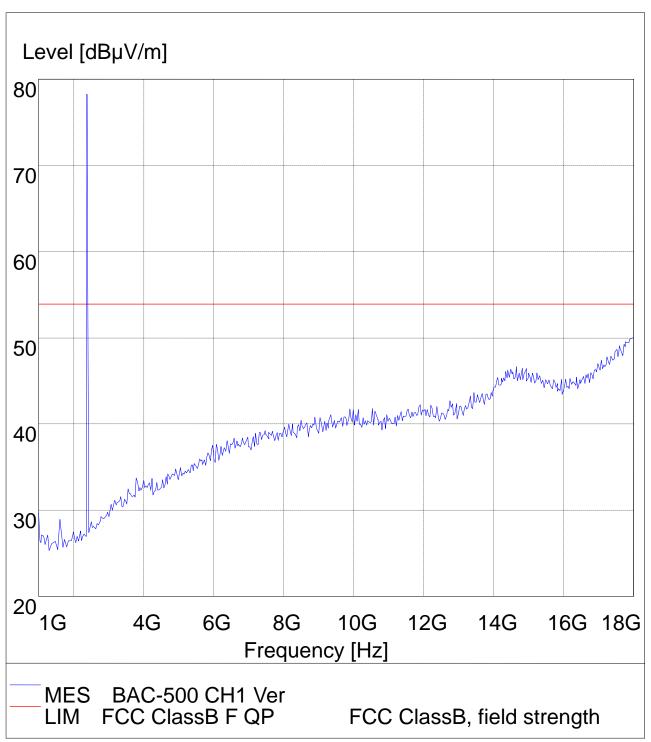


Page 19 of 68

Report No: 0811037 Date: 2008-11-26



Low Channel: Horizontal

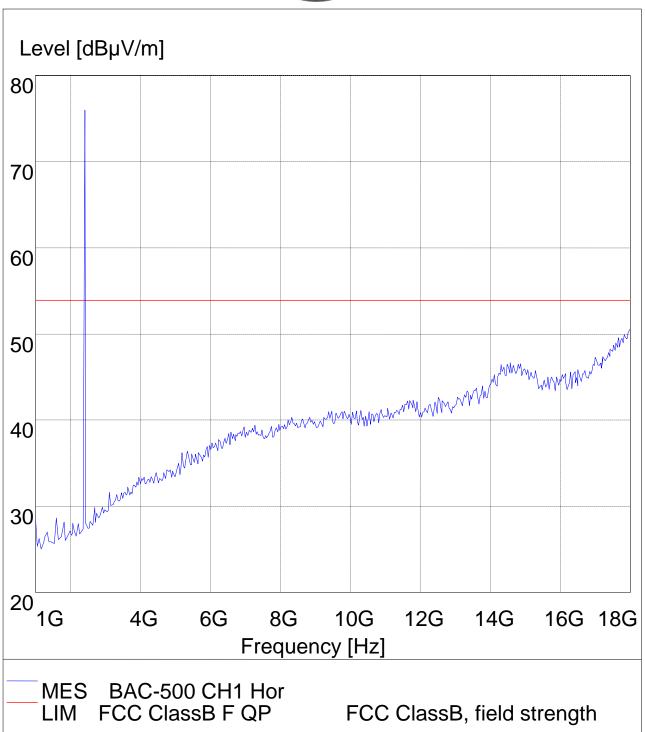


Page 20 of 68

Report No: 0811037 Date: 2008-11-26



Middle Channel: Horizontal

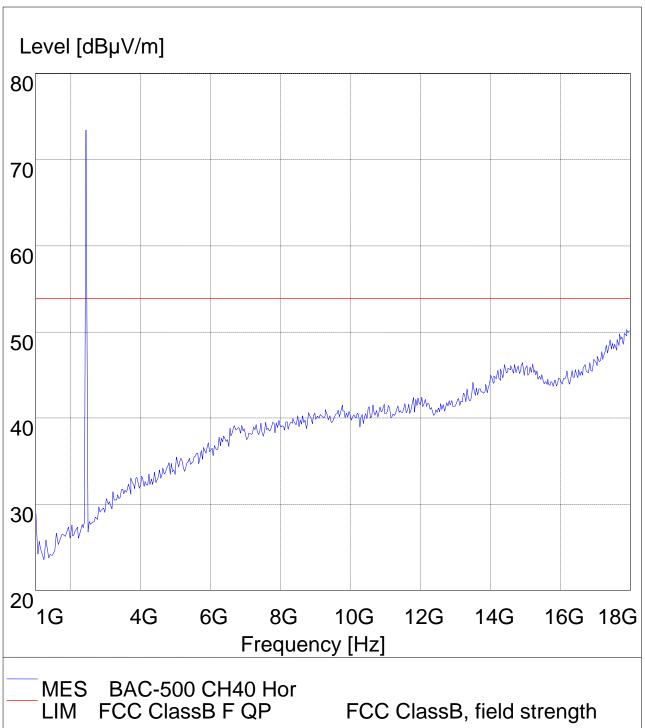


Page 21 of 68

Report No: 0811037 Date: 2008-11-26



Middle Channel: Vertical

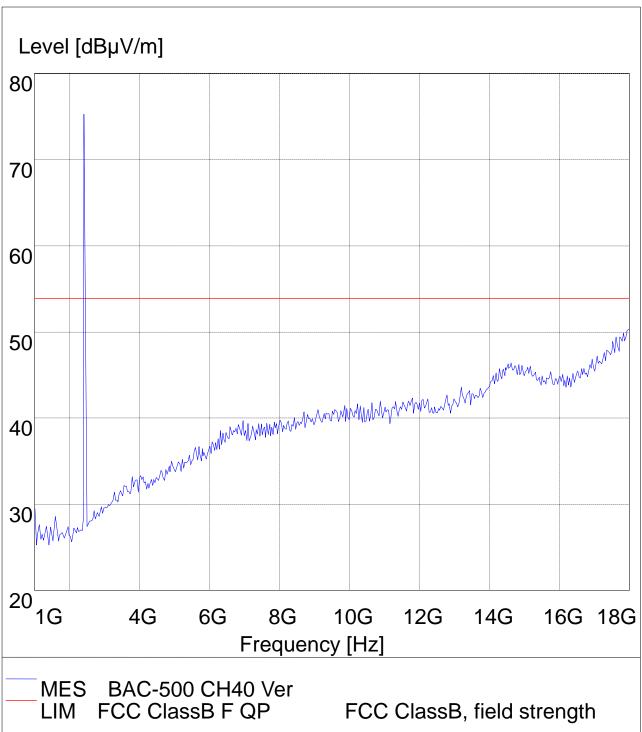


Page 22 of 68

Report No: 0811037 Date: 2008-11-26



High Channel: Horizontal

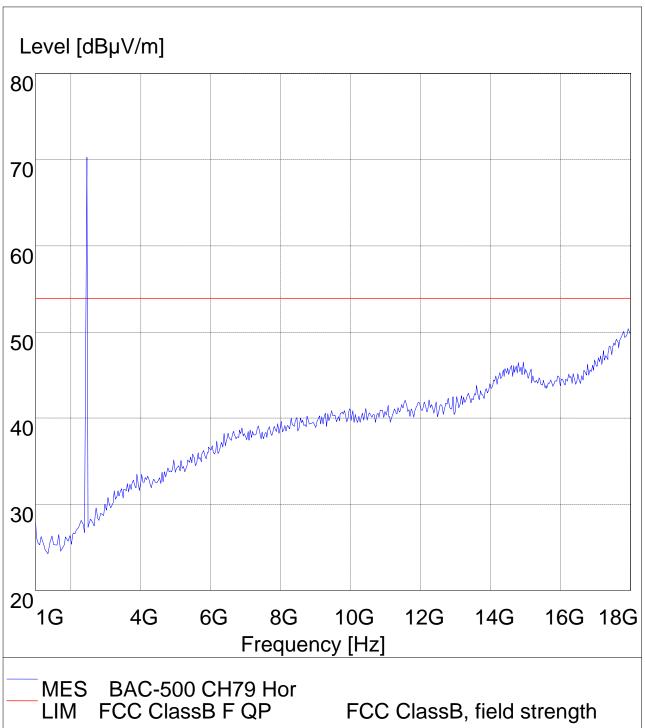


Page 23 of 68

Report No: 0811037 Date: 2008-11-26



High Channel: Vertical

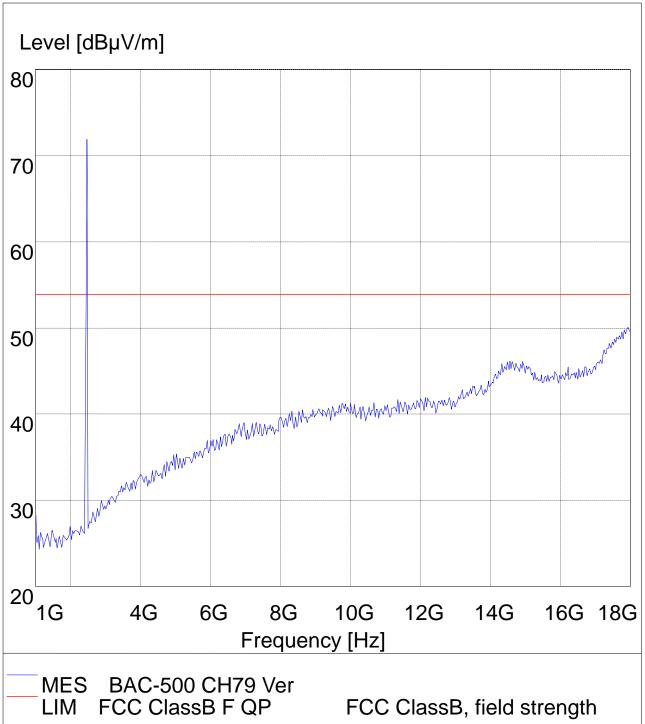


Page 24 of 68

Report No: 0811037 Date: 2008-11-26



18-25G Horizontal High Channel

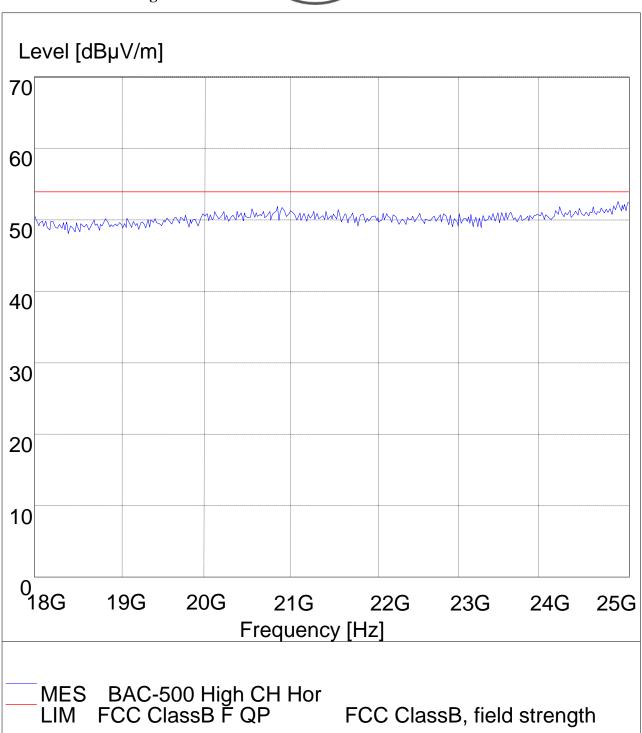


Page 25 of 68

Report No: 0811037 Date: 2008-11-26



18-25G Vertical High Channel

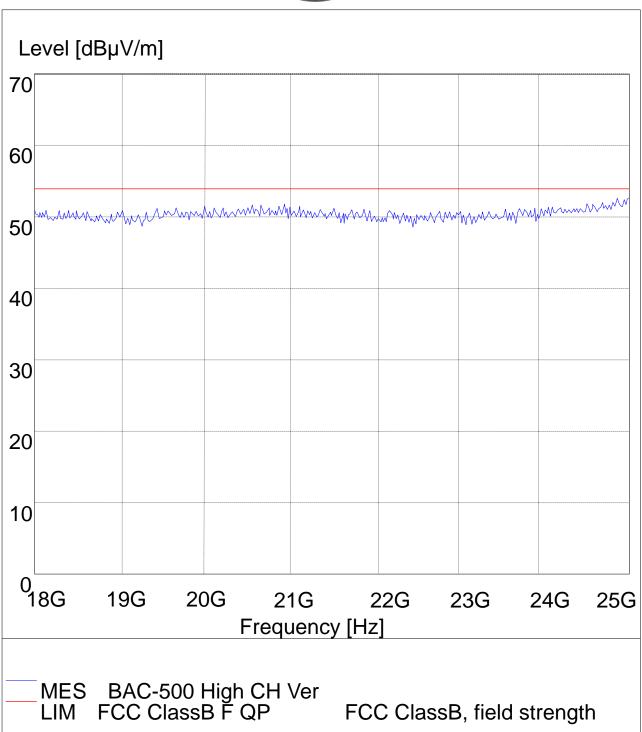

Report No: 0811037 Page 26 of 68

Date: 2008-11-26



7.0 20dB Bandwidth Measurement

7.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2 Limits of 20dB Bandwidth Measurement

The minimum of 20dB Bandwidth Measurement is <1MHz

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

EU'	Γ	Bluetooth Handsfree&Headset		Mod	lel	BAC-500		
Mod	le	Keep Transmitting I		Input Voltage		DC5	V	
Temper	ature	24	24 deg. C, Humid		dity 56%		6 RH	
Channel		Channel Frequency 20 dB Bandwidth (MHz) (kHz)		idth	Maximum Limit (kHz)		Pass/ Fail	
Low		2402	797.6		<	<1000	Pass	
Middle		2441 79		<1000		<1000	Pass	
High		2480 765.5			<	<1000	Pass	


Page 27 of 68

Report No: 0811037 Date: 2008-11-26



Test Figure:

1. Condition: Low Channel

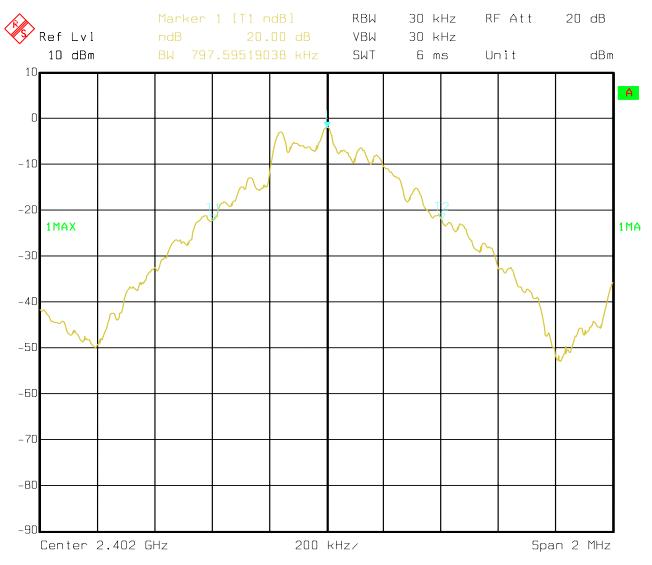


Date: 19.NOV.2008 15:35:02

Page 28 of 68

Report No: 0811037 Date: 2008-11-26



2. Condition: Middle Channel

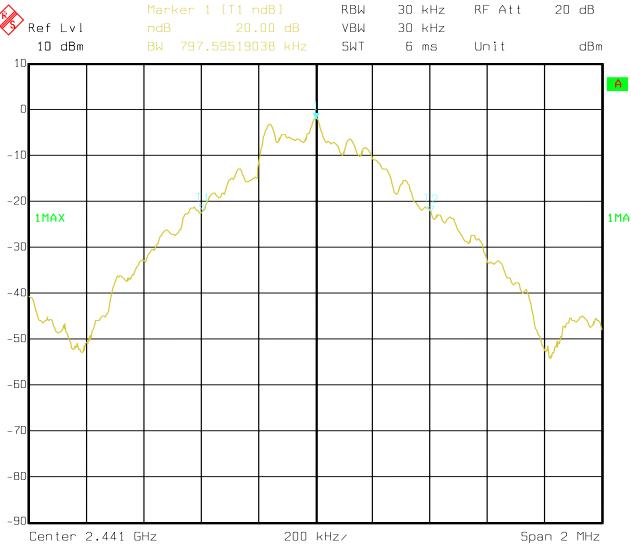


Date: 19.NOV.2008 15:33:58

Page 29 of 68

Report No: 0811037 Date: 2008-11-26



3. High Channel

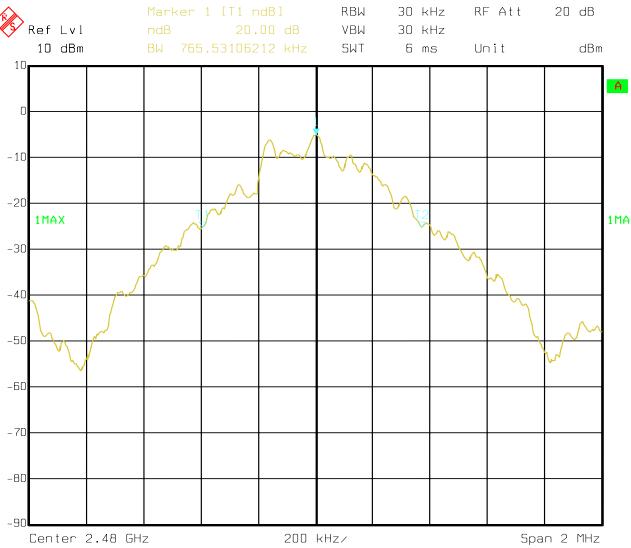

Date: 19.NOV.2008 15:36:09

Report No: 0811037 Page 30 of 68

Date: 2008-11-26



8. Maximum Peak Output Power

8.1 Regulation

According to \$15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to \$15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 31 of 68

Report No: 0811037 Date: 2008-11-26



8.4Test Results

EUT		Bluetooth Hands	free&Headset	M	Model		AC-500
Mode		Keeping Transmitting Input Voltage		Input Voltage		DC5V	
Temperature	e	24 deg	g. C,	Humidi	midity		5% RH
Channel	Cha	annel Frequency (MHz)	Peak Power (dBm)	Output	Peak P Lin (dB	nit	Pass/ Fail
Low		2402	2402 1.01		30		Pass
Middle		2441	0.82		30		Pass
High		2480	-1.48		30		Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Report No: 0811037 Page 32 of 68

Date: 2008-11-26



9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

9.4Test Result

EUT		Bluetooth Handsfree&Headset Model		BAC-500			
Mode		Keeping Transmitting Inp		Input Voltage		DC5V	
Temperature	e	24 deg	g. C,	Humidi	ty	56% RH	
Channel	Ch	annel Frequency (MHz)	Carrier Frequency Separation		Lin	nit	Pass/ Fail
Middle		2441	1MHz		≥ 25 kHz or 20		Pass
					dB band		


Page 33 of 68

Report No: 0811037 Date: 2008-11-26



Test Plots

Middle Channel

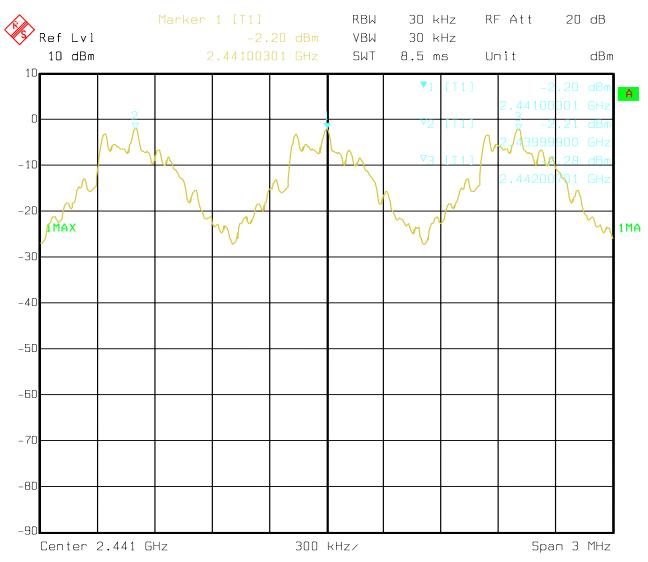

Date: 19.NOV.2008 15:44:32

Report No: 0811037 Page 34 of 68

Date: 2008-11-26



10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

11.4Test Result


EUT	Bluetooth Handsfree&Headset			Model		AC-500
Mode	Keeping Transmitting		Input Voltage		DC5V	
Temperature	24 deg. C,		Humidity		56% RH	
Operating Frequency		Number of hopping channel		Limit		Pass/ Fail
2402-2480MHz		79		≥ 15		Pass

Page 35 of 68

Report No: 0811037 Date: 2008-11-26




Test Plot

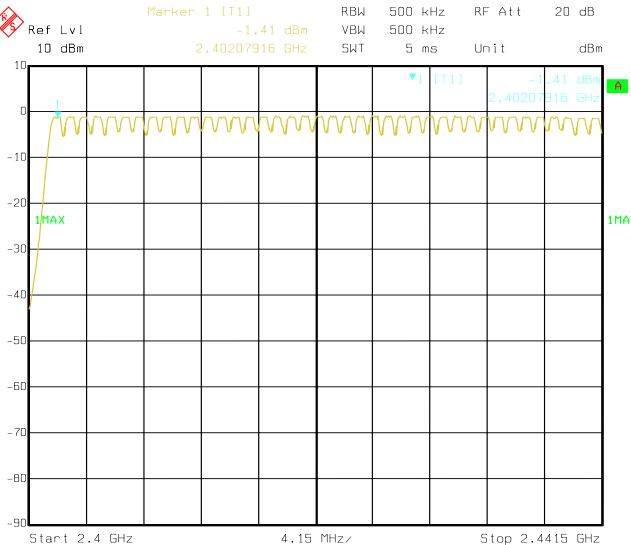

Date: 19.NOV.2008 15:51:07


Date: 2008-11-26

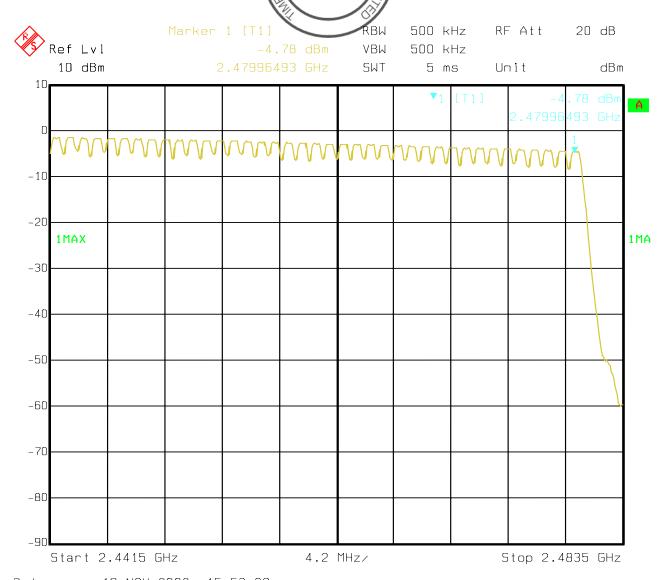

Date: 19.NOV.2008 15:53:09



Date: 2008-11-26

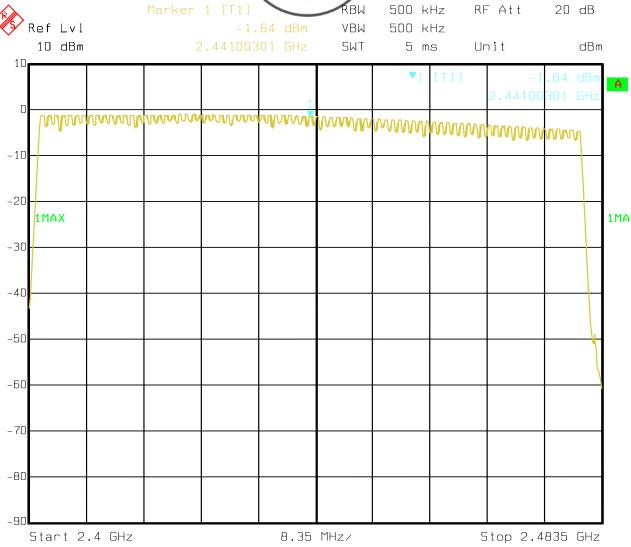

19.NOV.2008 Date: 15:47:58 Report No: 0811037 Page 38 of 68

Date: 2008-11-26



11. Time of Occupancy (Dewell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak;

Trace = max hold

- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Page 39 of 68

Report No: 0811037 Date: 2008-11-26



11.4Test Result

DH5

EUT		Bluetooth Hands	sfree&Headset	Model		В	AC-500
Mode		Keeping Transmitting Input Vo		Input Voltage		DC5V	
Temperature	e	24 deg	g. C,	Humidity		nidity 56% RH	
Channel		Reading	eading Hoping Rat		Actual		Limit
Low		2.9058	266.667 hop/s		0.31		0.4s
Middle		2.9058	266.667 hop/s		0.31		0.4s
High		2.9058	266.667 ho	p/s	0.31		0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels. And the DH5 is the worst case.

DH3

EUT		Bluetooth Hands	sfree&Headset	Model		BAC-500	
Mode	e Keeping Transmitting Input Vo		g Transmitting Input Voltage		Input Voltage		DC5V
Temperature	е	24 deg	g. C,	Humidity		Humidity 56% R	
Channel		Reading Hoping Rate		ate	Actual		Limit
Low		1.6533	400 hop/s		0.265		0.4s
Middle		1.6533	400 hop/s		0.265		0.4s
High		1.6533	400 hop/	's	0.265		0.4s

DH1

EUT		Bluetooth Hands	sfree&Headset	Model		BAC-500	
Mode	ode Keeping Transmitting Input Vo		Input Voltage		I	DC5V	
Temperature	e	24 deg	g. C,	Humidity		umidity 56% R	
Channel		Reading	Hoping Rate		Actual		Limit
Low		0.3908	800 hop/s		0.12	25	0.4s
Middle		0.3908	800 hop/s		0.125		0.4s
High		0.3908	800 hop/s		0.12	25	0.4s

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 40 of 68

Report No: 0811037 Date: 2008-11-26



Test Plots:

Low Channel: DH5

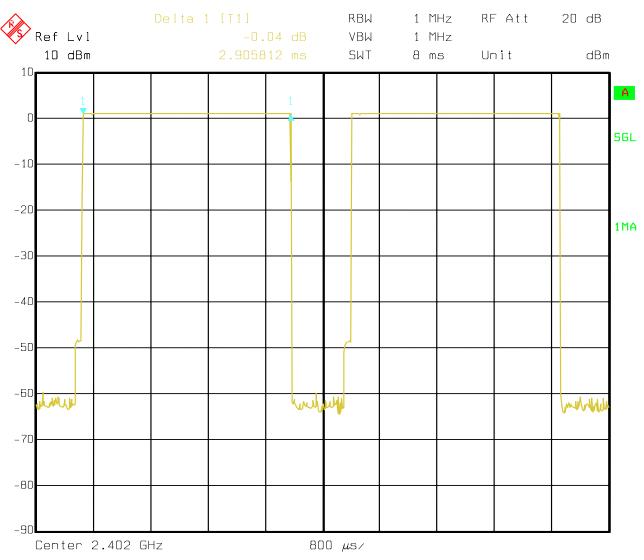


Date: 20.NOV.2008 18:36:00

Page 41 of 68

Report No: 0811037 Date: 2008-11-26



Middle Channel: DH5

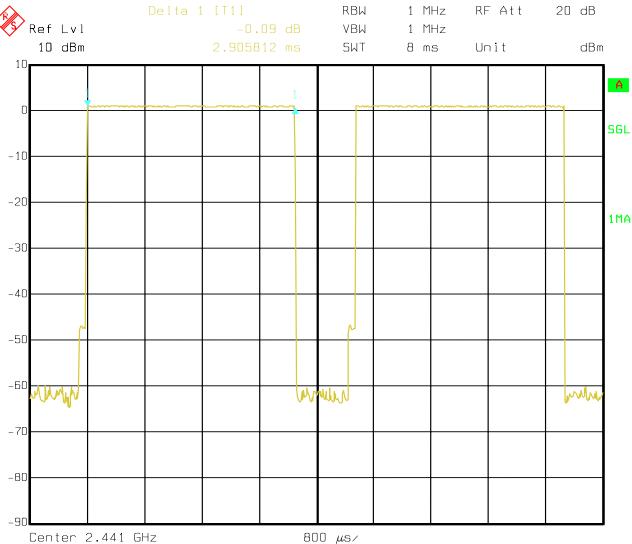


Date: 20.NOV.2008 18:36:47

Page 42 of 68

Report No: 0811037 Date: 2008-11-26



High Channel: DH5

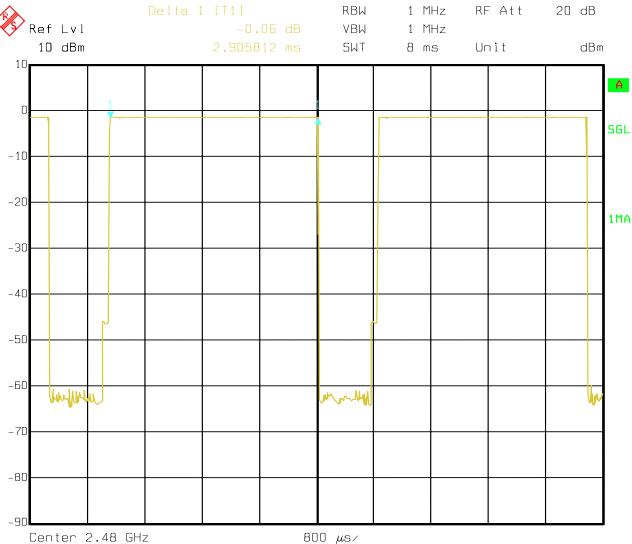


Date: 20.NOV.2008 18:37:30

Page 43 of 68

Report No: 0811037 Date: 2008-11-26



Low Channel: DH3

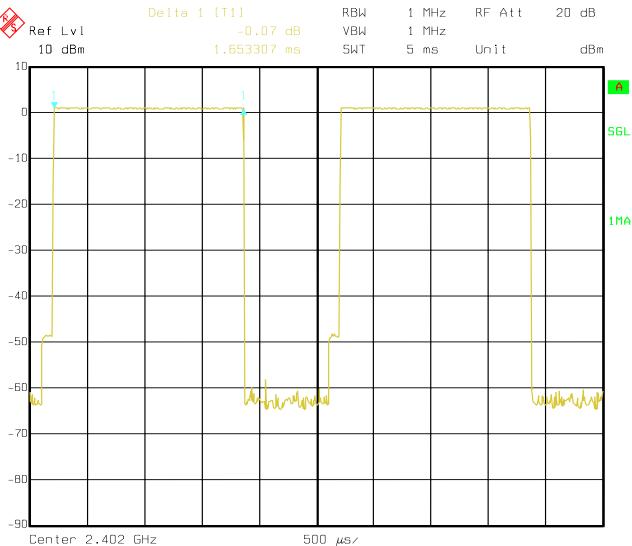


Date: 20.NOV.2008 18:35:01

Page 44 of 68

Report No: 0811037 Date: 2008-11-26



Middle Channel: DH3

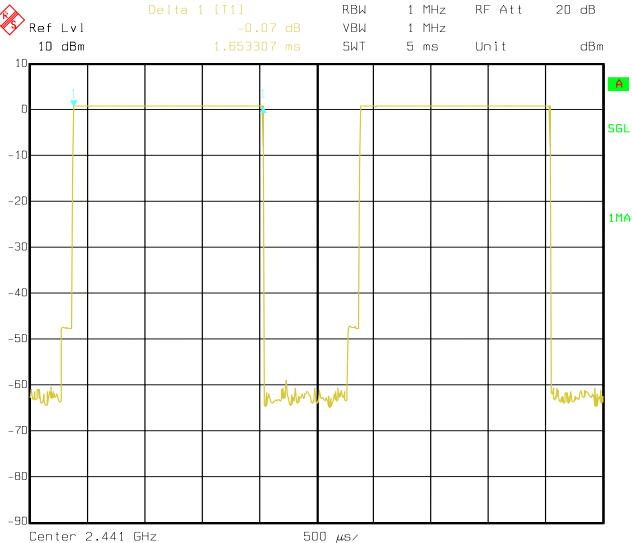


Date: 20.NOV.2008 18:33:54

Page 45 of 68

Report No: 0811037 Date: 2008-11-26



High Channel: DH3

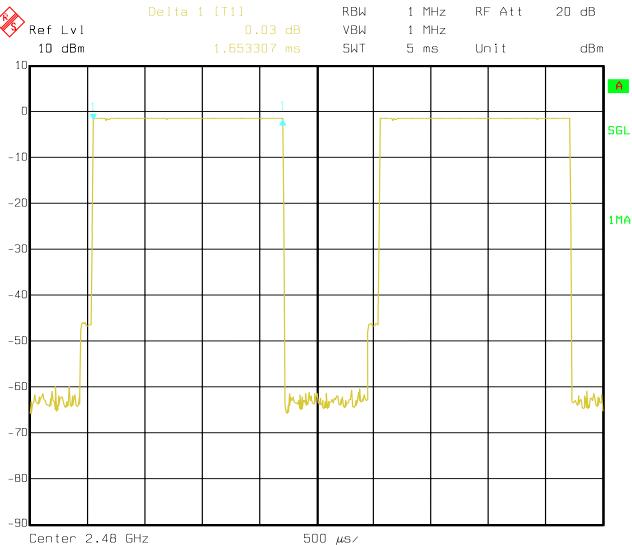


Date: 20.NOV.2008 18:33:14

Page 46 of 68

Report No: 0811037 Date: 2008-11-26



Low Channel: DH1

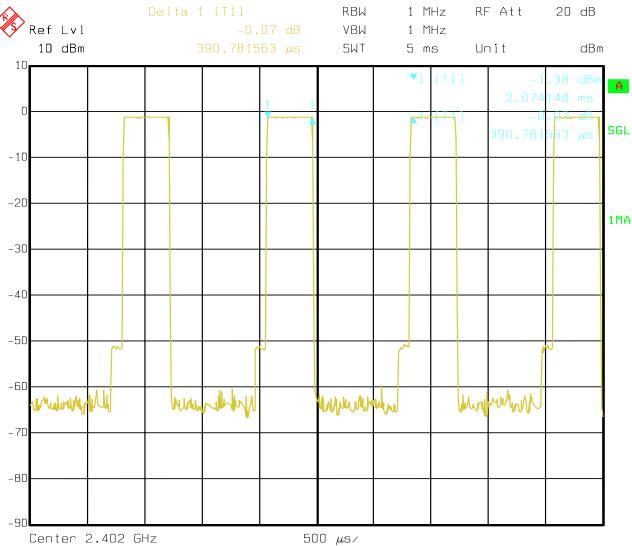


Date: 19.NOV.2008 15:55:46

Page 47 of 68

Report No: 0811037 Date: 2008-11-26



Middle Channel: DH1

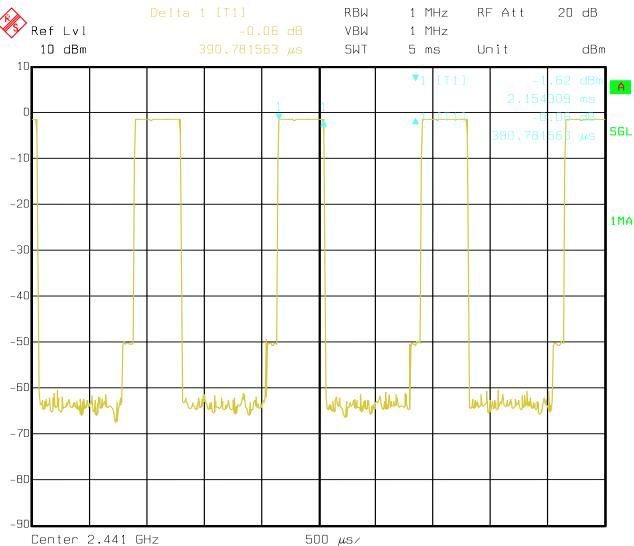


Date: 19.NOV.2008 15:56:35

Page 48 of 68

Report No: 0811037 Date: 2008-11-26



High Channel: DH1:

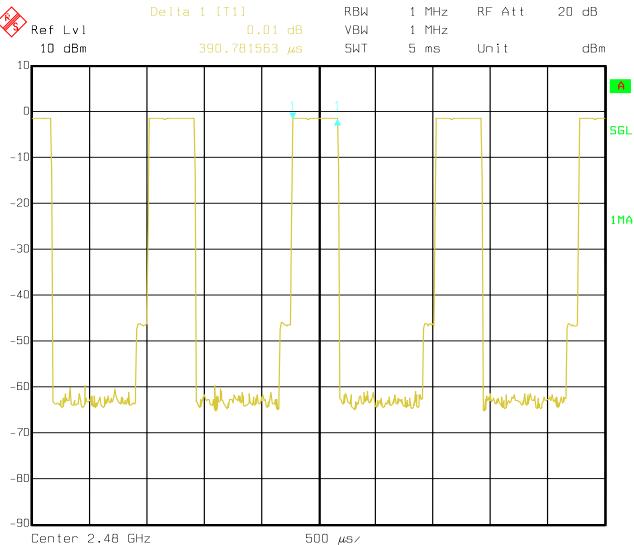

Date: 20.NOV.2008 18:31:14


Report No: 0811037 Page 49 of 68

Date: 2008-11-26



12 Out of Band Measurement

12.1 Test Setup



12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. RBW=VBW=1MHz for PK value and RBW=1MHz, VBW=10Hz for AV value; For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

Report No: 0811037 Page 50 of 68


Date: 2008-11-26



12.4 Out of Band Test Result

Product:	Bluetooth Handsfree&Headset		Model	BAC-500
Mode	Keeping Transmitting		Input Voltage	DC 5V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pas	Pass		PK
The Max. FS in	PK (dBµV/m)	40.3	Limit	$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)	28.1	Lillill	54(dBµV/m)

Test Figure:

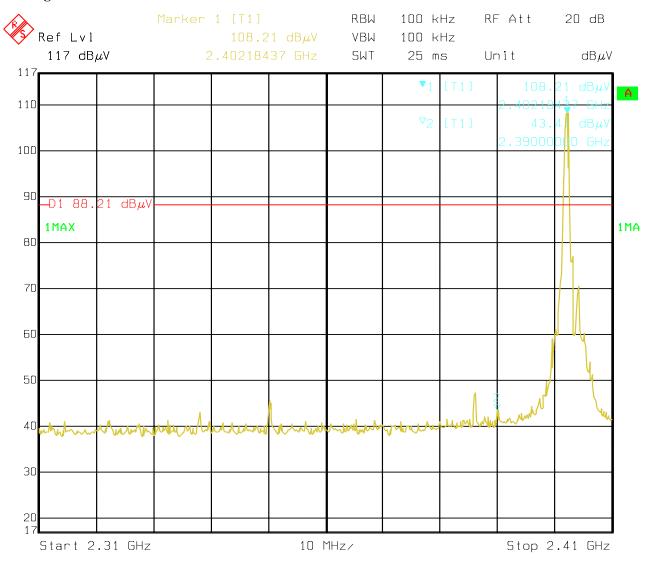

Date: 20.NOV.2008 18:53:50

Page 51 of 68

Date: 2008-11-26


Report No: 0811037



12.4 Out of Band Test Result

Product:	Bluetooth Handsfree&Headset		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC 5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	52.3	Limit	$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)	38.6		54(dBµV/m)

Test Figure:

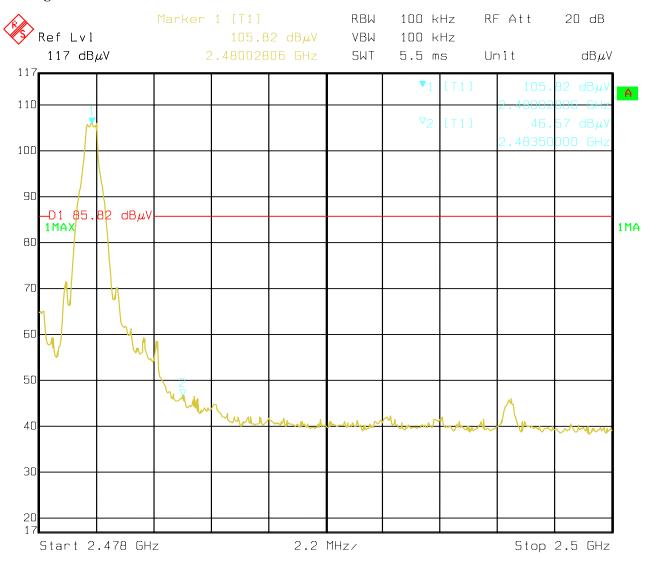

Date: 20.NOV.2008 18:49:45

Note: The Max. FS in Restrict Band was measured in conventional method

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0811037 Page 52 of 68

Date: 2008-11-26



13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi

are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected construction

The antenna is chip dielectric antenna. The maximum Gain of this antenna is 2.0dBi

Report No: 0811037 Date: 2008-11-26



14.0 Maximum Permissible Exposure

Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2m normally can be maintained between the user and the device.

(a) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E 2 , H 2 or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100000			5	6

(b) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E 2 , H 2 or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100000			1.0	30

Note: f=frequency in MHz; *Plane-wave equivalent power density

MPE Calculation Method

 $E(V/m) = (30*P*G)^{0.5}/d$ Power Density: $Pd(W/m^2) = E^2/377$

 $\mathbf{E} = \text{Electric Field (V/m)}$

P = Peak RF output Power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

 $Pd = (30*P*G) / (377*d^2)$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0811037 Page 54 of 68

Date: 2008-11-26




Calculated Result and Limit

Antenna Gain (Numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm²)	Limit of Power Density (S) (mW/cm²)	Test Result
1.585	1.01	1.262	0.0004	1	Compiles

Report No: 0811037 Page 55 of 68

Date: 2008-11-26

15.0 99% Bandwidth Measurement Test Setup



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW. Then use the 99% Occupied Bandwidth function of the analyzer to measure. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

Test Result


EUT		Bluetooth Handsfree&Headset Model		BAC-500
Mode		Keep Transmitting	Input Voltage	DC 5V
Temperate	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz) Data Transfer Rate (Mbps)		99% Bandwidth (kHz)	Pass/ Fail
1		2402	829.7	Pass
6		2441	825.7	Pass
11		2480	821.6	Pass

Page 56 of 68

Report No: 0811037 Date: 2008-11-26



Test Figure: Low Channel

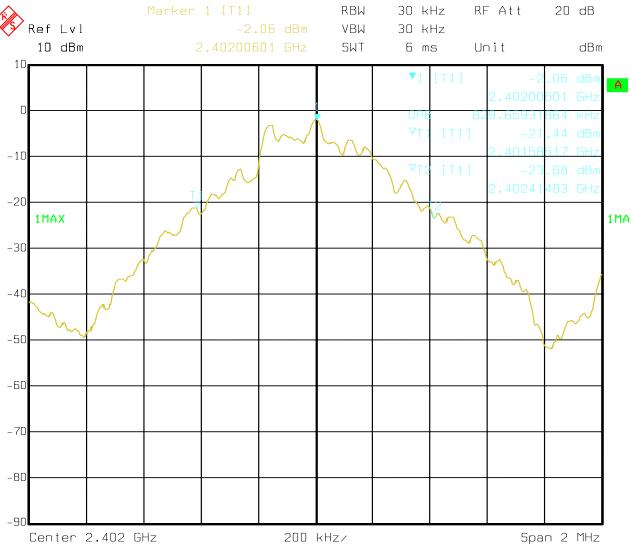


Date: 19.NOV.2008 15:41:36

Page 57 of 68

Report No: 0811037 Date: 2008-11-26



Middle Channel

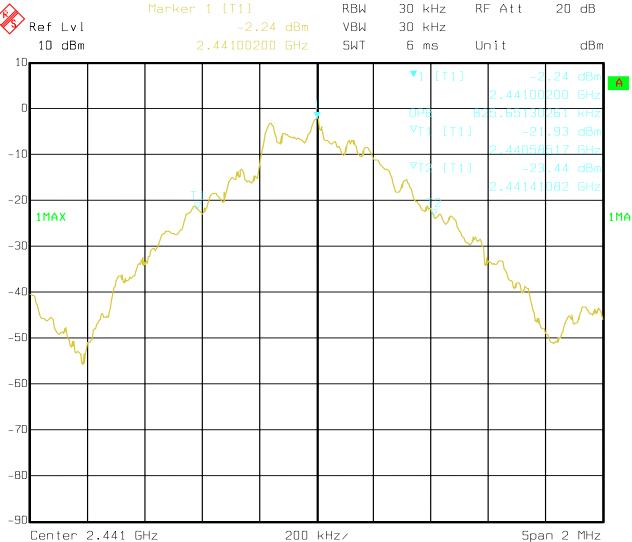


Date: 19.NOV.2008 15:39:17

Page 58 of 68

Report No: 0811037 Date: 2008-11-26



High Channel

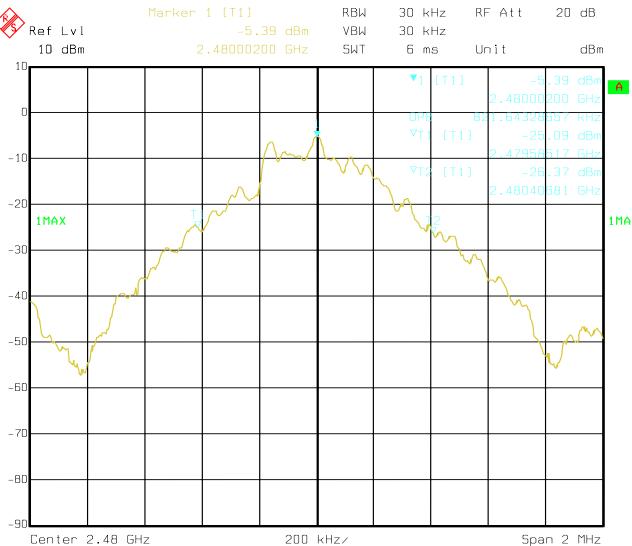

Date: 19.NOV.2008 15:38:17

Page 59 of 68

Report No: 0811037 Date: 2008-11-26



16.0 FCC ID Label

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any

interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:




Page 60 of 68

Report No: 0811037 Date: 2008-11-26



17.0 Photo of testing

17.1 Conducted test View—

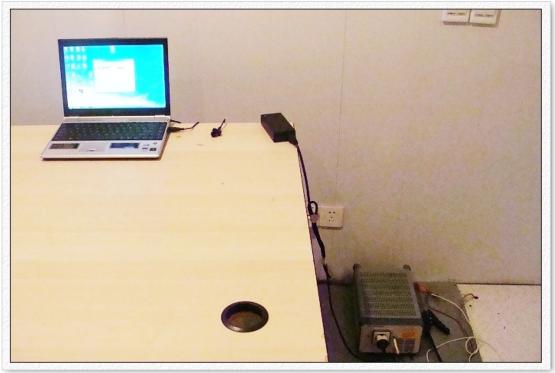

DSC-H10 F3.5 1/50s ISO1600

Page 61 of 68

Report No: 0811037 Date: 2008-11-26



Emission Radiated test View--



Page 62 of 68

Report No: 0811037 Date: 2008-11-26



Photo for the EUT 17.3





DSC4H10 F3.5 1/15: ISO 400



Page 63 of 68








The report refers only to the sample tested and does not apply to the bulk.

Page 64 of 68




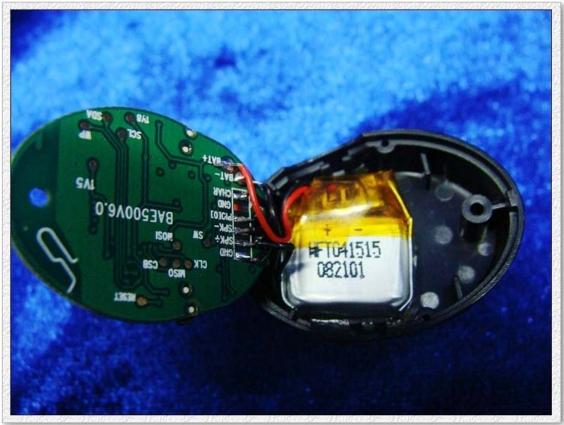

DSC-H10 F3.5 1/8s ISO 400

Page 65 of 68




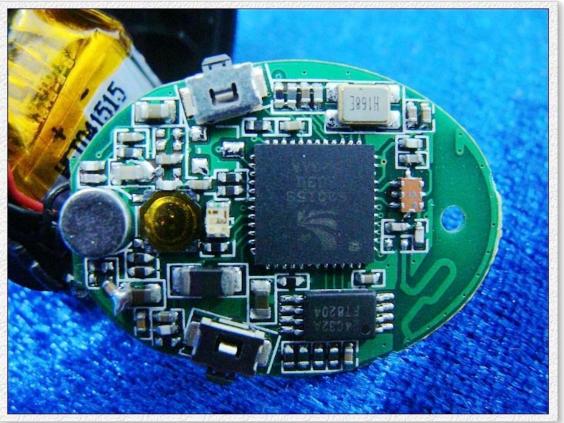

DSC-H10 F3.5 1/4s ISO640 1.0EV

Page 66 of 68



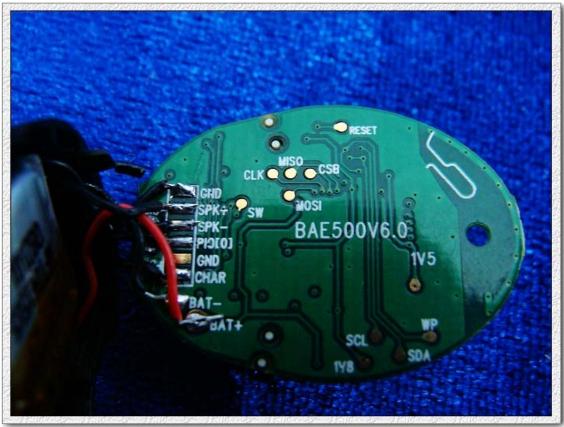

DSC-H10 F3.5 1/4s ISO640

Page 67 of 68







Page 68 of 68

Report No: 0811037 Date: 2008-11-26



Car Charger



End of the report