


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


| | | | |
|---------------|----------|----------------|-----------|
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Alvin Li | Configurations | 2.4G + 5G |

Horizontal

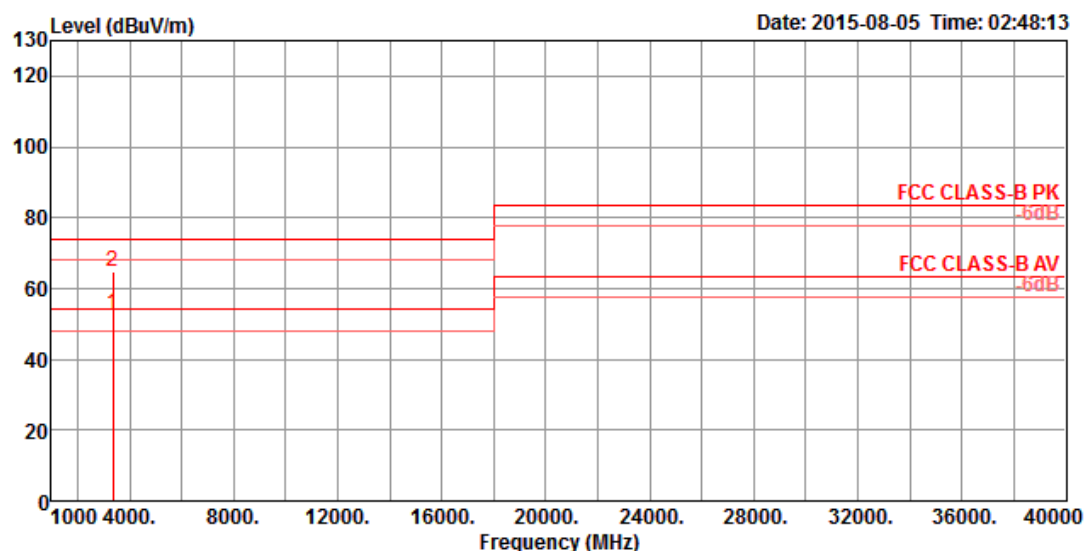

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 3346.74 | 52.89 | 54.00 | -1.11 | 54.05 | 4.59 | 28.67 | 34.42 | 132 | 275 Average | HORIZONTAL |
| 2 | 3348.11 | 64.65 | 74.00 | -9.35 | 65.81 | 4.59 | 28.67 | 34.42 | 132 | 275 Peak | HORIZONTAL |

Vertical

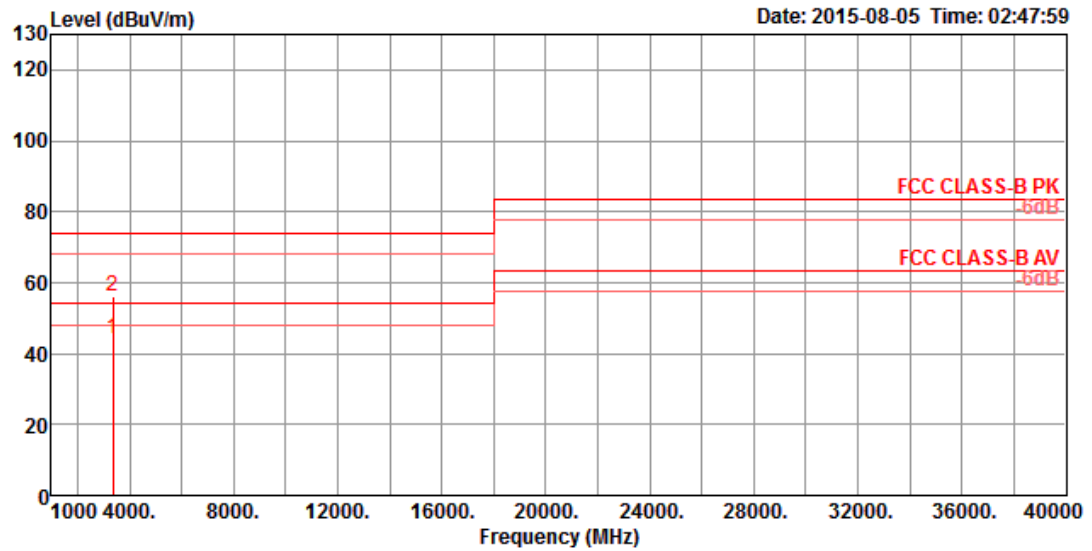

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-------------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 3349.20 | 44.35 | 54.00 | -9.65 | 45.51 | 4.59 | 28.67 | 34.42 | 153 | 298 Average | VERTICAL |
| 2 | 3350.43 | 56.19 | 74.00 | -17.81 | 57.35 | 4.59 | 28.67 | 34.42 | 153 | 298 Peak | VERTICAL |