


RF Exposure Info. for Model F3507G

The Figure-1 through Figure-5 show the antenna configurations of the applying host PC devices in this application.

Figure-1 Antenna configuration of ThinkPad X200/X200s

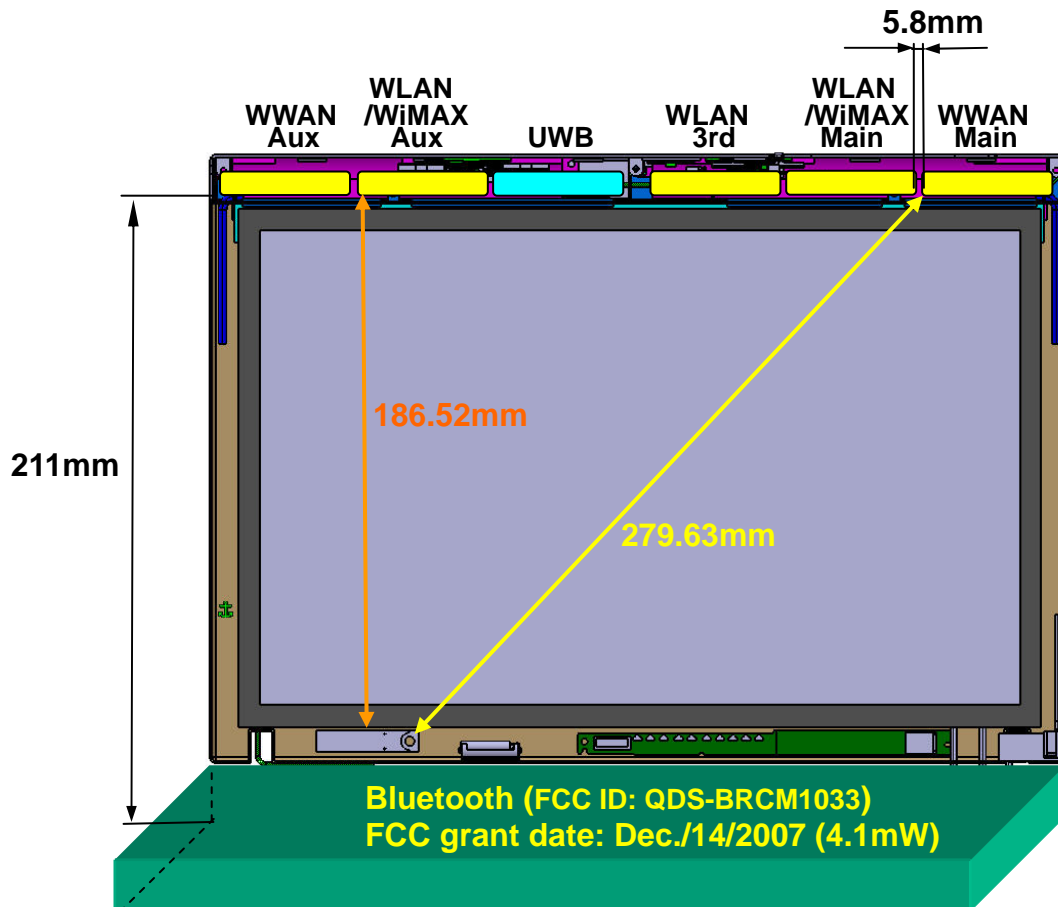

WWAN - Bluetooth:

The RF Exposure evaluation nor SAR testing in co-locating with Bluetooth is not required pursuant to the FCC document "616217 D01 SAR for Laptop v01" issued on December/07/2007, since the separation distance to the nearest WWAN Tx antenna is more than 5cm apart and its maximum power is 4.1mW.


WWAN - UWB:

Since UWB transmitter is not mentioned in the section 2.1091 and 2.1093, it does not subject to RF exposure evaluation. Therefore no co-located MPE or SAR testing is required.

WWAN - WLAN:

The WWAN main (Tx) antenna and WLAN (or WiMAX) Tx antennas co-locate with 5.8mm of separation distance, and both devices transmit RF simultaneously.

Figure-2 Antenna configuration of ThinkPad X300/X301

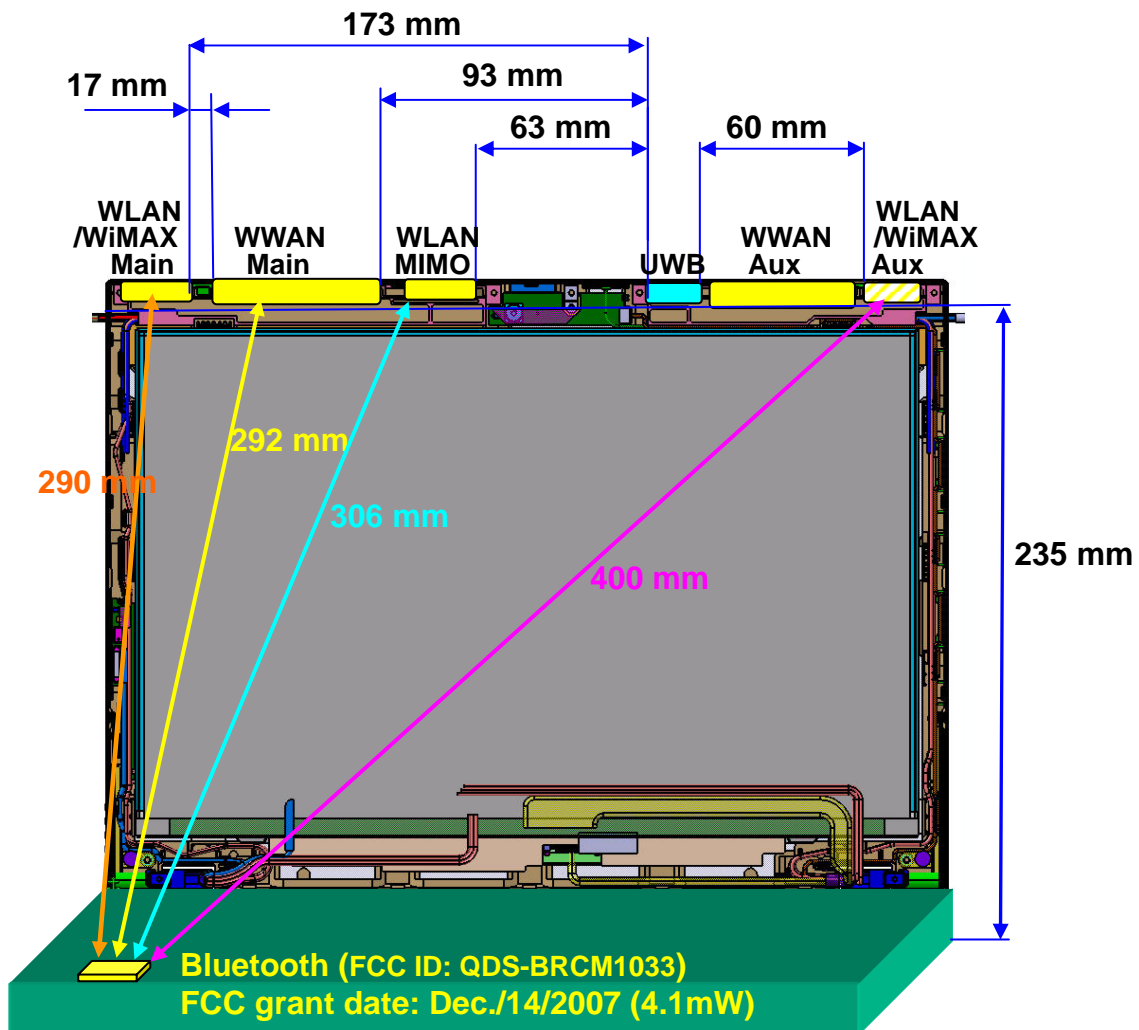

WWAN - Bluetooth:

The RF Exposure evaluation nor SAR testing in co-locating with Bluetooth is not required pursuant to the FCC document "616217 D01 SAR for Laptop v01" issued on December/07/2007, since the separation distance to the nearest WWAN Tx antenna is more than 5cm apart and its maximum power is 4.1mW.


WWAN - UWB:

Since UWB transmitter is not mentioned in the section 2.1091 and 2.1093, it does not subject to RF exposure evaluation. Therefore no co-located MPE or SAR testing is required.

WWAN - WLAN:

The WWAN main (Tx) antenna and WLAN (or WiMAX) Tx antennas co-locate with 17mm of separation distance, and both devices transmit RF simultaneously.

Figure-3 Antenna configuration of ThinkPad SL300

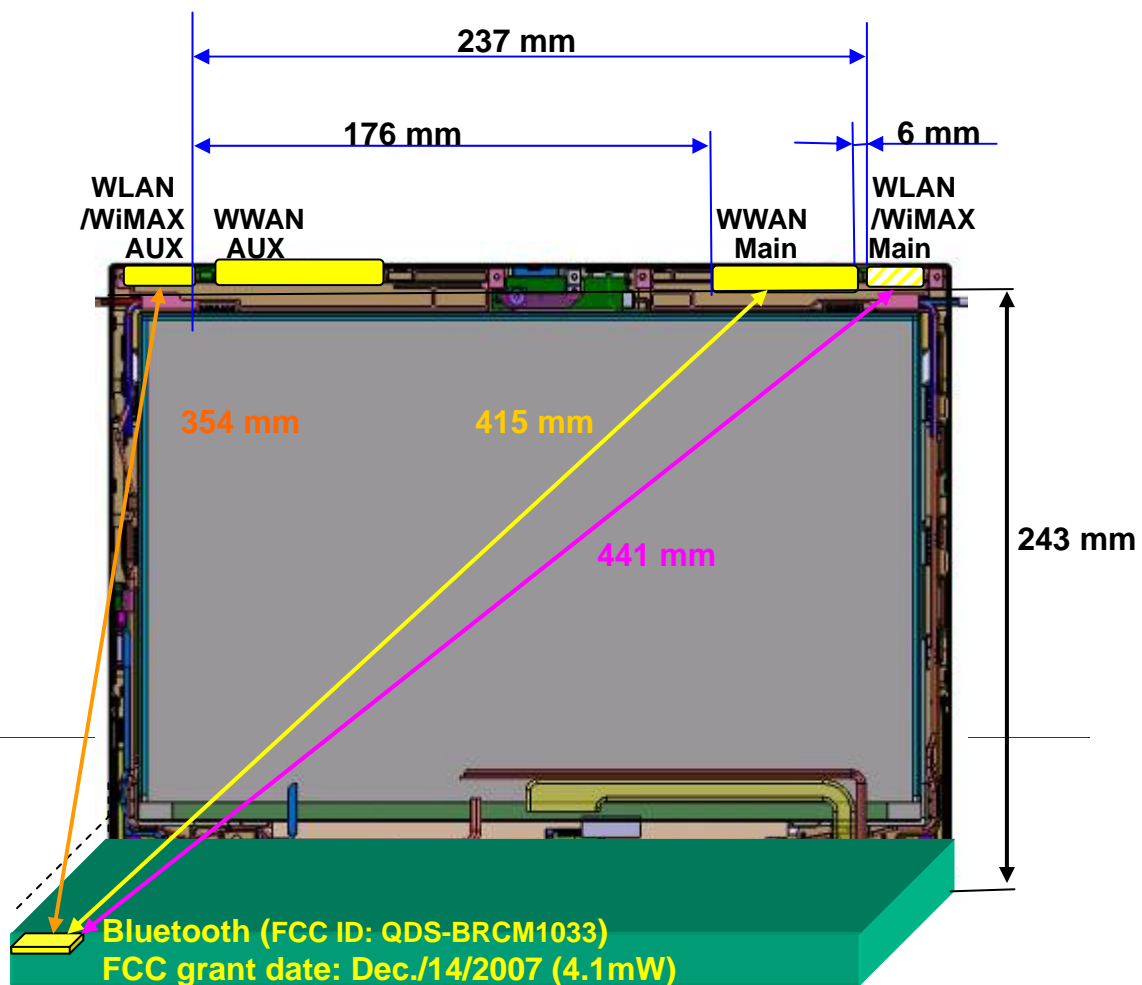


WWAN - Bluetooth:

The RF Exposure evaluation nor SAR testing in co-locating with Bluetooth is not required pursuant to the FCC document "616217 D01 SAR for Laptop v01" issued on December/07/2007, since the separation distance to the nearest WWAN Tx antenna is more than 5cm apart and its maximum power is 4.1mW.

WWAN - WLAN:

The WWAN main (Tx) antenna and WLAN (or WiMAX) Tx antennas co-locate with 6mm of separation distance, and both devices transmit RF simultaneously.

Figure-4 Antenna configuration of ThinkPad SL400

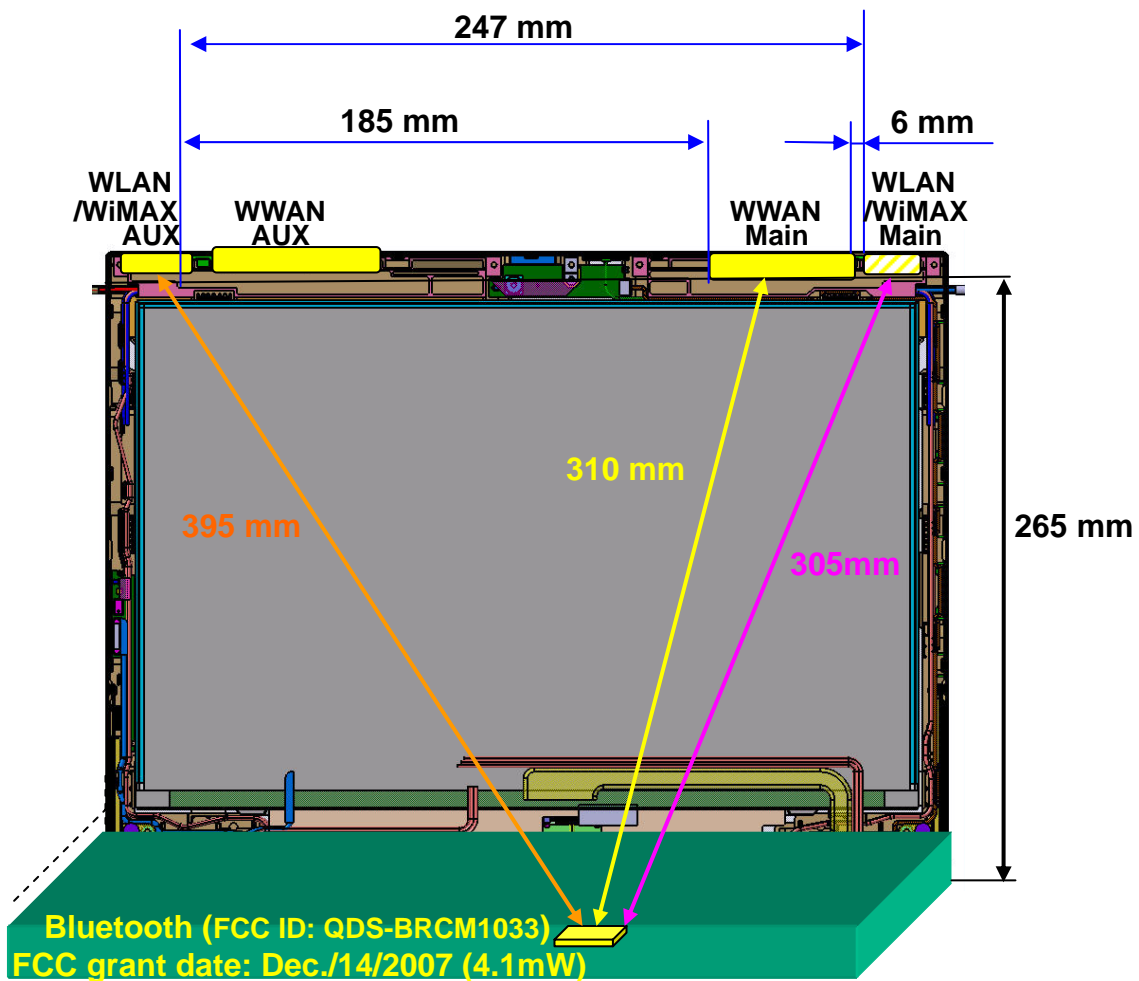


WWAN - Bluetooth:

The RF Exposure evaluation nor SAR testing in co-locating with Bluetooth is not required pursuant to the FCC document "616217 D01 SAR for Laptop v01" issued on December/07/2007, since the separation distance to the nearest WWAN Tx antenna is more than 5cm apart and its maximum power is 4.1mW.

WWAN - WLAN:

The WWAN main (Tx) antenna and WLAN (or WiMAX) Tx antennas co-locate with 6mm of separation distance, and both devices transmit RF simultaneously.

Figure-5 Antenna configuration of ThinkPad SL500

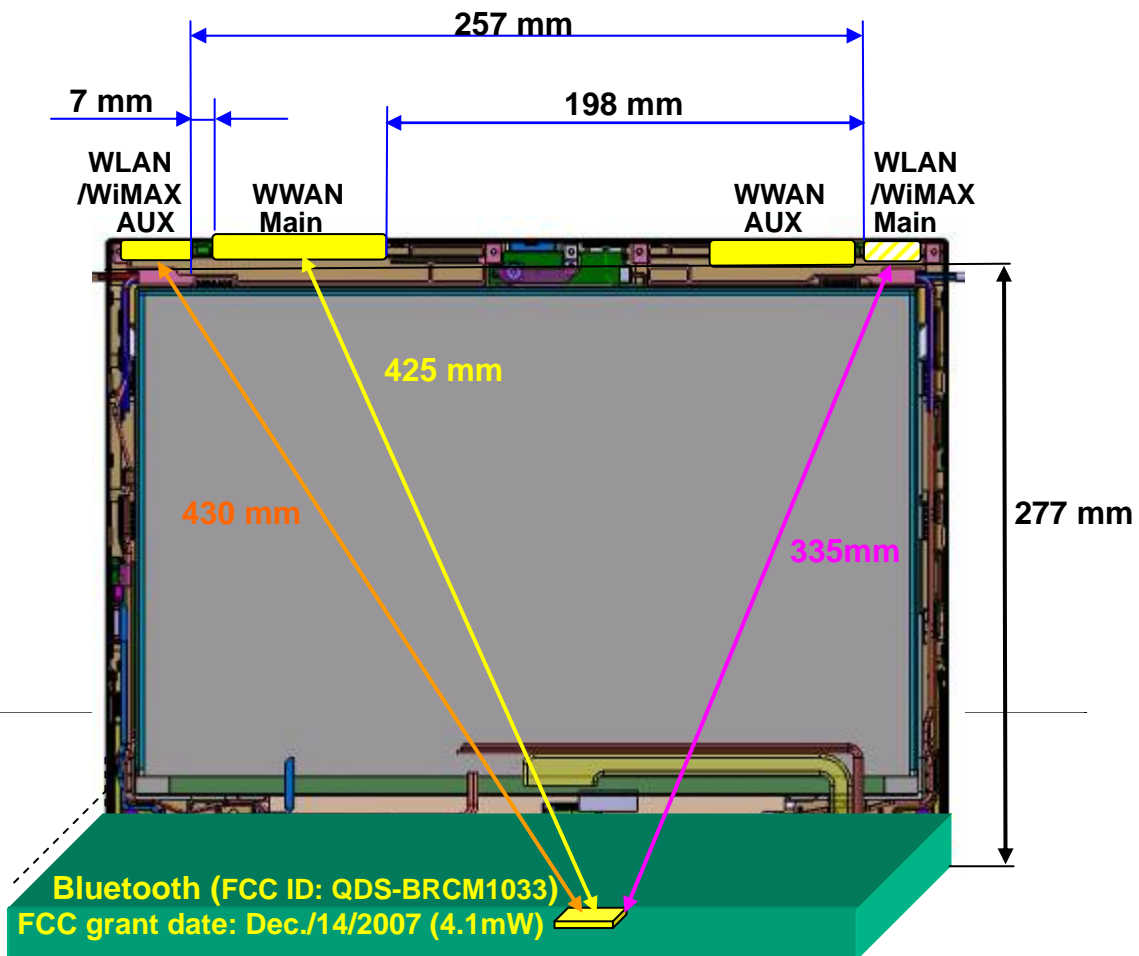

WWAN - Bluetooth:

The RF Exposure evaluation nor SAR testing in co-locating with Bluetooth is not required pursuant to the FCC document "616217 D01 SAR for Laptop v01" issued on December/07/2007, since the separation distance to the nearest WWAN Tx antenna is more than 5cm apart and its maximum power is 4.1mW.

WWAN - WLAN:

The WWAN main (Tx) antenna and WLAN (or WiMAX) Tx antennas co-locate with 7mm of separation distance, and both devices transmit RF simultaneously.

Table-1: WWAN (Model: **F3507G**) MPE info.

F3507G Grant date	Host PC model	FCC CFR	Max. Conducted power (P)	Max. Host PC antenna gain (G)	Distance (D)	MPE *1 (mW/cm ²)	limit (mW/cm ²)
07/18/2008 with WLAN co-location	ThinkPad 200/X200s	Part 22H	2.0 W	-1.17 dBi	21.1 cm	0.273	0.533 (=800/1500)
	ThinkPad 300/X301			-0.04 dBi	23.5 cm	0.286	
	ThinkPad SL300			-1.97 dBi	24.3 cm	0.171	
	ThinkPad SL400			-1.08 dBi	26.5 cm	0.179	
	ThinkPad SL500			-0.52 dBi	27.7 cm	0.184	
	ThinkPad 200/X200s	Part 24E	0.871 W	1.34 dBi	21.1 cm	0.212	1.0
	ThinkPad 300/X301			3.92 dBi	23.5 cm	0.310	
	ThinkPad SL300			0.12 dBi	24.3 cm	0.121	
	ThinkPad SL400			-1.16 dBi	26.5 cm	0.076	
	ThinkPad SL500			2.10 dBi	27.7 cm	0.147	

$$*1: MPE = (P \times 1000) \times (10^{G/10}) / (4 \times \pi \times D^2)$$

Table-2: Maximum WWAN antenna gain

Host PC model	Antenna Manufacturer	LCD size	Antenna P/N	Cable length (mm)	LCD Material	Frequency band (MHz)	
						EVDO/GSA/UMTS (US)	
						824 – 849	1850 - 1910
ThinkPad X200/X200s	ACON	12.1"	25.90600.001	535	Magnesium+ Aluminum+ABS	-1.86	1.34
	Wistron		25.90589.001	551		-1.17	-1.09
ThinkPad X300/X301	NISSEI	13.3"W	3209996	486	CFRP+GFRP	-0.04	3.92
ThinkPad SL300	ACON	13.3"W	AMP8P-700054	564	ABS	-4.12	-1.56
	Amphenol		14G152168431LV	599		-1.97	0.12
ThinkPad SL400	ACON	14.1"W	AMP8P-700052	788	ABS	-1.08	-1.71
	Tyco		C-2023943-1			-4.87	-1.16
ThinkPad SL500	ACON	15.4"W	AMP8P-700053	974	ABS	-3.25	-2.38
	Tyco		C-2023949-1			-0.52	2.10

Table-3: Co-located WLAN&WiMAX Peak power

Grant date	FCC ID	WLAN				WiMAX
		Part 15C 2.4GHz band	Part 15E 5.18 – 5.32GHz	Part 15E 5.50 – 5.70GHz	Part 15C 5.745 – 5.825GHz	Part 27 2.496 – 2.690GHz
05/09/2008	PPD-AR5BHB63-L	0.1977W	N/A	N/A	N/A	N/A
06/24/2008	PD9LEN512ANMU	0.091 W	0.028 W	0.054 W	0.021 W	N/A
07/07/2008	PD9533ANMU	0.130 W	0.110 W	0.110 W	0.068 W	N/A
07/18/2008	PD9533ANXMU *2	0.470 W	0.048 W	0.048 W	0.436 W	0.211 W

*2: The new co-located WLAN&WiMAX combo module in this application

Table-4: WLAN&WiMAX MPE info.

	Max. Conducted power from Table-3 (P)	Max. Host PC antenna gain from Table-5 (G)	MPE *3 (mW/cm ²)	limit (mW/cm ²)
Part 15C 2.4GHz band	0.470 W	1.94 dBi	0.146	1.0
Part 15E 5.18 – 5.32GHz	0.110 W	2.12 dBi	0.036	
Part 15E 5.50 – 5.70GHz	0.110 W	2.34 dBi	0.038	
Part 15C 5.745 – 5.825GHz	0.436 W	2.76 dBi	0.164	
Part 27 2.496 – 2.690GHz	0.211 W	1.72 dBi	0.062	

$$*3: MPE = (P \times 1000) \times (10^{G/10}) / (4 \times \pi \times 20^2)$$

With the results of Table-1 and Table-4, the summation of the highest MPE for WWAN and WLAN (or WiMAX) devices is calculated as below.

- 1) Part 24E (PCM) & Part 15C/E or Part 27:
 $0.310 + 0.164 = \mathbf{0.474} \text{ mW/cm}^2$ (Limit=1.0)
- 2) Part 22H (Cellular) & Part 15C/E or Part 27:
Per OET Bulletin 65 for frequency bands with different limits, the MPEs are calculated separately for each band, then divided by the limit for the band and the results are summed. The summation must be less than 1.
i.e. $0.286 / 0.533 + 0.164 / 1.0 = 0.701 < 1.0$

Therefore, the applying modular transmitter has found to comply with the FCC MPE limit according to FCC CFR 47 section 2.1091 for general Population/Uncontrolled exposure, even the co-located WLAN (or WiMAX) devices shown in the Table-3 transmit RF simultaneously.

Table-5: Certified WLAN&WiMAX antenna List

		WLAN Main Antenna				
Host PC	Antenna Manufacturer	Antenna P/N	Frequency band (GHz)			
			2.4 -2.5	5.15 -5.35	5.47 -5.725	5.725 -5.85
X300	NISSEI	3209970	1.88	2.12	2.34	2.31
X301						
X200/X200s	ACON	25.90598.001	1.17	-1.19	-2.38	-2.36
	Wistron NW	25.90587.001	1.94	0.16	0.61	0.29
SL300	ACON	APM6P-700033	0.96	-0.05	-1.73	-2.27
	Amphenol	14G152168231LV	-0.59	1.36	2.18	1.64
SL400	ACON	APM6P-700027	-1.32	-0.88	-3.22	-2.97
	TYCO	2023940-1	-2.39	-0.55	-2.48	-2.66
SL500	ACON	APM6P-700028	-1.16	-1.83	-2.00	-2.00
	TYCO	2023946-1	-0.58	-0.68	-2.08	-1.69

		WLAN Auxiliary Antenna			
Antenna P/N		Frequency band (GHz)			
		2.4 -2.5	5.15 -5.35	5.47 -5.725	5.725 -5.85
3210002		1.26	-0.14	1.44	1.47
25.90597.001		1.04	-0.11	0.33	-1.06
25.90586.001		0.59	-1.27	-0.33	-0.77
APM6P-700034		-0.86	-2.97	-0.85	-0.69
14G152168131LV		-1.00	1.96	2.19	2.76
APM6P-700029		-0.23	-1.77	-2.57	-2.74
2023944-1		1.52	-0.96	-1.93	-1.93
APM6P-700030		-0.74	-3.11	-2.68	-2.51
2023950-1		-0.11	-1.50	-2.40	-3.11

		WLAN 3rd Antenna			
Antenna P/N		Frequency band (GHz)			
		2.4 -2.5	5.15 -5.35	5.47 -5.725	5.725 -5.85
3209988		0.90	-0.14	-0.50	-0.64
25.90601.001		-1.05	-1.39	-3.47	-4.61
25.90590.001		0.44	-1.77	-1.06	-1.01
N/A					
N/A					
N/A					
N/A					
N/A					
N/A					

		WiMAX Main Antenna (Only main antenna is used for WiMAX Tx.)	
Host PC	Antenna Manufacturer	Antenna P/N	Frequency band (GHz)
			2.49 - 2.69
X300	NISSEI	3209970	1.72
X301			
X200/X200s	ACON	25.90598.001	1.51
	Wistron NW	25.90587.001	0.90
SL300	ACON	APM6P-700033	-0.96
	Amphenol	14G152168231LV	-0.59
SL400	ACON	APM6P-700027	-3.61
	TYCO	2023940-1	-2.20
SL500	ACON	APM6P-700028	-1.65
	TYCO	2023946-1	-0.67