



Onsource International Limited

Application
For
Certification
(FCC ID: VVWOS200701)

Animal Ultrasonic Humidifier

0728762
AL/ Connie Lau
December 31, 2007

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2371 0521 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Onsource International Limited

MODEL: Onsource: WA-85, WA-87, WA-88, WA-92

Health Select: WA-85, WA-87, WA-88, WA-92

FCC ID: VVWOS200701

December 31, 2007

This report concerns (check one:) Original Grant ☒ Class II Change ☐

Equipment Type: Animal Ultrasonic Humidifier

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 18.123? Yes ☐ No ☒

If no, assumed Part 18 for Animal Ultrasonic Humidifier - the new 47 CFR Part 18 [10-01-06 Edition] provision.

Report prepared by:

Chow Chi Ming, Billy
Intertek Testing Services Hong Kong Ltd.
2/F., Garment Center,
576, Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8528
Fax: 852-2371-0521

INTERTEK TESTING SERVICES

Table of Contents

1.0 <u>General Description</u>	2
1.1 Product Description	2
1.2 Related Submittal(s) Grants	2
1.3 Test Methodology	3
1.4 Test Facility and Test Equipment Used	3
2.0 <u>System Test Configuration</u>	5
2.1 Justification	5
2.2 EUT Exercising Software	5
2.3 Special Accessories	5
2.4 Equipment Modification	6
2.5 Measurement Uncertainty	6
2.6 Support Equipment and Description	6
3.0 <u>Emission Results</u>	8
3.1 Field Strength Calculation	9
3.2 Radiated Emission Configuration Photograph	11
3.3 Radiated Emission Data	12
3.4 Conducted Emission Configuration Photograph	15
3.5 Conducted Emission Data	16
4.0 <u>Equipment Photographs</u>	22
5.0 <u>Product Labelling</u>	24
6.0 <u>Technical Specifications</u>	26
7.0 <u>Instruction Manual</u>	28
8.0 <u>Miscellaneous Information</u>	30
8.1 Discussion of Pulse Desensitization	31
8.2 Calculation of Average Factor	32
8.3 Emission Test Procedures	33

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	filename
Test Report	Test Report	report.pdf
Operation Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission	radiated photos.doc
Test Setup Photo	Conducted Emission	conducted photos.doc
External Photo	External Photo	external photos.doc
Internal Photo	Internal Photo	internal photos.doc
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 **General Description**

1.1 Product Description

The Equipment Under Test (EUT) is an Animal Ultrasonic Humidifier which is powered by AC 120V 60Hz and operating at around 2.4MHz frequency. When the EUT is powered ON, it will use high-frequency vibration to create water droplets and emit these mist of water into the room.

The models WA-87, WA-88 and WA-92 are declared to be identical to the model WA-85 in hardware aspect. The difference in model number and trade name serves as marketing strategy. The representative model WA-85 was selected to test.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of a Animal Ultrasonic Humidifier. No other related submittal grants.

INTERTEK TESTING SERVICES

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in FCC/OST MP-5 (1986). All measurements were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The EUT was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in FCC/OST MP-5 (1986).

The EUT was powered by 120V a.c. 60Hz.

For maximizing emissions, the EUT was rotated through 360°. For loop antenna, the antenna height was fixed at around 2 meters above the ground plane. For biconical and log-periodic antenna, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the EUT is turned on, it emits the RF energy.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

INTERTEK TESTING SERVICES

2.4 Equipment Modification

Any modifications installed previous to testing by Onsource International Limited will be incorporated in each production model sold/leased in the United States. No modifications were installed by Intertek Testing Services.

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

N/A

All the items listed under section 2.0 of this report are

Confirmed by:

*Chow Chi Ming, Billy
Manager
Intertek Testing Services Hong Kong Ltd.
Agent for Onsource International Limited*

Signature

December 31, 2007 Date

INTERTEK TESTING SERVICES

EXHIBIT 3

EMISSION RESULTS

INTERTEK TESTING SERVICES

3.0 **Emission Results**

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization, average factor and distance factor (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + PD + AV - DF$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

AF = Antenna Factor in dB (including the cable factor)

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

DF = Distance Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + PD + AV - DF$$

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation (cont'd)

Example

Assume a receiver reading of 39.0 dB μ V is obtained. The antenna factor of 10.6 dB is added. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was 0 dB, however, the distance factor is -20 dB. The net field strength for comparison to the appropriate emission limit is 29.6 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 39.0 \text{ dB}\mu\text{V}$$

$$AF = 10.6 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$DF = 20 \log(3/30) = -20\text{dB}$$

$$AV = 0 \text{ dB}$$

$$FS = 39 + 10.6 - 20 = 29.6 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(29.6 \text{ dB}\mu\text{V/m})/20] = 30.2 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
at
5.004 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.doc.

INTERTEK TESTING SERVICES

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by -2.1 dB margin

The radiated emission test was observed up to 400MHz

TEST PERSONNEL:



Signature

Tam Ka Po, Sylvia, Compliance Engineer
Typed/Printed Name

December 31, 2007
Date

INTERTEK TESTING SERVICES

Applicant: Onsource International Limited
Model: WA-85

Date of Test: 12 December, 2007

Table 1

Radiated Emissions
Pursuant to FCC 18.305(b) emissions requirement

Frequency (MHz)	Net at 3m (dB μ V/m)	Calculated at 30m (dB μ V/m)	Limit at 30m (dB μ V/m)	Margin (dB)
2.505	40.9	20.9	23.5	-2.6
5.004	41.4	21.4	23.5	-2.1
7.530	40.2	20.2	23.5	-3.3
15.004	38.1	18.1	23.5	-5.4
25.001	36.3	16.3	23.5	-7.2
27.509	34.8	14.8	23.5	-8.7

- Notes:
1. Average Detector Data unless otherwise stated.
 2. Negative value in the margin column shows emission below limit.
 3. Frequency range scanned: 9kHz to 30MHz
 4. Only emissions significantly above equipment noise floor are reported.
 5. A closer fixed distance was used for testing and 1/d attenuation law factor was used.
 6. Loop antenna was used for the emission below 30MHz.

Test Engineer: Tam Ka Po, Sylvia

INTERTEK TESTING SERVICES

Applicant: Onsource International Limited
Model: WA-85

Date of Test: 12 December, 2007

Table 2

Radiated Emissions
Pursuant to FCC 18.305(b) emissions requirement

Polarization	Frequency (MHz)	Net at 3m (dB μ V/m)	Calculated at 30m (dB μ V/m)	Limit at 30m (dB μ V/m)	Margin (dB)
V	40.003	28.8	8.8	23.5	-14.7
V	80.003	28.0	8.0	23.5	-15.5
V	109.950	28.9	8.9	23.5	-14.6
V	119.950	28.6	8.6	23.5	-14.9
V	130.050	27.8	7.8	23.5	-15.7
V	142.500	26.9	6.9	23.5	-16.6
V	147.500	30.4	10.4	23.5	-13.1
V	157.504	34.4	14.4	23.5	-9.1
V	159.900	38.5	18.5	23.5	-5.0
V	162.350	38.0	18.0	23.5	-5.5
V	165.050	36.8	16.8	23.5	-6.7
V	167.550	35.5	15.5	23.5	-8.0
V	170.250	31.1	11.1	23.5	-12.4

- Notes:
1. Average Detector Data unless otherwise stated.
 2. Negative value in the margin column shows emission below limit.
 3. Frequency range scanned: 30MHz to 400MHz
 4. Only emissions significantly above equipment noise floor are reported.
 5. A closer fixed distance was used for testing and 1/d attenuation law factor was used.

Test Engineer: Tam Ka Po, Sylvia

INTERTEK TESTING SERVICES

3.4 Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at
2.55 MHz

For electronic filing, the worst case line-conducted configuration photograph are saved with filename: conducted photos.doc.

INTERTEK TESTING SERVICES

3.5 Conducted Emission Data

The data on the following page lists the significant emission frequencies, the level and the limit of compliance.

Judgement: Passed by at least -12.5 dB margin

TEST PERSONNEL:



Signature

Tam Ka Po, Sylvia, Compliance Engineer
Typed/Printed Name

December 31, 2007
Date

INTERTEK TESTING SERVICES

Report No.: 0728762
ON mode
AC mains "L"

Report No.:0728762

Scan Settings (3 Ranges)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
9k	50k	100Hz	200Hz	PK+AV	50ms	AUTO	LD OFF 60dB
50k	150k	100Hz	200Hz	PK+AV	20ms	AUTO	LN OFF 60dB
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV

Meas Time: 1 s


Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

2 1 9k 30M EW0700

12 9k 30M EW1449

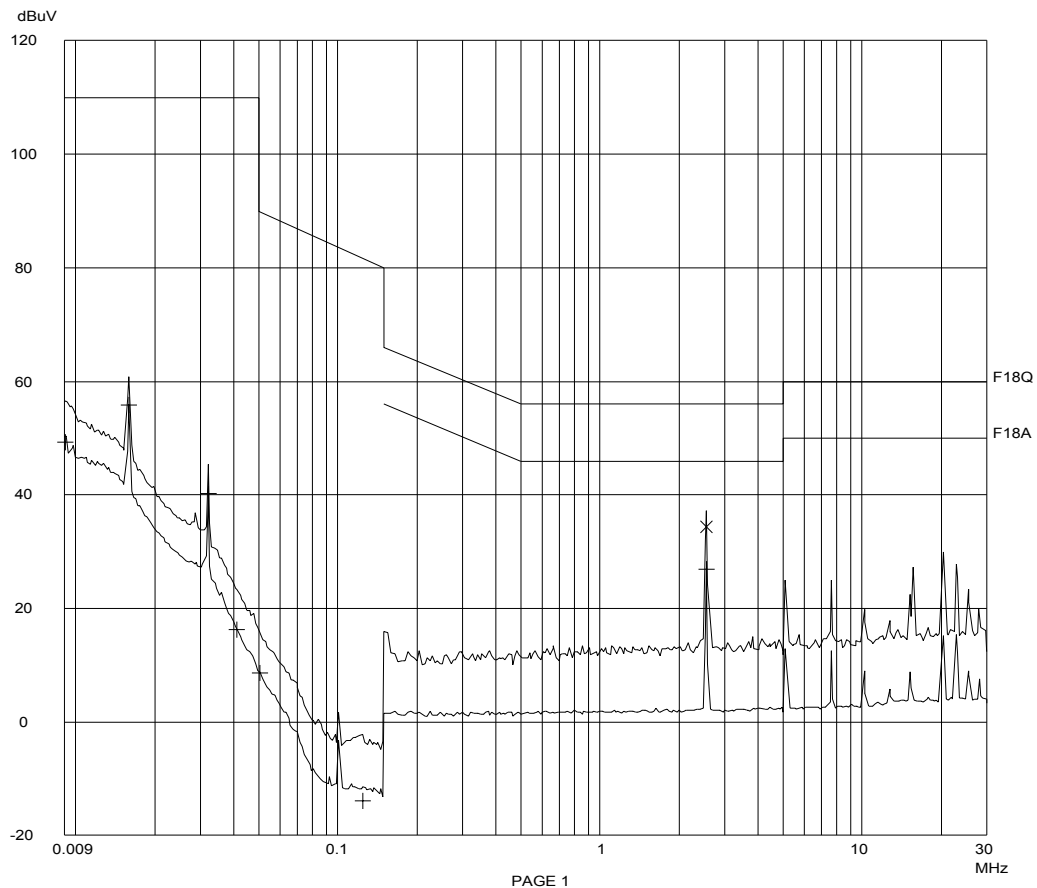

INTERTEK TESTING SERVICES

Report No.:0728762

Scan Settings (3 Ranges)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	50k	100Hz	200Hz	PK+AV	50ms	AUTO	LD OFF	60dB
50k	150k	100Hz	200Hz	PK+AV	20ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

2.54500	34.3	56.0
---------	------	------

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.0091000	49.3	
0.0160000	55.9	
0.0320000	40.3	
0.0412000	16.2	
0.05020	8.7	
0.12420	-13.8	
2.54500	26.9	46.0

* limit

INTERTEK TESTING SERVICES

Report No.: 0728762
ON mode
AC mains "N"

Report No.:0728762

Scan Settings (3 Ranges)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
9k	50k	100Hz	200Hz	PK+AV	50ms	AUTO	LD OFF
50k	150k	100Hz	200Hz	PK+AV	20ms	AUTO	LN OFF
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF

Final Measurement: x QP / + AV

Meas Time: 1 s


Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M
---	---	----	-----

12	9k	30M	EW1449
----	----	-----	--------

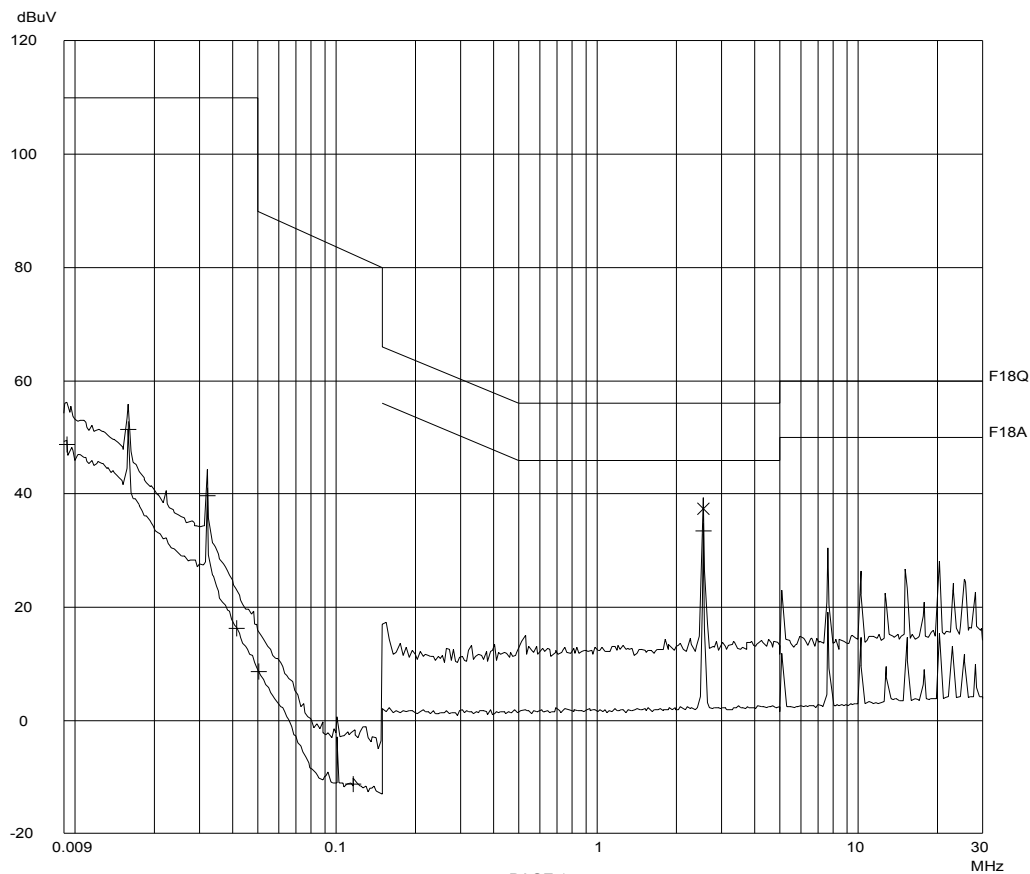

INTERTEK TESTING SERVICES

Report No.:0728762

Scan Settings (3 Ranges)

----- Frequencies -----			----- Receiver Settings -----					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
9k	50k	100Hz	200Hz	PK+AV	50ms	AUTO	LD OFF	60dB
50k	150k	100Hz	200Hz	PK+AV	20ms	AUTO	LN OFF	60dB
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

2.55000	37.3	56.0
---------	------	------

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.0093000	48.7	
0.0160000	51.4	
0.0320000	39.7	
0.0413000	16.3	
0.05020	8.6	
0.11600	-11.2	
2.55000	33.5	46.0

* limit

INTERTEK TESTING SERVICES

EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

4.0 **Equipment Photographs**

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.doc & internal photos.doc.

INTERTEK TESTING SERVICES

EXHIBIT 5

PRODUCT LABELLING

INTERTEK TESTING SERVICES

5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 6

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

6.0 **Technical Specifications**

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 7

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 8

MISCELLANEOUS INFORMATION

INTERTEK TESTING SERVICES

8.0 **Miscellaneous Information**

This miscellaneous information includes details of the test procedure and calculation of factors such as pulse desensitization and averaging factor.

INTERTEK TESTING SERVICES

8.1 Discussion of Pulse Desensitization

No desensitization of the measurement equipment is required as this device is an Animal Ultrasonic Humidifier.

INTERTEK TESTING SERVICES

8.2 Calculation of Average Factor

This device is an Animal Ultrasonic Humidifier. It is not necessary to apply average factor to the measurement result.

8.3 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of Animal Ultrasonic Humidifier operating under Part 18, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of FCC/OST MP-5 (1986).

The equipment under test (EUT) is placed on a wooden turntable which is 1.5 x 1 meter dimension and approximately 1 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated to resulting in maximum emissions. The antenna polarization is varied during the testing to search for maximum signal levels. For loop antenna, the height of the antenna is set at 2 meters. For biconical and log-periodic antenna, the antenna height is varied from one to four meters.

According to FCC/OST MP-5 (1986), the frequency range scanned is 9 kHz to 400MHz in field strength emission. The detector function of the measurement is set to average. For line conducted emission, the frequency range scanned is from 9 kHz to 30 MHz in quasi peak and average measurement.