



WIFI 5GHz Template: Release December 16th, 2016

TEST REPORT

N°: 155636-721608-D Version: 01

Subject Radio spectrum matters

tests according to standards: 47 CFR Part 15.407 (RF Test Only)№

Issued to **SAGEMCOM BROADBAND SAS**

> 250 Route de l' Empereur 92500 - RUEIL MALMAISON

FRANCE

Apparatus under test

♥ Product Home router

♦ Trade mark **SAGEMCOM** Manufacturer **SAGEMCOM**

♥ Model under test DCIWA384 UHD Alt US V2

Serial number 253764997

♥ FCC ID VW3DCIWA384-V2

: May 16, 2018 to June 13, 2018 Test date **Test location** Fontenay Aux Roses & Ecuelles

Composition of document 238 pages

September 17, 2018 **Document issued on**

> Written by: **Mathieu CERISIER Tests operator**



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision.



PUBLICATION HISTORY

Version	Date	Author	Modification	
01	June 22, 2018	Mathieu CERISIER	Creation of the document	



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH	18
4.	CARRIER FREQUENCIES	29
5.	26DB EMISSION BANDWIDTH	41
6.	6DB EMISSION BANDWIDTH	51
7.	DUTY CYCLE	57
8. EIRP,	MAXIMUM CONDUCTED OUTPUT POWER, MAXIMUM POWER SPECTRAL DENSITY, MAXIMUM EIRP SPECTRAL DENSITY	60
9.	TRANSMIT POWER CONTROL	137
10.	AC POWER LINE CONDUCTED EMISSIONS	164
11.	UNWANTED EMISSIONS & UNDESIRABLE EMISSION	169
12.	UNCERTAINTIES CHART	238



1. Test Program

References

- > 47 CFR Part 15.407
- > KDB 789033 D02 General U-NII Tests Procedures New Rules v02r01
- > KDB 662911 D01 Multiple Transmitter Output v02r01
- > ANSI C63.10-2013

Radio requirement:

Clause (47CFR Part 15.407) Test Description Test result - Comments			Comments	
Occupied Bandwidth	☑ PASS	□ FAIL	□ NA	□ NP(1)
26dB Bandwidth №	☑ PASS	□ FAIL	□ NA(2)	□ NP(1)
6dB Bandwidth ∄	☑ PASS	□ FAIL	□ NA(3)	□ NP(1)
Duty Cycle ₽	☑ PASS	□ FAIL	□ NA	□ NP(1)
EIRP 12	☑ PASS	□ FAIL	□NA	□ NP(1)
Maximum Conducted Output Power	☑ PASS	□ FAIL	□ NA	□ NP(1)
Power Spectral Density Density	☑ PASS	□ FAIL	□NA	□ NP(1)
Transmit Power Control 🏻	☑ PASS	□ FAIL	□ NA(4)	□ NP(1)
AC Power Line Conducted Emission 🎘	☑ PASS	□ FAIL	□ NA(5)	□ NP(1)
Unwanted Emissions & Undesirable Emission 🏱	☑ PASS	□ FAIL	□ NA	□ NP(1)
Frequency Stability 🎘	☑ PASS	□ FAIL	□ NA	□ NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

^{(1):} Limited program


- (2): EUT only operates outside the 5725MHz-5850MHz band
- (3): EUT only operates inside the 5725MHz-5850MHz band
- (4): EIRP below 27dBm or EUT only operates inside 5150MHz-5250MHz or/and 5725MHz-5850MHz bands
- (5): EUT not directly or indirectly connected to the AC Power Public Network



2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT): SAGEMCOM DCIWA384 UHD Alt US V2

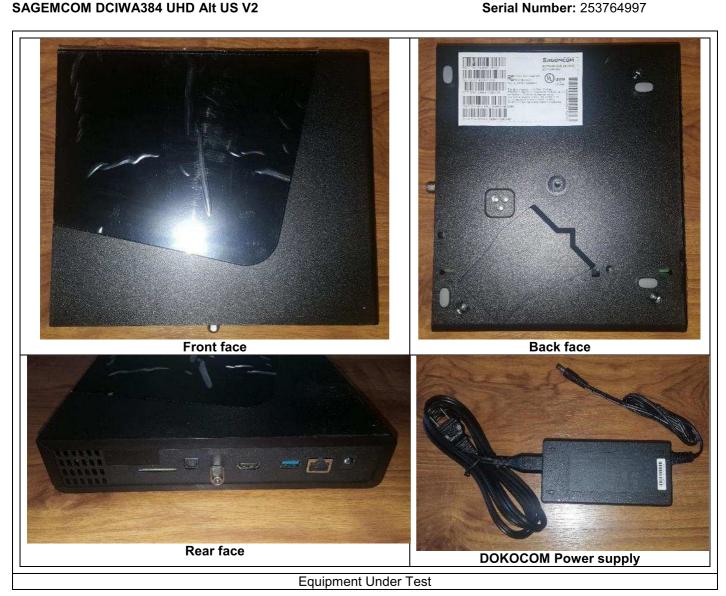





Equipment Under Test

Inputs/outputs - Cable:

Access	Туре	Length used (m)	Declared <3m	Shielded	Under test	Comments
Ethernet cable	-	-				-
Power supply cable	1	-				-

Auxiliary equipment used during test:

taxinary equipment acca auri	taxinary equipment acca adming tooti					
Туре	Reference	Sn	Comments			
Laptop computer	-	-	-			
Power supply	MSA-Z3800IC12.0-48W-P		MOSO			



Equipment information:						
Type:			W	IFI		
Frequency band:	☑ 5150MH 5250MH		☑ 5250MHz-5350MHz		☑ 5470MHz-5725MHz	
	☑ 802.11a		☑ 802.11	☑ 802.11n HT20		∄ 802.11n HT40
Standard:	☑ 802.11ac VHT20		☑ 802.11a	c VHT40	\checkmark	802.11ac VHT80
				ac VHT160		
Spectrum Modulation:				FDM		
Channel bandwidth:	☑ 20MHz	v	₫ 40MHz	☑ 80MH	z	☐ 160MHz
Antenna Type:	✓ Integra	al	☐ Exte	ernal		□ Dedicated
Antenna connector:	✓ Yes		□ N			Temporary for test
Transmit chains:	□ 1		□ 2	□ 3		☑ 4
	□ 5		□ 6	□ 7		□ 8
TPC:		✓ Yes ✓ Yes		□ 3	□ No	
Receiver chains	□ I □ 5	□ 1 □ 2 □ 6		□ 3 □ 7		☑ 4
Type of equipment:	☑ Stand-ald	one	□ Plu			☐ Combined
	Tmin:		□ -20°C	☑ 0°C		□X°C
Operating temperature range:	Tnom: 20°C					
	Tmax:	[□ 35°C	□ 55°C	;	☑ 45 °C
Type of power source:	☑ AC power s	supply	☐ DC powe	er supply	□В	attery Battery Type
	Vmin:		☑ 102 V/60Hz			☐ X Vdc
Operating voltage range:	Vnom:		☑ 120V/60Hz		☐ X Vdc	
	Vmax			V/60Hz		☐ X Vdc
	☑ Maste	r	☐ Slave with radar		☑ Slave without radar	
Mode:	⊡ Maste		detection		detection	
	☐ Bridge		☐ Mesh			
Fixed outdoor P to P/M application:		□ Yes		☑ No		No
System architectures:	☑ IP based		d	☐ Frame based		
Time require for EUT to complete	\			· 6		
its power cycle on	X s					
	that inform					
User access restriction:	parameters of					No
	Waveforms is r		able to the end			
	user)					



	Antenna Characteristic				
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)		
1	1,58	5150-5350	50		
2	1,02	5150-5350	50		
3	2	5150-5350	50		
4	1,7	5150-5350	50		
Accumulated	7.6	5150-5350	50		
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)		
1	2,62	5470-5850	50		
2	2,1	5470-5850	50		
3	2,96	5470-5850	50		
4	2,8	5470-5850	50		
Accumulated	8.65	5470-5850	50		

Accumulated gain calculation			
Formula used for calculation	KDB	Correlated	
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + + 10^{GN/20}) 2 / N_{ANT}] dBi$	KDB 662911 D01 v02r01	☑ Yes / □ No	



CHANNEL PLAN					
	802.11a / 802.11n HT20/ 802.11ac VHT20				
Channel	Frequency (MHz)	Available Channel			
C1=36	5180				
C2=40	5200				
44	5220				
C3=48	5240				
C4=52	5260				
56	5280				
C5=60	5300				
C6=64	5320				
C7=100	5500	\square			
104	5520				
108	5540				
112	5560				
C8=116	5580				
120	5600				
124	5620				
128	5640				
132	5660	\square			
136	5680				
C9=140	5700				
C10=144	5720				
C11=149	5745	d			
153	5765	V			
C12=157	5785	\square			
161	5805				
C13=165	5825	\square			



	CHANNEL PLAN				
	802.11n HT40/ 802.11ac VHT40				
Channel	Channel Frequency (MHz) Available Channel				
C14=36+40	5190				
C15=44+48	5230				
C16=52+56	5270				
C17=60+64	5310	Ø			
C18=100+104	5510	Ø			
C19=108+112	5550	d			
116+120	5590	I			
124+128	5630	Ø			
C20=132+136	5670	Ø			
C21=140+144	5710				
C22=149+153	5755				
C23=157+161	5795	I			

CHANNEL PLAN						
802.11ac VHT80						
Channel	Channel Frequency (MHz) Available Channe					
C24=36+40+44+48	5210	\square				
C25=52+56+60+64	5290					
C26=100+104+108+112	5530	\square				
C27=116+120+124+128	5610	\square				
C28=132+136+140+144	5690					
C29=149+153+157+161	5775	\square				

No DFS Channel
DFS Channel
Weather DFS Channel



	DATA RATE							
	802.11a							
Data Rate (Mbps)	Modulation Type	Modulation Worst Case						
6	BPSK	d						
9	BPSK							
12	QPSK							
18	QPSK							
24	16-QAM							
36	16-QAM							
48	64-QAM							
54	64-QAM							



					DATA F				
Available	Moo	Crastial			802.11n	HT20	Det- D	late (Mhns)	Worst Coos
Available for EUT	MCS Index	Spatial streams		Modul	ation		(GI = 800ns)	(GI = 400ns)	Worst Case Modulation
	0	1		BPS			6.5	7.2	✓
	1	1 1		QPSK			13	14.4	
ŀ	3	1		QPSK			19.5 26	21.7 28.9	
✓	4	1 1		16-QAM 16-QAM		39	43.3		
	5	1		64-Q			52	57.8	
	6	1		64-Q			58.5	65	
	7 8	2		64-Q BPS			65 13	72.2 14.4	
ŀ	9	2		QPS			26	28.9	
	10	2		QPS			39	43.3	
✓	11	2		16-Q			52	57.8	
_	12	2		16-Q			78	86.7	
ŀ	13 14	2 2		64-Q 64-Q			104 117	115.6 130.3	
	15	2		64-Q			130	144.4	
	16	3		BPS			19.5	21.7	
	17	3		QPS			39	43.3	
ļ	18 19	3	<u> </u>	QPS 16-Q			58.5 78	65 86.7	
	19 20	3 3	1	16-Q 16-Q			78 117	130	
ŀ	21	3	1	64-Q			156	173.3	
ļ	22	3		64-Q	AM		175.5	195	
	23	3		64-Q			195	216.7	
	24	4		BPS ODS			26	28.9	Ø
ŀ	25 26	4	1	QPS QPS			52 78	57.8 86.7	
	27	4		16-Q			104	115.6	
	28	4		16-Q	AM		156	173.3	
	29	4		64-Q			208	231.1	
ŀ	30 31	4		64-Q 64-Q			234 260	260 288.9	
	32	1	BPSK	- 04-Q	AIVI -	l -	-	200.9	
	33	2	16-QAM	QPSK	-	-	39	43.3	
	34	2	64-QAM	QPSK	-	-	52	57.8	
	35	2	64-QAM	16-QAM	-	-	65	72.2	
ŀ	36 37	2 2	16-QAM 64-QAM	QPSK QPSK	-	-	58.5 78	65 86.7	
ŀ	38	2	64-QAM	16-QAM	-	-	97.5	108.3	
	39	3	16-QAM	QPSK	QPSK	-	52	57.8	
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	
	41 42	3	64-QAM	QPSK 16 OAM	QPSK	-	65 78	72.2 86.7	
ŀ	42	3	64-QAM 64-QAM	16-QAM 16-QAM	QPSK 16-QAM	-	78 91	101.1	
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	
ŀ	47 48	3	16-QAM 64-QAM	16-QAM QPSK	QPSK QPSK	-	97.5 97.5	108.3 108.3	
ŀ	49	3	64-QAM	16-QAM	QPSK	-	117	130	
ľ	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	
	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	
	52	3	64-QAM	64-QAM	16-QAM	- ODSK	156	173.3	
ŀ	53 54	4 4	16-QAM 16-QAM	QPSK 16-QAM	QPSK QPSK	QPSK QPSK	65 78	72.2 86.7	
ŀ	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	
ľ	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	
[57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	
	58	4	64-QAM	16-QAM	16-QAM 16-QAM	QPSK 16 OAM	104	115.6	
}	59 60	4	64-QAM 64-QAM	16-QAM QPSK	16-QAM QPSK	16-QAM QPSK	117 104	130 115.6	
ŀ	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	
ļ	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	
[63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	
	64 65	4	64-QAM 16-QAM	64-QAM	64-QAM QPSK	16-QAM	143 97.5	158.9 108.3	
ŀ	66	4	16-QAM 16-QAM	QPSK 16-QAM	QPSK QPSK	QPSK QPSK	97.5 117	108.3	
ľ	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	
ļ	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	
[69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	
	70 71	4	64-QAM 64-QAM	16-QAM 16-QAM	16-QAM 16-QAM	QPSK 16-QAM	156 175.5	173.3 195	
ŀ	71	4	64-QAM	64-QAM	QPSK	QPSK	175.5	173.3	
ŀ	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	
ļ	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	
	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	



					DATA F				
Available for EUT	MCS Index	Spatial streams		Modul	802.11n ation	HT40	Data F (GI = 800ns)	Rate (Mbps) (GI = 400ns)	Worst Case Modulation
	0	1		BPS			13	15	V
_	2	1		QPS			27	30	
_	3	1 1		QPSK 16-QAM			40.5 54	45 60	
✓ –	4	1		16-Q			81	90	
	5	1		64-Q			108	120	
	6 7	1 1		64-Q 64-Q			121.5 135	135 150	
	8	2		BPS			27	30	
	9	2		QP:			54	60	
	10	2		QP:			81	90	
	11	2		16-Q			108	120	
-	12 13	2 2		16-Q 64-Q			162 216	180 240	
	14	2		64-G			243	270	
	15	2		64-C			270	300	
	16	3		BPS			40.5	45	
-	17 18	3 3	1	QP: QP:			81 121.5	90 135	
	19	3	1	16-Q			162	180	
✓	20	3		16-Q	AM		243	270	
	21	3		64-Q			324	360	
-	22 23	3 3	 	64-Q 64-Q			364.5 405	405 450	
	24	4		BPS			54	60	<u> </u>
	25	4		QP:	SK		108	120	
	26	4		QPS			162	180	
	27 28	4		16-Q 16-Q			216 324	240 360	
-	29	4		64-Q			432	480	
	30	4		64-Q			486	540	
	31	4		64-Q		•	540	600	
	32 33	2	BPSK 16-QAM	- QPSK	-	-	6.0 81	6.7 90.0	
	33	2	64-QAM	QPSK QPSK	-	-	108	120	
	35	2	64-QAM	16-QAM	-	-	135	150	
	36	2	16-QAM	QPSK	-	-	121.5	135	
_	37	2	64-QAM	QPSK	-	-	162	180	
	38 39	3	64-QAM 16-QAM	16-QAM QPSK	- QPSK	-	202.5 108	225 120	
	40	3	16-QAM	16-QAM	QPSK	-	135	150	
	41	3	64-QAM	QPSK	QPSK	-	135	150	
	42	3	64-QAM	16-QAM	QPSK	-	162	180	
-	43 44	3	64-QAM 64-QAM	16-QAM 64-QAM	16-QAM QPSK	-	189 189	210 210	
_	45	3	64-QAM	64-QAM	16-QAM	-	216	240	
	46	3	16-QAM	QPSK	QPSK	-	162	180	
	47	3	16-QAM	16-QAM	QPSK	-	202.5	225	
_	48 49	3 3	64-QAM 64-QAM	QPSK 16-QAM	QPSK QPSK	-	202.5 243	225 270	
	50	3	64-QAM	16-QAM	16-QAM	-	283.5	315	
-	51	3	64-QAM	64-QAM	QPSK	-	283.5	315	
	52	3	64-QAM	64-QAM	16-QAM	-	324	360	
<u> </u>	53	4	16-QAM	QPSK 16 OAM	QPSK	QPSK	135	150	
-	54 55	4	16-QAM 16-QAM	16-QAM 16-QAM	QPSK 16-QAM	QPSK QPSK	162 189	180 210	
-	56	4	64-QAM	QPSK	QPSK	QPSK	162	180	
	57	4	64-QAM	16-QAM	QPSK	QPSK	189	210	
	58	4	64-QAM	16-QAM	16-QAM	QPSK	216	240	
-	59 60	4	64-QAM 64-QAM	16-QAM QPSK	16-QAM QPSK	16-QAM QPSK	243 216	270 240	
-	61	4	64-QAM	16-QAM	16-QAM	QPSK	243	270	
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	270	300	
	63	4	64-QAM	64-QAM	64-QAM	QPSK	270	300	
	64 65	4	64-QAM 16-QAM	64-QAM QPSK	64-QAM QPSK	16-QAM QPSK	297 202.5	330 225	
<u> </u> -	66	4	16-QAM	16-QAM	QPSK	QPSK	202.5	270	
	67	4	16-QAM	16-QAM	16-QAM	QPSK	283.5	315	
	68	4	64-QAM	QPSK	QPSK	QPSK	243	270	
	69	4	64-QAM	16-QAM	QPSK 16 OAM	QPSK	283.5	315	
-	70 71	4	64-QAM 64-QAM	16-QAM 16-QAM	16-QAM 16-QAM	QPSK 16-QAM	324 364.5	360 405	
-	72	4	64-QAM	64-QAM	QPSK	QPSK	324	360	
	73	4	64-QAM	64-QAM	16-QAM	QPSK	364.5	405	
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	405	450	
	75	4	64-QAM	64-QAM 64-QAM	64-QAM 64-QAM	QPSK 16-QAM	405 445.5	450	



			DATA RATE: 802.11ac VHT20				
Available for EUT		Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
	0	1	BPSK	1/2	6,5	7,2	
☑	1	1	QPSK	1/2	13	14,4	
	2	1	QPSK 16 OAM	3/4	19,5	21,7	
	3 4	<u> </u>	16-QAM 16-QAM	1/2 3/4	26 39	28,9 43,3	
	5	1	64-QAM	2/3	52	57,8	
	6	1	64-QAM	3/4	58,5	65	
	7	1	64-QAM	5/6	65	72,2	
	8	1	256-QAM	3/4	78	86,7	
	9	1	256-QAM	5/6	N/A	N/A	
	10	2	BPSK	1/2	13	14,4	
	11	2	QPSK	1/2	26	28,8	
	12	2	QPSK	3/4	39	43,4	
	13	2	16-QAM	1/2	52	57,8	
✓	14	2	16-QAM	3/4	78	86,6	
	15	2	64-QAM	2/3	104	115,6	
	16	2	64-QAM	3/4	117	130	
	17	2	64-QAM	5/6	130	144,4	
	18	2	256-QAM	3/4	156	173,4	
	19	2	256-QAM	5/6	N/A	N/A	
	20	3	BPSK	1/2	19,5	21,6	
	21	3	QPSK	1/2	39	43,2	
	22	3	QPSK 16-QAM	3/4 1/2	58,5 78	65,1 86,7	
	23 24	3	16-QAM 16-QAM	3/4	78 117	129,9	
\square	25	3	16-QAM 64-QAM	2/3	156	173,4	
	26	3	64-QAM	3/4	175,5	173,4	
	27	3	64-QAM	5/6	195	216,6	
	28	3	256-QAM	3/4	234	260,1	
	29	3	256-QAM	5/6	N/A	N/A	
	30	4	BPSK	1/2	26	28,8	✓
	31	4	QPSK	1/2	52	57,6	
	32	4	QPSK	3/4	78	86,8	
	33	4	16-QAM	1/2	104	115,6	
✓	34	4	16-QAM	3/4	156	173,2	
•	35	4	64-QAM	2/3	208	231,2	
	36	4	64-QAM	3/4	234	260	
	37	4	64-QAM	5/6	260	288,8	
	38	4	256-QAM	3/4	312	346,8	
	39	4	256-QAM	5/6	N/A	N/A	
	40	5	BPSK	1/2	32,5	36	
	41	5	QPSK	1/2	65	72	
	42	5	QPSK	3/4	97,5	108,5	
	43	5	16-QAM	1/2 3/4	130	144,5	
	44 45	<u>5</u> 5	16-QAM 64-QAM	2/3	195 260	216,5 289	
	46	5	64-QAM	3/4	292,5	325	
	47	5	64-QAM	5/6	325	361	
	48	5	256-QAM	3/4	390	433,5	
	49	5	256-QAM	5/6	N/A	N/A	
	50	6	BPSK	1/2	39	43,2	
	51	6	QPSK	1/2	78	86,4	
	52	6	QPSK	3/4	117	130,2	
	53	6	16-QAM	1/2	156	173,4	
	54	6	16-QAM	3/4	234	259,8	
	55	6	64-QAM	2/3	312	346,8	
	56	6	64-QAM	3/4	351	390	
	57	6	64-QAM	5/6	390	433,2	
	58	6	256-QAM	3/4	468	520,2	
<u> </u>	59 60	6	256-QAM	5/6	N/A	N/A 50.4	
	60 61	<u>7</u> 7	BPSK QPSK	1/2 1/2	45,5 91	50,4 100,8	
	62	7	QPSK QPSK	3/4	136,5	100,8	
	63	7	16-QAM	1/2	182	202,3	
	64	7	16-QAM	3/4	273	303,1	
	65	7	64-QAM	2/3	364	404,6	
	66	7	64-QAM	3/4	409,5	455	
	67	7	64-QAM	5/6	455	505,4	
	68	7	256-QAM	3/4	546	606,9	
	69	7	256-QAM	5/6	N/A	N/A	
	70	8	BPSK	1/2	52	57,6	
1	71	8	QPSK	1/2	104	115,2	
ļ	72	8	QPSK	3/4	156	173,6	
]	73	8	16-QAM	1/2	208	231,2	
✓	74	8	16-QAM	3/4	312	346,4	
_	75	8	64-QAM	2/3	416	462,4	
1	76	8	64-QAM	3/4	468	520	
	77	8	64-QAM	5/6	520	577,6	
	78	8	256-QAM	3/4	624	693,6	
	79	8	256-QAM	5/6	N/A	N/A	



Available for EUT	MCS Index	Nbr of spatial streams	DATA RATE: 802.11ac VHT40 Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
Available for Eor	0	1	BPSK	1/2	13,5	15	
V	1	1	QPSK	1/2	27	30	
	3	<u>1</u> 1	QPSK 16-QAM	3/4 1/2	40,5 54	45 60	
	4	1	16-QAM	3/4	81	90	
	5	1	64-QAM	2/3	108	120	
	6	1	64-QAM	3/4	121,5	135	
	7	11	64-QAM	5/6	135	150	
	<u>8</u> 9	<u> </u>	256-QAM 256-QAM	3/4 5/6	162 180	180	
	10	2	BPSK	1/2	27	30	
	11	2	QPSK	1/2	54	60	
	12	2	QPSK	3/4	81	90	
	13	2 2	16-QAM 16-QAM	1/2	108	120	
✓	14 15	2	64-QAM	3/4 2/3	162 216	180 240	
	16	2	64-QAM	3/4	243	270	
	17	2	64-QAM	5/6	270	300	
	18	2	256-QAM	3/4	324	360	
	19	2	256-QAM	5/6	360	400	
	20 21	<u>3</u> 3	BPSK QPSK	1/2 1/2	40,5 81	45 90	
	22	3	QPSK	3/4	121,5	135	
	23	3	16-QAM	1/2	162	180	
✓	24	3	16-QAM	3/4	243	270	
	25	3	64-QAM	2/3	324	360	
	26 27	3 3	64-QAM 64-QAM	3/4 5/6	364,5 405	405 450	
	28	3	256-QAM	3/4	486	540	
	29	3	256-QAM	5/6	540	600	
	30	4	BPSK	1/2	54	60	Ø
	31	4	QPSK	1/2	108	120	
	32 33	<u>4</u> 4	QPSK 16-QAM	3/4 1/2	162 216	180 240	
_	34	4	16-QAM	3/4	324	360	
☑	35	4	64-QAM	2/3	432	480	
	36	4	64-QAM	3/4	486	540	
	37	4	64-QAM	5/6	540	600	
	38 39	<u>4</u> 4	256-QAM 256-QAM	3/4 5/6	648 720	720 800	
	40	5	BPSK	1/2	67,5	75	
	41	5	QPSK	1/2	135	150	
	42	5	QPSK	3/4	202,5	225	
	43	5	16-QAM	1/2	270	300	
	44 45	<u>5</u> 5	16-QAM 64-QAM	3/4 2/3	405 540	450 600	
	46	5	64-QAM	3/4	607,5	675	
	47	5	64-QAM	5/6	675	750	
	48	5	256-QAM	3/4	810	900	
	49	5	256-QAM	5/6	900	1000	
	50 51	6	BPSK QPSK	1/2 1/2	81 162	90 180	
	52	6	QPSK	3/4	243	270	
	53	6	16-QAM	1/2	324	360	
	54	6	16-QAM	3/4	486	540	
_	55 56	6	64-QAM	2/3 3/4	648	720 810	
	56 57	6	64-QAM 64-QAM	5/6	729 810	900	
	58	6	256-QAM	3/4	972	1080	
	59	6	256-QAM	5/6	1080	1200	
	60	7	BPSK	1/2	94,5	105	
	61 62	7	QPSK QPSK	1/2 3/4	189 283,5	210 315	
	63	7	16-QAM	1/2	378	420	
	64	7	16-QAM	3/4	567	630	
	65	7	64-QAM	2/3	756	840	
	66	7	64-QAM	3/4	850,5	945	
	67 68	7	64-QAM 256-QAM	5/6 3/4	945 1134	1050 1260	
	69	7	256-QAM 256-QAM	5/6	1134	1400	
	70	8	BPSK	1/2	108	120	
	71	8	QPSK	1/2	216	240	
	72	8	QPSK	3/4	324	360	
	73	8	16-QAM	1/2	432	480 720	
	74 75	<u>8</u> 8	16-QAM 64-QAM	3/4 2/3	648 864	960	
	76	8	64-QAM	3/4	972	1080	
	77	8	64-QAM	5/6	1080	1200	
	78	8	256-QAM	3/4	1296	1440	



79	8	256-OAM	5/6	1440	1600	



			DATA DATE: 000 44 1/1/1700				
Available for EUT	MCS Index	Nbr of spatial streams	DATA RATE: 802.11ac VHT80 Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
Available for Lot	0	1	BPSK	1/2	29.3	32.5	✓
	1	1	QPSK	1/2	58.5	65	
	2	1	QPSK	3/4	87.8	97.5	
Ø	3	1	16-QAM	1/2	117	130	
	4	1	16-QAM	3/4	175.5	195	
	5	1	64-QAM	2/3	234	260	
	6	1	64-QAM	3/4	263.3	292.5	
	7	1	64-QAM	5/6 3/4	292.5	325 390	
	<u>8</u> 9	1	256-QAM 256-QAM	5/6	351 390	433.3	
	10	2	BPSK	1/2	58.6	65	
	11	2	QPSK	1/2	117	130	
	12	2	QPSK	3/4	175.6	195	
	13	2	16-QAM	1/2	234	260	
✓	14	2	16-QAM	3/4	351	390	
	15	2	64-QAM	2/3	468	520	
	16	2	64-QAM	3/4	526.6	585	
	17	2	64-QAM	5/6	585	650	
	18	2	256-QAM	3/4	702	780	
	19	2	256-QAM	5/6	780	866.6	
	20 21	3	BPSK QPSK	1/2 1/2	87.9 175.5	97.5 195	
]	22	3	QPSK QPSK	3/4	263.4	292.5	
]	23	3	16-QAM	1/2	351	390	
	24	3	16-QAM	3/4	526.5	585	
☑	25	3	64-QAM	2/3	702	780	
]	26	3	64-QAM	3/4	789.9	877.5	
	27	3	64-QAM	5/6	877.5	975	
]	28	3	256-QAM	3/4	1053	1170	
	29	3	256-QAM	5/6	1170	1299.9	
	30	4	BPSK	1/2	117.2	130	✓
	31	4	QPSK	1/2	234	260	
	32	4	QPSK	3/4	351.2	390	
	33 34	4	16-QAM 16-QAM	1/2 3/4	468 702	520 780	
	35	4	64-QAM	2/3	936	1040	
	36	4	64-QAM	3/4	1053.2	1170	
	37	4	64-QAM	5/6	1170	1300	
	38	4	256-QAM	3/4	1404	1560	
	39	4	256-QAM	5/6	1560	1733.2	
	40	5	BPSK	1/2	146.5	162.5	
	41	5	QPSK	1/2	292.5	325	
	42	5	QPSK	3/4	439	487.5	
	43	5	16-QAM	1/2	585	650	
	44	5	16-QAM	3/4	877.5	975	
	45	5	64-QAM	2/3	1170	1300	
	46 47	5	64-QAM 64-QAM	3/4 5/6	1316.5 1462.5	1462.5 1625	
	48	5 5	256-QAM	3/4	1755	1950	
	49	5	256-QAM	5/6	1950	2166.5	
	50	6	BPSK	1/2	175.8	195	
	51	6	QPSK	1/2	351	390	
]	52	6	QPSK	3/4	526.8	585	
]	53	6	16-QAM	1/2	702	780	
	54	6	16-QAM	3/4	1053	1170	
	55	6	64-QAM	2/3	1404	1560	
	56	6	64-QAM	3/4	1579.8	1755	
	57	6	64-QAM	5/6	1755	1950	
	58 59	6 6	256-QAM 256-QAM	3/4 5/6	2106 2340	2340 2599.8	
-	59 60	7	256-QAM BPSK	1/2	2340	2599.8	
]	61	7	QPSK	1/2	409.5	455	
]	62	7	QPSK	3/4	614.6	682.5	
	63	7	16-QAM	1/2	819	910	
	64	7	16-QAM	3/4	1228.5	1365	
	65	7	64-QAM	2/3	1638	1820	
]	66	7	64-QAM	3/4	1843.1	2047.5	
	67	7	64-QAM	5/6	2047.5	2275	
	68	7	256-QAM	3/4	2457	2730	
	69	7	256-QAM	5/6	2730	3033.1	
]	70	8	BPSK	1/2	234.4	260	
]	71 72	8 8	QPSK QPSK	1/2 3/4	468 702.4	520 780	
ļ	73	8	QPSK 16-QAM	1/2	936	1040	
]	74	8	16-QAM	3/4	1404	1560	
	75	8	64-QAM	2/3	1872	2080	
_		8	64-QAM	3/4	2106.4	2340	
]	/6						
	76 77	8	64-QAM	5/6	2340	2600	



2.2. RUNNING MODE

The EUT is set in the following modes during tests:

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent emission with modulation on a fixed channel in the data rate that produced the lowest power
- Permanent reception

Following commands with the specific test document "CR-20180405 - WIFI compliance test command of M384R-US-4L FCC 5GHz.docx" is used to set the product:

2.3. EQUIPMENT LABELLING



2.4. EQUIPMENT MODIFICATION

✓ None
✓ Modification:



3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : May 31, 2018
Ambient temperature : 26 °C

Relative humidity : 42 %

3.2. TEST SETUP

- The Equipment Under Test is installed:
- ☑ On a table
- ☐ In an anechoic chamber
- Measurement is performed with a spectrum analyzer in:
- ☑ Conducted Method
- ☐ Radiated Method
- Test Procedure:
- ☑ KDB 789033 D02 General UNII Test Procedures New Rules v02r01 § D



Photograph for Occupied bandwidth



3.1. **LIMIT**

None

3.2. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2017/05	2019/05
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2017/05	2019/05
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09




3.3. RESULTS






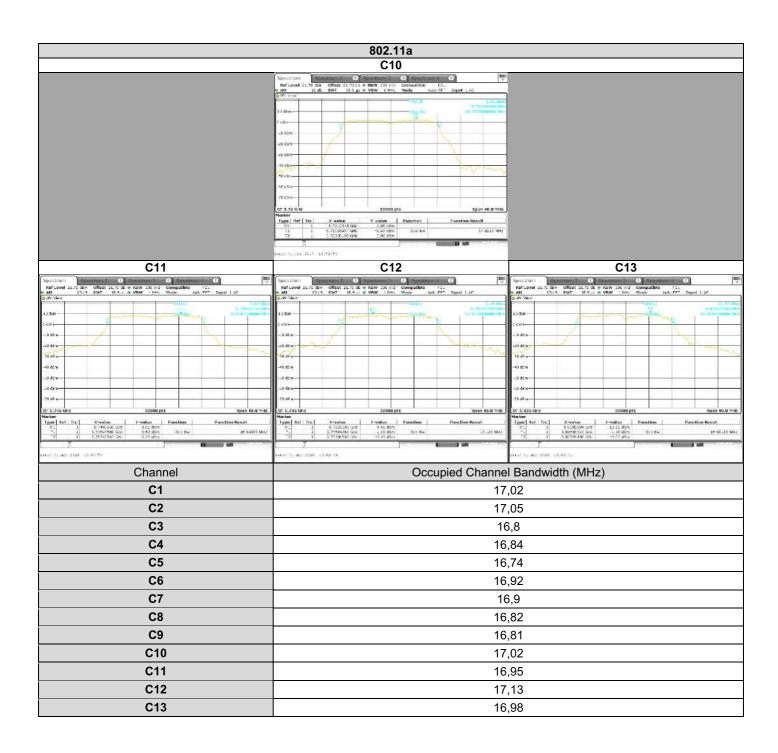



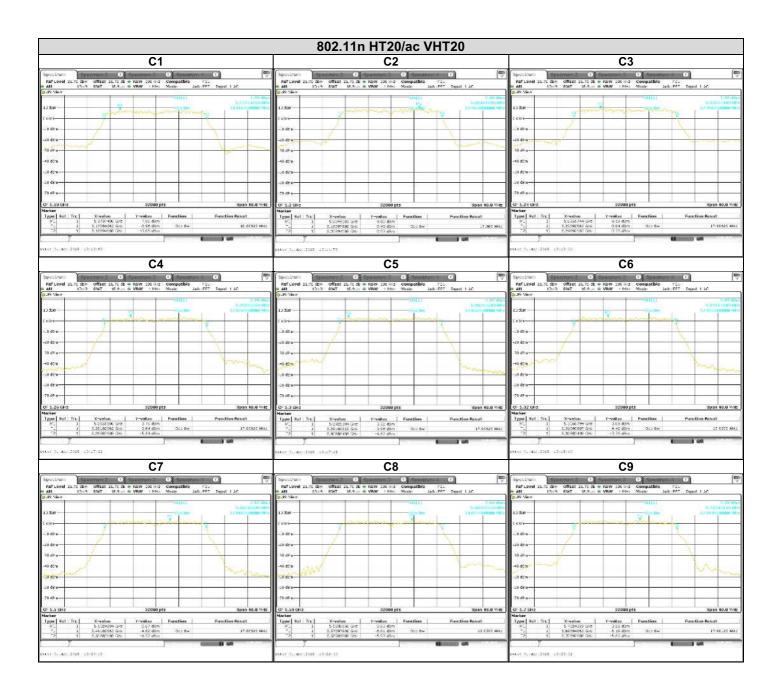



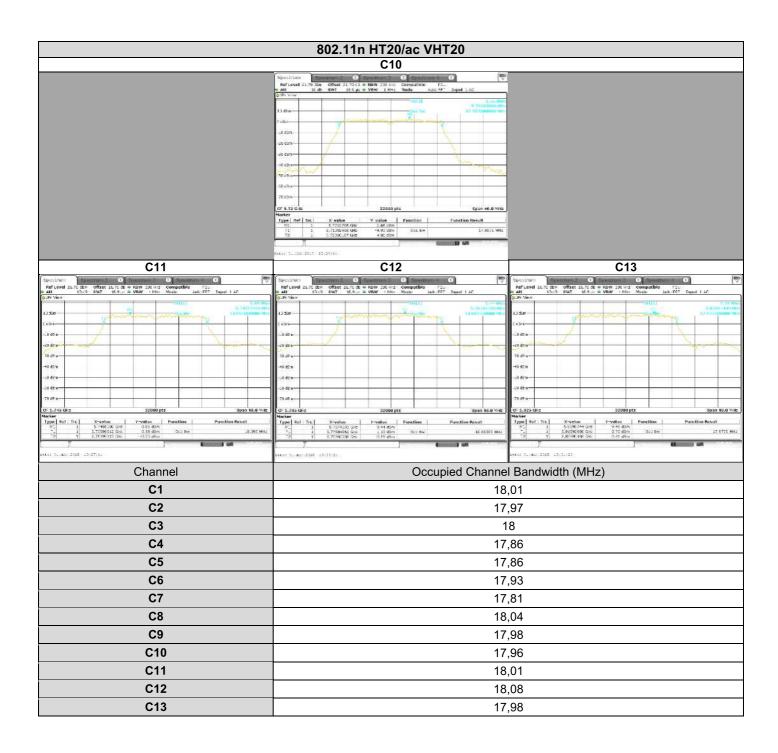












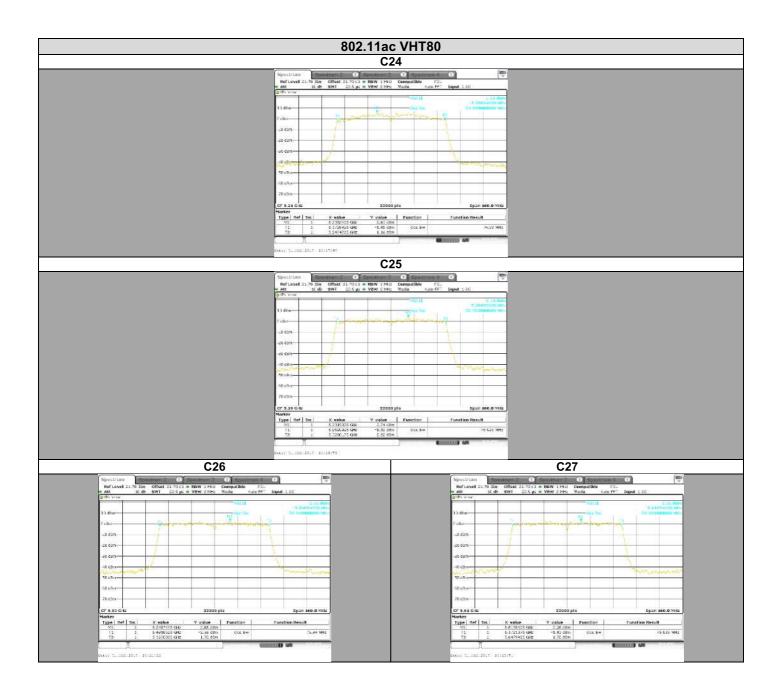







3.1. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD Alt US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.407** limits.



4. CARRIER FREQUENCIES

4.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER

Date of test : May 31, 2018

Ambient temperature : 26 °C

Relative humidity : 42 %

4.2. TEST SETUP

- The Equipment under Test is installed:

☑ In the climatic chamber

☐ On a table

☐ In an anechoic chamber

-Measurement is performed with a spectrum analyzer

☑ On the EUT conducted access

☐ With a test fixture

-Method of measurement

☐ Unmodulated (Spectrum Analyzer Counter Function)

☑ Modulated (Spectrum Analyzer NdB down Function)

In case of smart antenna systems operating in a multiple transmit chains active simultaneously, the measurement is only performed on one of the active transmit chains.



Photograph for Carrier Frequencies



4.3. **LIMIT**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2017/05	2019/05
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2017/05	2019/05
Climatic chamber	SECASI	SLT34	D1024029	2018/06	2019/12
Hygrometer	AOIP	TM360	B4041042	2018/06	2019/12
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09

Note: In our quality system, the test equipment calibration due is more & less 2 months

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


☑ None	□ Divergence:

TEST REPORT

N° **155636-721608-D**Version : **01**Page 31/239




4.6. RESULTS

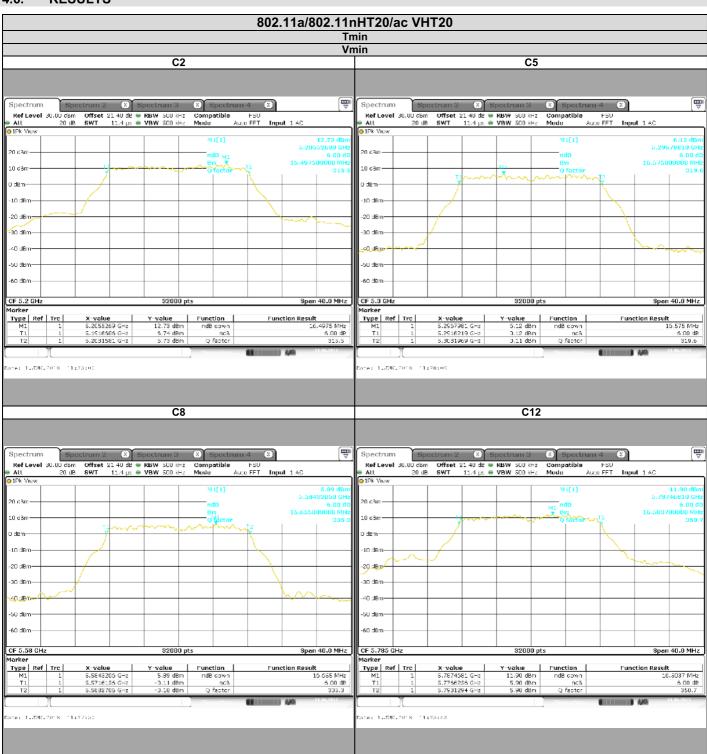







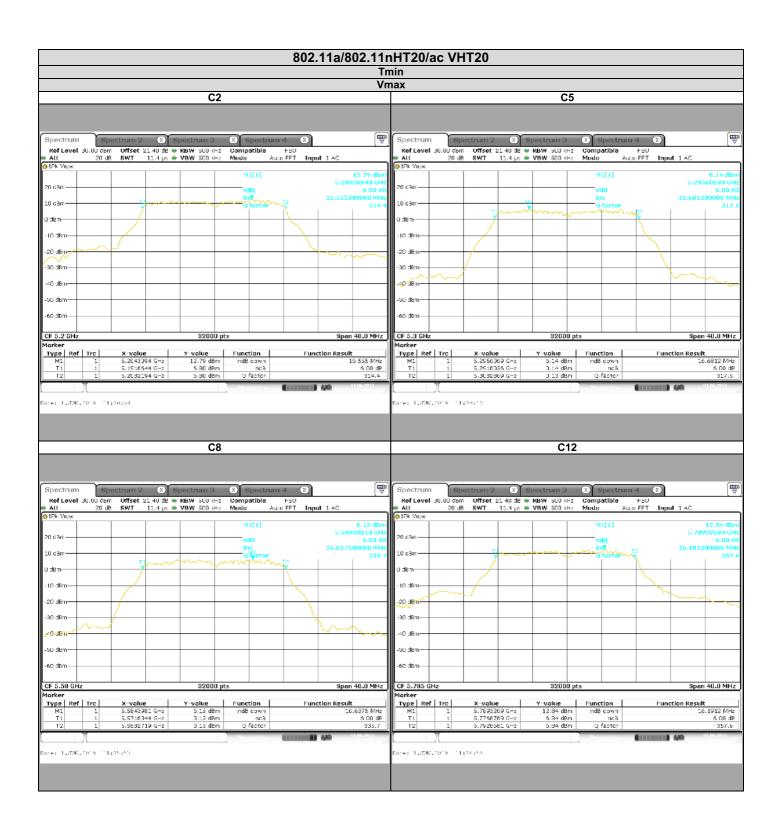












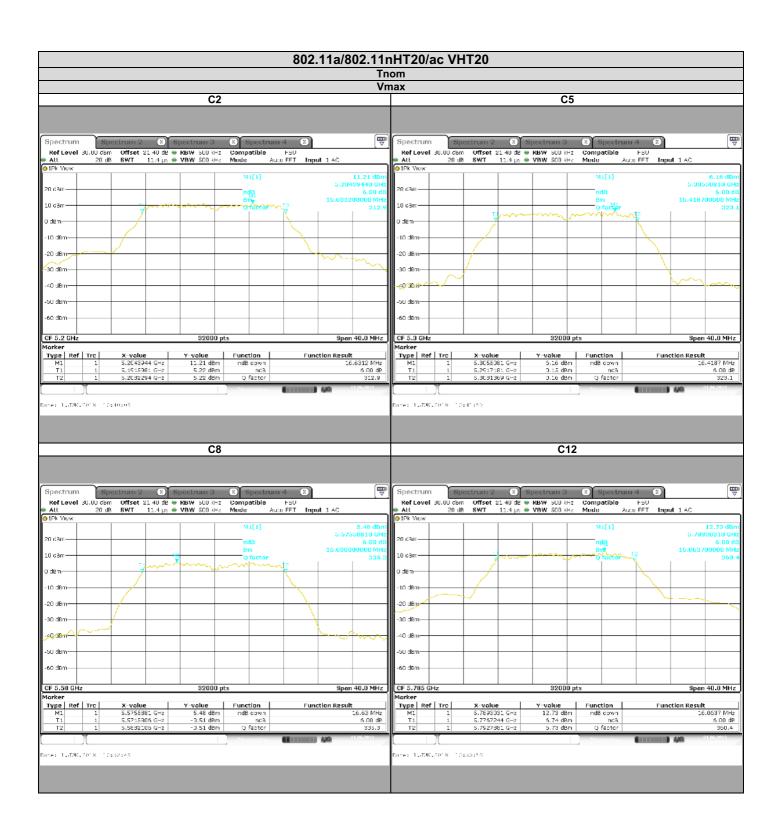












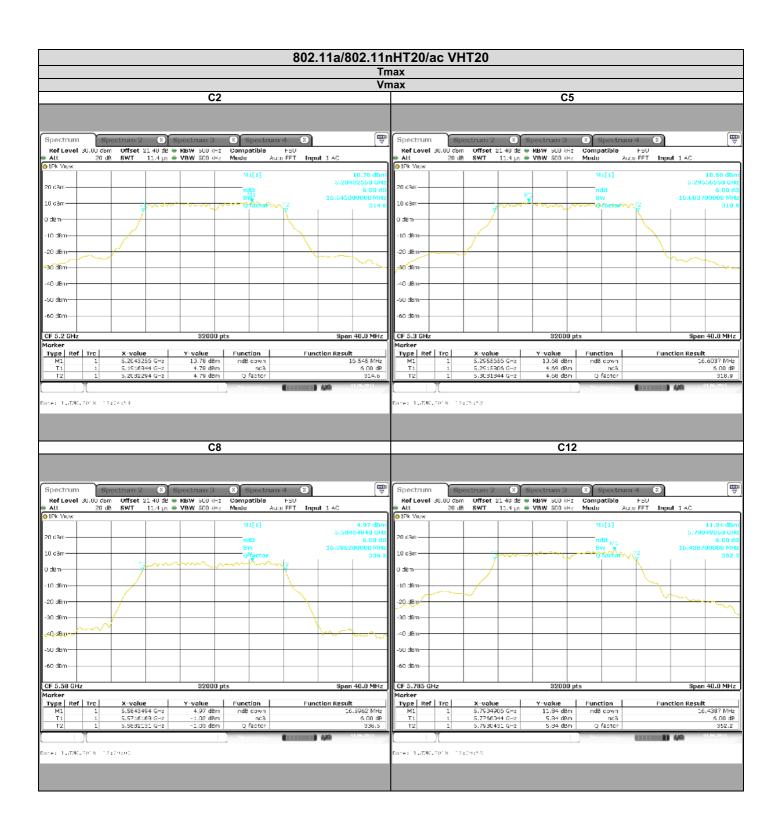



802.11a/802.11nHT20/ac VHT20

Temperature	Tmin			Tnom			Tmax					
Voltage	Vmin											
Channel	C2	C5	C8	C12	C2	C5	C8	C12	C2	C5	C8	C12
Frequency drift (ppm)	-17,4	-17,1	-10,2	-21,2	-17,4	-20,6	-13,2	-26,8	-17,2	-5,7	-8,4	-28,0
Voltage	Vnom											
Channel	C2	C5	C8	C12	C2	C5	C8	C12	C2	C5	C8	C12
Frequency drift (ppm)	-20,8	-1,2	-9,0	-23,1	-19,0	-17,0	-11,8	-26,4	-14,9	-18,2	-12,0	-26,3
Voltage	Vmax											
Channel	C2	C5	C8	C12	C2	C5	C8	C12	C2	C5	C8	C12
Frequency drift (ppm)	-11,2	-10,1	-8,4	-39,3	-16,6	-13,7	-18,7	-42,1	-8,3	-22,2	-15,2	-30,5

4.7. CONCLUSION

Carrier frequencies measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD Alt US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.407 limits.



5. 26DB EMISSION BANDWIDTH

5.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER
Date of test : May 31, 2018
Ambient temperature : 26 °C

Relative humidity : 42 %

5.2. TEST SETUP

- The Equipment Under Test is installed:
- ☑ On a table
- ☐ In an anechoic chamber
- Measurement is performed with a spectrum analyzer in:
- ☑ Conducted Method
- ☐ Radiated Method
- Test Procedure:
- ☑ KDB 789033 D02 General UNII Test Procedures New Rules v02r01 § C1



Photograph for 26dB emission bandwidth



5.3. LIMIT

None

5.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2017/05	2019/05
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2017/05	2019/05
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09



5.5. RESULTS









