



## **Accredited testing-laboratory**

**DAR registration number: DAT-P-176/94-D1**

**Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97**

**Recognized by the Federal Communications Commission**

**Anechoic chamber registration no.: 90462 (FCC)**

**Anechoic chamber registration no.: 3463A-1 (IC)**

**Certification ID: DE 0001**

**Accreditation ID: DE 0002**

**Accredited Bluetooth® Test Facility (BQTF)**

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,  
Inc. and any use of such marks by Cetecom ICT is under license*

**Test report no. : 4-2752-01-08/07 A**  
**Type identification : SpectoDrive Device**  
**Applicant : TECHKON GmbH**  
**FCC ID : VYL-SDRDEVICE**  
**IC Certification No : 7548A-DEVICE**  
**Test standards : 47 CFR Part 15**  
**RSS - 210 Issue 7**

## Table of contents

<b>1</b>	<b>General information.....</b>	<b>3</b>
1.1	Notes .....	3
1.2	Testing laboratory .....	4
1.3	Details of applicant .....	4
1.4	Application details .....	4
<b>2</b>	<b>Test standard/s:.....</b>	<b>5</b>
<b>3</b>	<b>Technical tests .....</b>	<b>6</b>
3.1	Details of manufacturer.....	6
3.1.1	Test item.....	6
3.1.2	Additional EUT information For IC Canada (appendix 2).....	7
3.1.3	RF Technical Brief Cover Sheet acc. To RSS-102 .....	8
3.1.4	EUT operating modes.....	9
3.1.5	Extreme conditions testing values .....	9
<b>4</b>	<b>Summary of Measurement Results and list of all performed test cases .....</b>	<b>10</b>
<b>5</b>	<b>RF measurement testing .....</b>	<b>11</b>
5.1	Description of test set-up.....	11
5.1.1	Radiated measurements.....	11
5.1.2	Conducted measurements.....	11
5.2	Referenced Documents .....	12
5.3	Additional comments .....	12
5.4	Antenna gain .....	12
5.5	Peak Power Spectral density (digitally modulated systems) §15.247(e).....	13
5.6	Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2).....	14
5.7	Maximum output power (conducted) §15.247 (b)(3).....	16
5.8	Max. peak output power (radiated) §15.247 (b)(3) .....	19
5.9	Band-edge compliance of conducted emissions §15.247 (d) .....	20
5.10	Band-edge compliance of radiated emissions §15.205 .....	22
5.11	Spurious Emissions - conducted (Transmitter) §15.247 (c).....	24
5.12	Spurious Emissions - radiated (Transmitter) §15.209 .....	25
5.13	Spurious Emissions - radiated (Receiver) §15.109 / 209 .....	28
5.14	Spurious Emissions - radiated <30 MHz §15.209 .....	31
5.15	Conducted Emissions <30 MHz §15.107/207 .....	32
<b>6</b>	<b>Test equipment and ancillaries used for tests .....</b>	<b>33</b>
<b>7</b>	<b>Photographs of the Test Set-up.....</b>	<b>35</b>
<b>8</b>	<b>Photographs of the EUT .....</b>	<b>37</b>

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2008-01-23

Jakob Reschke

Date

Name

Signature

A black ink signature, appearing to read "Jakob Reschke", written over a horizontal line.

Technical responsibility for area of testing:


2008-01-23

Michael Berg

Date

Name

Signature

A blue ink signature, appearing to read "Michael Berg", written over a horizontal line.

## 1.2 Testing laboratory

### CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: [info@ICT.cetecom.de](mailto:info@ICT.cetecom.de)

Internet: <http://www.cetecom-ict.de>

State of accreditation: The test laboratory (area of testing) is accredited according to  
DIN EN ISO/IEC 17025  
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :  
Street :  
Town :  
Country :  
Phone :  
Fax :

## 1.3 Details of applicant

<b>Name:</b>	<b>TECHKON GmbH</b>
<b>Street:</b>	<b>Wiesbadener Str. 27</b>
<b>Town:</b>	<b>61462 Königstein</b>
<b>Country:</b>	<b>Germany</b>
<b>Telephone:</b>	<b>+49 (0)6174 9244 68</b>
<b>Fax:</b>	<b>+49 (0)6174 9244 99</b>
<b>Contact:</b>	<b>Herr Martin Däsch</b>
<b>E-mail:</b>	<b><a href="mailto:martin_da@techkon.com">martin_da@techkon.com</a></b>
<b>Telephone:</b>	<b>+49 (0)6174 9244 68</b>

## 1.4 Application details

<b>Date of receipt of order:</b>	<b>2007-10-30</b>
<b>Date of receipt of test item:</b>	<b>2007-12-10</b>
<b>Date of start test:</b>	<b>2007-12-10</b>
<b>Date of end test</b>	<b>2008-01-14</b>
<b>Persons(s) who have been present during the test:</b>	

## 2 Test standard/s:

47 CFR Part 15	2007-09	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter A - general, Part 15-Radio frequency devices
RSS - 210 Issue 7	2007-06	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

### 3 Technical tests

#### 3.1 Details of manufacturer

Name:	TECHKON GmbH
Street:	Wiesbadener Str. 27
Town:	61462 Königstein
Country:	Germany

##### 3.1.1 Test item

Kind of test item	:	Spectral reading device
Type identification	:	SpectoDrive Device
S/N serial number	:	-/-/-
HW hardware status	:	-/-
SW software status	:	-/-
Frequency Band [MHz]	:	ISM 2.400 - 2.483,5
Type of Modulation	:	(CSS) Chirp
Number of channels	:	1
Antenna	:	Integrated antenna
Power Supply	:	115 V AC
Temperature Range	:	-/- °C to -/- °C

Max. power radiated: -7.24 dBm / MHz

Max. power conducted: -11.30 dBm / MHz

FCC ID: VYL-SDRDEVICE

IC: 7548A-DEVICE

**3.1.2 Additional EUT information For IC Canada (appendix 2)**

IC Registration Number:	<b>7548A-DEVICE</b>
Model Name:	<b>SpectoDrive Device</b>
Manufacturer (complete Address):	<b>TECHKON GmbH Wiesbadener Str. 27 61462 Königstein Germany</b>
Tested to Radio Standards Specification (RSS) No.:	<b>RSS-210 Issue 7</b>
Open Area Test Site Industry Canada Number:	<b>IC 3463A-1</b>
Frequency Range (or fixed frequency) [MHz]:	<b>2441 MHz</b>
RF: Power [W] (max):	<b>Rad. EIRP: 0.19 mW Conducted : 0.07 mW</b>
Antenna Type:	<b>Integrated antenna</b>
Occupied Bandwidth [MHz]:	<b>69.80</b>
Type of Modulation:	<b>(CSS) Chirp</b>
Emission Designator (TRC-43):	<b>69M8G1D</b>
Transmitter Spurious (worst case) [ $\mu$ V/m in 3m]:	<b>Nothing found</b>
Receiver Spurious (worst case) [ $\mu$ V/m in 3m]:	<b>Nothing found</b>

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2008-01-23

Test engineer: Jakob Reschke

### 3.1.3 RF Technical Brief Cover Sheet acc. To RSS-102

All Fields must be completed with the requested information or the following codes: N/A for Not Applicable, N/P for Not Performed or N/V for Not Available. Where applicable, check appropriate box.

1. COMPANY NUMBER: **7548A-DEVICE**
2. MODEL NUMBER: **SpectoDrive Device**
3. MANUFACTURER: **TECHKON GmbH**
4. TYPE OF EVALUATION:

#### (c) RF Evaluation

- Evaluated against exposure limits: General Public Use ☒ Controlled Use ☐
- Duty cycle used in evaluation: 99 %
- Standard used for evaluation: RSS-102 Issue 2 (2005-11)
- Measurement distance: 0.20 m
- RF value: 0.00037 V/m ☐ A/m ☐ W/m<sup>2</sup> ☒
- Measured ☐ Computed ☐ Calculated ☒

#### Declaration of RF Exposure Compliance

**ATTESTATION:** I attest that the information provided in this testreport is correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.



Name: Jakob Reschke  
Title: Engineer  
Company: Cetecom ICT Services GmbH



### 3.1.4 EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

\*) EUT operating mode no. is used to simplify the test plan

### 3.1.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature	T <sub>nom</sub>	°C	<b>23</b>
Nominal Humidity	H <sub>nom</sub>	%	<b>52</b>
Nominal Power Source	V <sub>nom</sub>	V	<b>115</b>

Type of power source: **AC**

Deviations from these values are reported in chapter 2

#### 4 Summary of Measurement Results and list of all performed test cases

- ☒ No deviations from the technical specifications were ascertained  
☐ There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASS	2008-01-23	PASS

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (e)	Peak power spectral density	Yes			
§15.247(a)(2)	Spectrum Bandwidth of a DSSS System / 6dB BW	Yes			
§ 15.247 (b)(3)	Maximum output power (conducted)	Yes			
§ 15.247 (b)(3)	Max. peak output power (radiated)	Yes			
§15.247 (d)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (d)	Spurious Emission - conducted (Transmitter)	Yes			
§15.209	Spurious Emission -radiated (Transmitter)	Yes			
§15.109	Spurious Emissions-radiated (Receiver)	Yes			
§15.209	Spurious Emissions-radiated <30 MHz	Yes			
§15.107/207	Conducted Emissions <30 MHz	Yes			

## 5 RF measurement testing

### 5.1 Description of test set-up

#### 5.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

9 kHz - 150 MHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120 kHz Bandwidth, biconical antenna


200MHz - 1GHz: Quasi Peak measurement, 120 kHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.209 and 15.207

#### 5.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal path are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

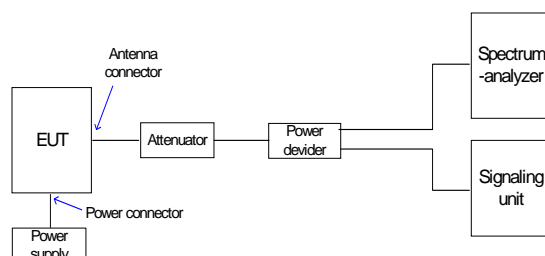

## 5.2 Referenced Documents

.-

## 5.3 Additional comments

EUT measured with Sony Laptop (S/N: 28364751 5342163)

The EUT was during the tests in a testmode with continuous transmission over the whole frequency band.

For the output power measurements the carrier was stopped at the lowest, middle and highest frequency.

As there is no Gaussian distribution of the energy over the occupied bandwidth, we do not need to use a correction factor for calculating the total power.

The information is not in one carrier but in the whole signal. So the bandwidth was measured with the whole frequency band used.

For further information about the signal see operation description.


## 5.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

	2441 MHz
Conducted power [dBm]	-11.30
Radiated power [dBm]	-7.24
Gain [dBi]	4.06

5.5 Peak Power Spectral density (digitally modulated systems) §15.247(e)

Plot 1: (result calculated by the Signal analyzer FSP from Rohde & Schwarz)

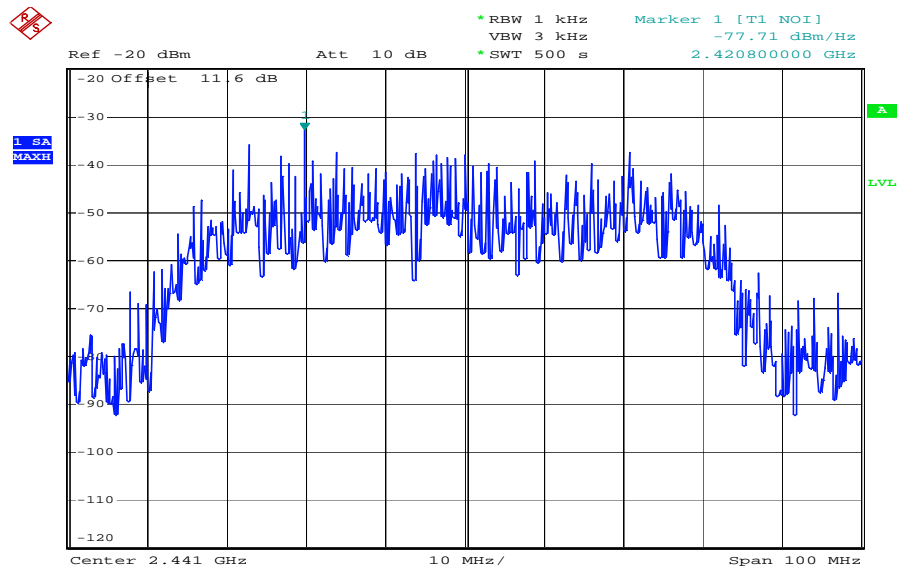

Date: 10.JAN.2008 14:32:32

Results: Plot 1: Power density: -77.71 dBm/Hz = -42.91 dBm / 3 kHz


Correction factor from dBm/Hz to dBm/3 kHz is +34,8 dB

Limits :


Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission
-----------------------------------	---

## 5.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2)

Plot 1:

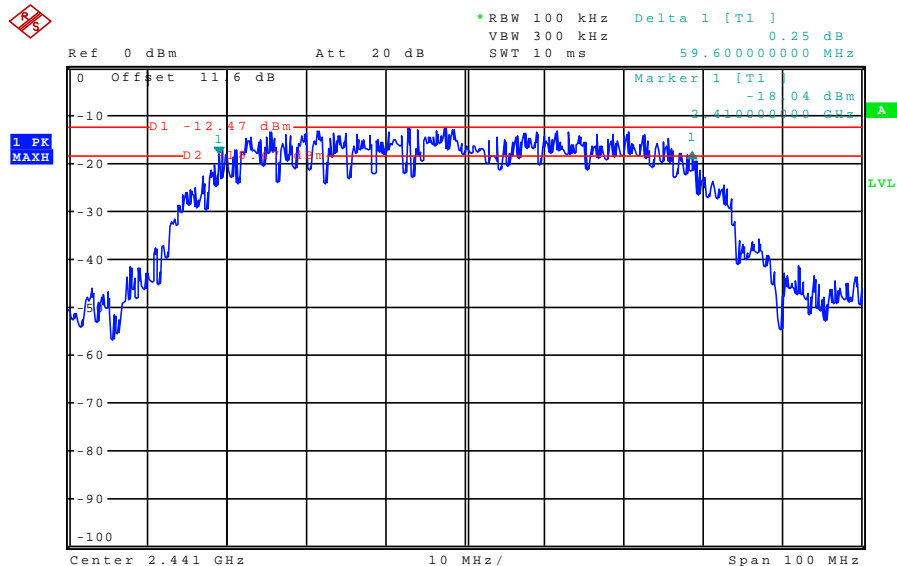

Plot 2:

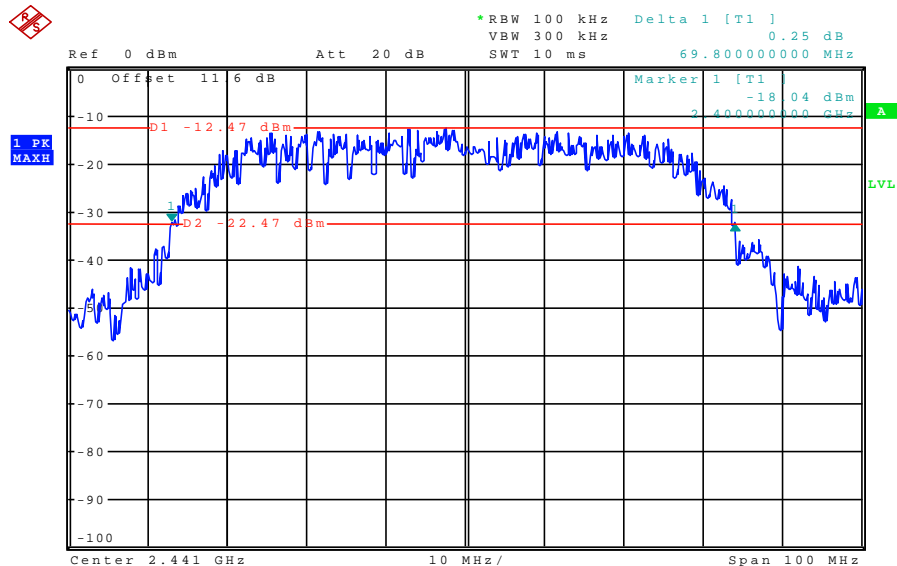

## Results:

Test conditions		6 dB BANDWIDTH [MHz]
Frequency [MHz]		2441
T <sub>nom</sub>	V <sub>nom</sub>	59.60
Measurement uncertainty		±1kHz

Test conditions		20 dB BANDWIDTH [MHz]
Frequency [MHz]		2441
T <sub>nom</sub>	V <sub>nom</sub>	69.80
Measurement uncertainty		±1kHz


RBW: 100 kHz / VBW 300 kHz

## Limits:


Under normal test conditions only	> 500 kHz
-----------------------------------	-----------

## 5.7 Maximum output power (conducted) §15.247 (b)(3)

Plot 1: Carrier stopped at the lowest frequency

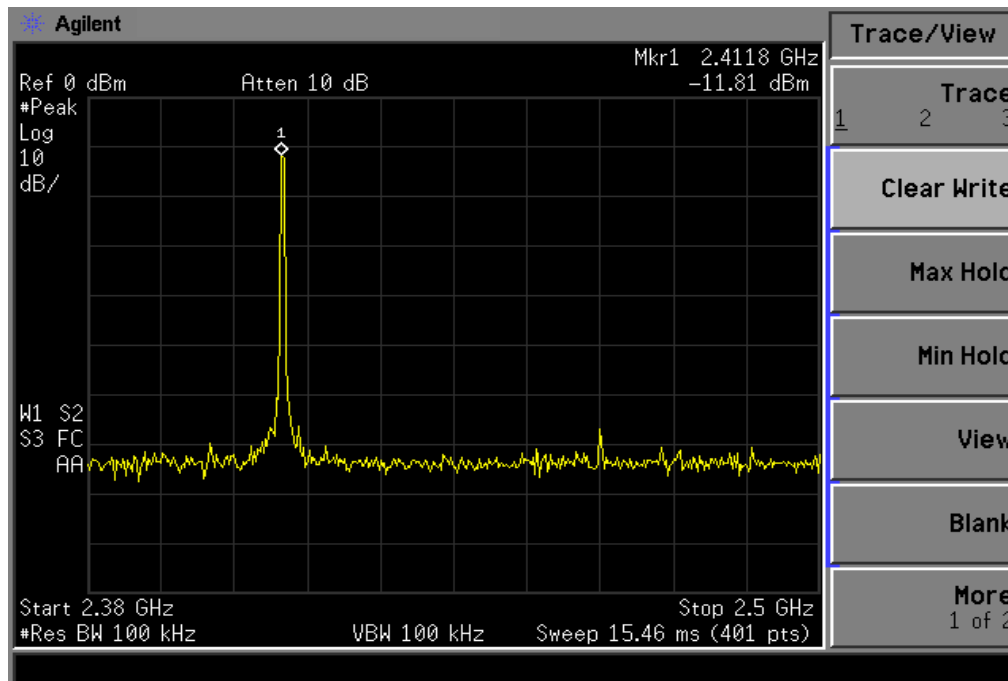


Plot 2: Carrier stopped at the middle frequency (Offset of -10dB must be calculated to the value)

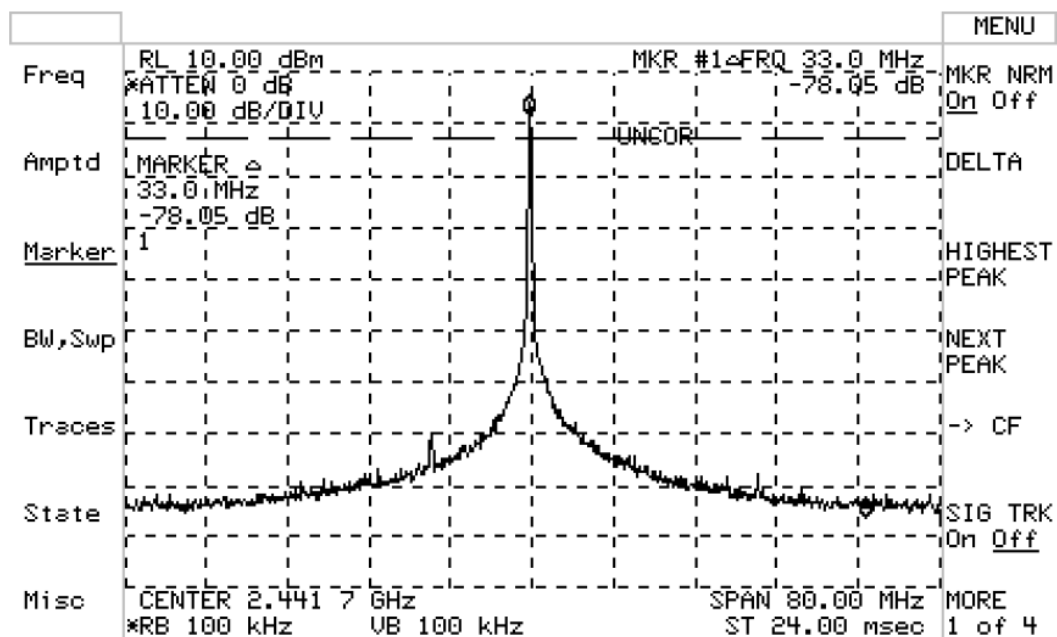



Plot 3: Carrier stopped at the highest frequency

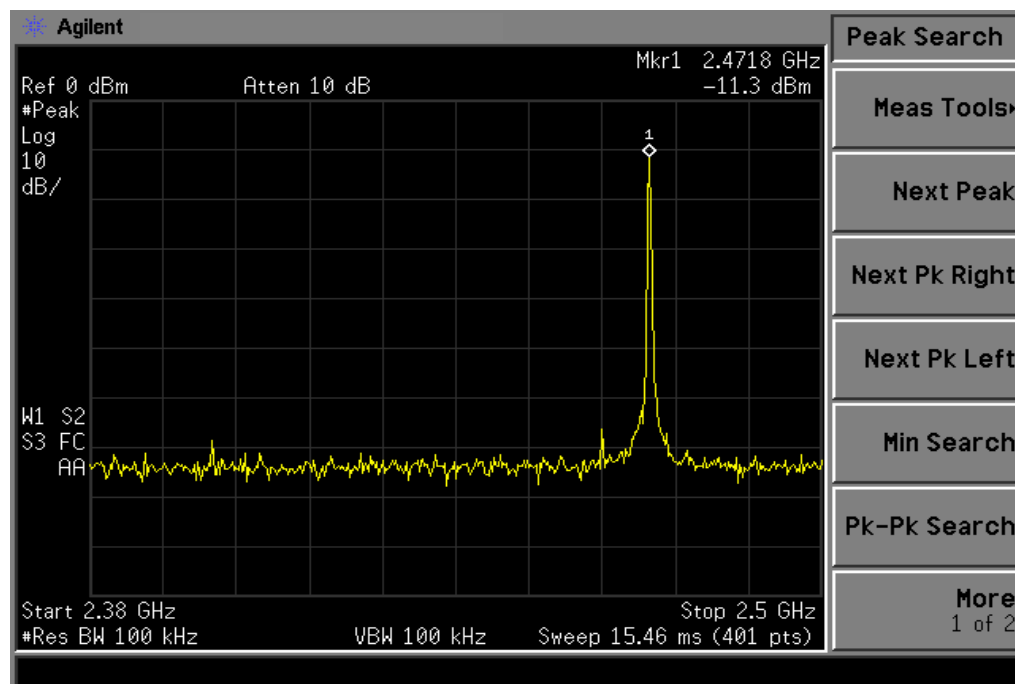

Results:

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]			Low	Center	High
T <sub>nom</sub>	V <sub>nom</sub>	PK	-11.81	-11.53	-11.30
Antenna gain: [dBi]			2.96	2.96	2.96
Measurement uncertainty		±3dB			

RBW / VBW: 1 MHz

Remark:

The correction factor is calculated by  $10 \times \log(\text{measured BW} / \text{used BW})$  [dB]

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

### MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where  $S$  = power density ( in appropriate units, e.g. mW/cm<sup>2</sup>)

$P$  = power input to the antenna (in appropriate units e.g. mW)

$G$  = power gain of the antenna in the direction of interest relative to the isotropic radiator

$R$  = distance to the centre of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = \text{EIRP}/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

#### Calculation:

(Calculated for max. EIRP)

EIRP: -7.24 dBm (0.19 mW)

calculated at distance of 20 cm:

$$\text{power density} = 0.19/4\pi 20^2 = 0.000037 \text{ mW/cm}^2$$

Limit:

1mW/ cm<sup>2</sup> is the reference level for general public exposure according to the OET Bulletin 65,  
Edition 97-01 Table 1.

## 5.8 Max. peak output power (radiated) §15.247 (b)(3)

Results:

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]			Low	Center	High
T <sub>nom</sub>	V <sub>nom</sub>	PK	-7.75	-7.47	-7.24
Antenna gain: [dBi]			4.06	4.06	4.06
Measurement uncertainty		±3dB			

RBW / VBW: 1 MHz

Remark:


The correction factor is calculated by  $10 \times \log(\text{measured BW} / \text{used BW})$  [dB]

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------


## 5.9 Band-edge compliance of conducted emissions §15.247 (d)

Plot 1, lowest channel

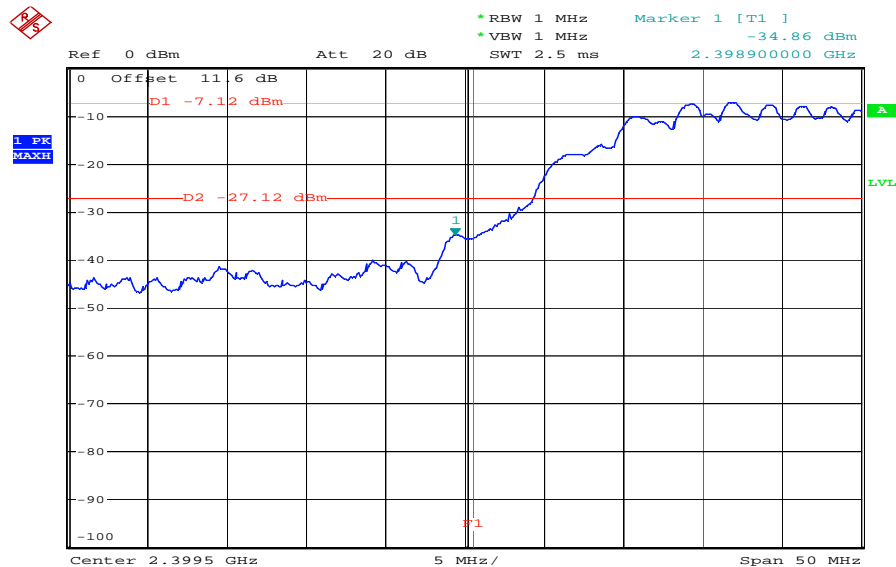

Date: 10.JAN.2008 14:41:19

Plot 2, highest channel

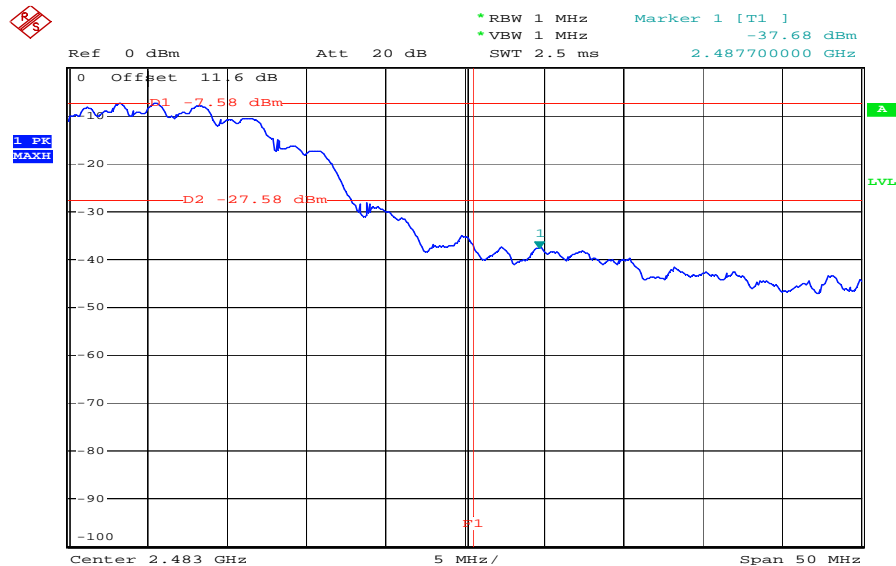

Date: 10.JAN.2008 14:42:14


---

Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

## 5.10 Band-edge compliance of radiated emissions §15.205


Plot 1: Max field strength in 3m distance (single frequency) peak

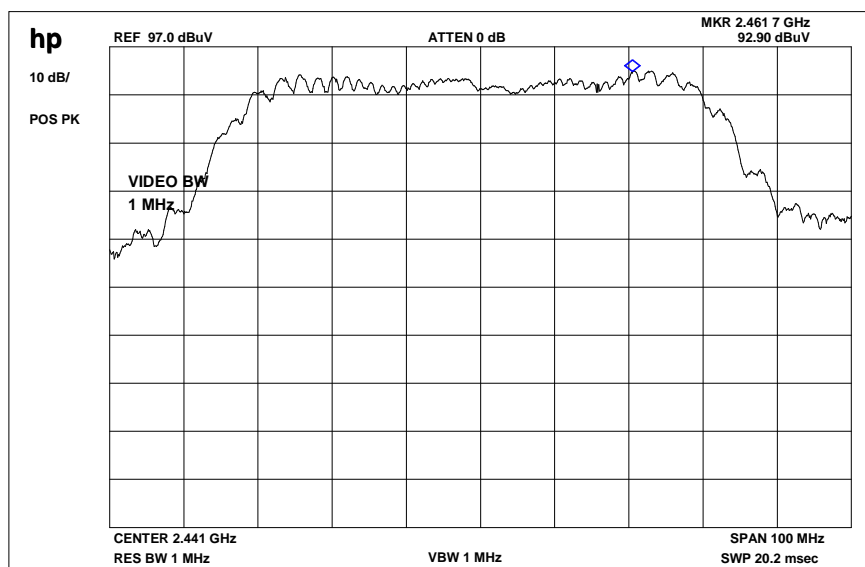

Result:

Frequency	Meter reading	Correction factor	Results
2462 MHz	92.90	-1.97 dB	90.93


Plot 2 : Max field strength in 3m distance (single frequency) average

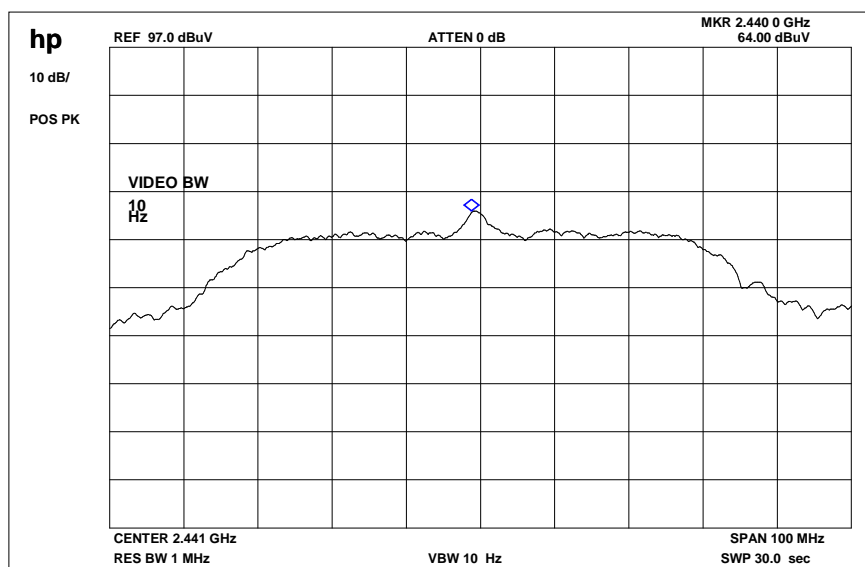

Result:

Frequency	Meter reading	Correction factor	Results
2462 MHz	64.00	-1.97 dB	62.03

## Plot 3: Marker-Delta Method

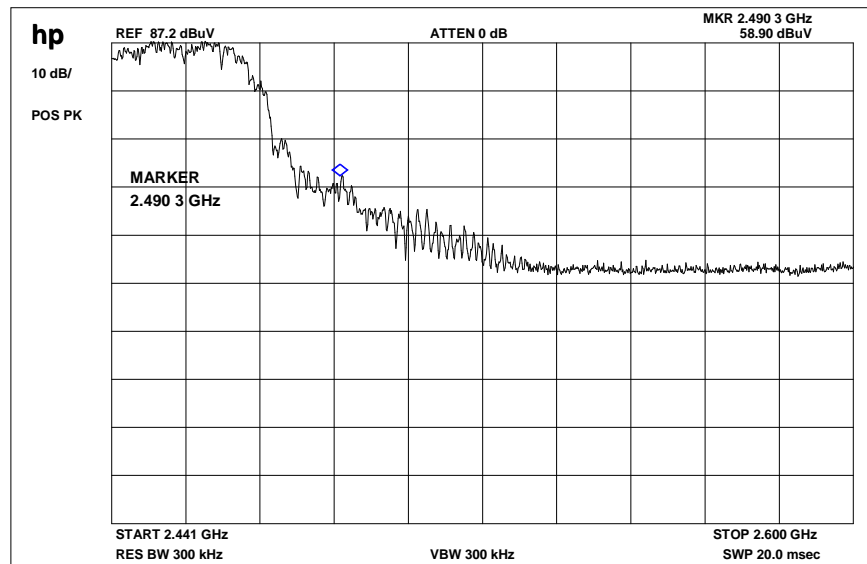

Result:

Marker-Delta-Value: 28.30 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

**Results & Limits:**


Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	92.90 dB $\mu$ V/m	-1.97 dB	90.93 dB $\mu$ V/m
Max. average value	1 MHz RBW 10 Hz VBW	64.00 dB $\mu$ V/m	-1.97 dB	62.03 dB $\mu$ V/m
Delta value	Peak 300 kHz RBW/VBW	28.30 dB		
Value at band edge	limit 54 dB $\mu$ V/m			33.73 dB $\mu$ V/m
Statement:				Complies

## 5.11 Spurious Emissions - conducted (Transmitter) §15.247 (c)

Plot 1:

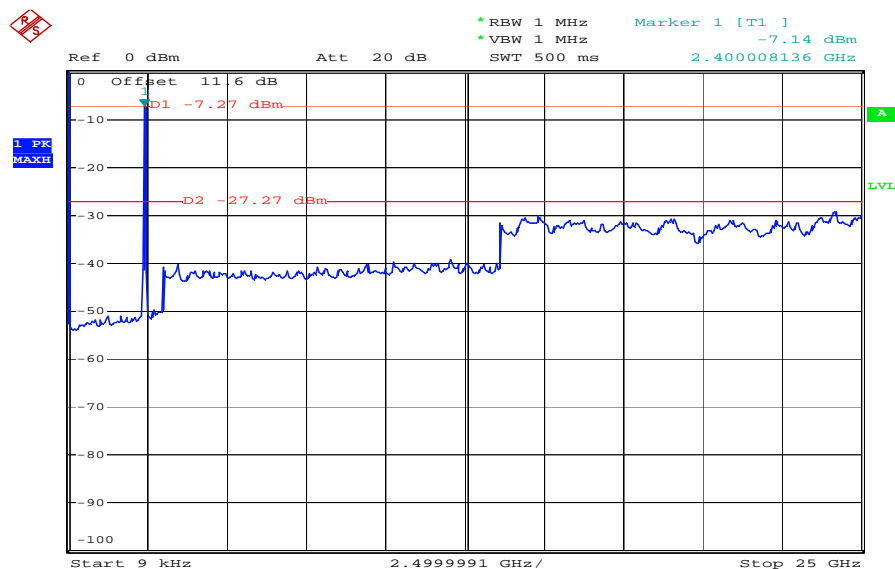

Date: 10.JAN.2008 14:52:22

In the Range from 9 kHz to 1 GHz no spurious were found, so the measurement was performed with RBW/VBW 1 MHz over the whole frequency range.

Result &amp; Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmission power	actual attenuation below frequency of operation [dB]	results
2412		-7.27	30 dBm		Operating frequency
No critical peaks found			-20 dBc		
Measurement uncertainty		± 3dB			

F < 1 GHz: RBW: 100 kHz VBW: 100 kHz  
F > 1 GHz: RBW: 1 MHz VBW: 1 MHz


Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.



## 5.12 Spurious Emissions - radiated (Transmitter) §15.209

Plot 1: 0.03 - 1 GHz

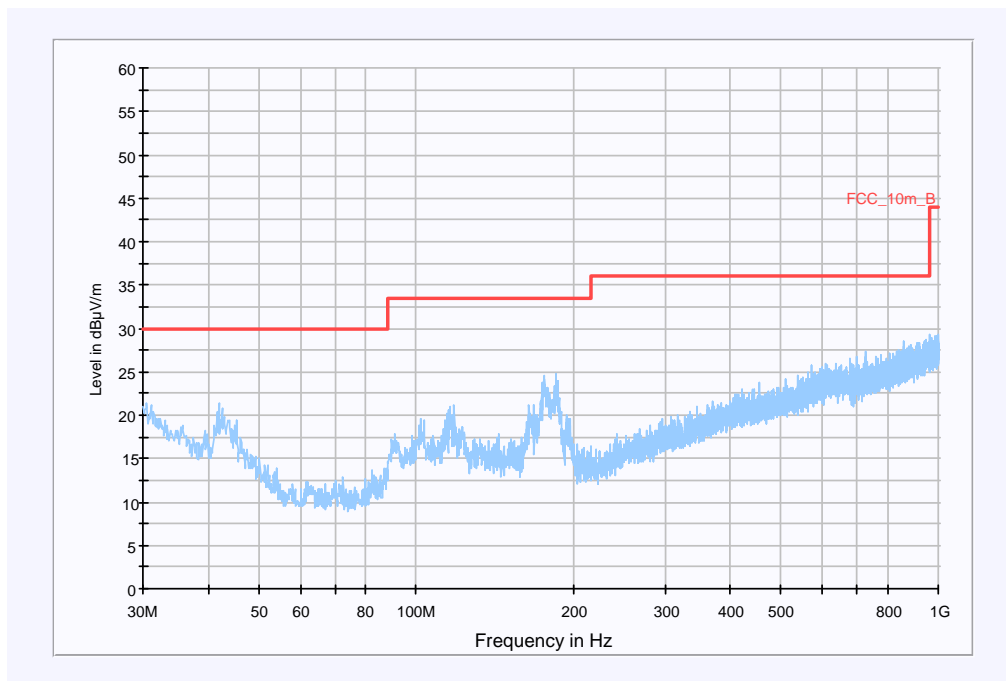


Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


### Subrange 1

Frequency Range:	30MHz - 2GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009
Signal Path:	without Notch FW 1.0
Antenna:	Chase Broadband BiLog Antenna CBL 6112 SN 2110, FW A, CAL 07.01.2009 Correction Table (vertical): Chase Broadband BiLog Antenna CBL 6112 Correction Table (horizontal): Chase Broadband BiLog Antenna CBL 6112
Antenna Tower:	Correction Table: Cabel with switch (1007) Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9)


Plot 2: 1 - 4 GHz

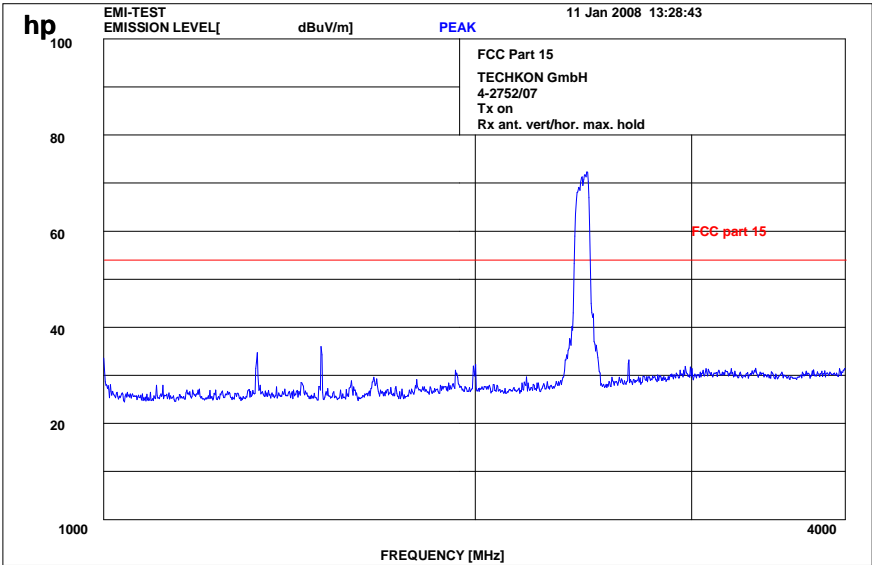

Plot 3: 4- 12 GHz

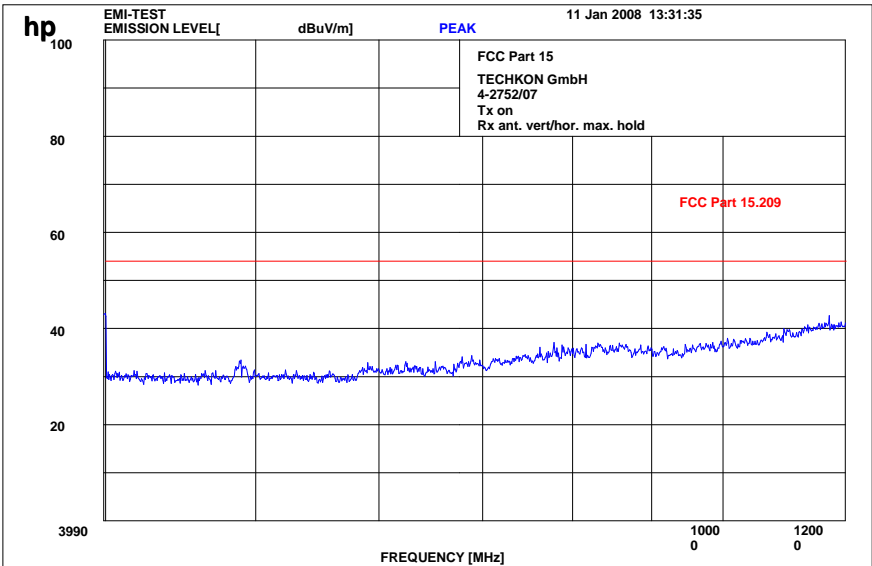

Plot 4: 12- 25 GHz

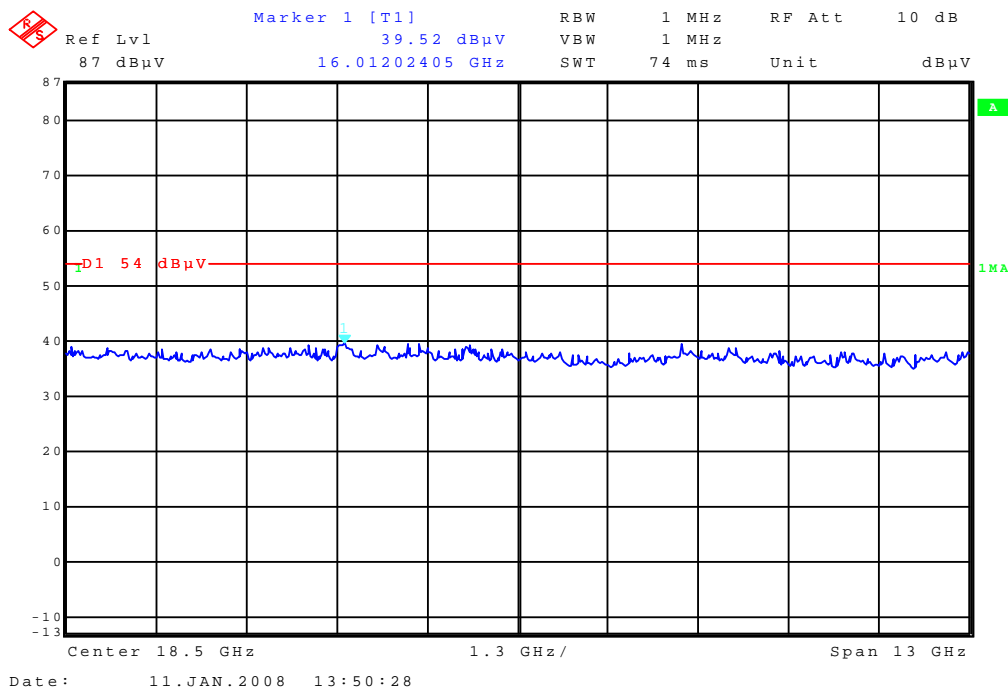

## Results:

SPURIOUS EMISSIONS LEVEL §15.209								
2441 MHz			-/-			-/-		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
No critical peaks found								
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209

Frequency [MHz]	Field strength [μV/m]	Measurement distance (m)
30 - 88	100 (40 dBμV/m)	3
88 - 216	150 (43.5 dBμV/m)	3
216 - 960	200 (46 dBμV/m)	3
above 960	500 (54 dBμV/m)	3

### 5.13 Spurious Emissions - radiated (Receiver) §15.109 / 209

Plot 1: 0.03 - 1 GHz vertical / horizontal (receiver)

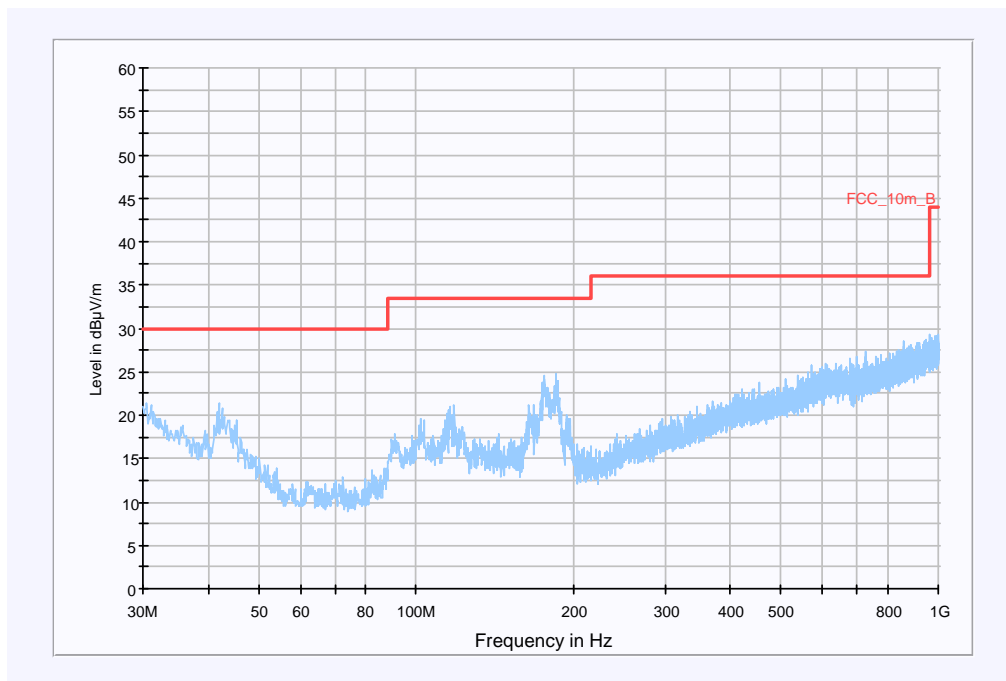


Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


#### Subrange 1

Frequency Range:	30MHz - 2GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009
Signal Path:	without Notch FW 1.0
Antenna:	Chase Broadband BiLog Antenna CBL 6112 SN 2110, FW A, CAL 07.01.2009 Correction Table (vertical): Chase Broadband BiLog Antenna CBL 6112 Correction Table (horizontal): Chase Broadband BiLog Antenna CBL 6112
Antenna Tower:	Correction Table: Cabel with switch (1007) Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9)


Plot 2: 1 - 4 GHz vertical / horizontal (receiver)

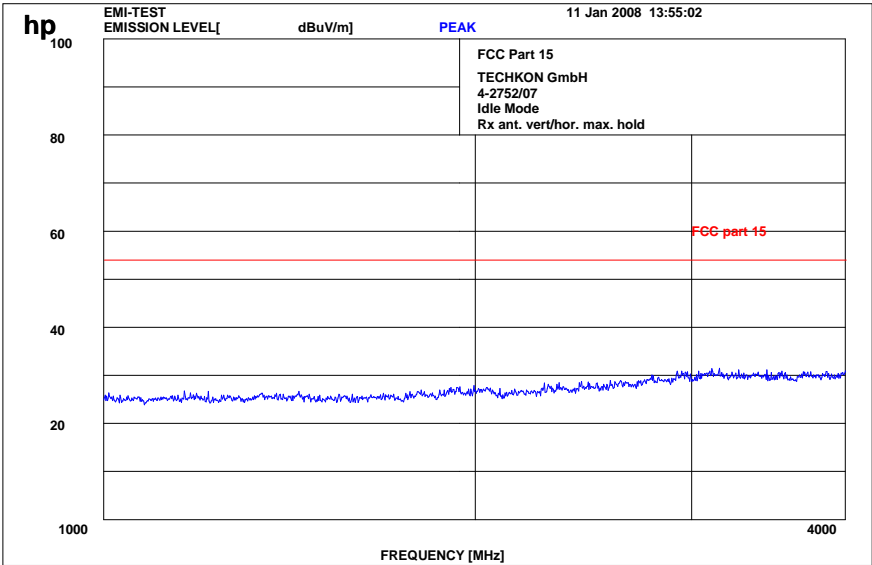

Plot 3: 4- 12 GHz (receiver)

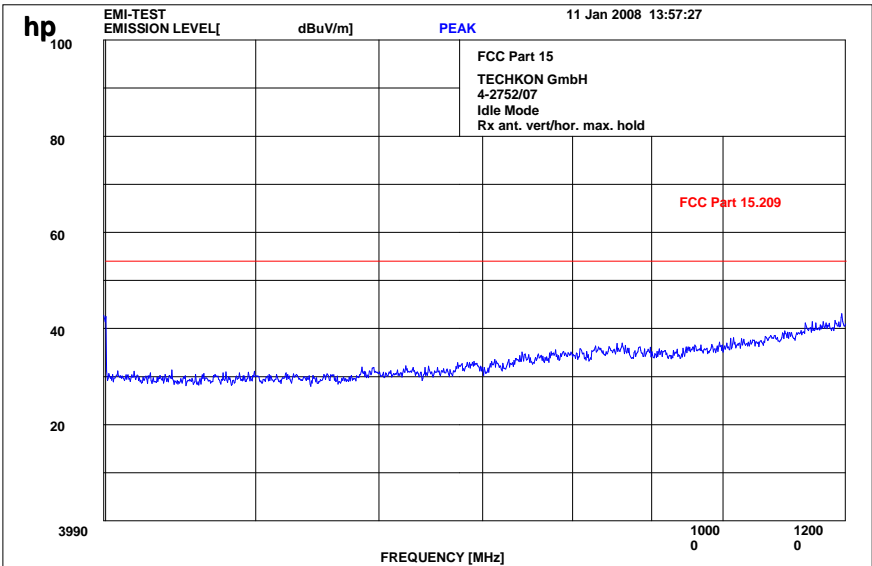

Plot 4: 12- 25 GHz (receiver)

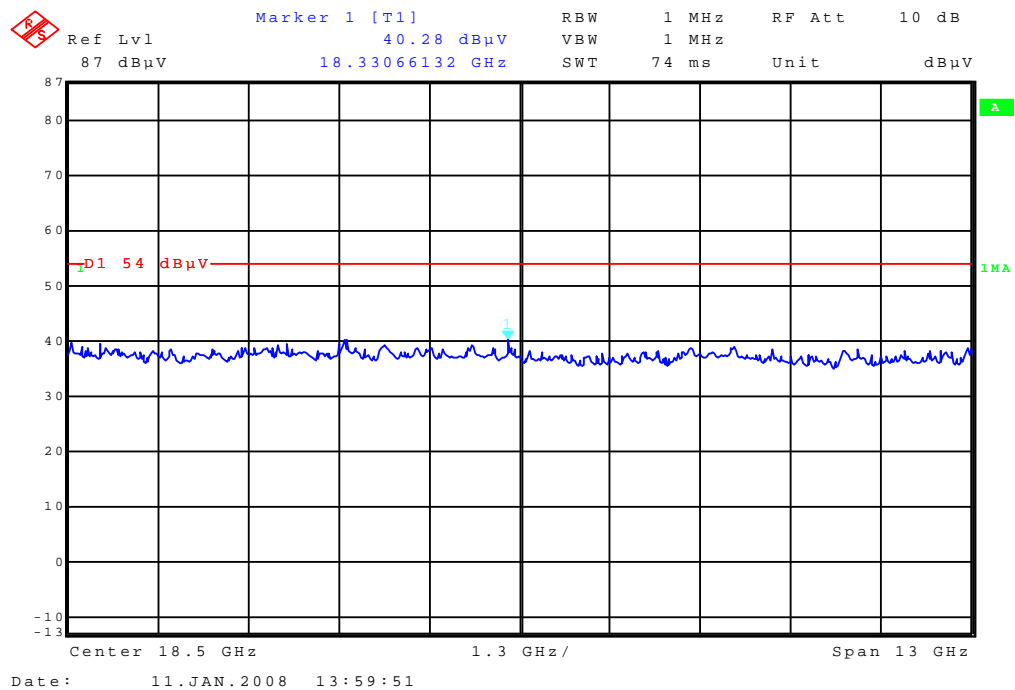

## Results:

Spurious Emissions level [dBμV/m]		
f[MHz]	Detector	Level [dBμV/m]
No critical peaks found		
Measurement uncertainty		±3 dB

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

See above plots

Measurement distance see table

Limits: § 15.109 / 209


Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
30 - 88	100 (40 dBμV/m)	3
88 - 216	150 (43.5 dBμV/m)	3
216 - 960	200 (46 dBμV/m)	3
above 960	500 (54 dBμV/m)	3

## 5.14 Spurious Emissions - radiated <30 MHz §15.209

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

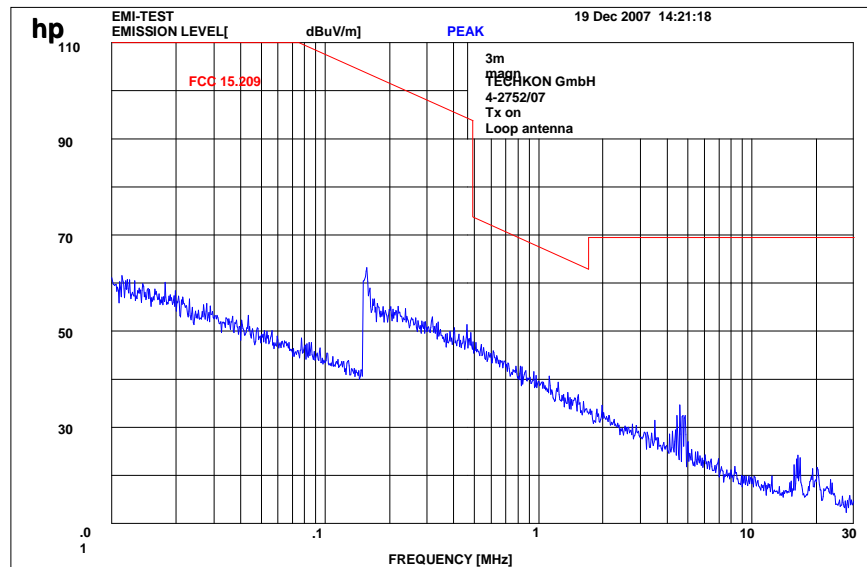


Limits:

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30
30 - 88	100 / 40 dB $\mu\text{V/m}$	3
88 - 216	150 / 43.5 dB $\mu\text{V/m}$	3
216 - 960	200 / 46 dB $\mu\text{V/m}$	3
above 960	54 dB $\mu\text{V/m}$	3

## 5.15 Conducted Emissions <30 MHz §15.107/207

Plot 1: CISPR 22

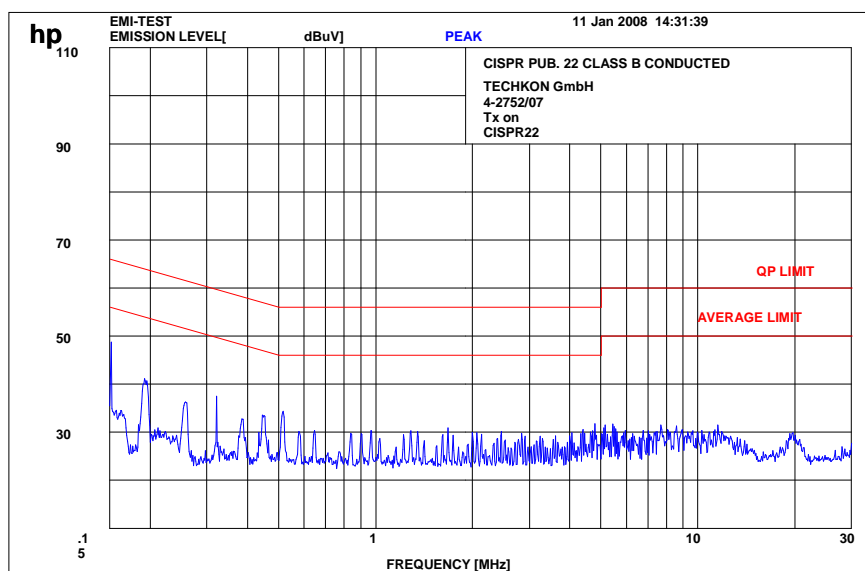

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits:

Under normal test conditions only	See plots
-----------------------------------	-----------



## 6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

### *Anechoic chamber C:*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	Spektrum Analyzer 8566B	HP	2747A05306	300001000	05.10.2006	24	05.10.2008
5	Spektrum Analyzer Display 85662A	HP	2816A16541	300002297	05.10.2006	24	05.10.2008
6	Quasi-Peak-Adapter 85650A	HP	2811A01131	300000999	05.10.2006	24	05.10.2008
7	RF-Preselector 85685A	HP	2837A00779	300000218	08.11.2006	24	08.11.2008
8	PC Vectra VL	HP		300001688	n.a.		
9	Software EMI	HP		300000983	n.a.		
10	Measurement System 2						
11	FSP 30	R&S	100623	ICT 300003464	05.10.2007	24	15.10.2009
12	PC	F+W			n.a.		
13	TILE	TILE			n.a.		
14	Biconical antenna	EMCO	S/N: 860 942/003		Monthly verification (System cal.)		
15	Log. Period. Antenna 3146	EMCO	2130	300001603	Monthly verification (System cal.)		
16	Double Ridged Antenna HP 3115P	EMCO	3088	300001032	Monthly verification (System cal.)		
17	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
18	Power Supply 6032A	HP	2818A03450	300001040	12.05.2007	36	12.05.2010
19	Busisolator	Kontron		300001056	n.a.		
20	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
21	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
22	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
23	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		

### *System Rack Room 005 :*

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	FSP 30	R&S		300003575	02.04.2007	24	02.04.2009
2	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
3	Switch Matrix	HP		300000929	n.a.		
4	Power Supply	HP	3041A00544	300002270	13.05.2007	36	13.05.2010
5	Signal Generator	R&S	836206/0092	300002680	30.05.2007	36	30.05.2010

*Anechoic chamber F:*

No.	Instrument/Ancillary	Manufacturer	Type	Serial-No.	Internal identification
<b>Radiated emission in chamber F</b>					
F-1	Control Computer	F+W		FW0502032	300003303
F-2	Bilog antenna	Chase	CBL 6112A	2110	300000573
F-3a	Amplifier	Veritech Microwave Inc.	0518C-138	- / -	- / -
F-4b	Switch	HP	3488A	- / -	300000368
F-5	EMI Test receiver	R&S	ESCI	100083	300003312
F-6	Turntable Controller	EMCO	1061 3M	1218	300000661
F-7	Tower Controller	EMCO	1051 Controller	1262	300000625
F-8	Tower	EMCO	1051 Tower	1262	300000625
F-9	Ultra Notch-Filter Rejected band Ch. 62	WRCD		9	
<b>Radiated immunity in chamber F</b>					
F-10	Control Computer	F+W		FW0502032	300003303
F-11	Signal Generator	R&S	SML 03	102519	300003407
F-12	RF-Amplifier	ar	50W1000	12932	300001438
F-13	Directional Coupler	ar	DC 3010	12708	300001428
F-14	Logper Antenna	R&S	HL023A1	323704/016	300001476
F-15	RF-Amplifier	ar	60S1G3	313649	300003410
F-16	Directional Coupler	ar	DC7144A	312786	300003411
F-17	Horn Antenna	ar	AT 4002	19739	300000633
F-18	Power Meter	R&S	NRV	860327/024	F033
F-19	Power sensor	R&S	URV5-Z2	839080/005	300002844.02
F-20	Power sensor	R&S	URV5-Z2	830755/057	F032
<b>Harmonics and flicker in front of chamber F</b>					
F-21	Flicker and Harmonics Test System	Spitzenberger & Spies	PHE4500/B I PHE4500/B II	B5983 B5984	300000210
F-22	Control Unit	Spitzenberger & Spies	STE	B5980	300000210
F-23	Power Amplifier	Spitzenberger & Spies	EP 4500/B	B5976	300000210
F-24	Conect Panel	Spitzenberger & Spies	Conect panel	B5982	300000210
F-25	Power Supply	Spitzenberger & Spies	NT-EP 4500	B3977	300000210
F-26	Additional transformer	Spitzenberger & Spies	UT-EP 4500	B5978	300000210
F-27	Analyzer Reference System	Spitzenberger & Spies	ARS 16/1	A3509 07/0 0205	300003314
F-26	Power Supply	Hewlett Packard	6032 A	2920 A 04466	300000580

## 7 Photographs of the Test Set-up

Photo documentation

Photo 1:



Photo 2:

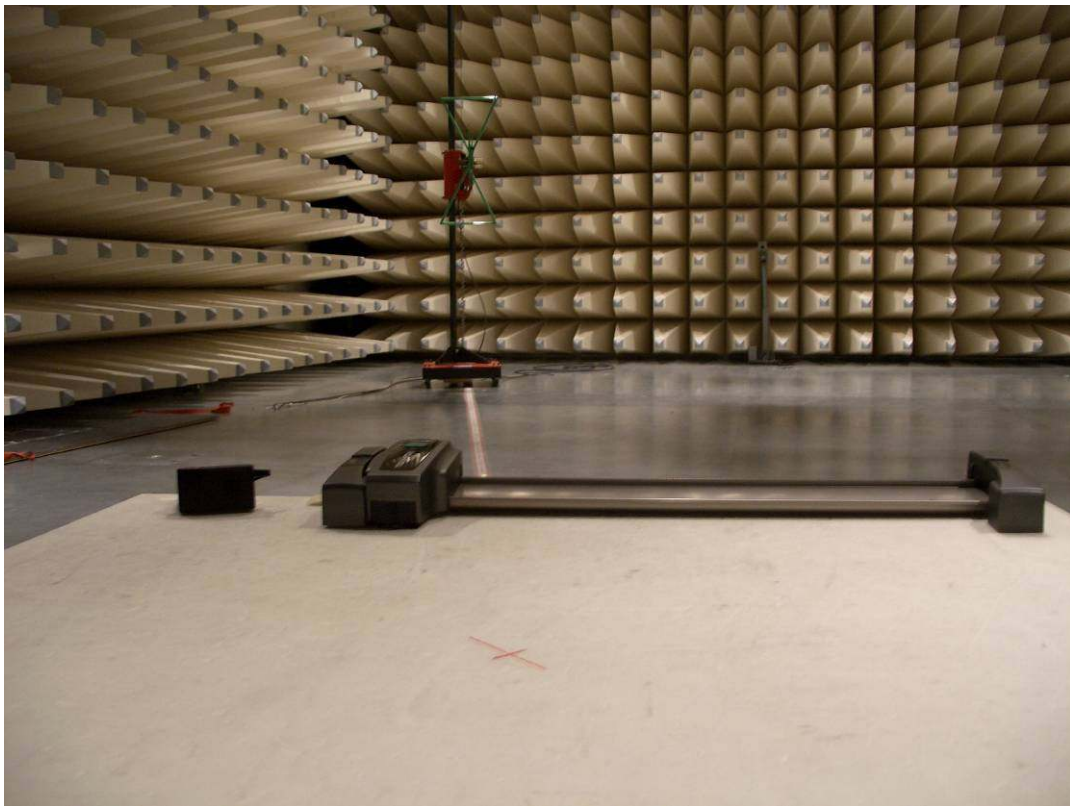


Photo 3:





## 8 Photographs of the EUT

Photo documentation

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:





Photo 6:

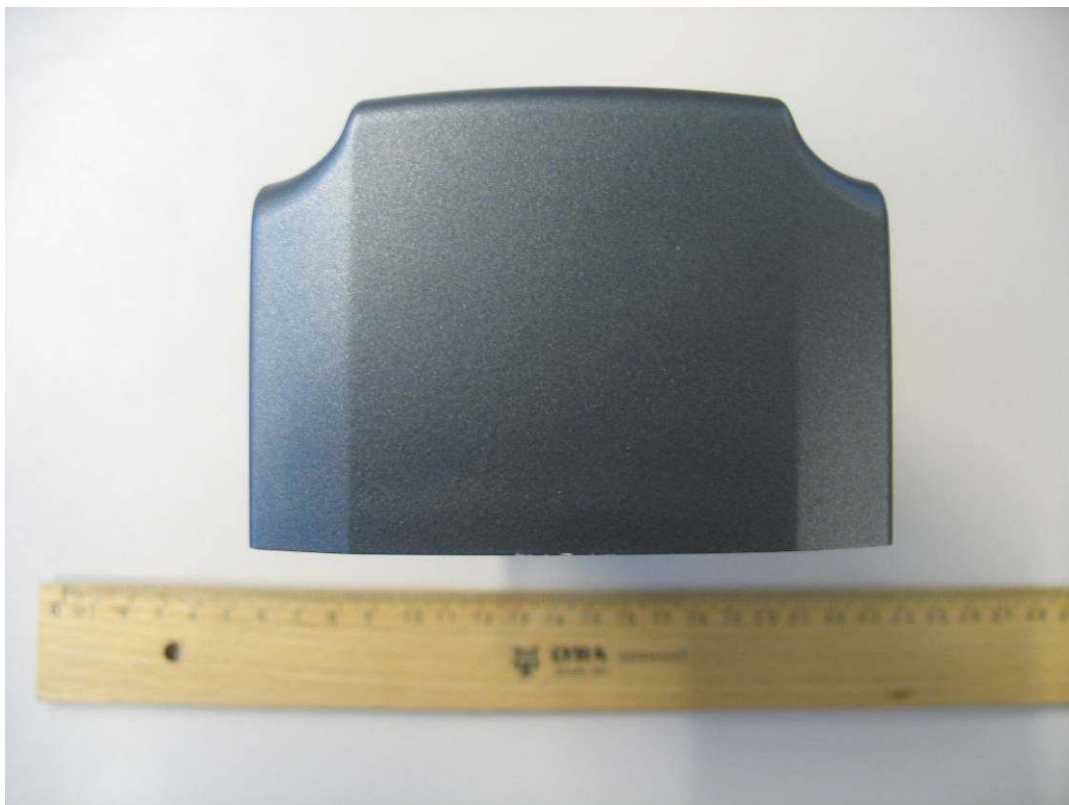


Photo 7:

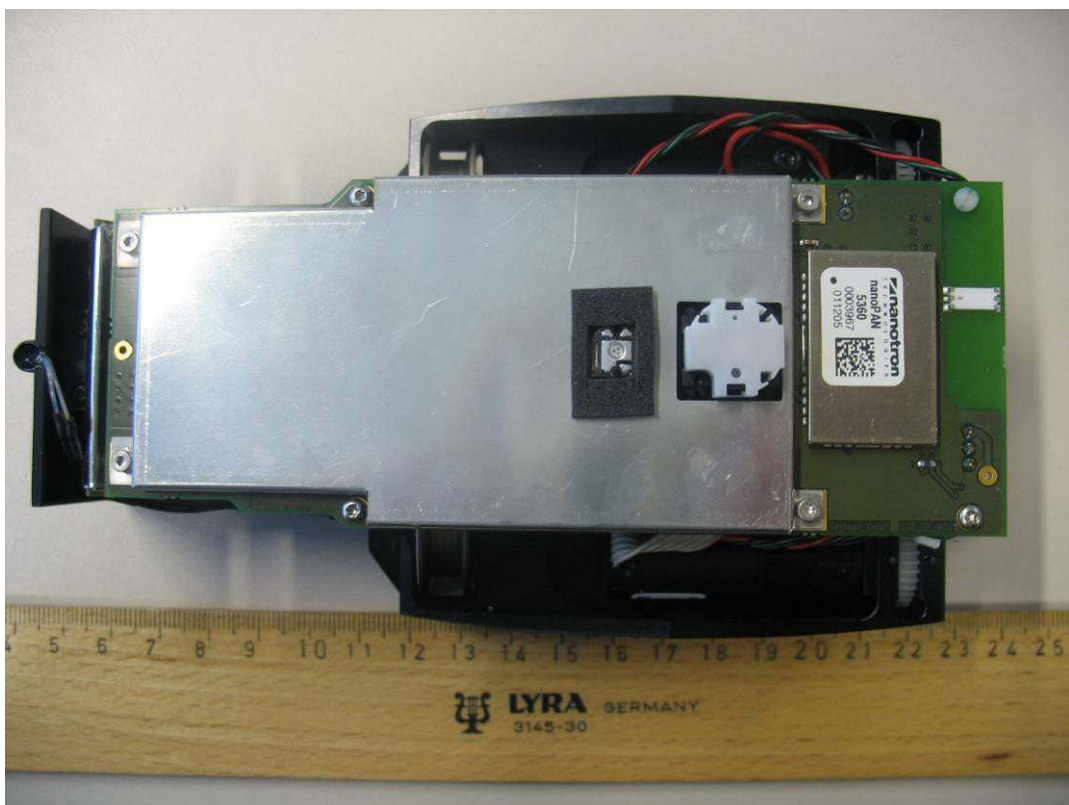




Photo 8:

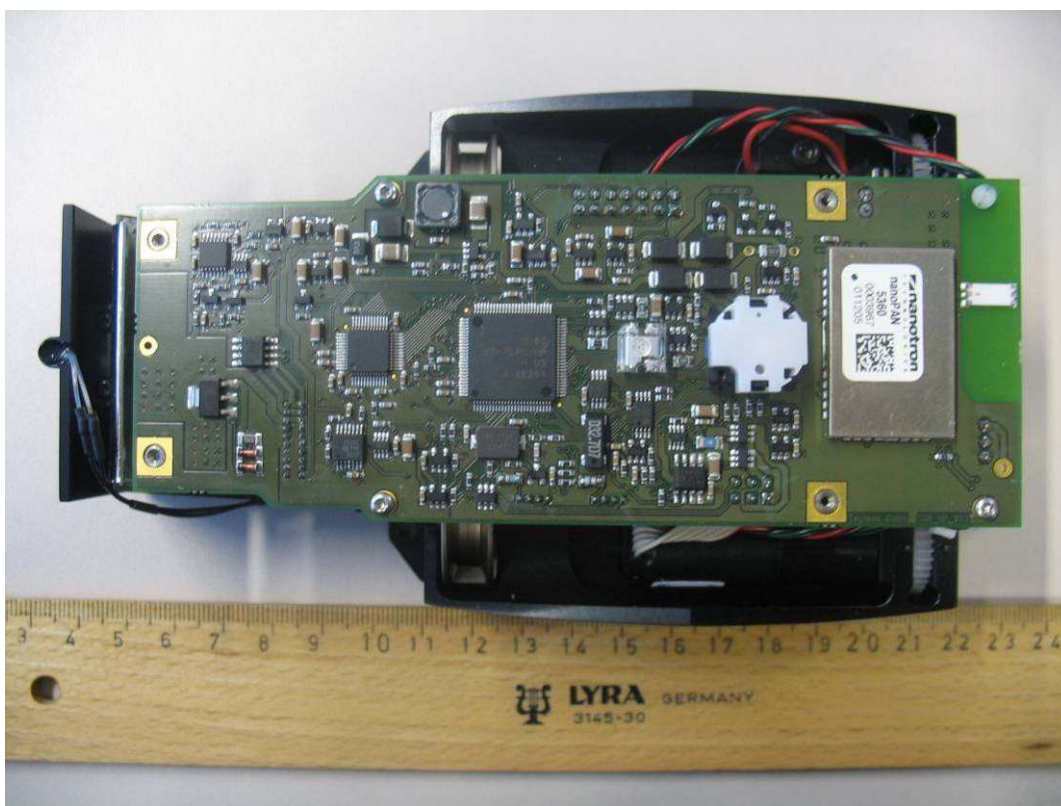


Photo 9:

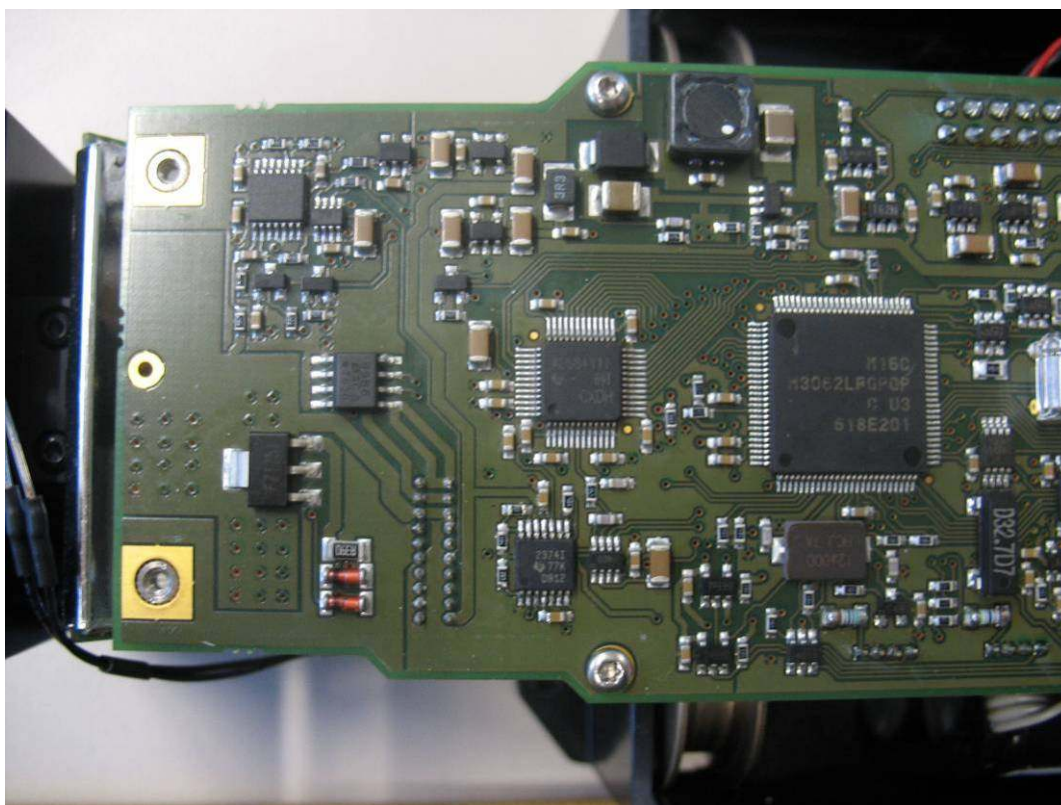


Photo 10:

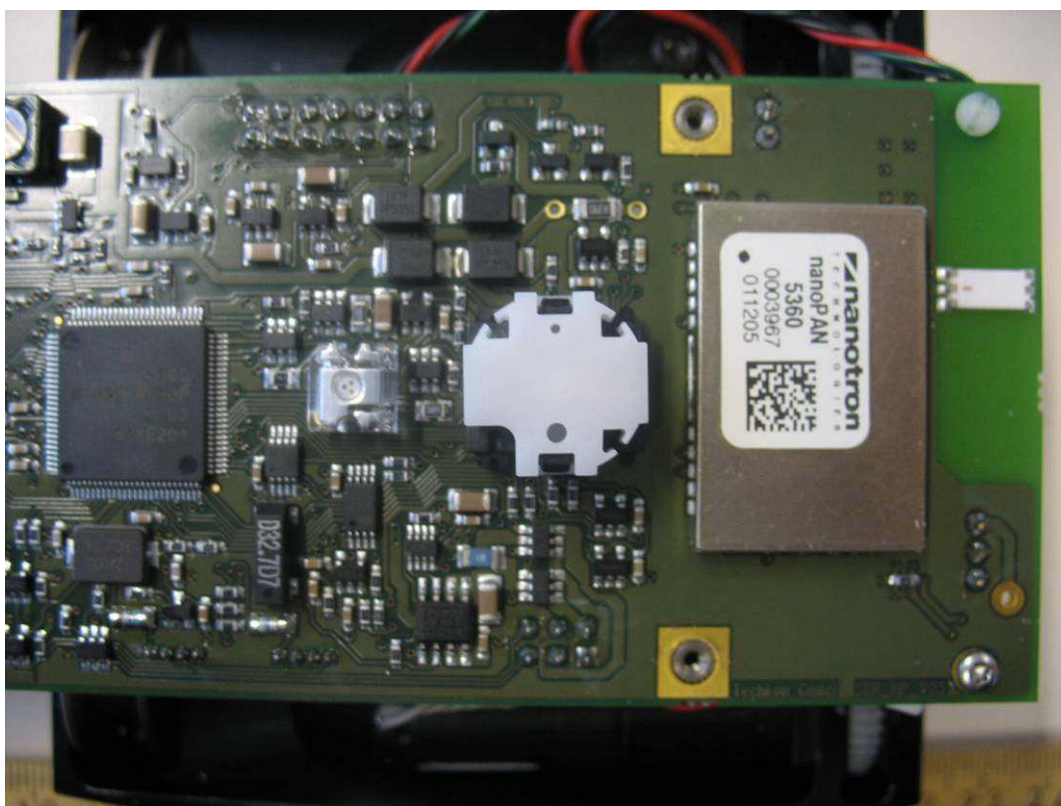


Photo 11:

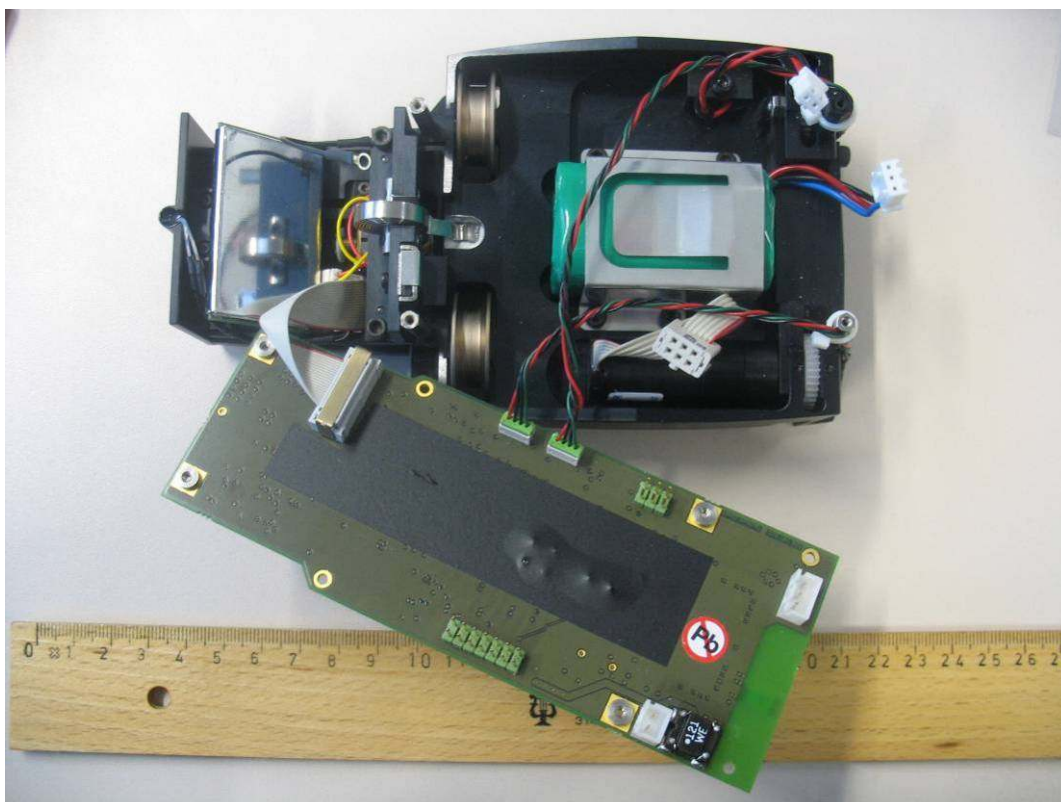




Photo 12:

