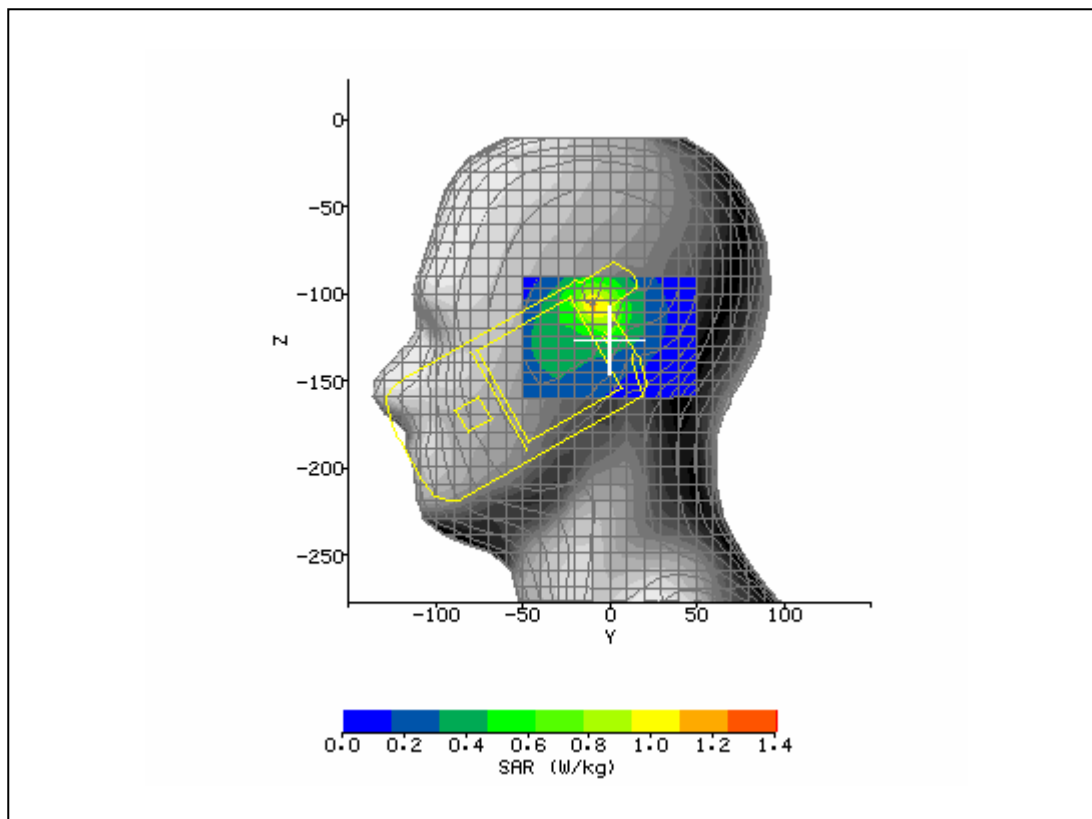|			
System / software:	SARA2 / 2.40 VPM	**Input Power Drift:**	
Date / Time:	4/18/2008 8:55:21 AM	**DUT Battery Model/No:**	
Filename:	temp.txt	**Probe Serial Number:**	L0116
Ambient Temperature:	23.0°C	**Liquid Simulant:**	850
Device Under Test:	S/N 21000080	**Relative Permittivity:**	40.85
Relative Humidity:	33.5%	**Conductivity:**	0.902
Phantom S/No:	Head04_37.csv	**Liquid Temperature:**	22.9°C
Phantom Rotation:	180°	**Max SAR Y-axis Location:**	16.00 mm
DUT Position:	Right Touch	**Max SAR Z-axis Location:**	-134.10 mm
Antenna Configuration:	Integral	**Max E Field:**	24.53 V/m
Test Frequency:	836.52MHz	**SAR 1g:**	0.575 W/kg
Air Factors:	504 / 365 / 331	**SAR 10g:**	0.414 W/kg
Conversion Factors:	.457 / .457 / .457	**SAR Start:**	0.315 W/kg
Type of Modulation:		**SAR End:**	0.314 W/kg
Modn. Duty Cycle:		**SAR Drift during Scan:**	-0.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	**Probe battery last changed:**	4/18/08
Input Power Level:	Power Control Bits "All Up"	**Extrapolation:**	poly4
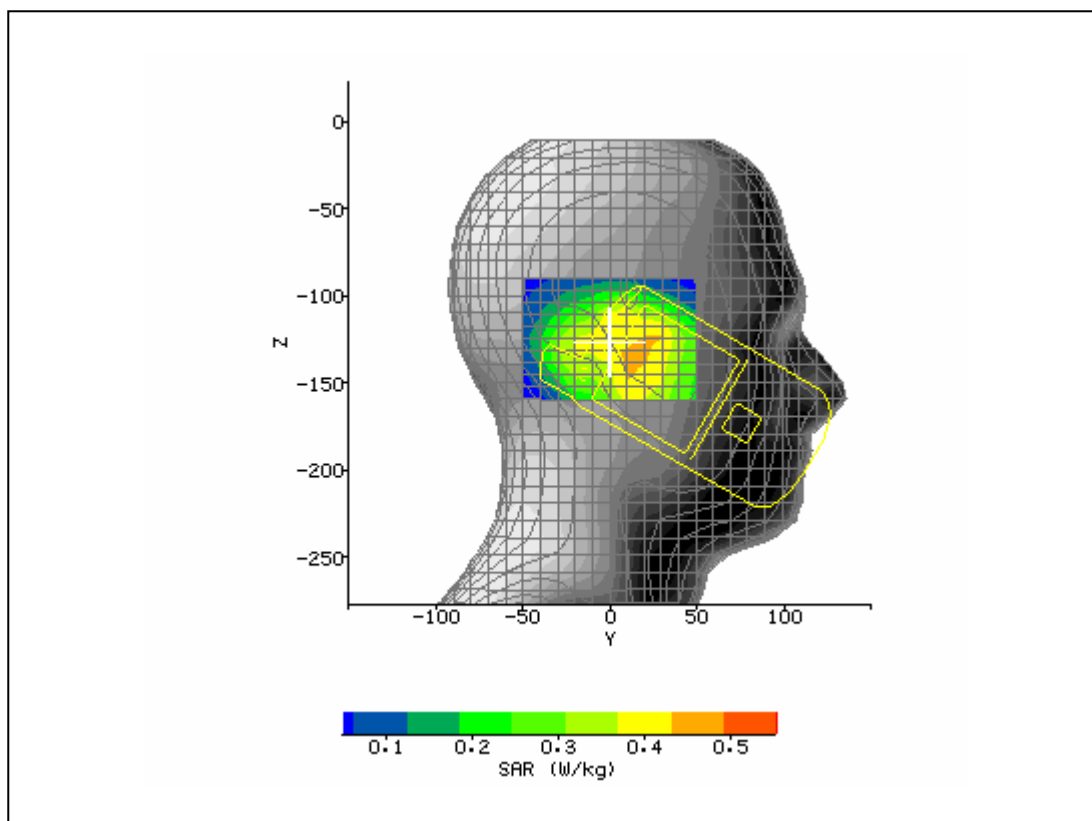
System / software:	SARA2 / 2.40 VPM		**Input Power Drift:**	
Date / Time:	4/18/2008 9:12:44 AM		**DUT Battery Model/No:**	
Filename:	Right_Touch_384_3d.txt		**Probe Serial Number:**	L0116
Ambient Temperature:	23.1°C		**Liquid Simulant:**	850
Device Under Test:	S/N 21000080		**Relative Permittivity:**	40.85
Relative Humidity:	35.6%		**Conductivity:**	0.902
Phantom S/No:	Head04_37.csv		**Liquid Temperature:**	23.0°C
Phantom Rotation:	180°		**Max SAR Y-axis Location:**	-18.00 mm
DUT Position:	Right Tilt		**Max SAR Z-axis Location:**	-133.40 mm
Antenna Configuration:	Integral		**Max E Field:**	26.95 V/m
Test Frequency:	836.52MHz		**SAR 1g:**	0.588 W/kg
Air Factors:	504 / 365 / 331		**SAR 10g:**	0.398 W/kg
Conversion Factors:	.457 / .457 / .457		**SAR Start:**	0.268 W/kg
Type of Modulation:			**SAR End:**	0.267 W/kg
Modn. Duty Cycle:			**SAR Drift during Scan:**	-0.35 %
Diode Compression Factors (V*200):	20 / 20 / 20		**Probe battery last changed:**	4/18/08
Input Power Level:	Control Bits "All Up"		**Extrapolation:**	poly4
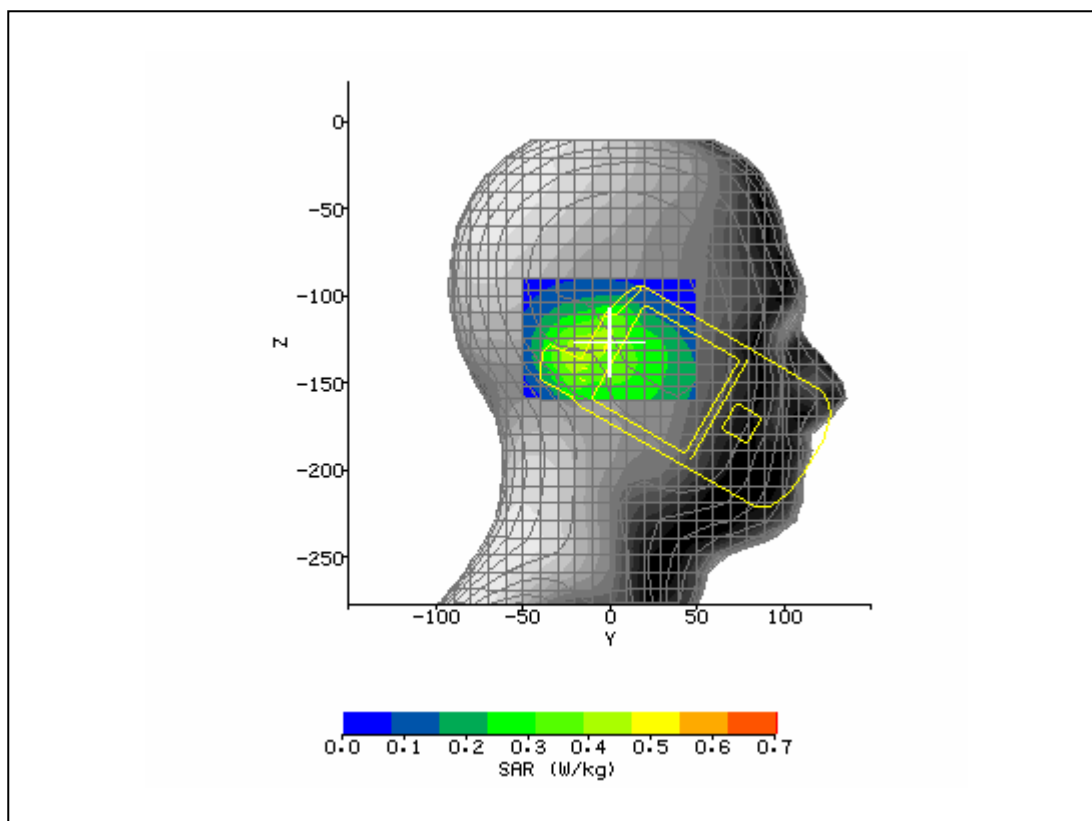
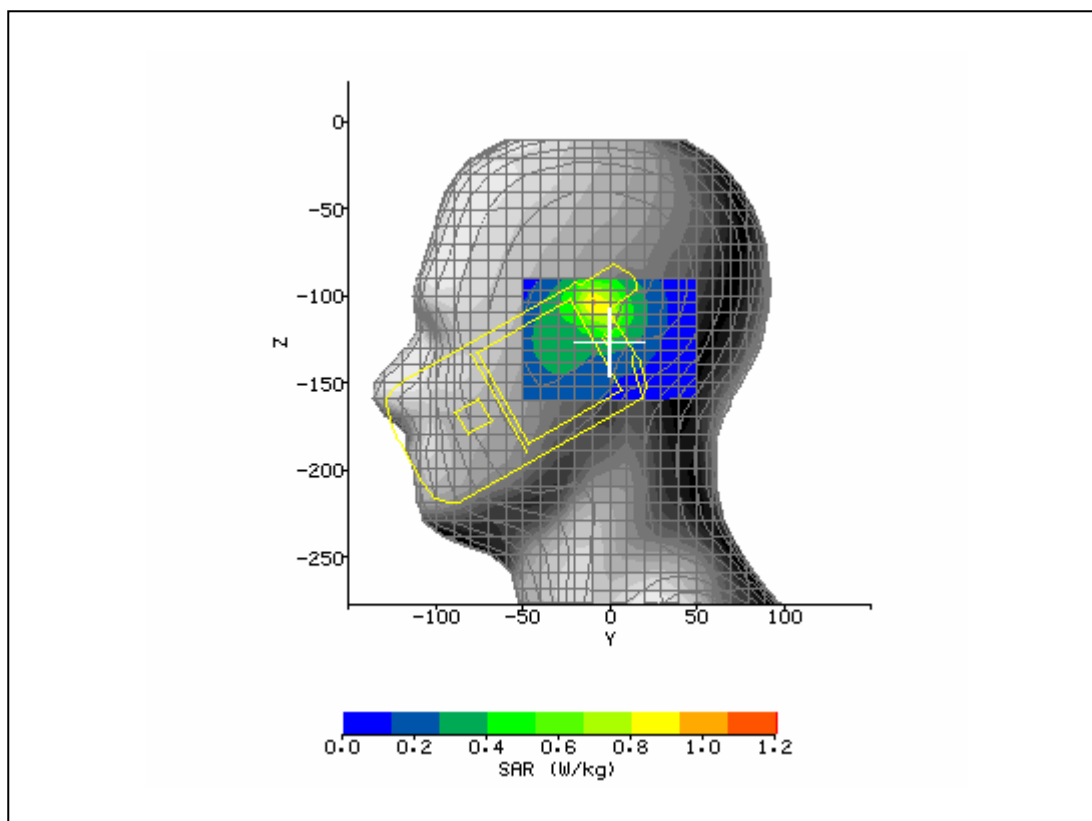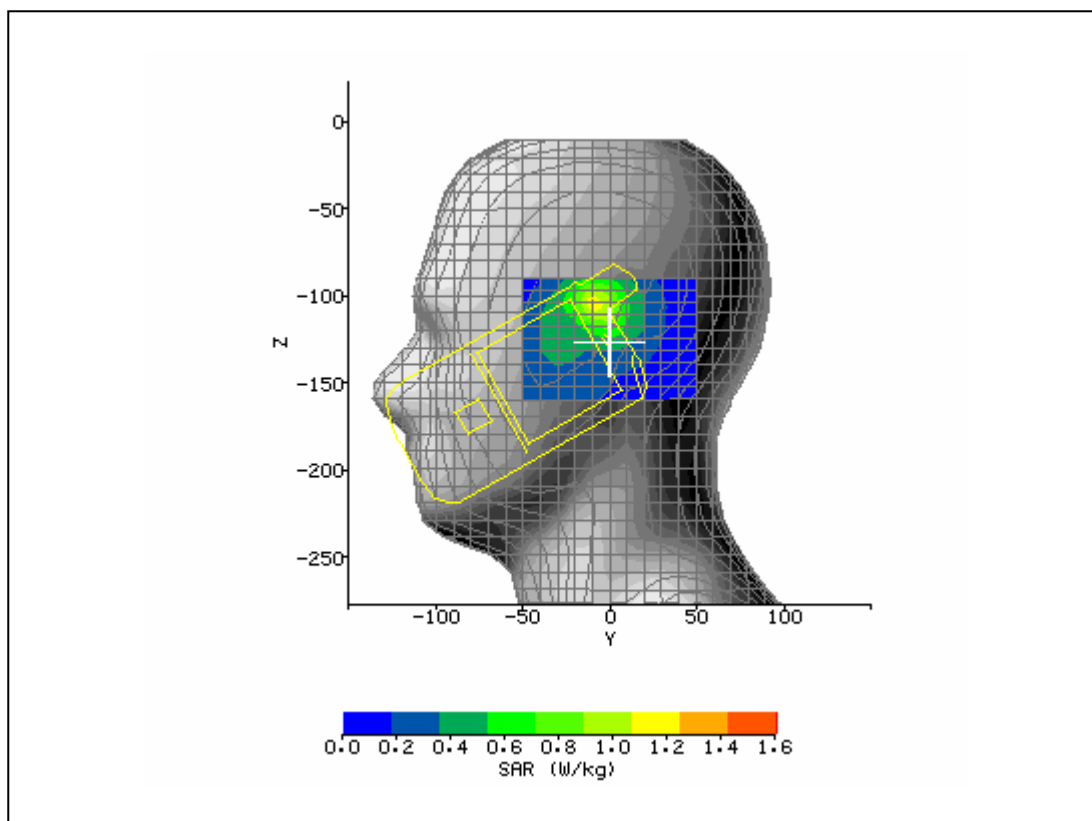| System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/18/2008 9:34:16 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_384_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.3°C	Liquid Simulant:	850
Device Under Test:	S/N 21000080	Relative Permittivity:	40.85
Relative Humidity:	35.9%	Conductivity:	0.902
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-10.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-102.60 mm
Antenna Configuration:	Integral	Max E Field:	32.87 V/m
Test Frequency:	836.52MHz	SAR 1g:	0.920 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.565 W/kg
Conversion Factors:	.457 / .457 / .457	SAR Start:	0.349 W/kg
Type of Modulation:		SAR End:	0.347 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.40 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/18/08
Input Power Level:	Control Bits 'All Up'	Extrapolation:	poly4
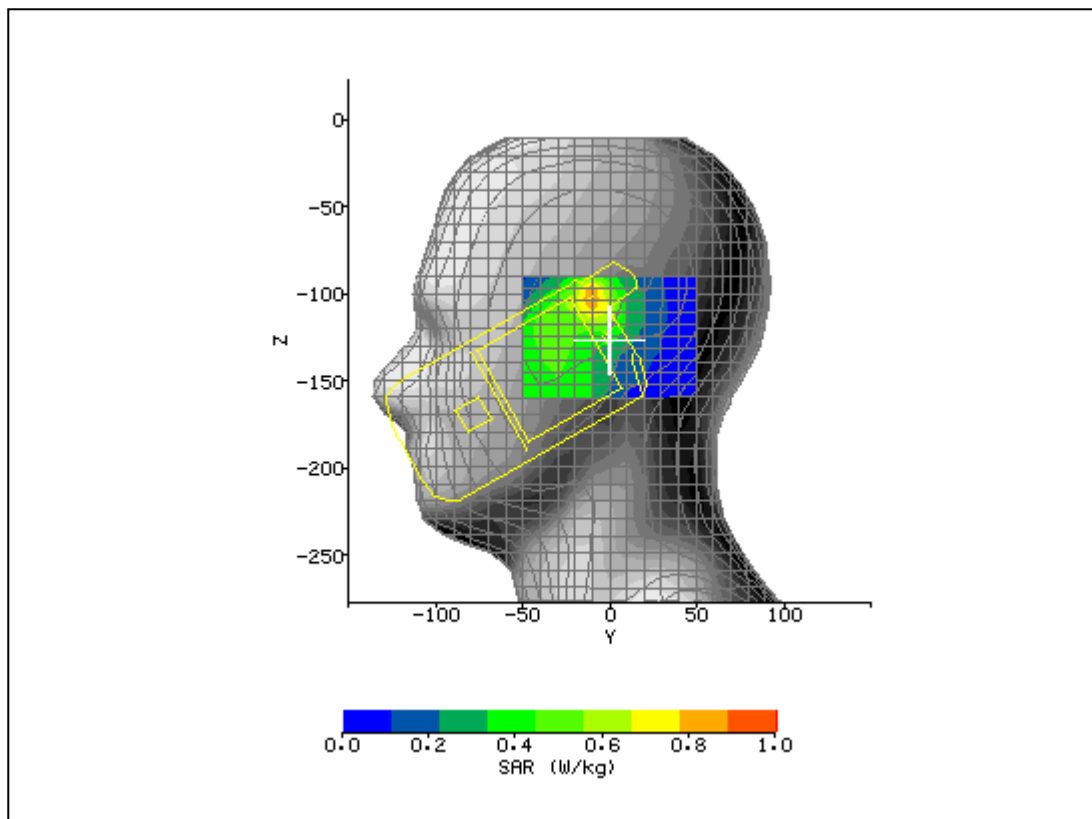
System / software:	SARA2 / 2.40 VPM		**Input Power Drift:**	
Date / Time:	4/18/2008 9:55:33 AM		**DUT Battery Model/No:**	
Filename:	Left_Touch_384_3d.txt		**Probe Serial Number:**	L0116
Ambient Temperature:	23.3°C		**Liquid Simulant:**	850
Device Under Test:	S/N 21000080		**Relative Permittivity:**	40.85
Relative Humidity:	35.9%		**Conductivity:**	0.902
Phantom S/No:	Head04_37.csv		**Liquid Temperature:**	23.2°C
Phantom Rotation:	0°		**Max SAR Y-axis Location:**	-8.00 mm
DUT Position:	Left Tilt		**Max SAR Z-axis Location:**	-106.80 mm
Antenna Configuration:	Integral		**Max E Field:**	38.76 V/m
Test Frequency:	836.52MHz		**SAR 1g:**	1.317 W/kg
Air Factors:	504 / 365 / 331		**SAR 10g:**	0.750 W/kg
Conversion Factors:	.457 / .457 / .457		**SAR Start:**	0.478 W/kg
Type of Modulation:			**SAR End:**	0.471 W/kg
Modn. Duty Cycle:			**SAR Drift during Scan:**	-1.32 %
Diode Compression Factors (V*200):	20 / 20 / 20		**Probe battery last changed:**	4/18/08
Input Power Level:	Control Bits 'All Up'		**Extrapolation:**	poly4

System / software:	SARA2 / 2.40 VPM	**Input Power Drift:**	
Date / Time:	4/18/2008 10:22:06 AM	**DUT Battery Model/No:**	
Filename:	Left_Tilt_384_3d.txt	**Probe Serial Number:**	L0116
Ambient Temperature:	23.3°C	**Liquid Simulant:**	850
Device Under Test:	S/N 21000080	**Relative Permittivity:**	41.04
Relative Humidity:	35.9%	**Conductivity:**	0.893
Phantom S/No:	Head04_37.csv	**Liquid Temperature:**	23.2°C
Phantom Rotation:	0°	**Max SAR Y-axis Location:**	-7.00 mm
DUT Position:	Left Tilt	**Max SAR Z-axis Location:**	-105.40 mm
Antenna Configuration:	Integral	**Max E Field:**	35.62 V/m
Test Frequency:	824.7MHz	**SAR 1g:**	1.069 W/kg
Air Factors:	504 / 365 / 331	**SAR 10g:**	0.618 W/kg
Conversion Factors:	.457 / .457 / .457	**SAR Start:**	0.402 W/kg
Type of Modulation:		**SAR End:**	0.399 W/kg
Modn. Duty Cycle:		**SAR Drift during Scan:**	-0.71 %
Diode Compression Factors (V*200):	20 / 20 / 20	**Probe battery last changed:**	4/18/08
Input Power Level:	Control Bits 'All Up'	**Extrapolation:**	poly4

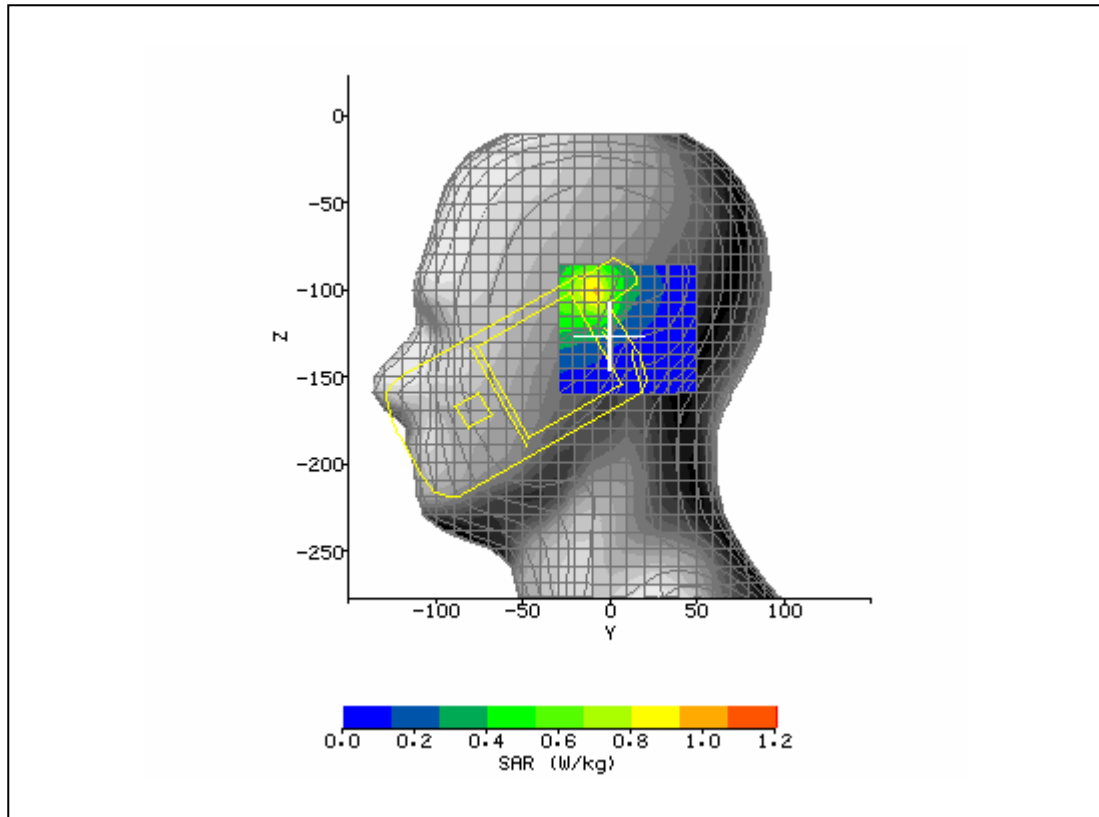| System / software:	SARA2 / 2.40 VPM		Input Power Drift:	
Date / Time:	4/18/2008 10:40:06 AM		DUT Battery Model/No:	
Filename:	Left_Tilt_1013_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	23.3°C		Liquid Simulant:	850
Device Under Test:	S/N 21000080		Relative Permittivity:	40.75
Relative Humidity:	35.9%		Conductivity:	0.907
Phantom S/No:	Head04_37.csv		Liquid Temperature:	23.2°C
Phantom Rotation:	0°		Max SAR Y-axis Location:	-7.00 mm
DUT Position:	Left Tilt		Max SAR Z-axis Location:	-105.40 mm
Antenna Configuration:	Integral		Max E Field:	39.71 V/m
Test Frequency:	848.31MHz		SAR 1g:	1.315 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.763 W/kg
Conversion Factors:	.457 / .457 / .457		SAR Start:	0.495 W/kg
Type of Modulation:			SAR End:	0.495 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	0.10 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	4/18/08
Input Power Level:	Control Bits 'All Up'		Extrapolation:	poly4

System / software:	SARA2 / 2.54 VPM coloc		**Input Power Drift:**	
Date / Time:	5/20/2008 4:12:59 PM		**DUT Battery Model/No:**	
Filename:	Left_Tilt_9538_3d.txt		**Probe Serial Number:**	L0116
Ambient Temperature:	24.2°C		**Liquid Simulant:**	1900
Device Under Test:	L3		**Relative Permittivity:**	39.93
Relative Humidity:	47.5%		**Conductivity:**	1.415
Phantom S/No:	Head04_37.csv		**Liquid Temperature:**	24.0°C
Phantom Rotation:	180°		**Max SAR Y-axis Location:**	-22.80 mm
DUT Position:	Right Touch		**Max SAR Z-axis Location:**	-132.60 mm
Antenna Configuration:	Integral		**Max E Field:**	20.69 V/m
Test Frequency:	1880MHz		**SAR 1g:**	0.556 W/kg
Air Factors:	504 / 365 / 331		**SAR 10g:**	0.329 W/kg
Conversion Factors:	.550 / .550 / .550		**SAR Start:**	0.159 W/kg
Type of Modulation:			**SAR End:**	0.159 W/kg
Modn. Duty Cycle:			**SAR Drift during Scan:**	0.33 %
Diode Compression Factors (V*200):	20 / 20 / 20		**Probe battery last changed:**	5/20/08
Input Power Level:	TPC bits all 1's		**Extrapolation:**	poly4
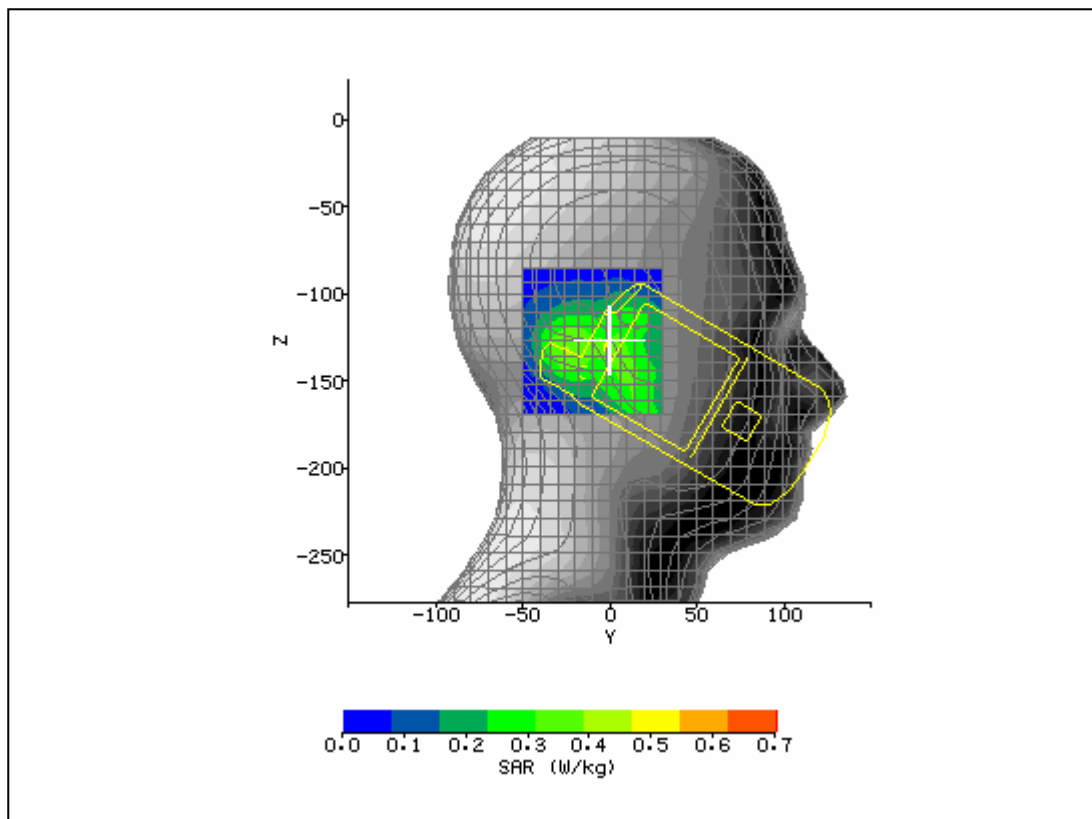
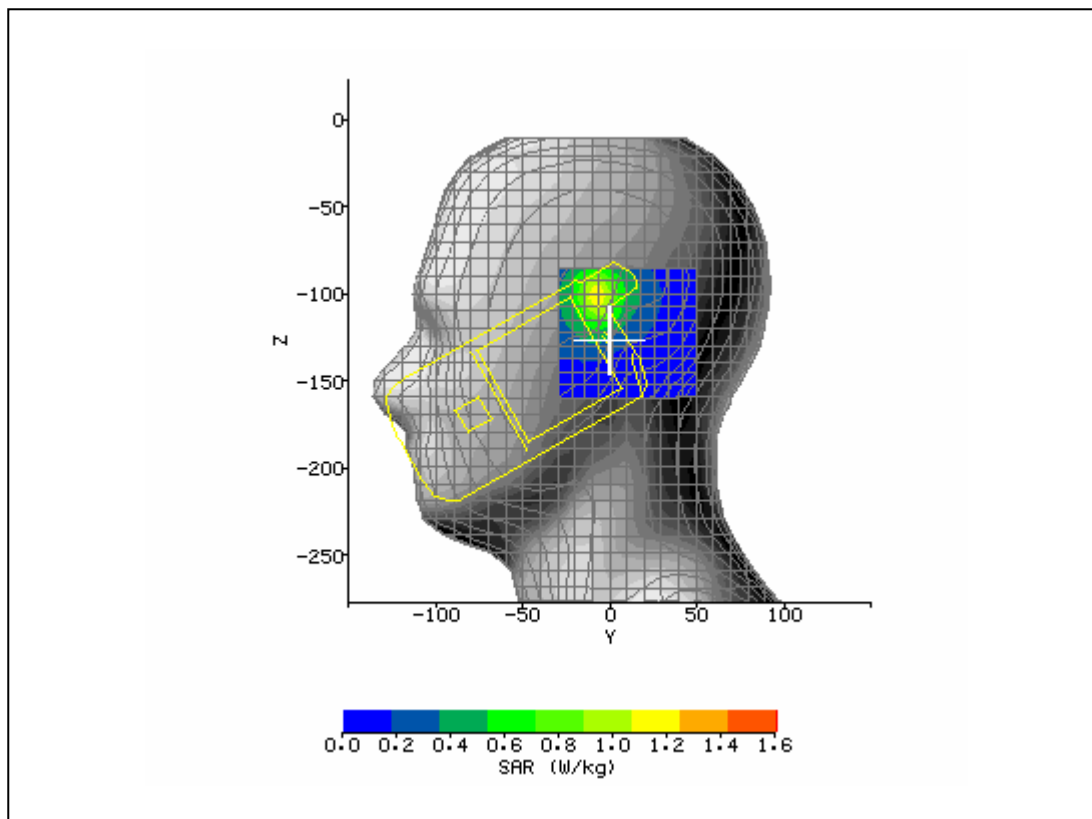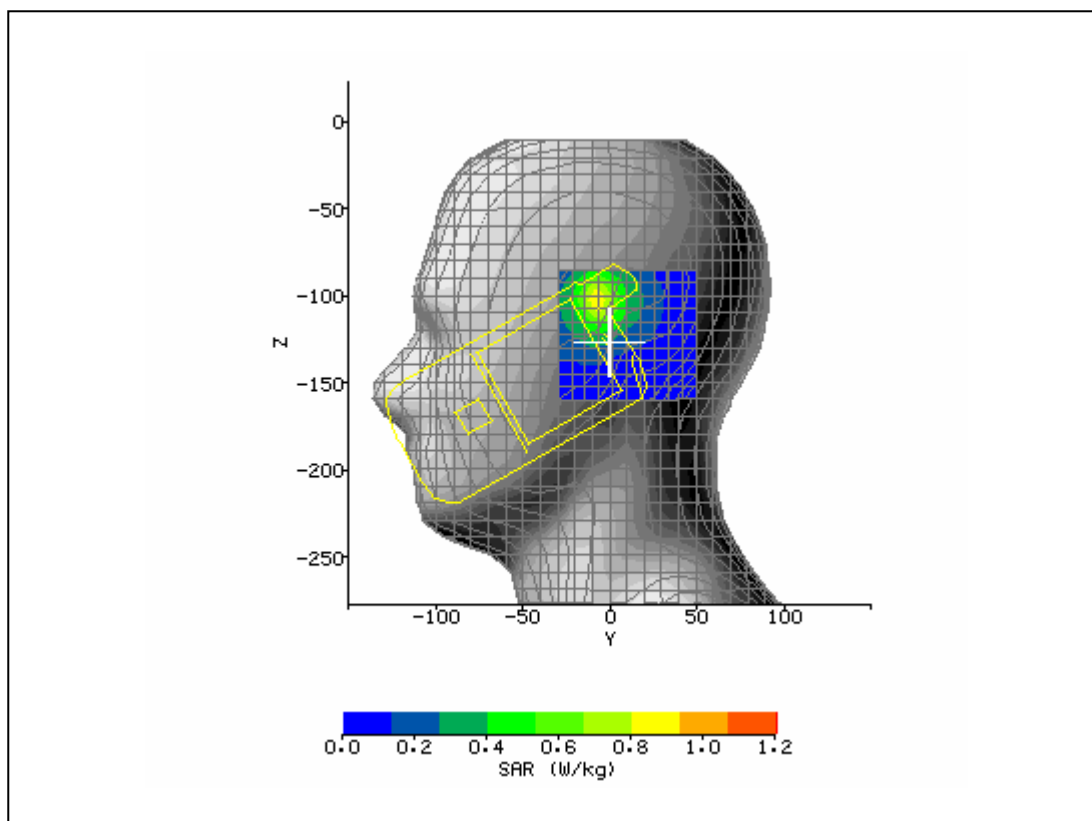| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/20/2008 4:36:31 PM		DUT Battery Model/No:	
Filename:	Right_Touch_600_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	24.2°C		Liquid Simulant:	1900
Device Under Test:	L3		Relative Permittivity:	39.93
Relative Humidity:	47.5%		Conductivity:	1.415
Phantom S/No:	Head04_37.csv		Liquid Temperature:	24.0°C
Phantom Rotation:	180°		Max SAR Y-axis Location:	-21.20 mm
DUT Position:	Right Tilt		Max SAR Z-axis Location:	-127.50 mm
Antenna Configuration:	Integral		Max E Field:	24.16 V/m
Test Frequency:	1880MHz		SAR 1g:	0.790 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.474 W/kg
Conversion Factors:	.550 / .550 / .550		SAR Start:	0.225 W/kg
Type of Modulation:			SAR End:	0.231 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	2.66 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/20/08
Input Power Level:	TPC bits all 1's		Extrapolation:	poly4
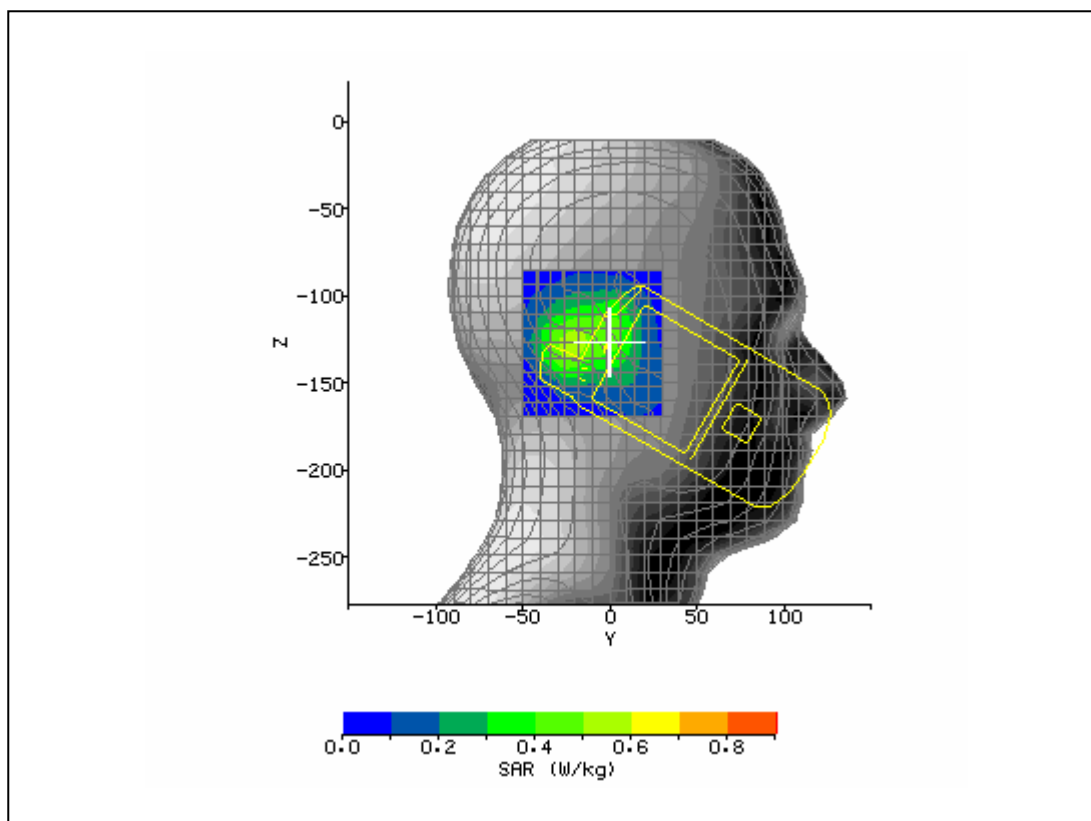
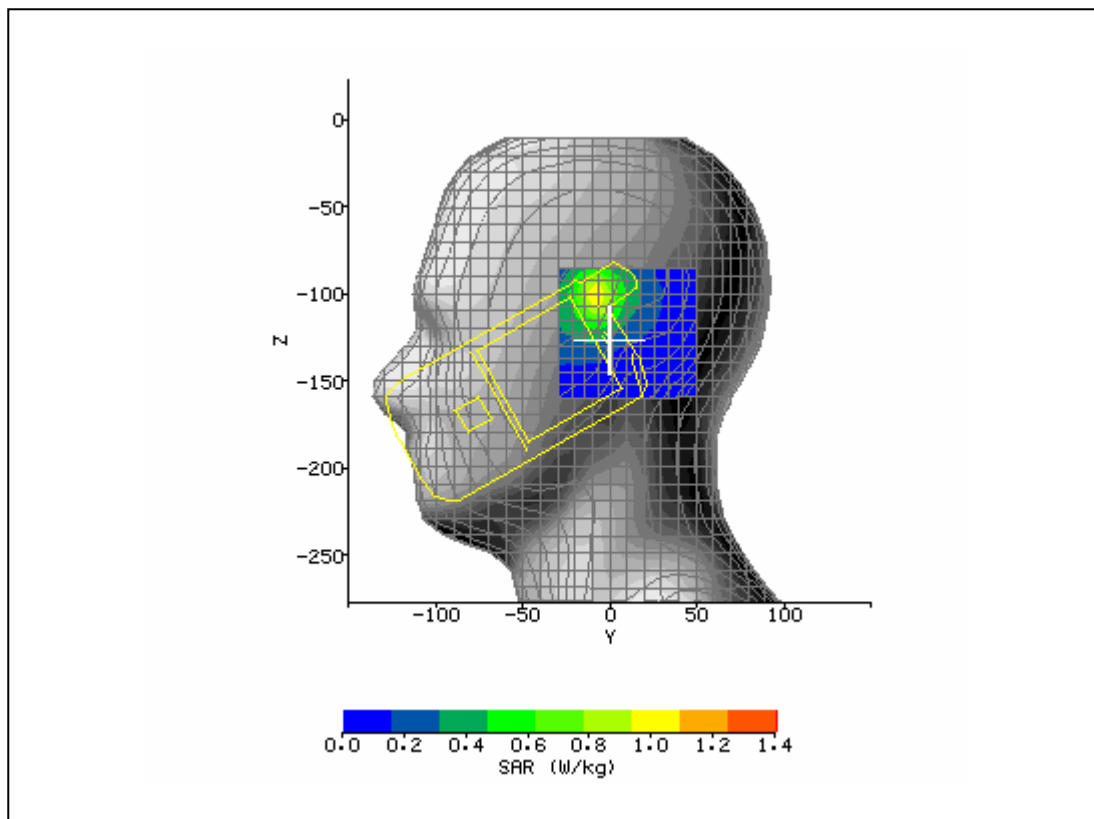|			
System / software:	SARA2 / 2.54 VPM coloc	**Input Power Drift:**	
Date / Time:	5/21/2008 9:01:32 AM	**DUT Battery Model/No:**	
Filename:	Right_Tilt_6003d.txt	**Probe Serial Number:**	L0116
Ambient Temperature:	22.5°C	**Liquid Simulant:**	1900
Device Under Test:	L3	**Relative Permittivity:**	39.93
Relative Humidity:	36.8%	**Conductivity:**	1.415
Phantom S/No:	Head04_37.csv	**Liquid Temperature:**	22.4°C
Phantom Rotation:	0°	**Max SAR Y-axis Location:**	-9.20 mm
DUT Position:	Left Touch	**Max SAR Z-axis Location:**	-101.50 mm
Antenna Configuration:	Integral	**Max E Field:**	28.72 V/m
Test Frequency:	1880MHz	**SAR 1g:**	1.096 W/kg
Air Factors:	504 / 365 / 331	**SAR 10g:**	0.666 W/kg
Conversion Factors:	.550 / .550 / .550	**SAR Start:**	0.263 W/kg
Type of Modulation:		**SAR End:**	0.258 W/kg
Modn. Duty Cycle:		**SAR Drift during Scan:**	-2.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	**Probe battery last changed:**	5/20/08
Input Power Level:	Power control bits all up	**Extrapolation:**	poly4

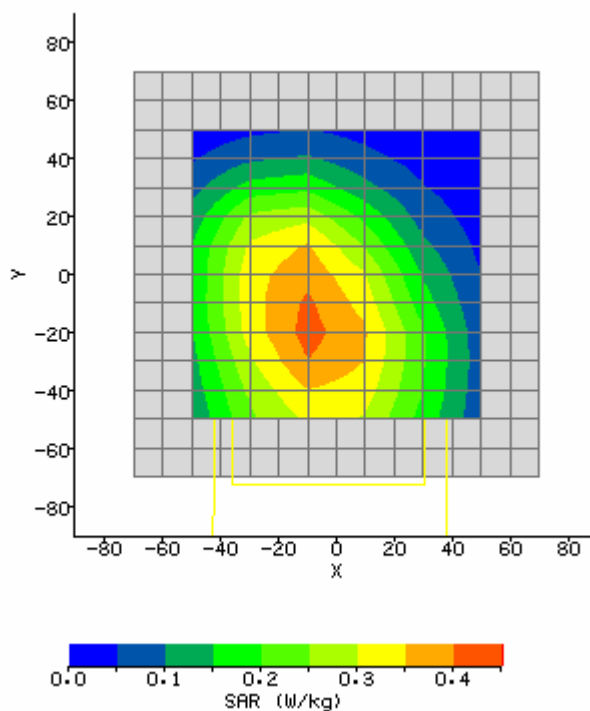| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/21/2008 9:29:27 AM		DUT Battery Model/No:	
Filename:	Left_Touch_600_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	1900
Device Under Test:	L3		Relative Permittivity:	39.93
Relative Humidity:	36.8%		Conductivity:	1.415
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR Y-axis Location:	-6.00 mm
DUT Position:	Left Tilt		Max SAR Z-axis Location:	-101.50 mm
Antenna Configuration:	Integral		Max E Field:	32.06 V/m
Test Frequency:	1880MHz		SAR 1g:	1.437 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.784 W/kg
Conversion Factors:	.550 / .550 / .550		SAR Start:	0.325 W/kg
Type of Modulation:			SAR End:	0.317 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-2.42 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/20/08
Input Power Level:	Power control bits all up		Extrapolation:	poly4

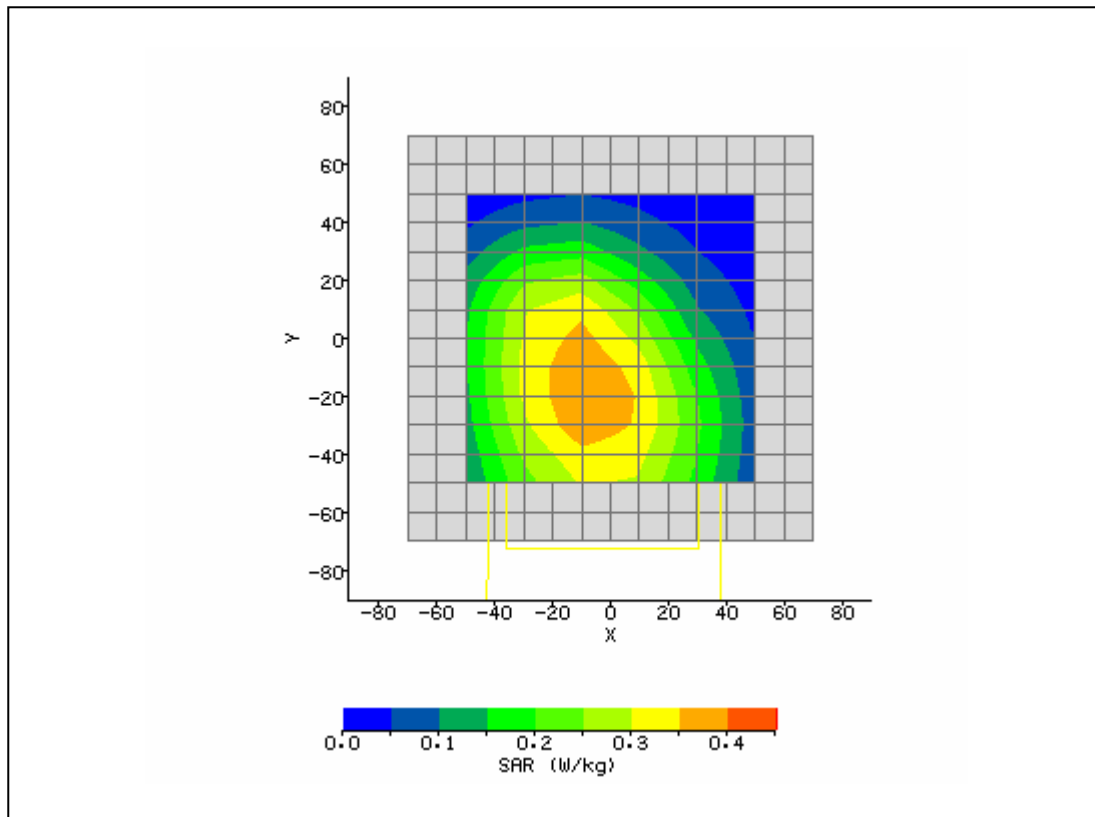| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/21/2008 9:52:25 AM		DUT Battery Model/No:	
Filename:	Left_Tilt_600_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	1900
Device Under Test:	L3		Relative Permittivity:	40.32
Relative Humidity:	36.8%		Conductivity:	1.382
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR Y-axis Location:	-6.00 mm
DUT Position:	Left Tilt		Max SAR Z-axis Location:	-102.25 mm
Antenna Configuration:	Integral		Max E Field:	28.62 V/m
Test Frequency:	1851.25MHz		SAR 1g:	1.079 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.590 W/kg
Conversion Factors:	.550 / .550 / .550		SAR Start:	0.248 W/kg
Type of Modulation:			SAR End:	0.246 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-0.88 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/20/08
Input Power Level:	Power control bits all up		Extrapolation:	poly4

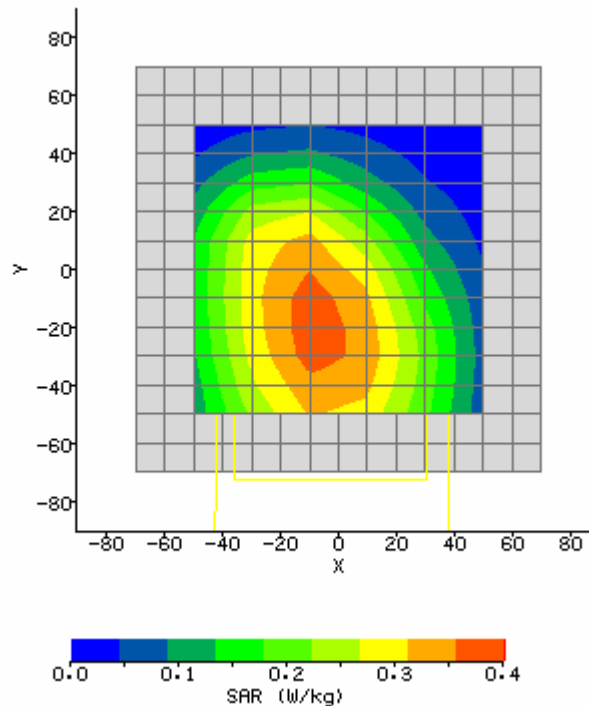| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/21/2008 10:37:20 AM		DUT Battery Model/No:	
Filename:	Left_Tilt_25_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	1900
Device Under Test:	L3		Relative Permittivity:	40.32
Relative Humidity:	36.8%		Conductivity:	1.416
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR Y-axis Location:	-6.80 mm
DUT Position:	Left Tilt		Max SAR Z-axis Location:	-100.75 mm
Antenna Configuration:	Integral		Max E Field:	30.64 V/m
Test Frequency:	1908.75MHz		SAR 1g:	1.287 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.695 W/kg
Conversion Factors:	.550 / .550 / .550		SAR Start:	0.278 W/kg
Type of Modulation:			SAR End:	0.270 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-2.84 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/20/08
Input Power Level:	Power control bits all up		Extrapolation:	poly4

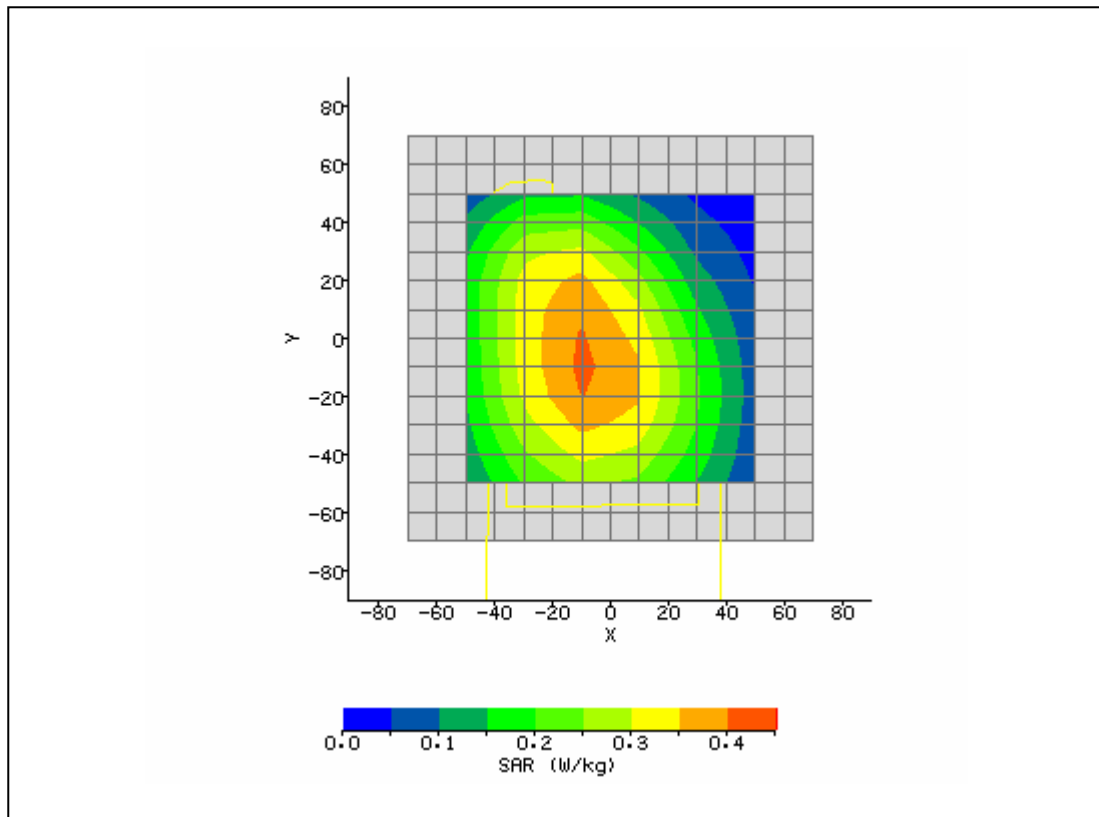|			
System / software:	SARA2 / 2.54 VPM coloc	**Input Power Drift:**	
Date / Time:	5/22/2008 9:18:09 AM	**DUT Battery Model/No:**	
Filename:	1175_15mm_3d.txt	**Probe Serial Number:**	L0116
Ambient Temperature:	22.5°C	**Liquid Simulant:**	850
Device Under Test:	L3	**Relative Permittivity:**	54.78
Relative Humidity:	36.8%	**Conductivity:**	0.968
Phantom S/No:	Head04_37.csv	**Liquid Temperature:**	22.4°C
Phantom Rotation:	0°	**Max SAR X-axis Location:**	-8.00 mm
DUT Position:	Body 15mm	**Max SAR Y-axis Location:**	-19.00 mm
Antenna Configuration:	Integral	**Max E Field:**	20.80 V/m
Test Frequency:	824.7MHz	**SAR 1g:**	0.495 W/kg
Air Factors:	504 / 365 / 331	**SAR 10g:**	0.367 W/kg
Conversion Factors:	.486 / .486 / .486	**SAR Start:**	0.157 W/kg
Type of Modulation:		**SAR End:**	0.156 W/kg
Modn. Duty Cycle:		**SAR Drift during Scan:**	-1.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	**Probe battery last changed:**	5/22/08
Input Power Level:	Power Control bits hold	**Extrapolation:**	poly4

CETECOM™

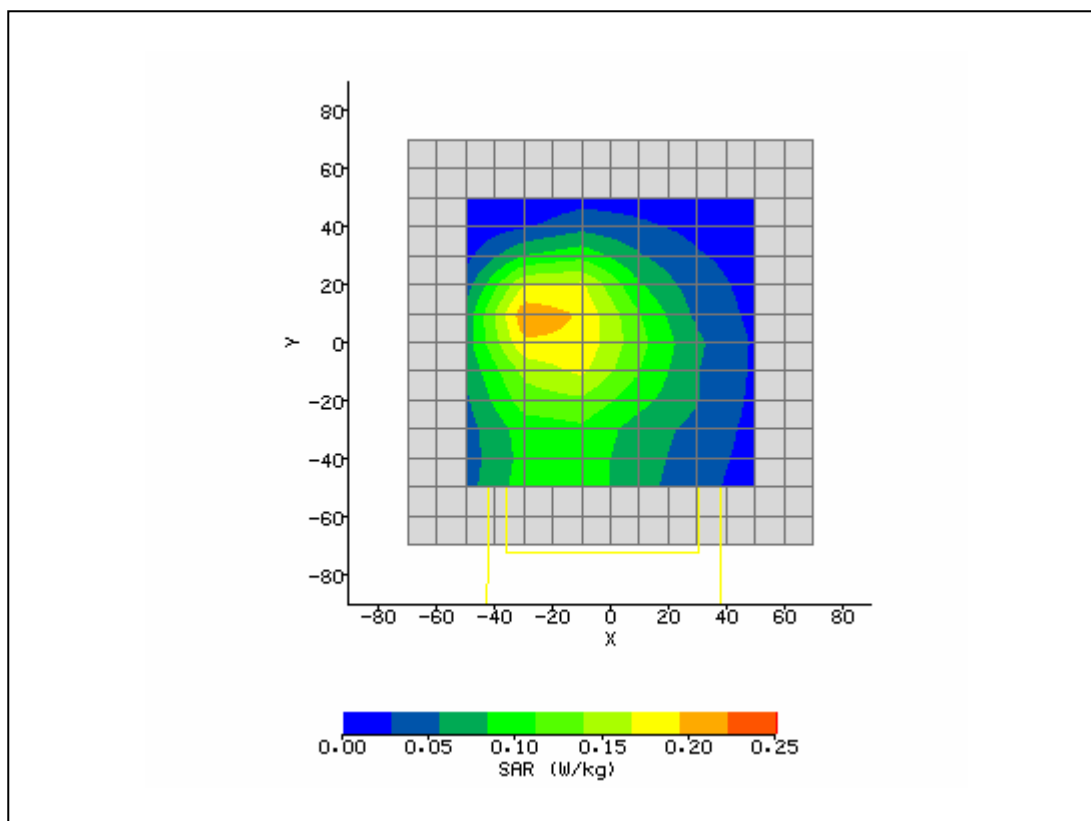| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/22/2008 9:31:28 AM		DUT Battery Model/No:	
Filename:	1013_15mm_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	850
Device Under Test:	L3		Relative Permittivity:	54.47
Relative Humidity:	36.8%		Conductivity:	0.98
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-8.00 mm
DUT Position:	Body 15mm		Max SAR Y-axis Location:	-20.00 mm
Antenna Configuration:	Integral		Max E Field:	20.31 V/m
Test Frequency:	836.52MHz		SAR 1g:	0.480 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.356 W/kg
Conversion Factors:	.486 / .486 / .486		SAR Start:	0.154 W/kg
Type of Modulation:			SAR End:	0.153 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-0.78 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/22/08
Input Power Level:	Power Control bits hold		Extrapolation:	poly4

CETECOM™

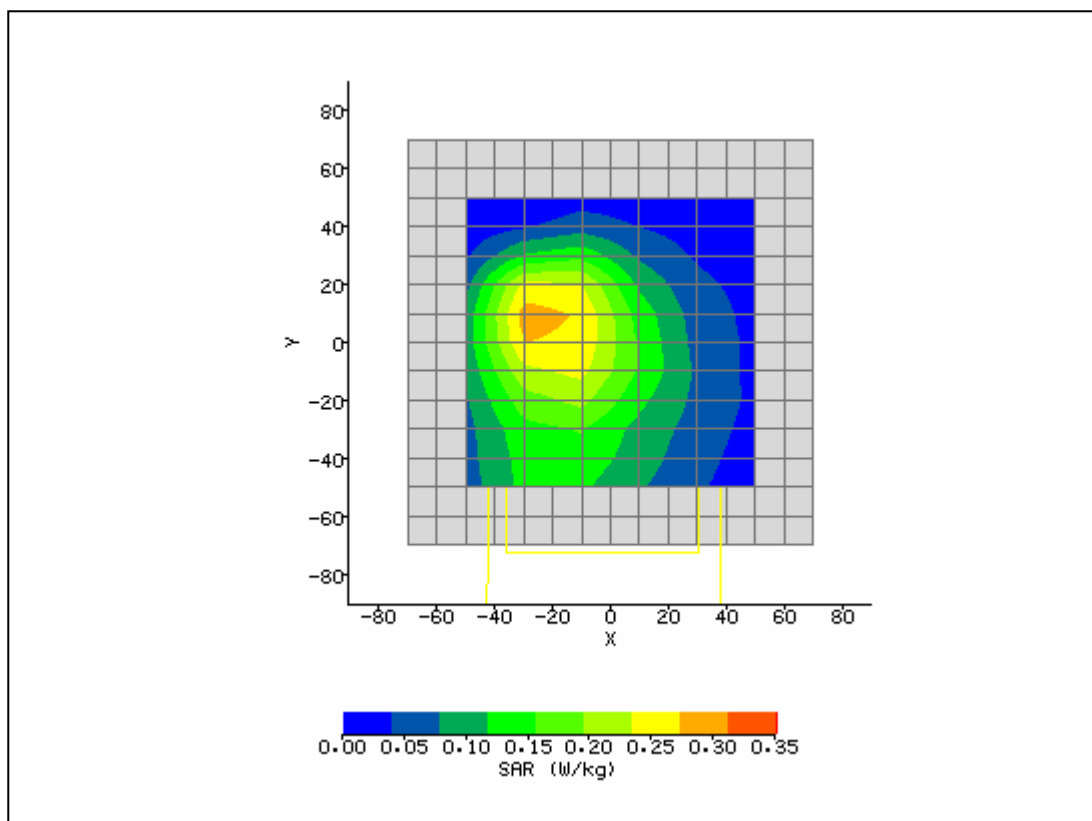| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/22/2008 9:44:33 AM		DUT Battery Model/No:	
Filename:	384_15mm_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	850
Device Under Test:	L3		Relative Permittivity:	54.38
Relative Humidity:	36.8%		Conductivity:	0.984
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-6.00 mm
DUT Position:	Body 15mm		Max SAR Y-axis Location:	-21.00 mm
Antenna Configuration:	Integral		Max E Field:	19.96 V/m
Test Frequency:	848.31MHz		SAR 1g:	0.470 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.348 W/kg
Conversion Factors:	.486 / .486 / .486		SAR Start:	0.150 W/kg
Type of Modulation:			SAR End:	0.151 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	0.59 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/22/08
Input Power Level:	Power Control bits hold		Extrapolation:	poly4

CETECOM™

System / software:	SARA2 / 2.54 VPM coloc	**Input Power Drift:**	
Date / Time:	8/5/2008 11:59:59 AM	**DUT Battery Model/No:**	
Filename:	10_a_5825_3d.txt	**Probe Serial Number:**	L0116
Ambient Temperature:	22.5°C	**Liquid Simulant:**	850
Device Under Test:	L3	**Relative Permittivity:**	53.26
Relative Humidity:	44.7%	**Conductivity:**	0.984
Phantom S/No:	Head04_37.csv	**Liquid Temperature:**	22.1°C
Phantom Rotation:	0°	**Max SAR X-axis Location:**	-8.00 mm
DUT Position:	15mm Body	**Max SAR Y-axis Location:**	-10.00 mm
Antenna Configuration:	Integral	**Max E Field:**	20.41 V/m
Test Frequency:	824.7MHz	**SAR 1g:**	0.481 W/kg
Air Factors:	504 / 365 / 331	**SAR 10g:**	0.363 W/kg
Conversion Factors:	.486 / .486 / .486	**SAR Start:**	0.165 W/kg
Type of Modulation:		**SAR End:**	0.162 W/kg
Modn. Duty Cycle:		**SAR Drift during Scan:**	-1.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	**Probe battery last changed:**	8/05/08
Input Power Level:	Bits All Up	**Extrapolation:**	poly4

CETECOM™

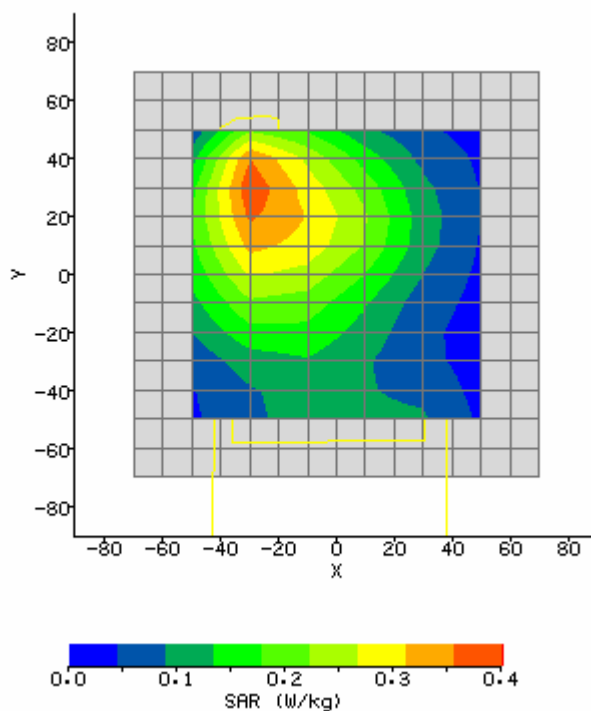| System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	5/21/2008 3:48:04 PM	DUT Battery Model/No:	
Filename:	Left_Tilt_1175_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.5°C	Liquid Simulant:	1900
Device Under Test:	L3	Relative Permittivity:	53.31
Relative Humidity:	36.8%	Conductivity:	1.463
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-18.00 mm
DUT Position:	Body 15mm	Max SAR Y-axis Location:	7.00 mm
Antenna Configuration:	Integral	Max E Field:	12.75 V/m
Test Frequency:	1851.25MHz	SAR 1g:	0.334 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.192 W/kg
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.047 W/kg
Type of Modulation:		SAR End:	0.046 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.10 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/20/08
Input Power Level:	Power control bits hold	Extrapolation:	poly4

System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/21/2008 4:01:09 PM		DUT Battery Model/No:	
Filename:	25_15mm_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	1900
Device Under Test:	L3		Relative Permittivity:	52.91
Relative Humidity:	36.8%		Conductivity:	1.501
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-18.00 mm
DUT Position:	Body 15mm		Max SAR Y-axis Location:	7.00 mm
Antenna Configuration:	Integral		Max E Field:	14.83 V/m
Test Frequency:	1880MHz		SAR 1g:	0.424 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.262 W/kg
Conversion Factors:	.610 / .610 / .610		SAR Start:	0.078 W/kg
Type of Modulation:			SAR End:	0.076 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-2.72 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/20/08
Input Power Level:	Power control bits hold		Extrapolation:	poly4

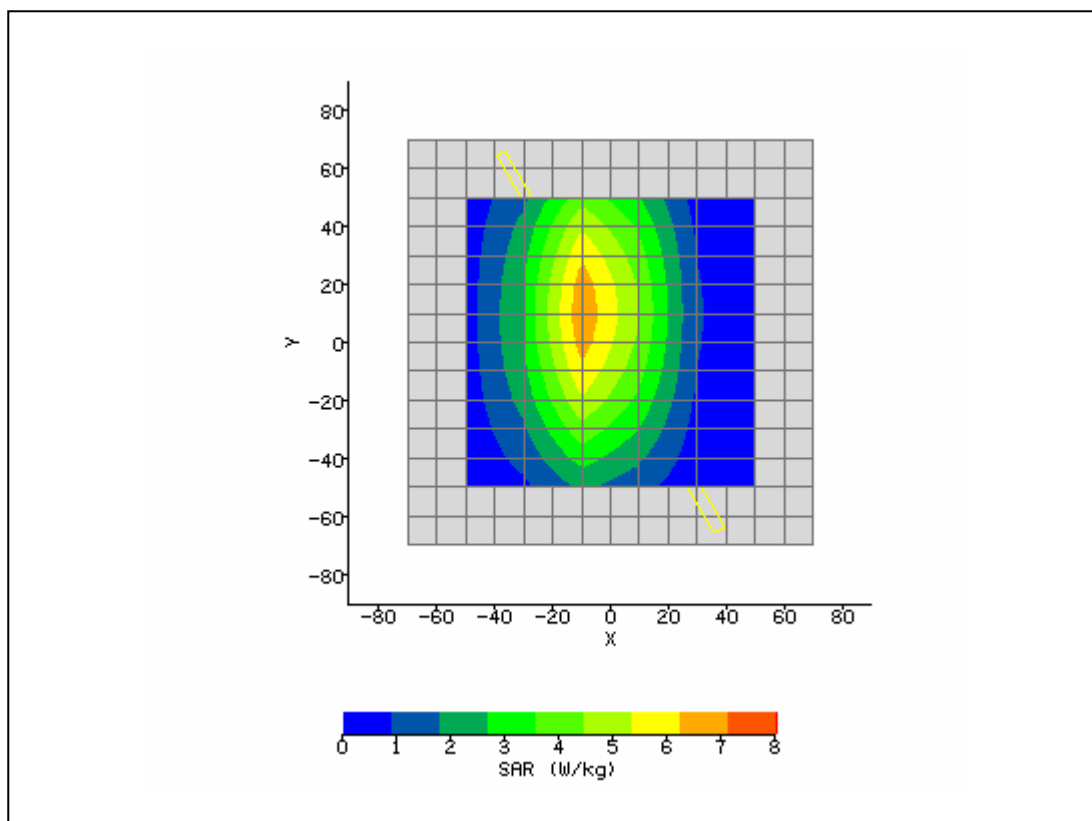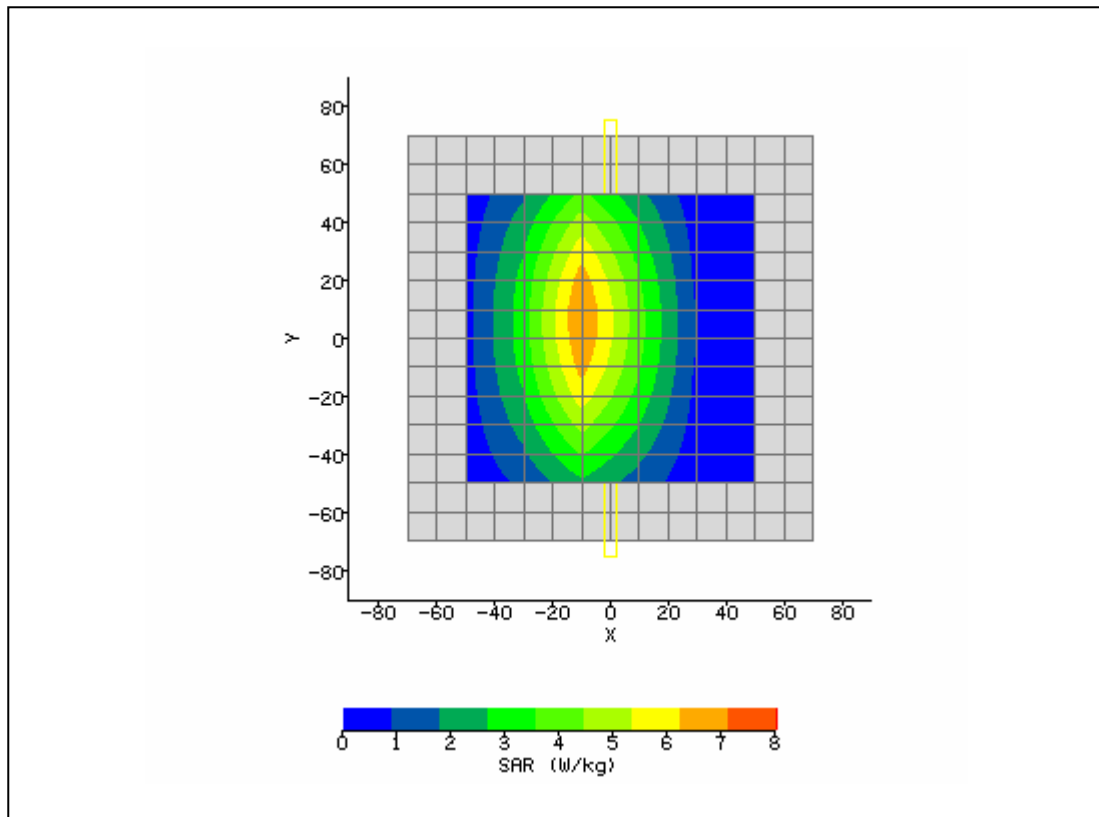| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/21/2008 4:16:34 PM		DUT Battery Model/No:	
Filename:	600_15mm_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	1900
Device Under Test:	L3		Relative Permittivity:	52.62
Relative Humidity:	36.8%		Conductivity:	1.503
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-20.00 mm
DUT Position:	Body 15mm		Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Integral		Max E Field:	14.76 V/m
Test Frequency:	1908.75MHz		SAR 1g:	0.423 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.253 W/kg
Conversion Factors:	.610 / .610 / .610		SAR Start:	0.060 W/kg
Type of Modulation:			SAR End:	0.059 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-2.81 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/20/08
Input Power Level:	Power control bits hold		Extrapolation:	poly4
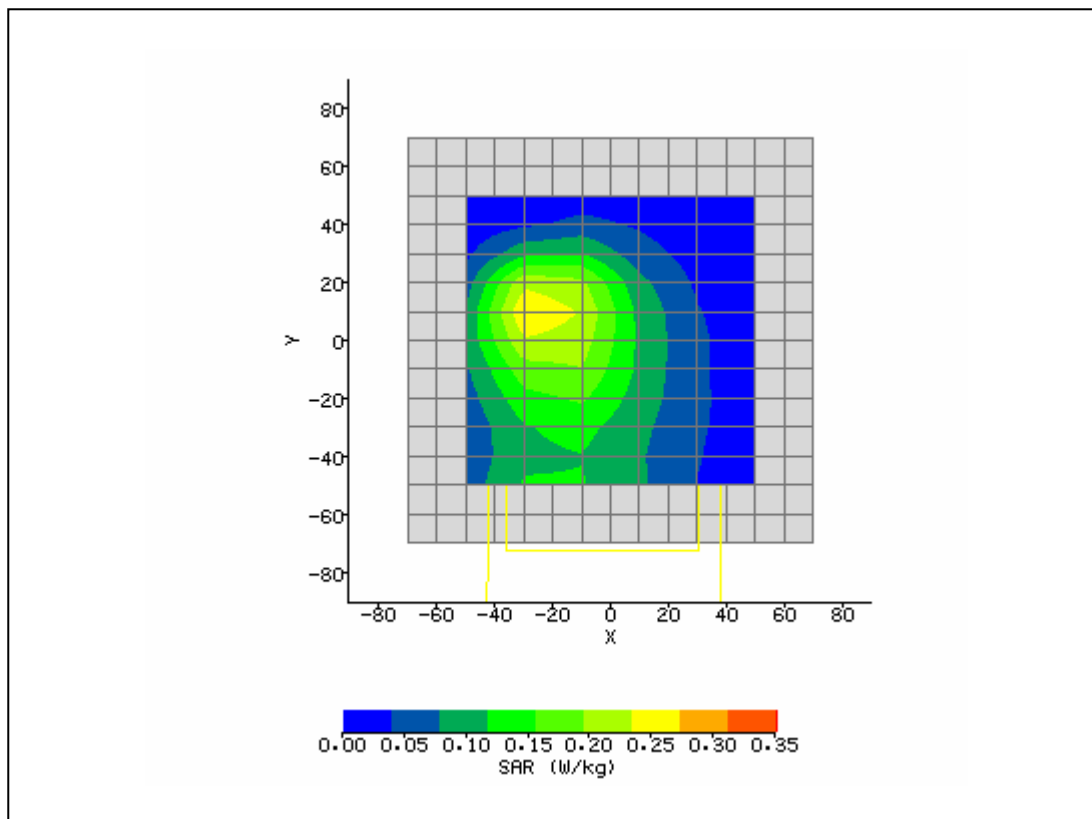
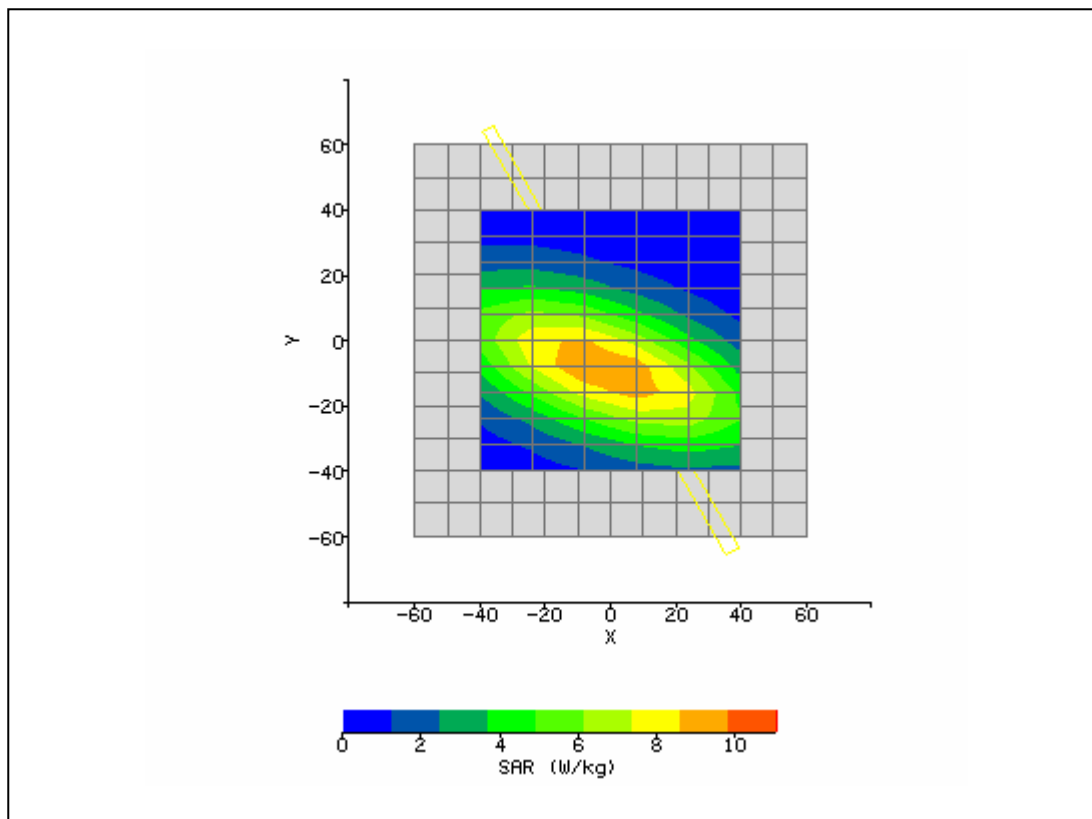| System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	8/5/2008 1:53:03 PM		DUT Battery Model/No:	
Filename:	1013_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	1900
Device Under Test:	L3		Relative Permittivity:	53.88
Relative Humidity:	44.7%		Conductivity:	1.494
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.1°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-22.00 mm
DUT Position:	15mm Body		Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Integral		Max E Field:	16.28 V/m
Test Frequency:	1880MHz		SAR 1g:	0.509 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	0.321 W/kg
Conversion Factors:	.610 / .610 / .610		SAR Start:	0.085 W/kg
Type of Modulation:			SAR End:	0.086 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	1.04 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	8/05/08
Input Power Level:	Bits All Up		Extrapolation:	poly4

System / software:	SARA2 / 2.40 VPM	**Input Power Drift:**	
Date / Time:	4/18/2008 7:57:26 AM	**DUT Battery Model/No:**	
Filename:	temp.txt	**Probe Serial Number:**	L0116
Ambient Temperature:	23.0°C	**Liquid Simulant:**	835
Device Under Test:	System	**Relative Permittivity:**	40.86
Relative Humidity:	33.6%	**Conductivity:**	0.901
Phantom S/No:	Head04_37.csv	**Liquid Temperature:**	22.9°C
Phantom Rotation:	180°	**Max SAR X-axis Location:**	-6.00 mm
DUT Position:	10mm	**Max SAR Y-axis Location:**	11.00 mm
Antenna Configuration:	Dipole	**Max E Field:**	89.08 V/m
Test Frequency:	835MHz	**SAR 1g:**	10.294 W/kg
Air Factors:	504 / 365 / 331	**SAR 10g:**	6.710 W/kg
Conversion Factors:	.457 / .457 / .457	**SAR Start:**	2.122 W/kg
Type of Modulation:		**SAR End:**	2.084 W/kg
Modn. Duty Cycle:		**SAR Drift during Scan:**	-1.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	**Probe battery last changed:**	4/17/08
Input Power Level:	1W	**Extrapolation:**	poly4

System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/22/2008 8:45:48 AM		DUT Battery Model/No:	
Filename:	1175_15mm_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	850
Device Under Test:	System		Relative Permittivity:	40.86
Relative Humidity:	36.8%		Conductivity:	0.901
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-8.00 mm
DUT Position:	10mm		Max SAR Y-axis Location:	6.00 mm
Antenna Configuration:	Dipole		Max E Field:	89.51 V/m
Test Frequency:	835MHz		SAR 1g:	9.922 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	5.922 W/kg
Conversion Factors:	.457 / .457 / .457		SAR Start:	2.125 W/kg
Type of Modulation:			SAR End:	2.072 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-2.50 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/22/08
Input Power Level:	1W		Extrapolation:	poly4

System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	8/05/2008 08:10:18 AM		DUT Battery Model/No:	
Filename:	temp.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.8°C		Liquid Simulant:	850
Device Under Test:	System		Relative Permittivity:	40.87
Relative Humidity:	30%		Conductivity:	0.904
Phantom S/No:	HeadBox2.csv		Liquid Temperature:	22.0°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-1.60 mm
DUT Position:	10mm.		Max SAR Y-axis Location:	-8.80 mm
Antenna Configuration:	835 Dipole		Max E Field:	103.35 V/m
Test Frequency:	835MHz		SAR 1g:	11.386 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	7.699 W/kg
Conversion Factors:	.457 / .457 / .457		SAR Start:	2.480 W/kg
Type of Modulation:			SAR End:	2.515 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	1.42 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	08/05/2008
Input Power Level:	1W		Extrapolation:	poly4

System / software:	SARA2 / 2.54 VPM coloc		**Input Power Drift:**	
Date / Time:	5/20/2008 8:19:28 AM		**DUT Battery Model/No:**	
Filename:	SubTest1_4233_15mm _3d.txt		**Probe Serial Number:**	L0116
Ambient Temperature:	24.2°C		**Liquid Simulant:**	1900
Device Under Test:	System		**Relative Permittivity:**	39.78
Relative Humidity:	47.5%		**Conductivity:**	1.415
Phantom S/No:	Head04_37.csv		**Liquid Temperature:**	24.0°C
Phantom Rotation:	180°		**Max SAR X-axis Location:**	-2.00 mm
DUT Position:	8mm		**Max SAR Y-axis Location:**	-1.00 mm
Antenna Configuration:	Dipole		**Max E Field:**	145.48 V/m
Test Frequency:	1880MHz		**SAR 1g:**	39.931 W/kg
Air Factors:	504 / 365 / 331		**SAR 10g:**	21.302 W/kg
Conversion Factors:	.550 / .550 / .550		**SAR Start:**	5.204 W/kg
Type of Modulation:			**SAR End:**	5.144 W/kg
Modn. Duty Cycle:			**SAR Drift during Scan:**	-1.14 %
Diode Compression Factors (V*200):	20 / 20 / 20		**Probe battery last changed:**	5/19/08
Input Power Level:	1 W		**Extrapolation:**	poly4
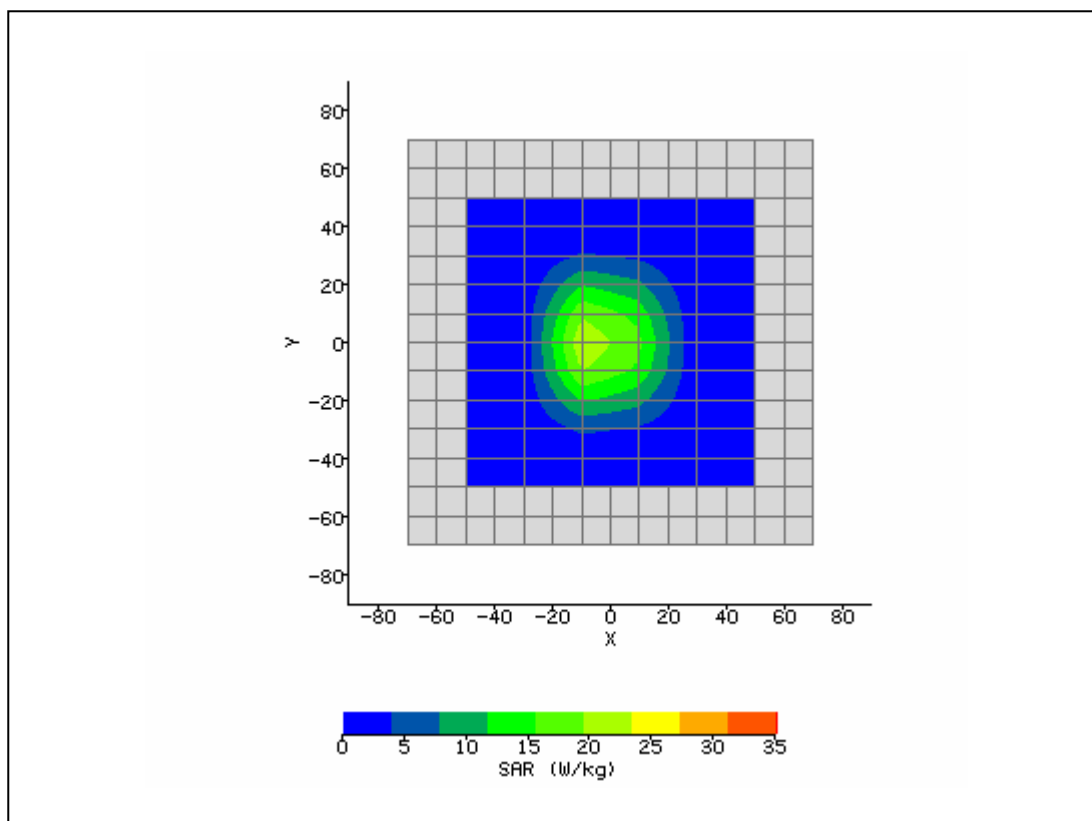
System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	5/21/2008 8:25:50 AM		DUT Battery Model/No:	
Filename:	Right_Tilt_6003d.txt		Probe Serial Number:	L0116
Ambient Temperature:	22.5°C		Liquid Simulant:	1900
Device Under Test:	System		Relative Permittivity:	39.78
Relative Humidity:	36.8%		Conductivity:	1.416
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.4°C
Phantom Rotation:	0°		Max SAR X-axis Location:	-6.00 mm
DUT Position:	8mm		Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Dipole		Max E Field:	141.20 V/m
Test Frequency:	1900MHz		SAR 1g:	37.547 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	20.052 W/kg
Conversion Factors:	.550 / .550 / .550		SAR Start:	4.789 W/kg
Type of Modulation:			SAR End:	4.702 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-1.83 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	5/20/08
Input Power Level:	1W		Extrapolation:	poly4
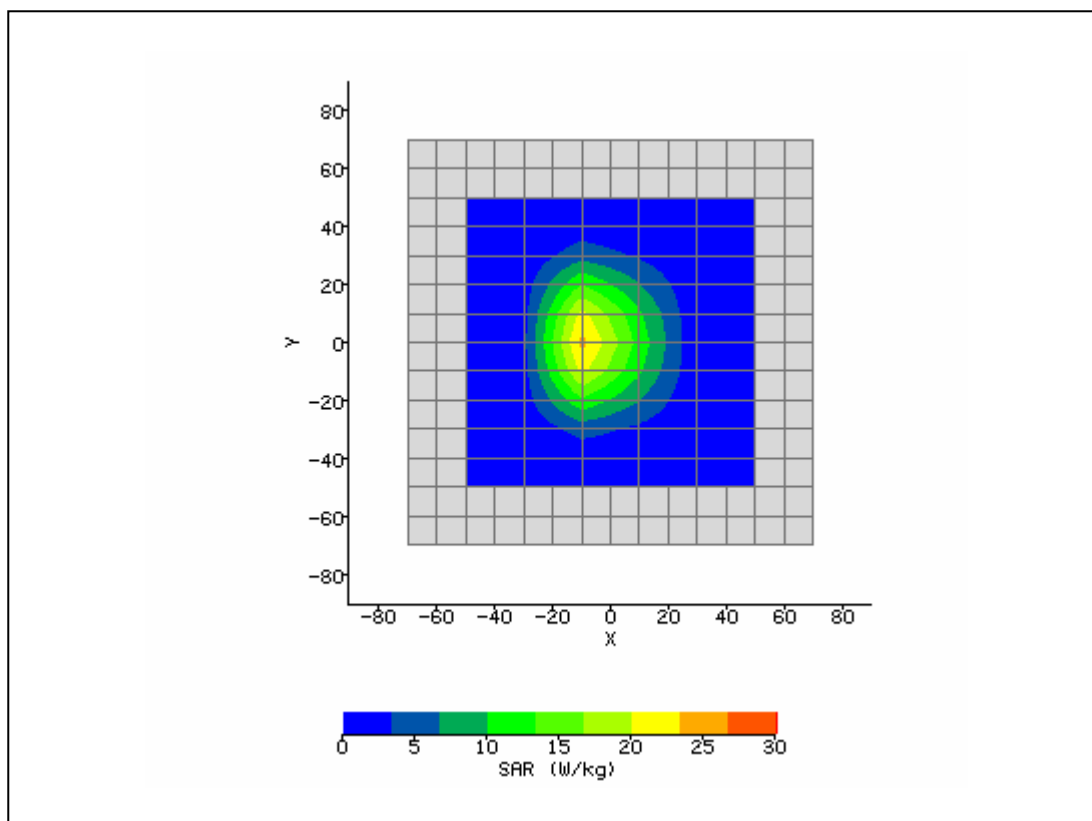
System / software:	SARA2 / 2.54 VPM coloc		Input Power Drift:	
Date / Time:	8/05/2008 9:47:55 AM		DUT Battery Model/No:	
Filename:	Right_Touch_9888_nl_3d.txt		Probe Serial Number:	L0116
Ambient Temperature:	23.1°C		Liquid Simulant:	1900 / 2100
Device Under Test:	System		Relative Permittivity:	40.02
Relative Humidity:	36.8%		Conductivity:	1.387
Phantom S/No:	Head04_37.csv		Liquid Temperature:	23.0°C
Phantom Rotation:	180°		Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm		Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Dipole		Max E Field:	147.69 V/m
Test Frequency:	1900MHz		SAR 1g:	39.315 W/kg
Air Factors:	504 / 365 / 331		SAR 10g:	20.760 W/kg
Conversion Factors:	.551 / .551 / .551		SAR Start:	4.852 W/kg
Type of Modulation:			SAR End:	4.776 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-1.56 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	8/05/08
Input Power Level:	1W		Extrapolation:	poly4