



FCC TEST REPORT (15.247)

REPORT NO.: 090804FIA01

MODEL NO.: MOGO TALK HEADSET

RECEIVED: Aug. 06, 2009

TESTED: Aug. 06 ~ Aug. 17, 2009

ISSUED: Aug. 18, 2009

APPLICANT: Newton Peripherals LLC

ADDRESS: 11 Mercer Road, Natick, MA

ISSUED BY: ADT (Shanghai) Corporation

ADDRESS: 2F, Building C, No.1618, Yishan Rd., 201103,
Shanghai, China

This test report consists of 60 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS.....	5
3.1.	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.2.	GENERAL DESCRIPTION OF EUT.....	7
3.3.	DESCRIPTION OF TEST MODES.....	8
3.4.	CONFIGURATION OF SYSTEM UNDER TEST	9
3.5.	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.6.	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.7.	DESCRIPTION OF SUPPORT UNITS.....	12
4.	TEST TYPES AND RESULTS.....	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP.....	14
4.1.6	EUT OPERATING CONDITIONS.....	15
4.1.7	TEST RESULTS	16
4.2	Radiated Emission Measurement	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP.....	21
4.2.6	EUT OPERATING CONDITIONS.....	21
4.2.7	TEST RESULTS	22
4.3	NUMBER OF HOPPING FREQUENCY USED	29
4.3.1	LIMIT OF HOPPING FREQUENCY USED	29
4.3.2	TEST INSTRUMENTS	29
4.3.3	TEST PROCEDURES	29
4.3.4	DEVIATION FROM TEST STANDARD	30
4.3.5	TEST SETUP.....	30
4.3.6	TEST RESULTS	30
4.4	DWELL TIME ON EACH CHANNEL	33
4.4.1	LIMIT OF DWELL TIME USED.....	33
4.4.2	TEST INSTRUMENTS	33
4.4.3	TEST PROCEDURES	33
4.4.4	DEVIATION FROM TEST STANDARD	33
4.4.5	TEST SETUP.....	34



A D T

4.4.6	TEST RESULTS	34
4.5	CHANNEL BANDWIDTH	36
4.5.1	LIMITS OF CHANNEL BANDWIDTH	36
4.5.2	TEST INSTRUMENTS	36
4.5.3	TEST PROCEDURE	36
4.5.4	DEVIATION FROM TEST STANDARD	37
4.5.5	TEST SETUP	37
4.5.6	EUT OPERATING CONDITION	37
4.5.7	TEST RESULTS	38
4.6	HOPPING CHANNEL SEPARATION	41
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	41
4.6.2	TEST INSTRUMENTS	41
4.6.3	TEST PROCEDURES	41
4.6.4	DEVIATION FROM TEST STANDARD	41
4.6.5	TEST SETUP	41
4.6.6	TEST RESULTS	42
4.7	MAXIMUM PEAK OUTPUT POWER	44
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	44
4.7.2	TEST INSTRUMENTS	44
4.7.3	TEST PROCEDURES	44
4.7.4	DEVIATION FROM TEST STANDARD	44
4.7.5	TEST SETUP	44
4.7.6	EUT OPERATING CONDITION	45
4.7.7	TEST RESULTS	45
4.8	BAND EDGES MEASUREMENT	48
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	48
4.8.2	TEST INSTRUMENTS	48
4.8.3	TEST PROCEDURE	48
4.8.4	DEVIATION FROM TEST STANDARD	48
4.8.5	EUT OPERATING CONDITION	48
4.8.6	TEST RESULTS	48
4.9	ANTENNA REQUIREMENT	51
4.9.1	STANDARD APPLICABLE	51
4.9.2	ANTENNA CONNECTED CONSTRUCTION	51
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	52
6	PHOTOGRAPHS OF THE EUT	56
7	APPENDIX - INFORMATION ON THE TESTING LABORATORIES	60



1. CERTIFICATION

PRODUCT: Bluetooth Headset

MODEL: MOGO TALK HEADSET

BRAND: MoGo

APPLICANT: Newton Peripherals LLC

TESTED: Aug. 06 ~ Aug. 17, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (Model: MOGO TALK HEADSET) has been tested by **ADT(Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Connie Wang, **DATE:** Aug. 18, 2009

Connie Wang
Certification Specialist

TECHNICAL ACCEPTANCE : Joy Zhu, **DATE:** Aug. 18, 2009

Joy Zhu
Lab Manager

APPROVED BY : [Signature], **DATE:** Aug. 18, 2009

Wallace Pan
Director of Operations



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.66dB at 0.35MHz
15.247(a)(1)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater	PASS	Meet the requirement of limit
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1)	Maximum Peak Output Power Limit: max. 21dBm	PASS	Meet the requirement of limit
15.247(d)	Transmitter Radiated Emissions FCC Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.53dB at 2483.50MHz
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.



3.1. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.55 dB
Radiated emissions	30MHz ~ 200MHz	2.98 dB
	200MHz ~ 1000MHz	2.96 dB
	1GHz ~18GHz	2.26 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.2. GENERAL DESCRIPTION OF EUT

EUT	Bluetooth Headset
MODEL NO.	MOGO TALK HEADSET
IC ID	VZOMG230
POWER SUPPLY	3.1-4.2Vdc from batteries
MODULATION TYPE	GFSK
MODULATION TECHNOLOGY	FHSS
TRANSFER RATE	1/2/3Mbps
FREQUENCY RANGE	2402~2480 MHz
NUMBER OF CHANNEL	Bluetooth: 79
CHANNEL SPACING	1MHz
OUTPUT POWER	1.15mW
ANTENNA TYPE	Ceramic Path Antenna with 0dBi gain
DATA CABLE	N/A
I/O PORTS	N/A
ACCESSORY DEVICES	Charger

NOTE:

1. Bluetooth technology is used in this EUT.
2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.3. DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

The EUT was tested under the following modes:

- ◆ Mode 1: Link with mobile phone;
- ◆ Mode 2: Charging by USB cable from PC;
- ◆ Mode 3: With PC controlled.

3.4. CONFIGURATION OF SYSTEM UNDER TEST


FOR Mode 1: a, Turn on the EUT, and link it to a mobile phone by Bluetooth.

b, Put it onto the center of the test table, then do the test.



FOR Mode 2: a, Put EUT onto the charger.


b, Plug the USB cable of the charger into the PC's USB port, then it will be charging, then do the test.

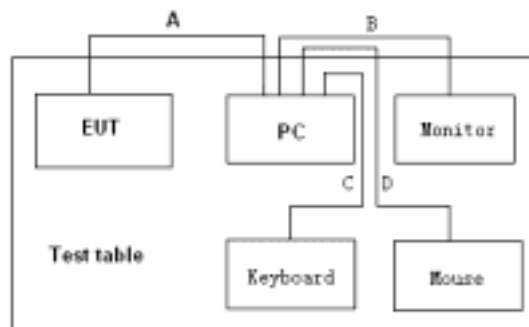

FOR Mode 3: a, Link EUT to the control board.

b, Then link the control board to the PC with the RS232 cable.

c, Use the software to control the EUT to transmit on the wanted channel, then do the test.

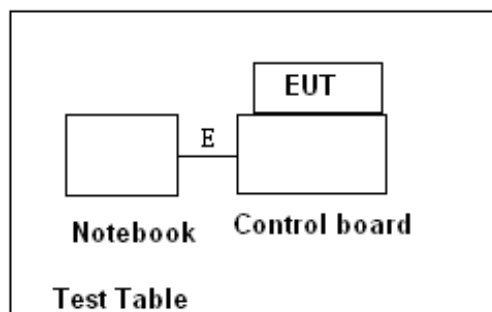



3.5. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to							Description
	DT	CB	HCS	MPOP	BM	CE	RE	
-	√	√	√	√	√	√	√	Powered by batteries

Where **DT:** Dwell Time on Each Channel **CB:** Channel Bandwidth
HCS: Hopping Channel Separation **MPOP:** Maximum Peak Output Power
BM: Band edge Measurement **CE:** Conducted Emission
RE: Radiated Emission

CONDUCTED EMISSION:

- ☒ Pre-Scan has been determine the worst-case mode from all possible combinations between available modulations and packet types.
- ☒ Following channel(s) was(were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	TEST MODE
0 to 78	0	FHSS	GFSK	DH5	2

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	TEST MODE	AXIS
0 to 78	0, 39, 78	FHSS	GFSK	DH5	3	Y

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	TEST MODE	AXIS
0 to 78	0	FHSS	GFSK	DH5	1, 2	Y

**BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 78	FHSS	GFSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5



3.6. GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: Public Notice DA 00-705 Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

3.7. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Mobile phone	Sony Ericsson	W950i	NA	NA
2	PC	Dell	330	NA	NA
3	Monitor	SAMSUNG	743N	NA	NA
4	Keyboard	LOGITECH	Y-UR83	NA	NA
5	Mouse	DELL	MOC5UO	NA	NA
6	Notebook	Lenovo	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
A	1.2m shielded USB cable
B	1.5m shielded VGA cable
C	1.5m shielded USB cable
D	1.5m shielded USB cable
E	1m shielded RS232 cable



4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Receiver R&S	ESCS30	E1R1002	Dec. 30, 2009
LISN Schwarzbeck	ENV216	E1L1011	Apr. 01, 2010
Software ADT	ADT_Conc_ V7.3.0	N/A	N/A

NOTE: The calibration interval of the above test instruments is 12 months.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

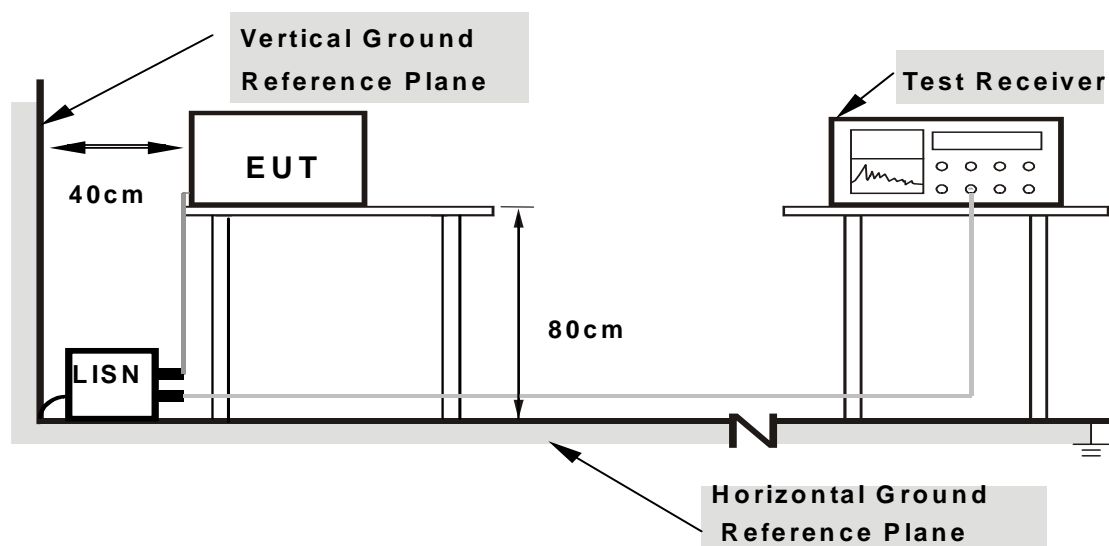

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

MODE 2: a, Put EUT onto the charger.


b, Plug the USB cable of the charger into the PC's USB port, then it will be charging, then do the test.

4.1.7 TEST RESULTS

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	PHASE	Line 1
MODE	2	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	1.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	21deg. C, 50%RH, 988hPa	TESTED BY	RAY XUE

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.35	9.61	26.39	25.70	36.00	35.31	58.98	48.98	-22.97	-13.66
2	0.81	9.60	23.46	19.41	33.06	29.01	56.00	46.00	-22.94	-16.99
3	1.27	9.61	20.83	17.61	30.44	27.22	56.00	46.00	-25.56	-18.78
4	2.42	9.61	17.14	12.79	26.75	22.40	56.00	46.00	-29.25	-23.60
5	10.05	9.69	26.25	24.97	35.94	34.66	60.00	50.00	-24.06	-15.34
6	17.78	9.70	23.01	17.75	32.71	27.45	60.00	50.00	-27.29	-22.55


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

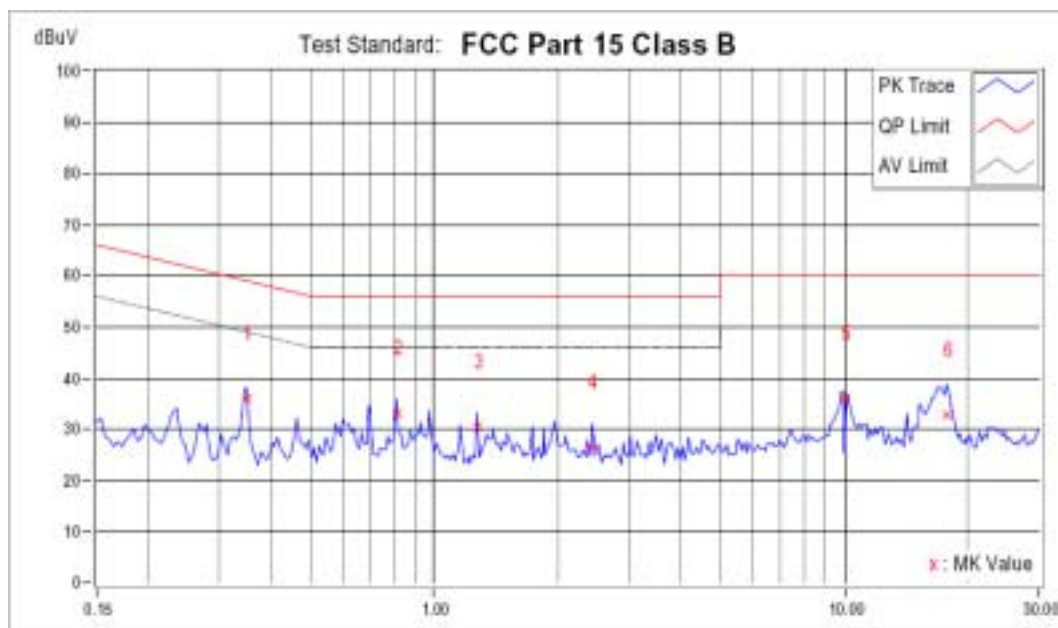

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	PHASE	Line 2
MODE	2	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	1.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	21deg. C, 66%RH, 988hPa	TESTED BY	Ray XUE

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23	9.61	23.69	20.78	33.30	30.39	62.37	52.37	-29.07	-21.98
2	0.35	9.61	26.19	24.93	35.80	34.54	59.07	49.07	-23.27	-14.53
3	0.81	9.60	22.90	17.35	32.50	26.95	56.00	46.00	-23.50	-19.05
4	1.15	9.61	21.17	18.03	30.78	27.64	56.00	46.00	-25.22	-18.36
5	10.01	9.69	25.03	23.90	34.72	33.59	60.00	50.00	-25.28	-16.41
6	17.6	9.71	26.51	24.62	36.22	34.33	60.00	50.00	-23.78	-15.67

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

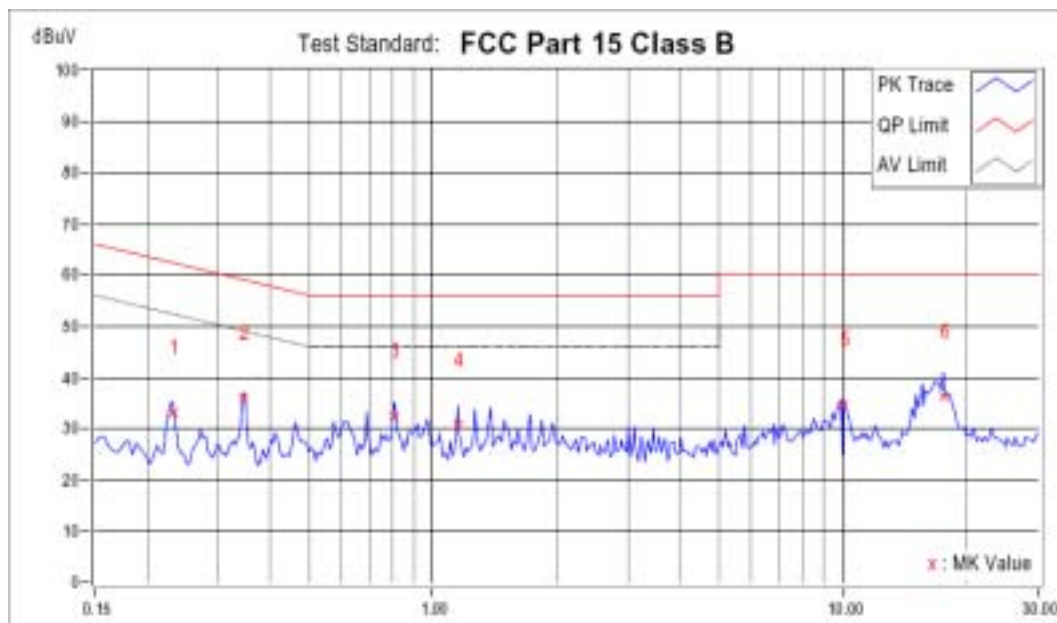



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Agilent	E4403B	E1S1001	Aug. 04, 2010
Receiver R&S	ESCS30	E1R1001	Jan. 03, 2010
Trilog Broadband Antenna Schwarzbeck	VULB 9168	E1A1001	Aug. 04, 2010
Horn Antenna Schwarzbeck	BBHA 9120D	E1A1002	Sep. 08, 2009
Spectrum R&S	FSP30	E1S1002	Aug. 04, 2010
Preamplifier Agilent	HP 8447D	E1A2001	Sep. 21, 2009
Preamplifier Agilent	HP 8449B	E1A2002	Sep. 08, 2009
Software ADT	ADT_Radiated_V7.5	N/A	N/A



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

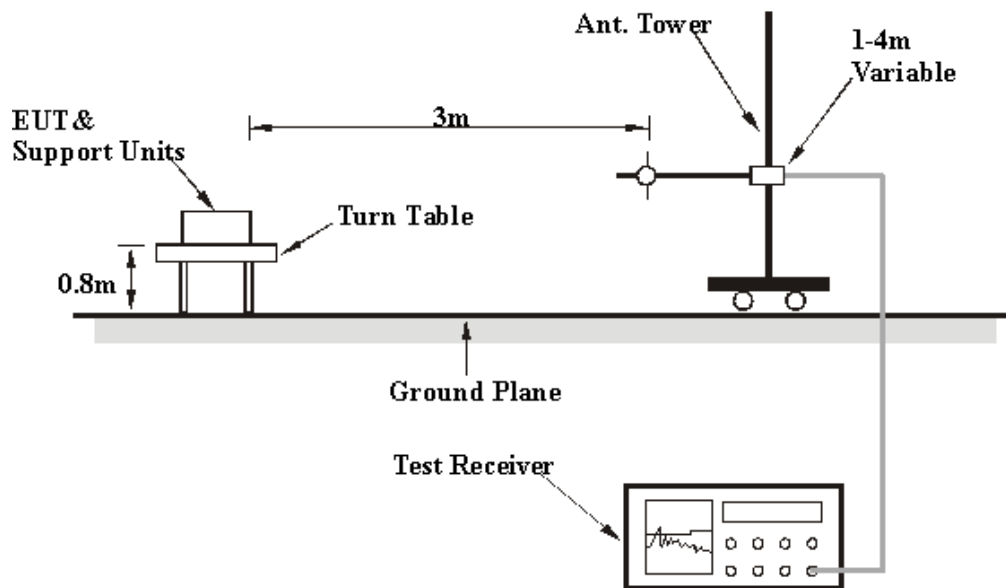

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

MODE 1: a, Turn on the EUT, and link it to a mobile phone by Bluetooth.

b, Put it onto the center of the test table, then do the test.

MODE 2: a, Put EUT onto the charger.

b, Plug the USB cable of the charger into the PC's USB port, then it will be charging, then do the test.

MODE 3: a, Link EUT to the control board.

b, Then link the control board to the PC with the RS232 cable.

c, Use the software to control the EUT to transmit on the wanted channel, then do the test.



4.2.7 TEST RESULTS

RADIATED ABOVE 1GHz DATA: GFSK MODULATION (Mode 3)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Above 1GHz
INPUT POWER	3.1-4.2Vdc from batteries	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH 1000hPa	TESTED BY	Ray Xue

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	2390.00	32.59	21.95	54.54PK	74.00	-19.46	100.00	0.00
2	*2402.00	32.59	59.98	92.57PK	--	--	--	--
3	4784.50	37.75	15.21	52.96 PK	74.00	-21.04	100.00	0.00
4	7206.00	44.58	9.35	53.94 PK	74.00	-20.06	100.00	0.00
5	9608.00	47.12	9.75	56.87 PK	74.00	-17.13	100.00	0.00
6	12010.00	48.18	11.60	59.78 PK	74.00	-14.22	100.00	0.00
7	2390.00	32.59	11.27	43.86 AV	54.00	-10.14	100.00	0.00
8	*2402.00	32.59	59.32	91.91 AV	--	--	--	--
9	4784.50	37.75	-14.89	22.86 AV	54.00	-31.14	100.00	0.00
10	7206.00	44.58	-20.75	23.84 AV	54.00	-30.16	100.00	0.00
11	9608.00	47.12	-20.35	26.77 AV	54.00	-27.23	100.00	0.00
12	12010.00	48.18	-18.50	29.68 AV	54.00	-24.32	100.00	0.00



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	2390.00	32.59	21.24	53.82PK	74.00	-20.18	100.00	0.00
2	*2402.00	32.59	61.39	93.98 PK	--	--	--	--
3	4794.00	37.74	17.84	55.58 PK	74.00	-18.42	100.00	0.00
4	7206.00	44.58	10.30	54.88 PK	74.00	-19.12	100.00	0.00
5	9608.00	47.12	9.03	56.16 PK	74.00	-17.84	100.00	0.00
6	12010.00	48.18	11.82	60.00 PK	74.00	-14.00	100.00	0.00
7	2390.00	32.59	11.39	43.97AV	54.00	-10.03	100.00	0.00
8	*2402.00	32.59	61.07	93.66 AV	--	--	--	--
9	4794.00	37.74	-12.26	25.48 AV	54.00	-28.52	100.00	0.00
10	7206.00	44.58	-19.80	24.78 AV	54.00	-29.22	100.00	0.00
11	9608.00	47.12	-21.07	26.06 AV	54.00	-27.94	100.00	0.00
12	12010.00	48.18	-18.28	29.90 AV	54.00	-24.10	100.00	0.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The product is holded on DH5 packet, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log((0.625*5) / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Above 1GHz
INPUT POWER	3.1-4.2Vdc from batteries	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH 1000hPa	TESTED BY	Ray Xue

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	*2441.00	32.67	60.47	93.14 PK	--	--	--	--
2	4872.00	38.00	12.83	50.83 PK	74.00	-23.17	100.00	0.00
3	7323.00	44.65	9.05	53.70 PK	74.00	-20.30	100.00	0.00
4	9764.00	47.52	9.55	57.08 PK	74.00	-16.92	100.00	0.00
5	12205.00	48.28	11.47	59.75 PK	74.00	-14.25	100.00	0.00
6	*2441.00	32.67	60.21	92.88 AV	--	--	--	--
7	4872.00	38.00	-17.27	20.73 AV	54.00	-33.27	100.00	0.00
8	7323.00	44.65	-21.05	23.60 AV	54.00	-30.40	100.00	0.00
9	9764.00	47.52	-20.55	26.98 AV	54.00	-27.02	100.00	0.00
10	12205.00	48.28	-18.63	29.65 AV	54.00	-24.35	100.00	0.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	*2441.00	32.67	61.10	93.77 PK	--	--	--	--
2	4872.00	38.00	18.58	56.57 PK	74.00	-17.43	100.00	0.00
3	7323.00	44.65	10.25	54.90 PK	74.00	-19.10	100.00	0.00
4	9764.00	47.52	10.36	57.89 PK	74.00	-16.11	100.00	0.00
5	12205.00	48.28	10.93	59.21 PK	74.00	-14.79	100.00	0.00
6	*2441.00	32.67	60.74	93.42 AV	--	--	--	--
7	4872.00	38.00	-11.52	26.47 AV	54.00	-27.53	100.00	0.00
8	7323.00	44.65	-19.85	24.80 AV	54.00	-29.20	100.00	0.00
9	9764.00	47.52	-19.74	27.79 AV	54.00	-26.21	100.00	0.00
10	12205.00	48.28	-19.17	29.11 AV	54.00	-24.89	100.00	0.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The product is holded on DH5 packet, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log((0.625*5) / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Above 1GHz
INPUT POWER	3.1-4.2Vdc from batteries	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH 1000hPa	TESTED BY	Ray Xue

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBUV)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	*2480.00	32.75	58.64	91.39PK	--	--	--	--
2	2483.50	32.76	21.72	54.48 PK	74.00	-19.52	100.00	0.00
3	4951.00	38.28	11.08	49.36 PK	74.00	-24.64	100.00	0.00
4	7440.00	44.58	9.89	54.47 PK	74.00	-19.53	100.00	0.00
5	9920.00	47.73	10.72	58.44 PK	74.00	-15.56	100.00	0.00
6	12400.00	48.39	12.04	60.43 PK	74.00	-13.57	100.00	0.00
7	*2480.00	32.75	58.27	91.02 AV	--	--	--	--
8	2483.50	32.76	16.78	49.54 AV	54.00	-4.46	100.00	0.00
9	4951.00	38.28	-19.02	19.26 AV	54.00	-34.74	100.00	0.00
10	7440.00	44.58	-20.21	24.37 AV	54.00	-29.63	100.00	0.00
11	9920.00	47.73	-19.38	28.34 AV	54.00	-25.66	100.00	0.00
12	12400.00	48.39	-18.06	30.33 AV	54.00	-23.67	100.00	0.00



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	*2480.00	32.75	60.86	93.61 PK	--	--	--	--
2	2483.50	32.76	22.83	55.59 PK	74.00	-18.41	100.00	0.00
3	4950.00	38.28	17.17	55.45 PK	74.00	-18.55	100.00	0.00
4	7440.00	44.58	9.72	54.30 PK	74.00	-19.70	100.00	0.00
5	9920.00	47.73	10.05	57.78 PK	74.00	-16.22	100.00	0.00
6	12400.00	48.39	12.02	60.41 PK	74.00	-13.59	100.00	0.00
7	*2480.00	32.75	60.35	93.10 AV	--	--	--	--
8	2483.50	32.76	18.71	51.47 AV	54.00	-2.53	100.00	0.00
9	4950.00	38.28	-12.93	25.35 AV	54.00	-28.65	100.00	0.00
10	7440.00	44.58	-20.38	24.20 AV	54.00	-29.80	100.00	0.00
11	9920.00	47.73	-20.05	27.68 AV	54.00	-26.32	100.00	0.00
12	12400.00	48.39	-18.08	30.31 AV	54.00	-23.69	100.00	0.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The product is holded on DH5 packet, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log((0.625*5) / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
MODE	Mode 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	3.1-4.2Vdc from batteries	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH 1000hPa	TESTED BY	Ray Xue

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	49.40	15.47	-7.16	8.31	40.00	-31.69	110.00	120.00
2	158.53	17.06	-6.95	10.10	43.50	-33.40	100.00	360.00
3	337.98	17.47	-6.76	10.71	46.00	-35.29	100.00	135.00
4	529.55	21.52	-6.85	14.67	46.00	-31.33	125.00	185.00
5	711.42	24.81	-7.16	17.65	46.00	-28.35	100.00	275.00
6	915.12	27.50	-6.96	20.55	46.00	-25.45	100.00	210.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	44.55	15.55	-7.13	8.42	40.00	-31.58	103.00	120.00
2	160.95	16.98	-7.31	9.67	43.50	-33.83	100.00	111.00
3	325.85	17.47	-6.77	10.70	46.00	-35.30	100.00	210.00
4	483.48	20.63	-6.72	13.91	46.00	-32.09	100.00	222.00
5	723.55	25.06	-7.36	17.70	46.00	-28.30	100.00	345.00
6	924.83	27.68	-6.75	20.92	46.00	-25.08	100.00	270.00

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL	
MODE	Mode 2	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	3.1-4.2Vdc from batteries	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH 1000hPa	TESTED BY	Ray Xue

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	125.80	15.11	6.01	21.13	43.50	-22.37	103.00	210.00
2	262.67	15.22	3.23	18.46	46.00	-27.54	100.00	325.00
3	350.34	17.48	4.96	22.44	46.00	-23.56	100.00	125.00
4	500.45	20.88	-6.70	14.18	46.00	-31.82	121.00	111.00
5	624.00	23.58	4.85	28.43	46.00	-17.57	100.00	78.00
6	878.75	26.65	-6.85	19.80	46.00	-26.20	100.00	200.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	61.91	14.44	5.88	20.32	40.00	-19.68	105.00	45.00
2	125.55	15.10	10.21	25.31	43.50	-18.19	100.00	55.00
3	262.80	15.23	-3.81	11.42	46.00	-34.58	100.00	120.00
4	600.00	23.13	7.38	30.51	46.00	-15.49	100.00	110.00
5	624.00	23.58	10.21	33.79	46.00	-12.21	100.00	335.00
6	810.85	26.05	-7.30	18.75	46.00	-27.25	100.00	100.00

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum R&S	FSP30	E1S1002	Aug. 04, 2010

4.3.3 TEST PROCEDURES


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.



4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T




*RBW 100 kHz Marker 2 [T1]
*VBW 300 kHz -9.59 dBm
SWT 5 ms 2.441000000 GHz

Ref 10 dBm

*Att 20 dB

SWT 5 ms

2.441000000 GHz

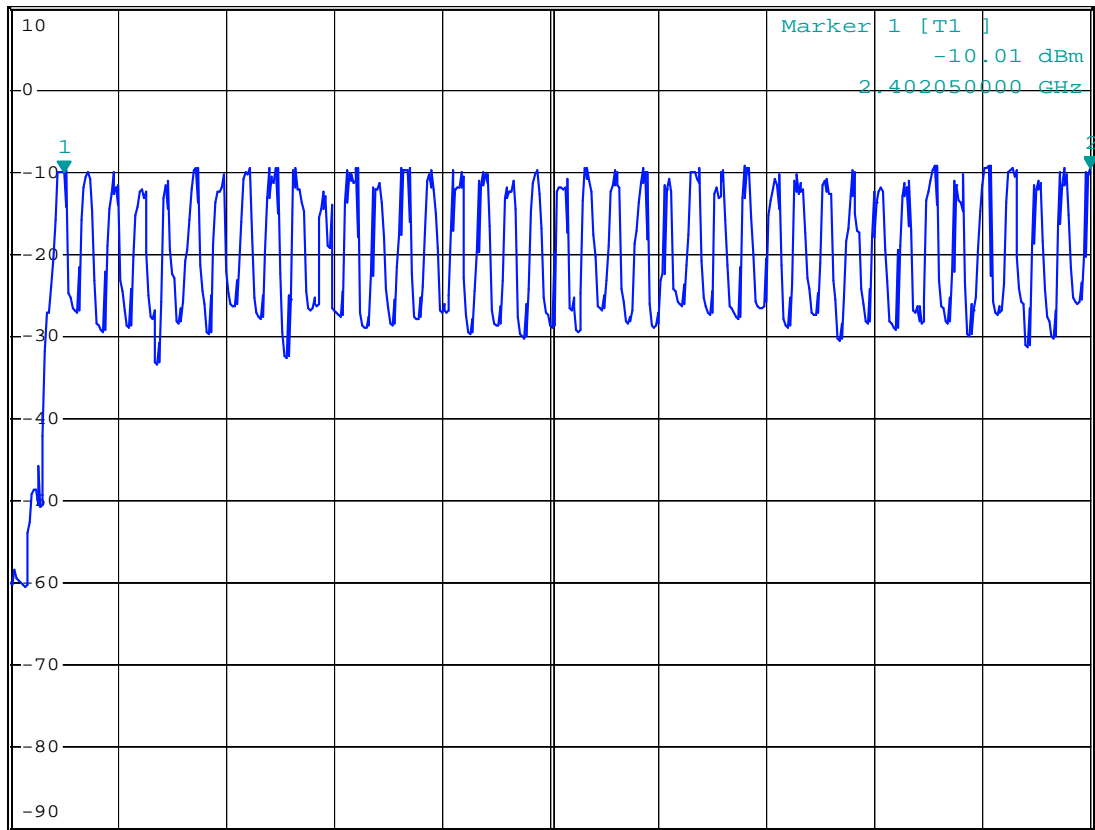1 PK
VIEW

Start 2.4 GHz

4.1 MHz/

Stop 2.441 GHz


Date: 15.AUG.2009 14:47:14



A D T



*RBW 100 kHz Marker 2 [T1]
 *VBW 300 kHz -9.80 dBm
 Ref 10 dBm 2.480014000 GHz
 *Att 20 dB SWT 5 ms

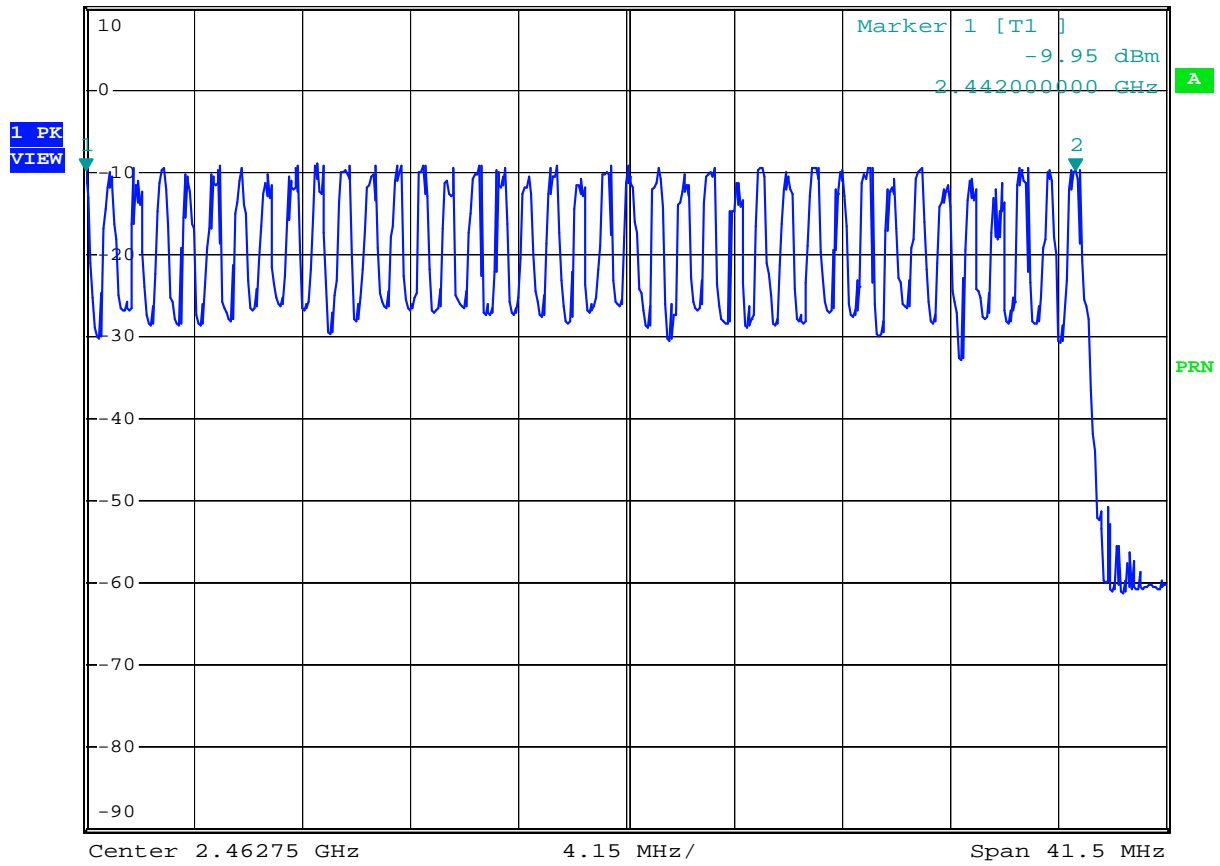

Date: 15.AUG.2009 14:53:59



4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum R&S	FSP30	E1S1002	Aug. 04, 2010

4.4.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.



4.4.5 TEST SETUP

Same as 4.3.5.

4.4.6 TEST RESULTS


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH5	99	0.192	19.008	400

NOTE: Test plots of the transmitting time slot are shown on the next page.




A D T

Time-1

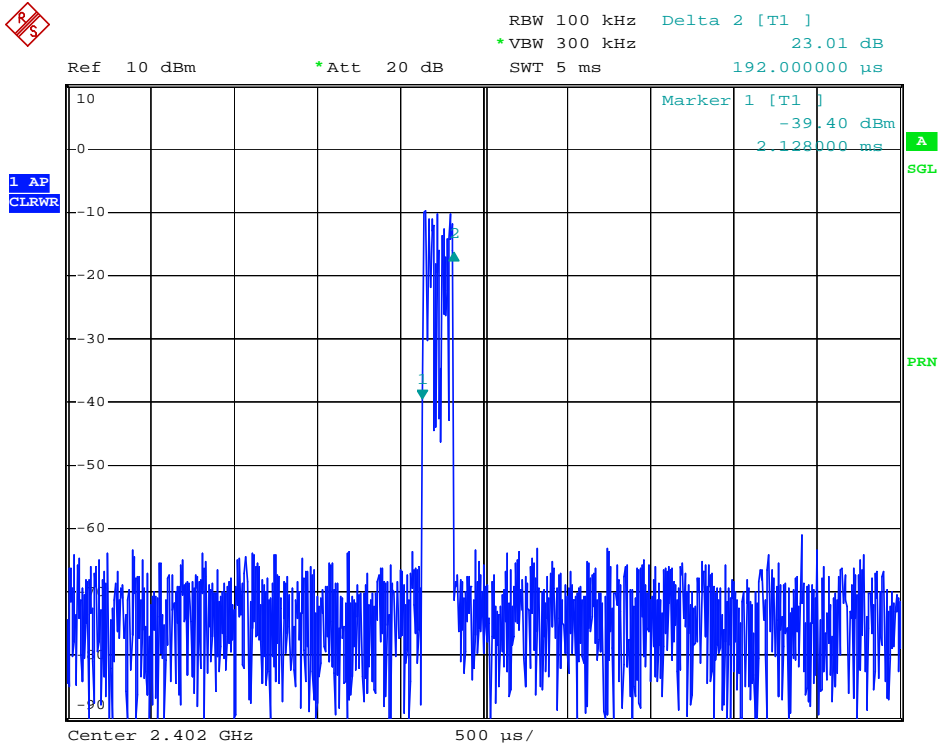

Date: 15.AUG.2009 15:28:35

Time-2

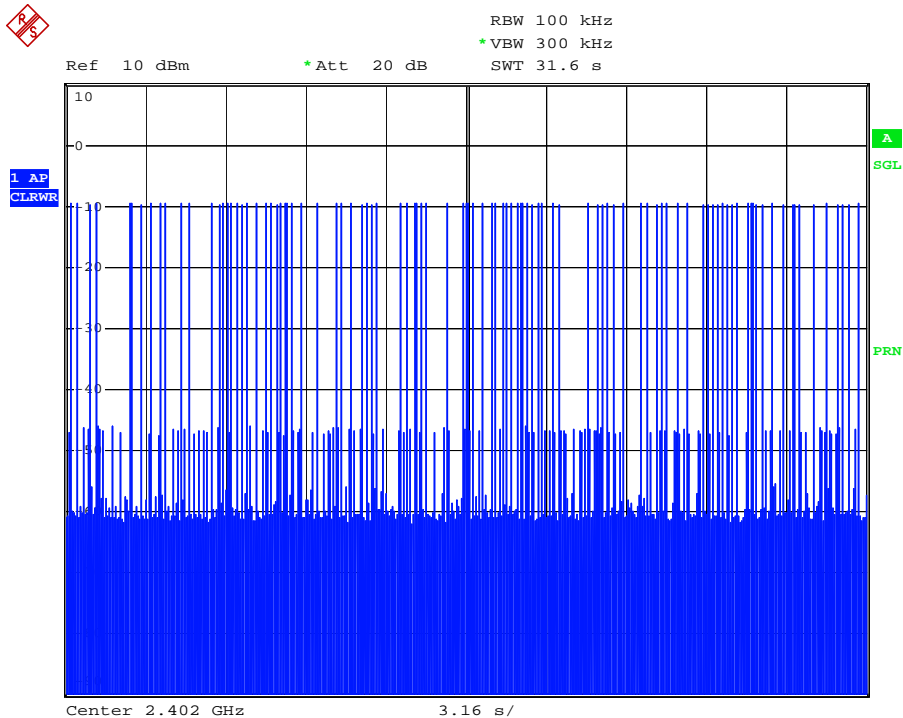

Date: 15.AUG.2009 15:35:14



4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum R&S	FSP30	E1S1002	Aug. 04, 2010

4.5.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.



4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

Same as 4.3.5.

4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




4.5.7 TEST RESULTS

MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
INPUT POWER	3.1-4.2Vdc from batteries	TESTED BY	Ray Xue

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.74
39	2441	0.74
78	2480	0.86

CH 0

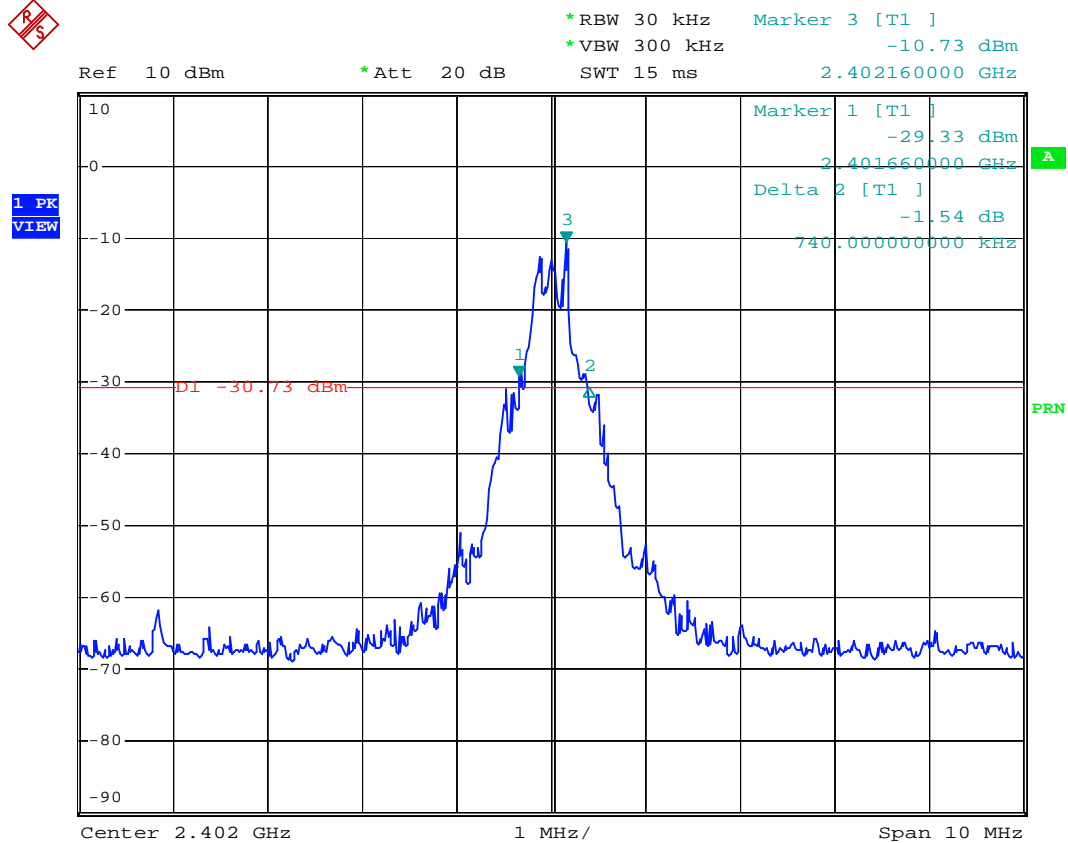


Date: 15.AUG.2009 15:03:39



A D T

CH 39

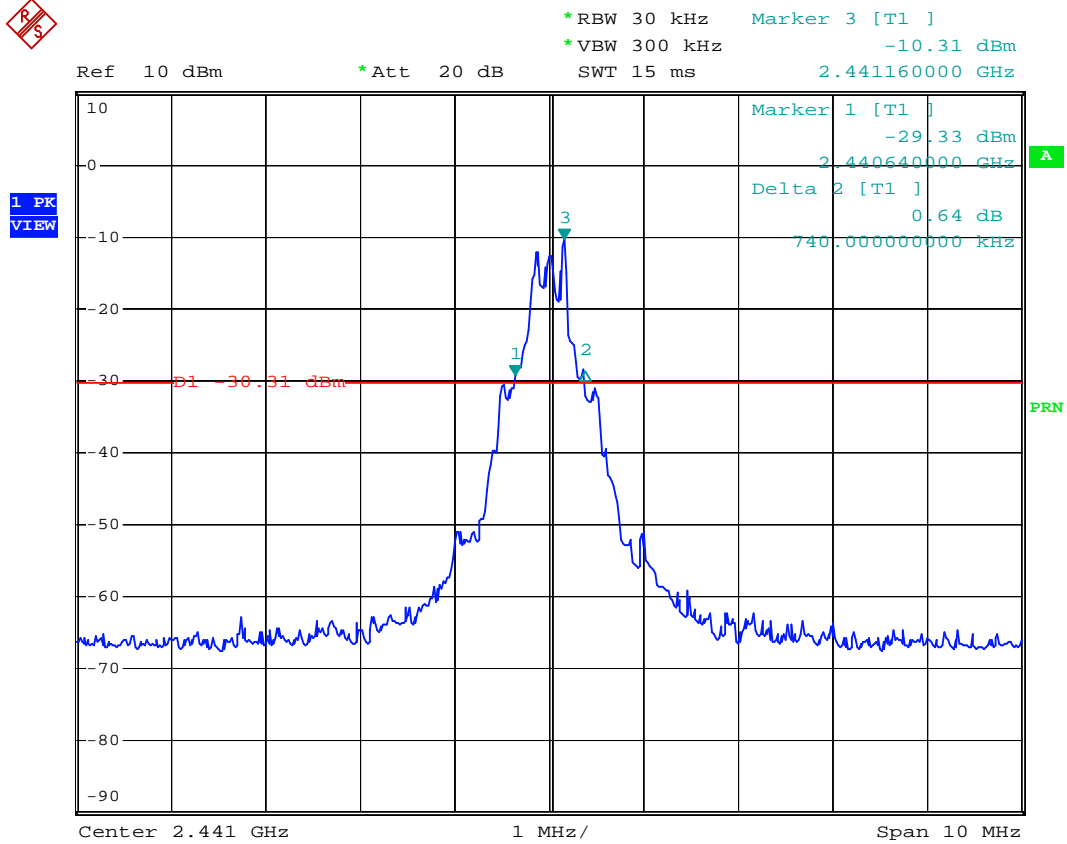


Date: 15.AUG.2009 15:05:32



A D T

CH 78

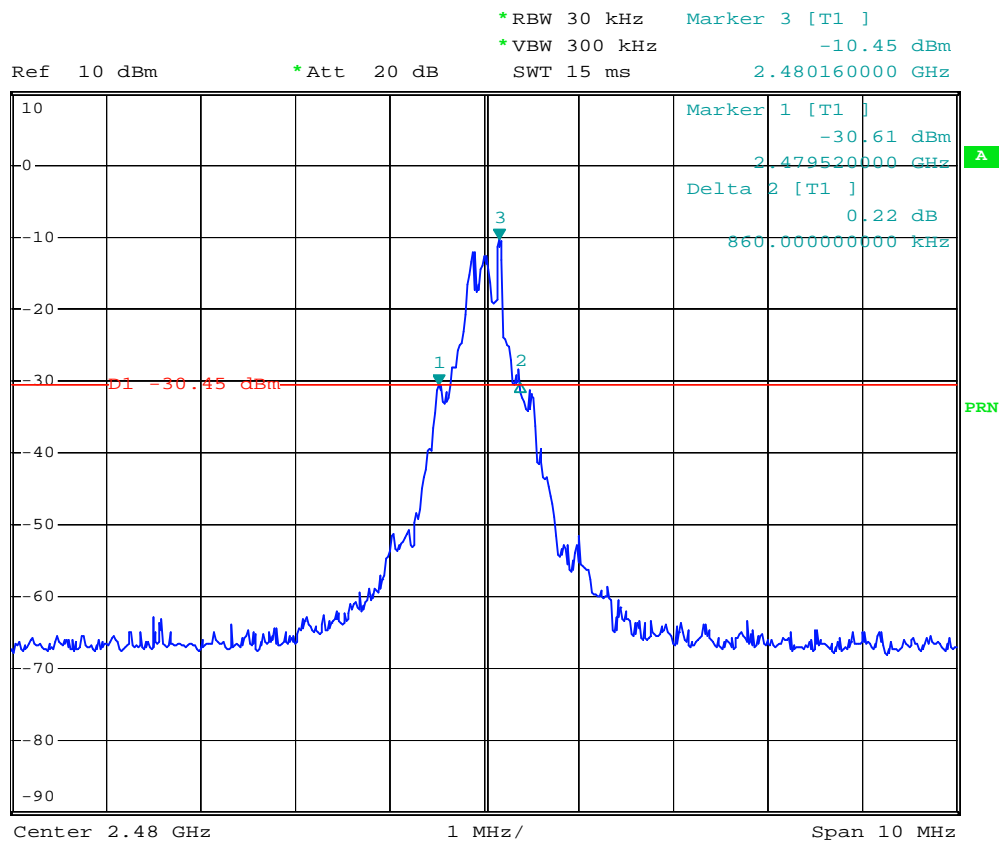1 PK
VIEW

Date: 15.AUG.2009 15:07:34



4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum R&S	FSP30	E1S1002	Aug. 04, 2010

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.


4.6.5 TEST SETUP

Same as 4.3.5

MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	23deg. C, 61%RH, 991hPa
INPUT POWER	3.1-4.2Vdc from batteries	TESTED BY	Ray Xue

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.02	0.74	0.49	pass
39	2441	1.00	0.74	0.49	pass
78	2480	1.00	0.86	0.57	pass

CH 0

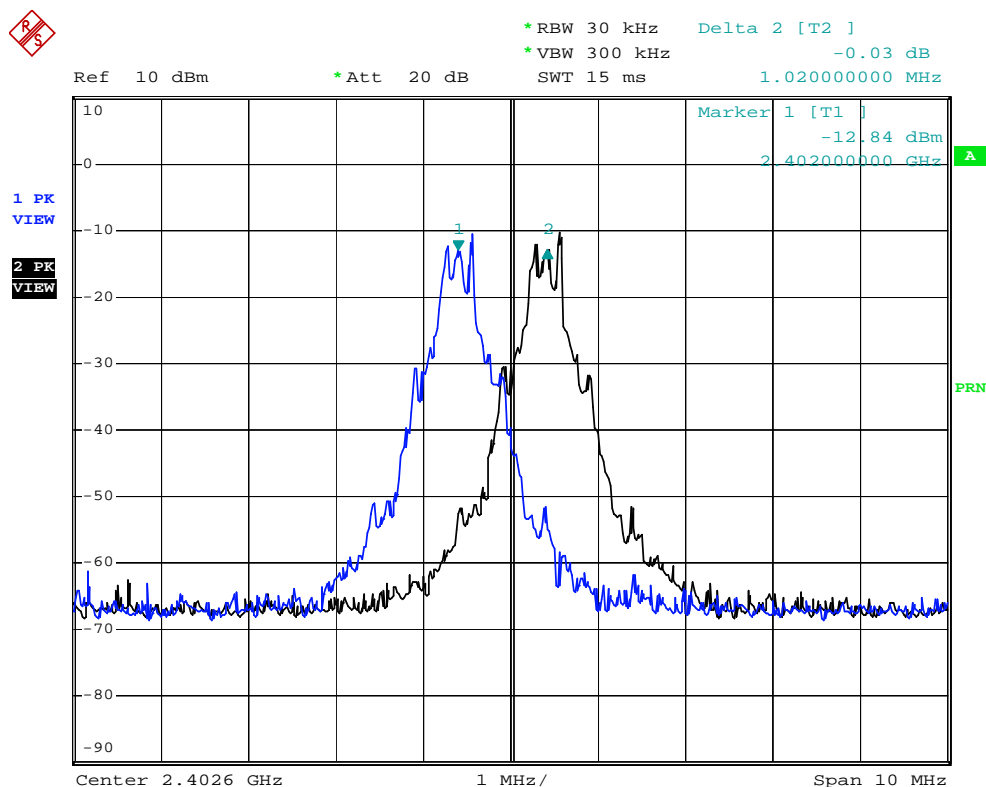


Date: 15.AUG.2009 15:15:33




A D T

CH 39

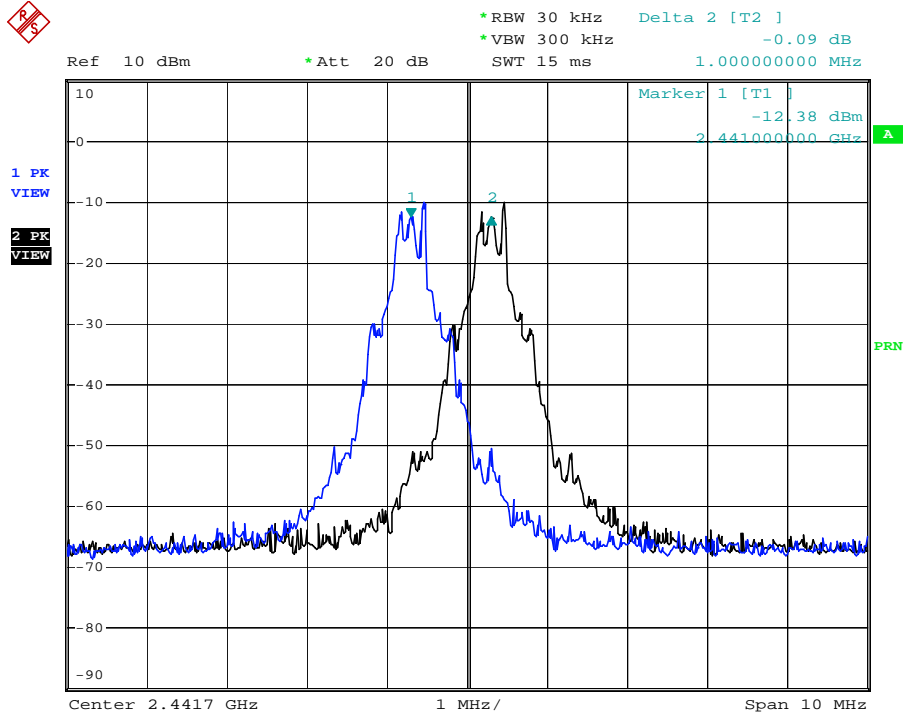

Date: 15.AUG.2009 15:13:50

CH 78

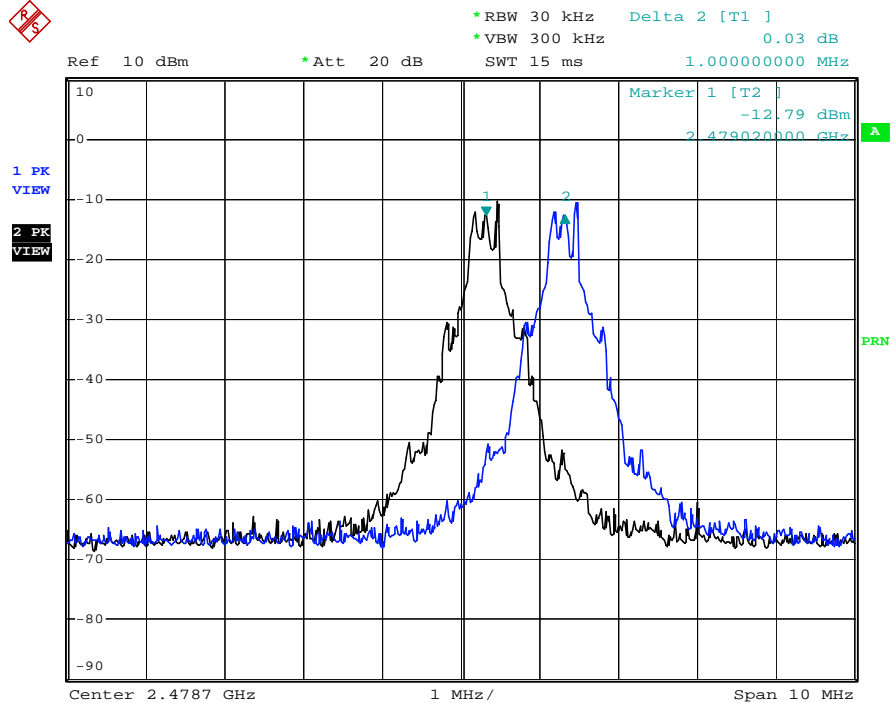

Date: 15.AUG.2009 15:11:24



4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum R&S	FSP30	E1S1002	Aug. 04, 2010

4.7.3 TEST PROCEDURES

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

Same as 4.3.5.



4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	23deg. C, 61%RH, 991hPa
INPUT POWER	3.1-4.2Vdc from batteries	TESTED BY	Ray Xue

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	1.15	0.61	125	PASS
39	2441	1.14	0.55	125	PASS
78	2480	1.10	0.43	125	PASS


CH 0



A D T



*RBW 3 MHz Marker 1 [T1]
*VBW 10 MHz 0.61 dBm
SWT 2.5 ms 2.401800000 GHz

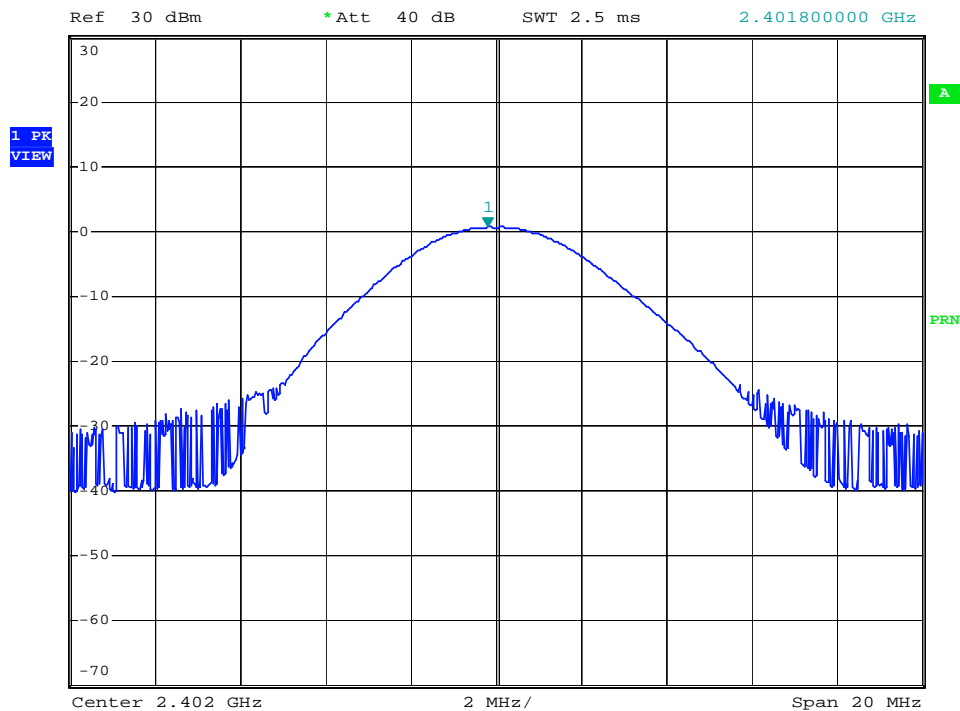


Date: 15.AUG.2009 16:02:15

CH 39



*RBW 3 MHz Marker 1 [T1]
*VBW 10 MHz 0.55 dBm
SWT 2.5 ms 2.441000000 GHz

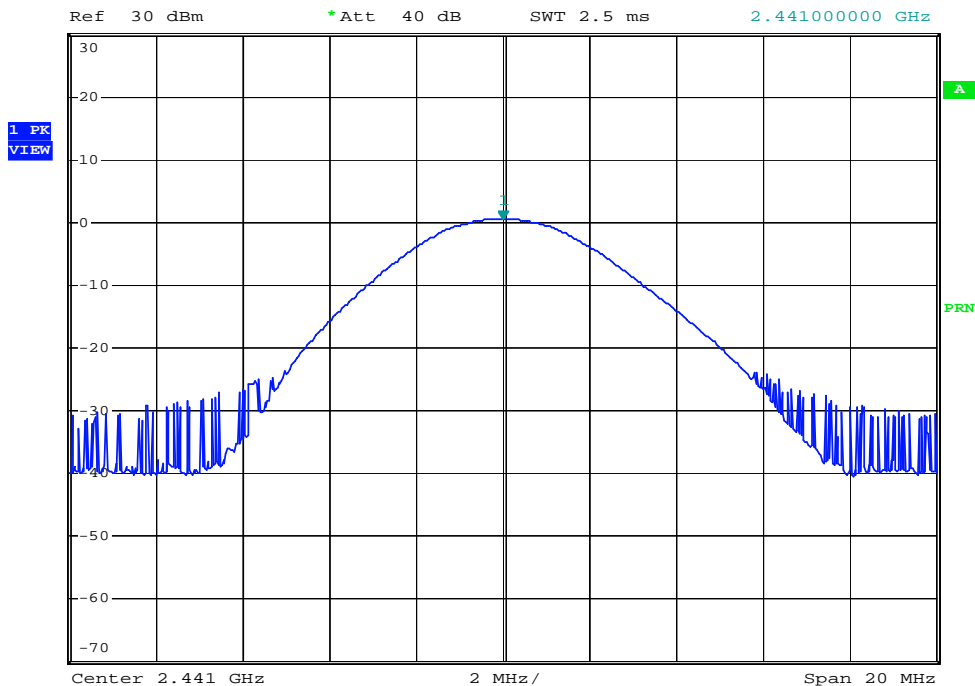


Date: 15.AUG.2009 16:04:35



A D T

CH 78

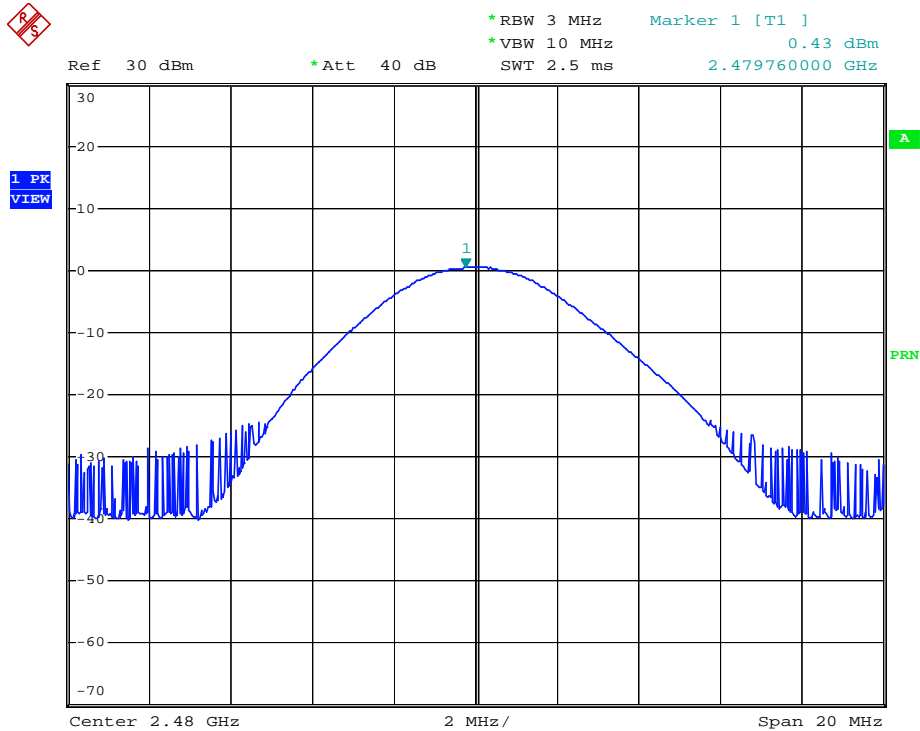

Date: 15.AUG.2009 16:06:42



4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum R&S	FSP30	E1S1002	Aug. 04, 2010

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest and highest channel frequencies individually.

4.8.6 TEST RESULTS


The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



CH 0

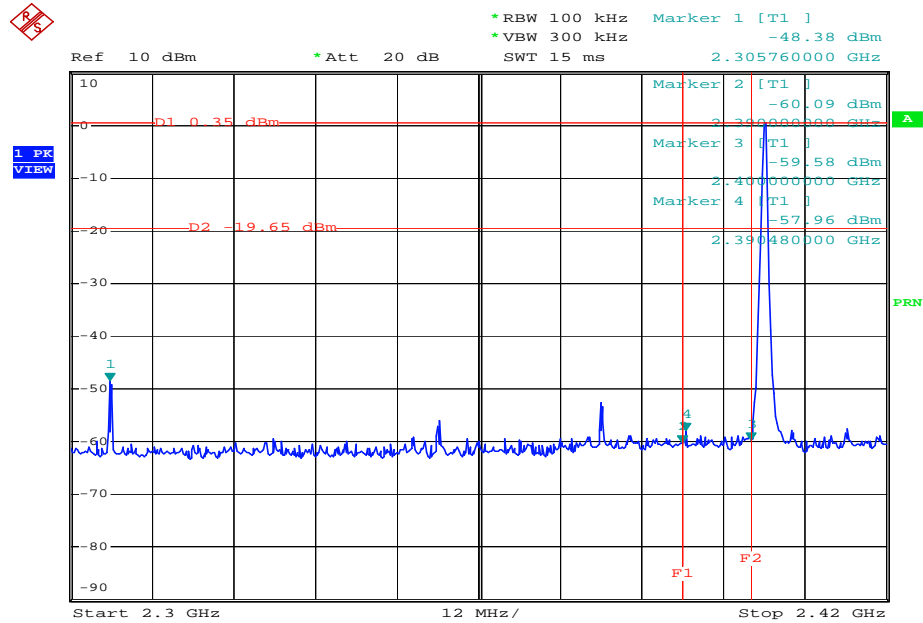

Date: 15.AUG.2009 16:34:32

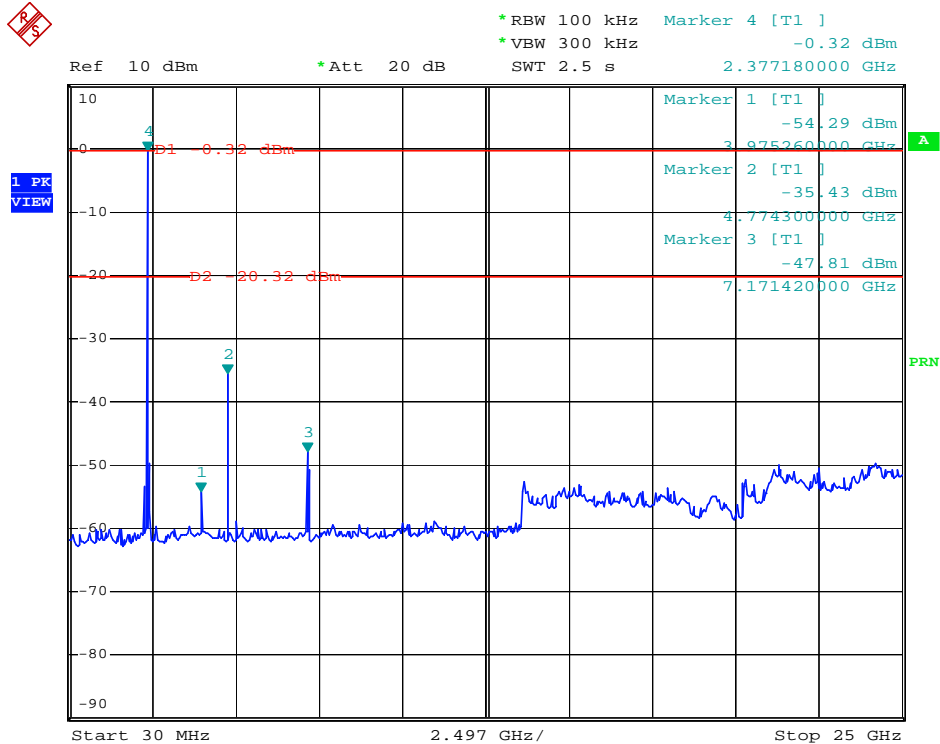


Date: 15.AUG.2009 16:44:14




A D T

CH 78

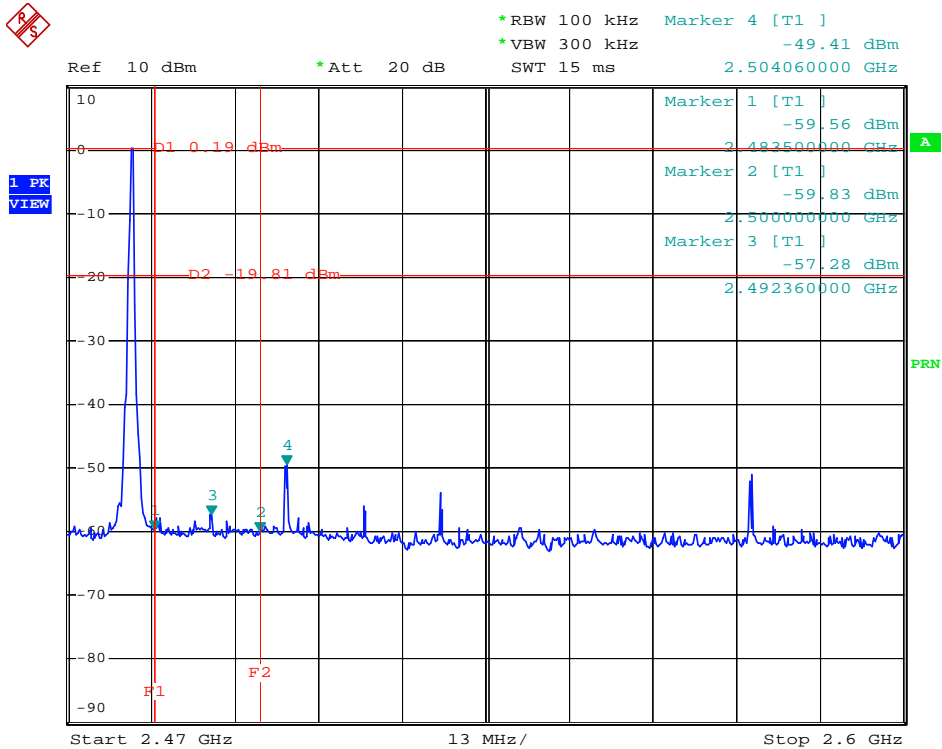

Date: 15.AUG.2009 16:37:48

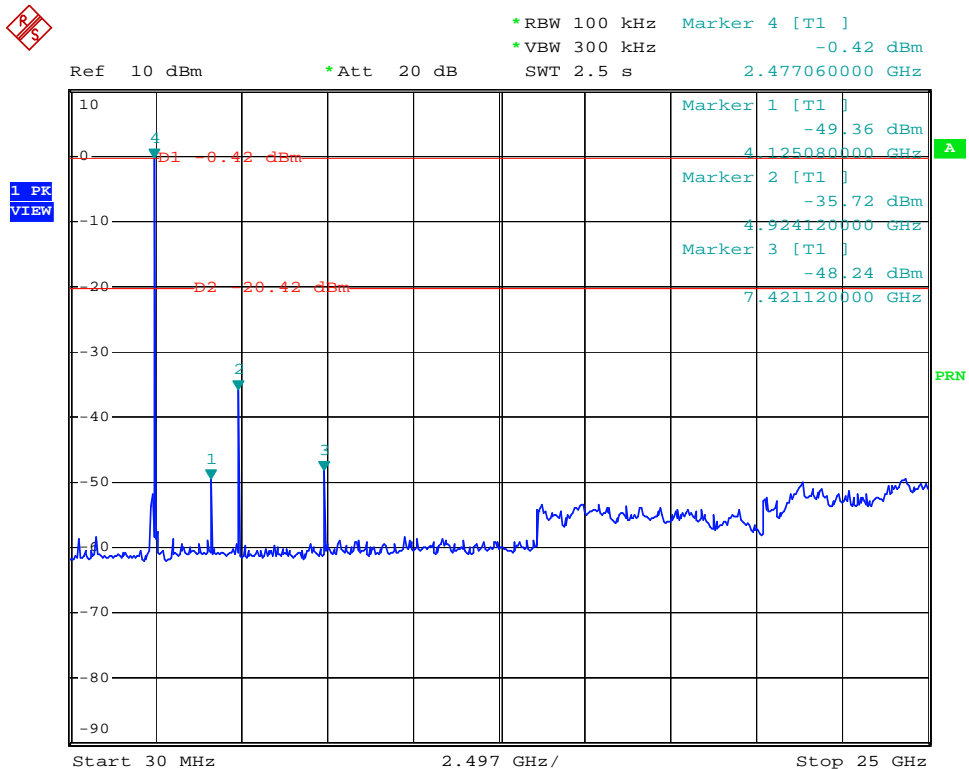

Date: 15.AUG.2009 16:42:59



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product is Printed antenna that without antenna connector. The maximum gain of this antenna is 0dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST MODE 1



MODE 2






A D T



MODE 3

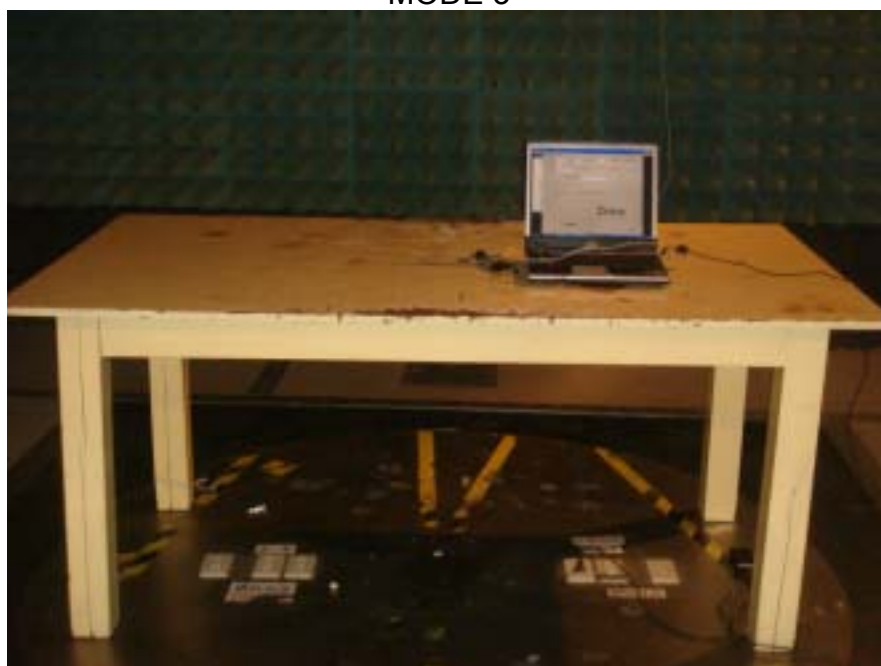



A D T





6 PHOTOGRAPHS OF THE EUT







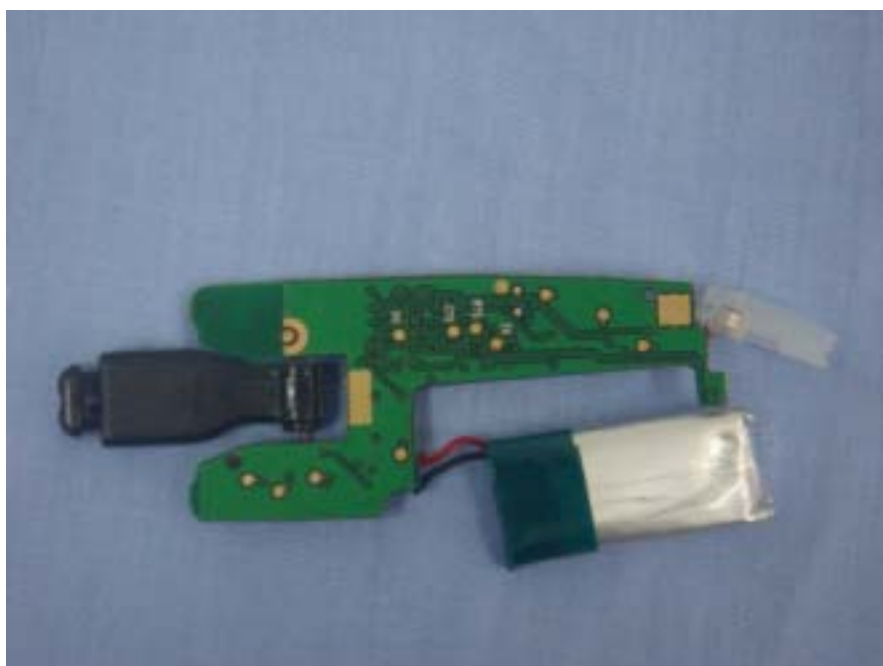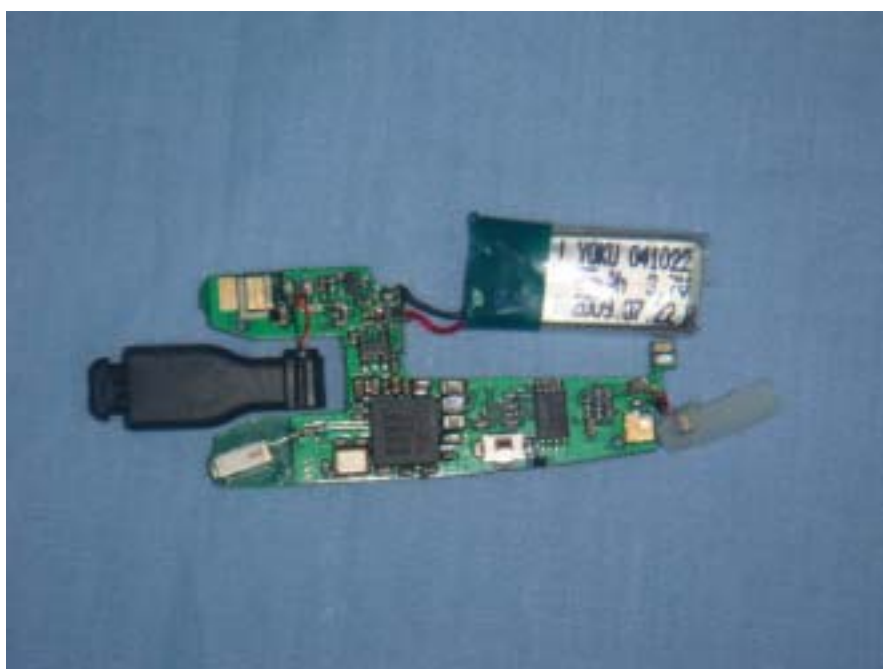



7 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT (Shanghai) Corporation, were founded in 2004 to provide our best service in EMC, Radio and Vehicle consultation. Our laboratories are accredited by the following accreditation bodies according to ISO/IEC 17025 (2005) .

USA	A2LA Certificate No.: 2343.01
China	CNAS Certificate No.: L2810

Copies of accreditation certificates could be inquired from our office. If you have any comments, please feel free to contact us at the following:

EMC / RF / Vehicle Lab:

Tel: +86 21 6465 9091

Fax: +86 21 6465 9092

Email: bvadtshmail@cn.bureauveritas.com

--- END ---