Page: 1 of 15

FCC TEST REPORT

FCC ID : W2IAM-3055

Applicant : Adomax Electronic Technology Co., (Z.Q.) Ltd. **Address** : East Side of Qiancun, Yingbin Road, Zhaoqing,

Guangdong, China

Equipment Under Test (EUT):

Product Name : Mouse

Model No. : AM-3055(USB), AM-3055(USB+PS/2)

Standards : FCC PART15 SUBPART B

Date of Test : July 13,2009

Test Engineer : Zero.Zhou

Reviewed By : Thelo 24 out

Test Result : PASS *

* The sample detailed above has been tested to the requirements of Council Directives ANSI C63.4:2003. The test results have been reviewed against the Directives above and found to meet their essential requirements.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen 518105, China

Tel:+86-755-27553488 Fax:+86-755-27553868

1 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15, SUBPART B: 2007	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART B: 2007	ANSI C63.4: 2003	Class B	N/A

2 Contents

1	COVE	ER PAGE	
1	TEST SU	MMARY	2
2	CONT	TENTS	3
3	GENE	CRAL INFORMATION	4
		ENT INFORMATION	
	3.2 Gen	NERAL DESCRIPTION OF E.U.T.	4
	3.3 Det	TAILS OF E.U.T	4
		SCRIPTION OF SUPPORT UNITS	
		INDARDS APPLICABLE FOR TESTING	
		T FACILITY	
	3.7 TES	T LOCATION	5
4	EQUI	PMENT USED DURING TEST	5
5	EMIS	SIONS TEST RESULTS	7
	5.1 Con	NDUCTED EMISSION DATA	7
		DIATION EMISSION DATA	
	5.2.1	Measurement Uncertainty	
	5.2.2	EUT Setup	8
	5.2.3	Spectrum Analyzer Setup	9
	5.2.4	Test Procedure	9
	5.2.5	Corrected Amplitude & Margin Calculation	
	5.2.6	Summary of Test Results	
	5.2.7	Photograph – Radiation Emission Test Setup	
6	PHOT	OGRAPHS - CONSTRUCTIONAL DETAILS	12
	6.1 EU	T – Front View	12
		T - BACK VIEW	
		T – OPEN VIEW	
		T – PCB-Front View	
	6.5 EU	T – PCB1-BACK VIEW	14
-	ECC I	ADDI	15

3 General Information

3.1 Client Information

Applicant: Adomax Electronic Technology Co., (Z.Q.) Ltd.

Address of Applicant: East Side of Qiancun, Yingbin Road, Zhaoqing,

Guangdong, China

Manufacturer: Adomax Electronic Technology Co., (Z.Q.) Ltd.

Address of Manufacturer: East Side of Qiancun, Yingbin Road, Zhaoqing,

Guangdong, China

3.2 General Description of E.U.T.

Product Name: Mouse

Model No. : AM-3055(USB), AM-3055(USB+PS/2)

3.3 Details of E.U.T.

Power supply: USB or PS/2 input

3.4 Description of Support Units

The EUT has been tested as independent unit.

3.5 Standards Applicable for Testing

The customer requested FCC tests for a mouse. The standards used were FCC PART 15 SUBPART B.

3.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• IC – Registration No.:7760A

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration No.:7760A,July 24,2008.

• FCC – Registration No.: 880581

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, July 9, 2008

3.7 Test Location

All Emissions testswere performed at:-Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

4 Equipment Used during Test

Equipment Name	Manufacture r Model	Equipme nt No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertain ty
EMC Analyzer	Agilent/ E7405A	MY4511 4943	W2008001	9k-26.5GHz	Aug-08	Aug-09	Wws20 081596	±1dB
Trilog Broadband Antenne 30- 3000 MHz	SCHWARZ BECK MESS- ELEKTRO M/ VULB9163	336	W2008002	30-3000 MHz	Aug-08	Aug-09		±1dB
Broad-band Horn Antenna 1-18 GHz	SCHWARZ BECK MESS- ELEKTRO M/ VULB9163	667	W2008003	1-18GHz	Aug-08	Aug-09		f<10 GHz: ±1dB 10GHz< f<18 GHz: ±1.5dB
Broadband Preamplifier 0.5-18 GHz	SCHWARZ BECK MESS- ELEKTRO M/ BBV 9718	9718- 148	W2008004	0.5-18GHz	Aug-08	Aug-09		±1.2dB
10m Coaxial Cable with N-male Connectors usable up to 18GHz,	SCHWARZ BECK MESS- ELEKTRO M/ AK 9515 H	-	-	-	Aug-08	Aug-09		-
10m 50 Ohm Coaxial Cable with N- plug,individu al length,usable up to 3(5)GHz,	SCHWARZ BECK MESS- ELEKTRO M/ AK 9513				Aug-08	Aug-09		

Equipment Name	Manufacture r Model	Equipme nt No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertain ty
Connector	1 Wodel	III INO			Date	Date	INO	ty
Positioning Controller	C&C LAB/ CC-C-IF				N/A	N/A		
Color Monitor	SUNSPO/ SP-14C				N/A	N/A		
Test Receiver	ROHDE&S CHWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug-08	Aug-09	Wws20 080942	±1dB
EMI Receiver	Beijingkehu an	KH3931		9k-1GHz	Aug-08	Aug-09		
Two-Line V- Network	ROHDE&S CHWARZ/ ENV216	100115	W2005002	50Ω/50μΗ	Aug-08	Aug-09	Wws20 080941	±10%
V-LISN	SCHWARZ BECK MESS — ELEKTRON IK	NSLK 8128	8128-259	9k-30MHz	Aug-08	Aug-09		
Absorbing Clamp	ROHDE&S CHWARZ/ MDS-21	100205	W2005003	impandance50 Ω loss : 17 dB	Aug-08	Aug-09	Wws20 080943	±1dB
10m 50 Ohm Coaxial Cable with N- plug,individu al length,usable up to 3(5)GHz, Connectors	SCHWARZ BECK MESS- ELEKTRO M/ AK 9514				Aug-08	Aug-09		
PC	accer	AG1720	-	-	Aug-08	Aug-09		±1dB

5 Emissions Test Results

5.1 Conducted Emission Data

Test Requirement: FCC Part15.107
Test Method: ANSI C63.4:2003

Test Result: N/A

Frequency Range: 150kHz to 30MHz

Class B

Limit: 66-56 dBµV between 0.15MHz & 0.5MHz

 $56 \text{ dB}\mu\text{V}$ between 0.5MHz & 5MHz $60 \text{ dB}\mu\text{V}$ between 5MHz & 30MHz

Detector: Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak & Average if maximised peak within 6dB of

Average Limit

Remark: Due to the EUT work without mains system, the test was not performed.

5.2 Radiation Emission Data

Test Requirement: FCC Part15.109
Test Method: ANSI C63.4:2003

Test Result: PASS

Frequency Range: 30MHz to 1GHz

Measurement Distance: 3m Class: Class B

Limit: $40.0 \text{ dB}\mu\text{V/m}$ between 30MHz & 88MHz

 $43.5 \text{ dB}\mu\text{V/m}$ between 88MHz & 216MHz $46.0 \text{ dB}\mu\text{V/m}$ between 216MHz & 960MHz

54.0 dBµV/m zbove 960MHz

Detector: Peak for pre-scan (120kHz resolution bandwidth)

Quasi-Peak if maximised peak within 6dB of limit

5.2.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is ± 5.03 dB.

5.2.2 EUT Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B limits.

The EUT was placed on the test table in working mode and connected with PC system,we pretest USB connector and PS/2 connector,the max.emission was detected using USB connector,so the data were shown as follow.

5.2.3 Spectrum Analyzer Setup

According to FCC Part15 B Rules, the system was tested 30 to 1000MHz.

Start Frequency	30 MHz
Stop Frequency	1000MHz
Sweep Speed Auto	
IF Bandwidth	120 KHz
Video Bandwidth	100KHz
Quasi-Peak Adapter Bandwidth	120 KHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	100KHz

5.2.4 Test Procedure

The radiated emissions test.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "**Qp**" in the data table.

The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

5.2.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:


Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain


The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-7dB\mu V$ means the emission is $7dB\mu V$ below the maximum limit for Class B. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – Class B Limit

5.2.6 Summary of Test Results

According to the data in this section, the EUT complied with the FCC Part15 B standards. Antenna polarization:Horizontal

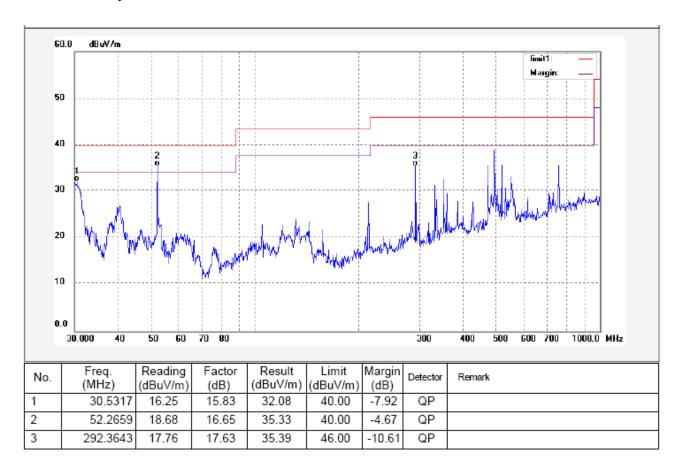

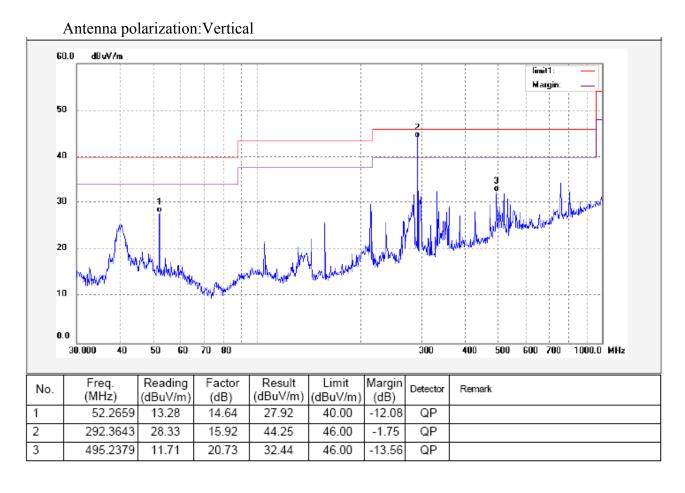

5.2.7 Photograph – Radiation Emission Test Setup



6 Photographs - Constructional Details

6.1 EUT – Front View




6.2 EUT - Back View




6.3 EUT – Open View



6.4 EUT – PCB-Front View

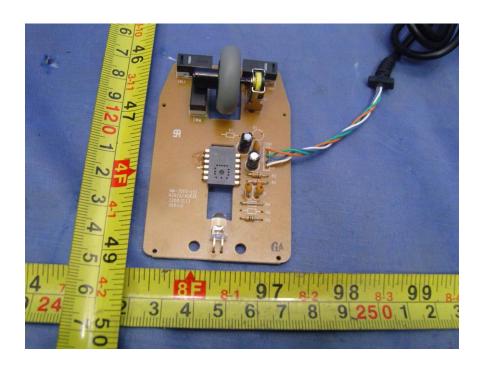

6.5 EUT – PCB1-Back View

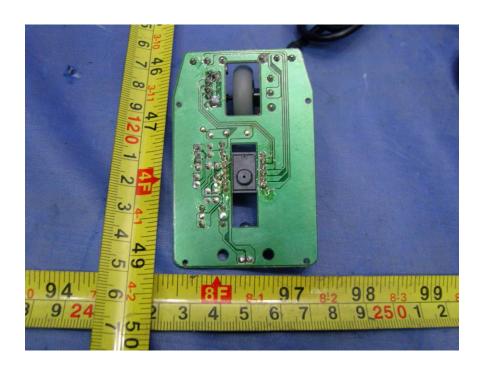

7 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation. The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

