

# TEST REPORT

Report number: Z071C-09410

Issue Date: March 16, 2010

The device, as described herewith, was tested pursuant to applicable test procedure indicated below and complies with the requirements of;

## FCC Part15 Subpart C / IC RSS-210

The test results are traceable to the international or national standards.

Applicant	: NIKON-TRIMBLE CO., LTD.
Equipment under test (EUT)	: Bluetooth Module
FCC ID	: W4LNT0003
IC Certification Number	: 8170A-NT0003
Model Number	: BTunit03
Serial Number	: N/A
EUT Condition	: Production

Test procedure	: ANSI C63.4-2003
Date of test	: February 25, March 1,2,3, 2010
Test place	: 3m Semi-anechoic chamber, Shielded room
Test results	: Complied


Zacta Technology Corporation certifies that no party to the application is subject to a denial of federal benefits that include FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

The results in this report are applicable only to the samples tested.

This report shall not be re-produced except in full without the written approval of ZACTA Technology Corporation.

This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by:

  
Hiroaki Suzuki  
Taiki Watanabe

Authorized by:

  
Katsumi Sumiyoshi

Manager of Quality Control Division



NVLAP LAB CODE 200306-0

## ***Table of contents***

	Page
1. Summary of Test.....	4
1.1 Purpose of test.....	4
1.2 Standards .....	4
1.3 Summary of test results .....	4
1.4 Deviation from the standard.....	4
1.5 Modification to the EUT by laboratory .....	4
2. Equipment description.....	5
2.1 General Description of equipment.....	5
2.2 EUT information.....	5
2.3 Operating channels and frequencies .....	6
2.4 Operating mode .....	7
3. Configuration information.....	8
3.1 EUT and Peripheral(s) used .....	8
3.2 System configuration.....	8
4. Test Type and Results .....	9
4.1 20dB Bandwidth / Occupied Bandwidth.....	9
4.1.1 Test Procedure [ FCC 15.247(a)(1), IC RSS-210 A8.1(a) ].....	9
4.1.2 Measurement Setup .....	9
4.1.3 Limit of Bandwidth at 20 dB below.....	9
4.1.4 Measurement Result.....	9
4.1.5 Trace Data.....	9
4.2 Carrier Frequency Separation .....	11
4.2.1 Test Procedure [ FCC 15.247(a)(1), IC RSS-210 A8.1(b) ] .....	11
4.2.2 Measurement Setup .....	11
4.2.3 Limit of Carrier Frequency Separation .....	11
4.2.4 Measurement Result.....	11
4.2.5 Trace Data.....	11
4.3 Number of Hopping Frequencies .....	13
4.3.1 Test Procedure [ FCC 15.247(a)(1)(iii), IC RSS-210 A8.1(d) ] .....	13
4.3.2 Measurement Setup .....	13
4.3.3 Limit of Number of Hopping Frequencies .....	13
4.3.4 Measurement Result.....	13
4.3.5 Trace Data.....	13
4.4 Time of Occupancy (Dwell Time).....	15
4.4.1 Test Procedure [ FCC 15.247(a)(1)(iii), IC RSS-210 A8.1(d) ] .....	15
4.4.2 Measurement Setup .....	15
4.4.3 Limit of Time of Occupancy (Dwell Time).....	15
4.4.4 Measurement Result.....	15

4.4.5 Trace Data.....	15
4.5 Maximum Peak Output Power - Conducted - .....	17
4.5.1 Test Procedure [ FCC 15.247(b)(1), 15.31(e), IC RSS-210 A8.4(2) ].....	17
4.5.2 Test Instruments and Measurement Setup .....	17
4.5.3 Limit of Maximum Peak Output Power .....	17
4.5.4 Measurement Result.....	17
4.5.5 Trace Data.....	17
4.6 Band Edge Compliance of RF Conducted Emissions .....	19
4.6.1 Test Procedure [ FCC 15.247 (d), IC RSS-210 A8.5 ].....	19
4.6.2 Test Instruments and Measurement Setup .....	19
4.6.3 Limit of Band-edge Compliance of RF Conducted Emissions .....	19
4.6.4 Measurement Results of Band-edge .....	19
4.6.5 Trace Data.....	20
4.7 Spurious Emissions - Conducted - .....	22
4.7.1 Test Procedure [ FCC 15.247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10 ].....	22
4.7.2 Measurement Setup .....	22
4.7.3 Limit of Spurious Emissions - Conducted - .....	22
4.7.4 Measurement Results of Spurious Emissions - Conducted - .....	22
4.7.5 Trace Data.....	22
4.8 Spurious Emissions - Radiated - (9kHz - 25GHz).....	25
4.8.1 Test Procedure [ FCC 15.205/209/247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10 ] .....	25
4.8.2 Measurement Setup .....	25
4.8.3 Limit of Spurious Emission Measurement .....	26
4.8.4 Sample of field strength calculation.....	26
4.8.5 Measurement Results .....	26
4.9 Restricted Band of Operation.....	35
4.9.1 Test Procedure [ FCC 15.205, 15.209, 15.247(d), IC RSS-210 2.2 ] .....	35
4.9.2 Measurement Setup .....	35
4.9.3 Limit of Restricted Band of Operation .....	35
4.9.4 Measurement Result.....	35
4.9.5 Trace Data.....	36
5. Uncertainty of measurement .....	53
6. Laboratory description.....	54
6.1 Location: .....	54
6.2 Facility filing information: .....	54
Appendix A: Test equipment.....	55

## 1. Summary of Test

### 1.1 Purpose of test

It is the original test in order to verify conformance to standards listed in section 1.2.

### 1.2 Standards

CFR47 FCC Part 15 Subpart C, RSS-210

### 1.3 Summary of test results

Table-A presents the list of the measurement items for Spread Spectrum, Frequency hopping devices under FCC Part 15 Subpart C and Industry Canada RSS-210 Issue 7.

Table-A: List of the measurements

Test Items Section	Test Items	Condition	Result
	Transmit mode [Tx]:		
15.247(a)(1) RSS-210 A8.1(a)	Occupied Bandwidth (20dB Bandwidth)	Conducted	Pass
RSS-Gen 4.6.1	99% Occupied bandwidth	Conducted	Pass
15.247(a)(1) RSS-210 A8.1(b)	Carrier Frequency Separation	Conducted	Pass
15.247(a)(1)(iii) RSS-210 A8.1(d)	Number of Hopping Frequencies	Conducted	Pass
15.247(a)(1)(iii) RSS-210 A8.1(d)	Time of Occupancy (Dwell Time)	Conducted	Pass
15.247(b)(1) 15.31(e) RSS-210 A8.4(2)	Maximum Peak Output Power - Conducted -	Conducted	Pass
15.247(d) RSS-210 A8.5	Band Edge Compliance of RF Conducted Emissions	Conducted	Pass
15.247(d) RSS-210 A8.5 RSS-Gen 4.9, 4.10	Spurious Emissions	Conducted Radiated	Pass
15.247(d) 15.205 15.209 RSS-210 2.2	Restricted Bands of Operation	Radiated	Pass

Note: Conducted Emissions measurement is not applicable because the EUT is powered by dry batteries.

### 1.4 Deviation from the standard

None

### 1.5 Modification to the EUT by laboratory

None

## 2. Equipment description

### 2.1 General Description of equipment

EUT is the Bluetooth Module.

### 2.2 EUT information

Applicant	: NIKON-TRIMBLE CO., LTD. 20, Shin-oyoke, Miya, Zao-machi, Katta-gun, Miyagi, 989-0701 Japan Phone: + 81-224-32-2240 Fax: + 81-224-32-2242		
Equipment under test (EUT)	: Bluetooth Module		
Trade name	: NIKON-TRIMBLE		
Model number	: BTunit03		
Serial number	: N/A		
EUT condition	: Production		
Max. frequency	: BTunit03: 13MHz (Host device: 624MHz)		
Power ratings	: DC 3.3V		
Size	: (W) 25 x (D) 45 x (H) 3.2 mm		
Environment	: Indoor and Outdoor use		
Thermal limitation	: -30°C to 50°C		
Operating mode	: Tx mode / Rx mode		
Host device	: There are Thirteen electrically identical host devices as follows;		
Variation of the family model(s)	<b>Model No.</b>	<b>Brand name</b>	<b>Modification(s) From Nivo<sup>2.C</sup></b>
	Nivo <sup>2.C</sup>	Nikon	-
	Nivo <sup>3.C</sup>	Nikon	telescope, angle precision
	Nivo <sup>5.C</sup>	Nikon	telescope, angle precision
	Nivo <sup>1.C</sup>	Nikon	angle precision, clamping of moving parts
	Trimble M3 DR 2"	Trimble	body-color shape
	Trimble M3 DR 3"	Trimble	telescope, angle precision, body-color shape
	Trimble M3 DR 5"	Trimble	telescope, angle precision, body-color shape
	Trimble M3 DR 5"W	Trimble	telescope, angle precision, body-color shape, lubricating oil
	TS835	Trimble	telescope, angle precision, body-color shape
	TS862	Trimble	body-color Shape
	FOCUS 8 2"	Spectra Precision	body-color shape
	FOCUS 8 5"	Spectra Precision	telescope, angle precision, body-color shape
	FOCUS 8 1"	Spectra Precision	angle precision, body-color shape, clamping of moving parts
[RF Specification]	: Bluetooth		
Protocol	: Bluetooth		
Spread method	: Frequency hopping spread spectrum (FHSS)		
Communication method	: TDD		
Frequency Range	: 2402MHz - 2480MHz		
Number of FR Channels	: 79 Channels		
Modulation Method/Data rate	: GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps)		
Nominal Bit Rates	: 1600hops/s		
Channel Separation	: 1MHz		
Output power	: 0.662mW		
Antenna (Rx and Tx)	: Chip antenna		
Antenna gain	: 2.00dBi		
RF type	: Transceiver		
Intended use	: Data transmission		
RF emission type designator	: 893KF1D (GFSK), 1M19G1D (8-DPSK)		

### 2.3 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## ***2.4 Operating mode***

### **【Tx mode】**

- i) Bluetooth test program set up
- ii) Select a test mode
  - Operating mode: Tx mode
  - Operating frequency: No hopping (CH.0, 39, 78), Hopping
  - Packet type: DH5, 3-DH5
- iii) Start test mode

Note: Tests were performed in DH5 and 3-DH5 which have the maximum bandwidth.

### **【Rx mode】**

- i) Bluetooth test program set up
- ii) Select a test mode
  - Operating mode: Rx mode
  - Operating frequency: No hopping (CH.0, 39, 78), Hopping
  - Packet type: DH5, 3-DH5
- iii) Start test mode

Note: Tests were performed in DH5 and 3-DH5 which have the maximum bandwidth.

### 3. Configuration information


#### 3.1 EUT and Peripheral(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Bluetooth Module	NIKON-TRIMBLE	BTunit03	N/A	FCC ID: W4LNT0003 IC ID: 8170A-NT0003	EUT
2	Total Station	NIKON-TRIMBLE	Nivo <sup>2.C</sup> Nivo <sup>5.C</sup> *	C050301 020211	-	Host device
3	Battery pack	Tripod Data Systems	2908	N/A	-	Accessory
4	Battery pack	Tripod Data Systems	2908	N/A	-	Accessory

\*: Only the radiated test was performed.

#### 3.2 System configuration

[RF Conducted test / RF Radiated test]

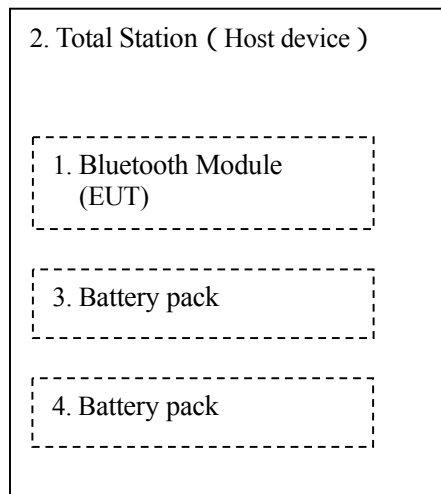

Note1: Numbers assigned to equipment on this diagram are corresponded to the list in “3.1 EUT and Peripheral(s) used”.



## 4. Test Type and Results

### 4.1 20dB Bandwidth / Occupied Bandwidth

#### 4.1.1 Test Procedure [ FCC 15.247(a)(1), IC RSS-210 A8.1(a) ]

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=30kHz, VBW=300kHz, Span=3MHz, Sweep=auto


The EUT was set to operate with following conditions.

- No hopping [ch 0 (low), ch 39 (mid) and ch 78 (high)]

The test mode of EUT is as follows.

- Tx mode

#### 4.1.2 Measurement Setup



#### 4.1.3 Limit of Bandwidth at 20 dB below

None

#### 4.1.4 Measurement Result

Channel	Center Frequency (MHz)	Packet type	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
0	2402.00	DH5	1.032	0.893
		3-DH5	1.322	1.189
39	2441.00	DH5	1.035	0.892
		3-DH5	1.321	1.190
78	2480.00	DH5	1.033	0.892
		3-DH5	1.323	1.191

#### 4.1.5 Trace Data

##### Test Personnel:


Tested by: Taiki Watanabe

Date : Feb. 25, 2010  
 Temperature : 22.0 [°C]  
 Humidity : 65.0 [%]  
 Test place : Shielded room


**20dB Bandwidth/Occupied Bandwidth**

**Channel 0: 2402.0MHz**

**DH5**

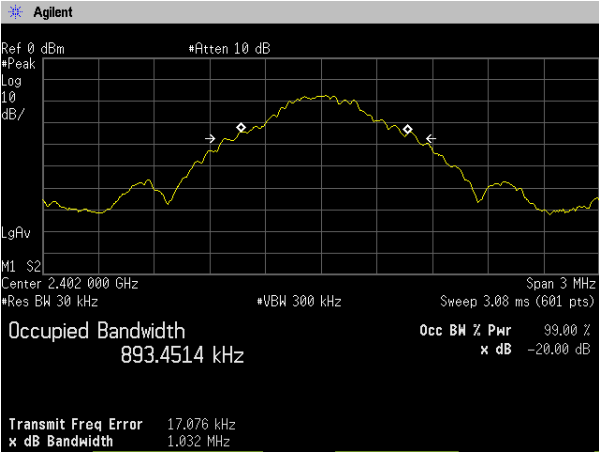


**3-DH5**

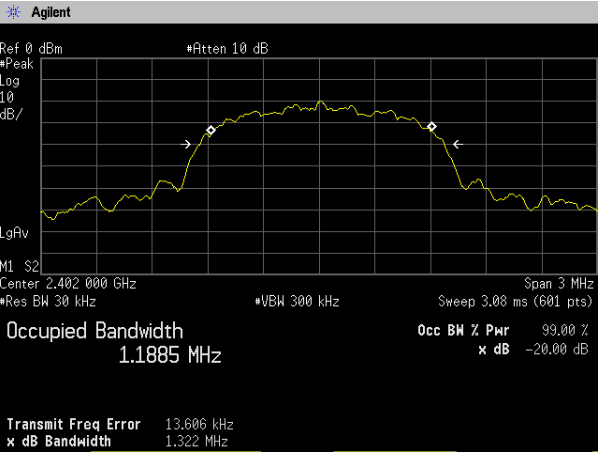


**Channel 39: 2441.0MHz**

**DH5**

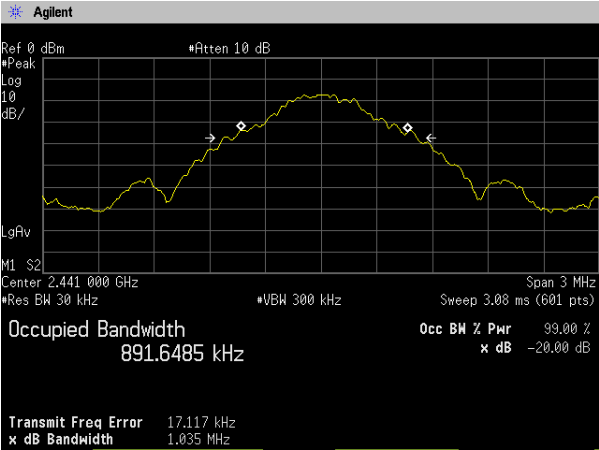


**3-DH5**

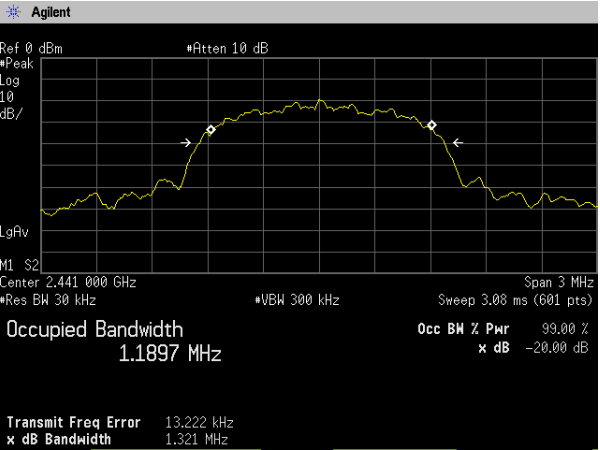


**Channel 78: 2480.0MHz**

**DH5**

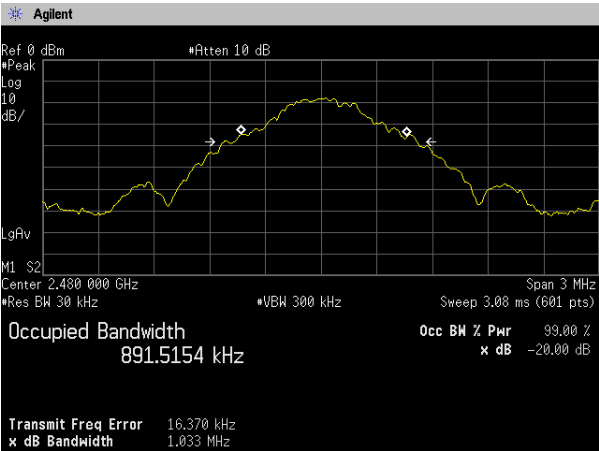

**3-DH5**

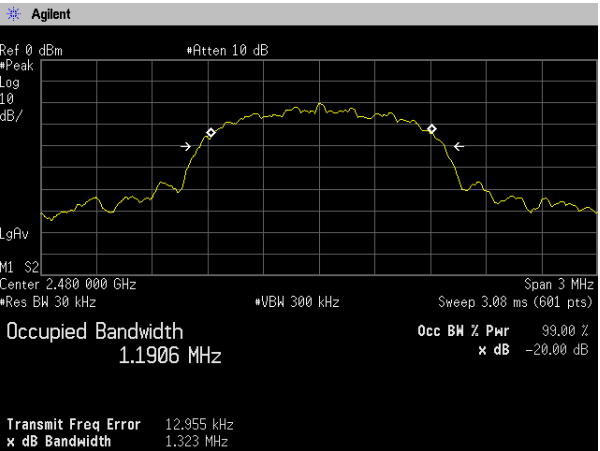

## 4.2 Carrier Frequency Separation

### 4.2.1 Test Procedure [ FCC 15.247(a)(1), IC RSS-210 A8.1(b) ]

The adjacent channel interval is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=30kHz, VBW=30kHz, Span=3MHz, Sweep=auto


The EUT was set to operate with following conditions.

- Hopping [ch 39 (mid)]

The test mode of EUT is as follows.

- Tx mode

### 4.2.2 Measurement Setup



### 4.2.3 Limit of Carrier Frequency Separation

Systems shall have hopping channel carrier frequencies separated by a minimum of; 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 4.2.4 Measurement Result

Packet type	Channel separation (MHz)	Limit (MHz)	Result
DH5	1.01	>two-thirds of the 20dB Bandwidth =690kHz	PASS
3-DH5	1.005	>two-thirds of the 20dB Bandwidth =882kHz	PASS

### 4.2.5 Trace Data

#### Test Personnel:

Tested by:

Taiki Watanabe


Date : Feb. 25, 2009

Temperature : 22.0 [°C]


Humidity : 65.0 [%]

Test place : Shielded room

**Carrier Frequency Separation**  
**Channel 39: 2441.0MHz**  
**DH5**

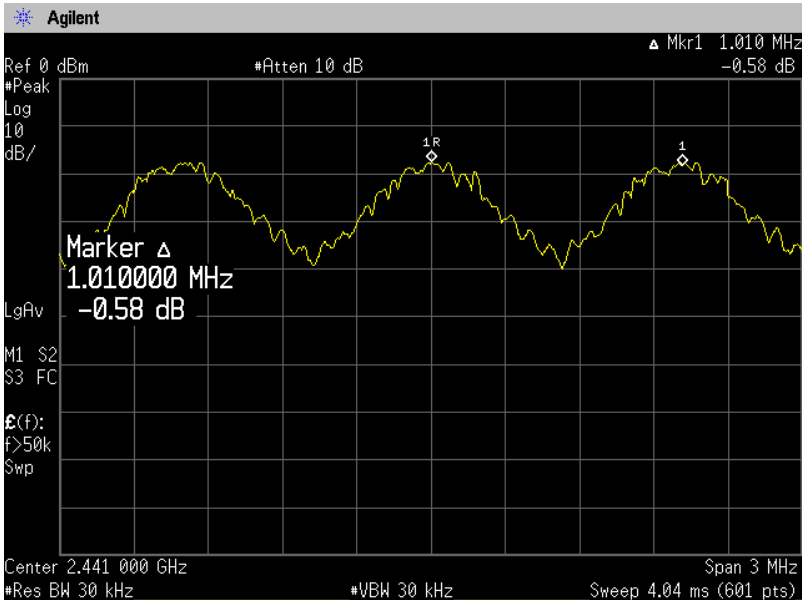

**3-DH5**

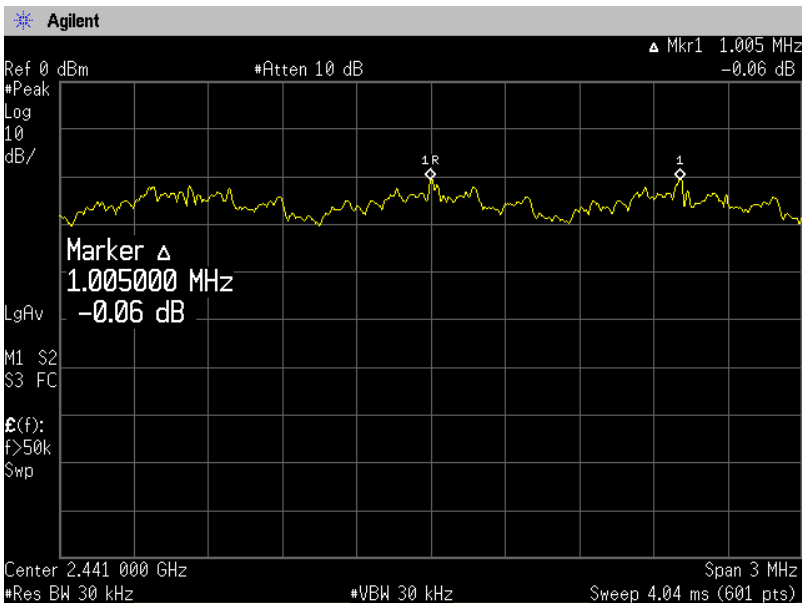

### 4.3 Number of Hopping Frequencies

#### 4.3.1 Test Procedure [ FCC 15.247(a)(1)(iii), IC RSS-210 A8.1(d) ]

The number of hopping channels is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=100kHz, VBW=300kHz, Span=Arbitrary setting, Sweep=auto


The EUT was set to operate with following conditions.

- Hopping

The test mode of EUT is as follows.

- Tx mode

#### 4.3.2 Measurement Setup



#### 4.3.3 Limit of Number of Hopping Frequencies

Shall have more than 15 channels.

#### 4.3.4 Measurement Result

Number of channels	Limit	Result
79	≥15 channel	PASS

#### 4.3.5 Trace Data


##### Test Personnel:

Tested by: Taiki Watanabe


Date : Feb. 25, 2010  
Temperature : 22.0 [°C]  
Humidity : 65.0 [%]  
Test place : Shielded room

**Number of Hopping Frequencies**

**Low**

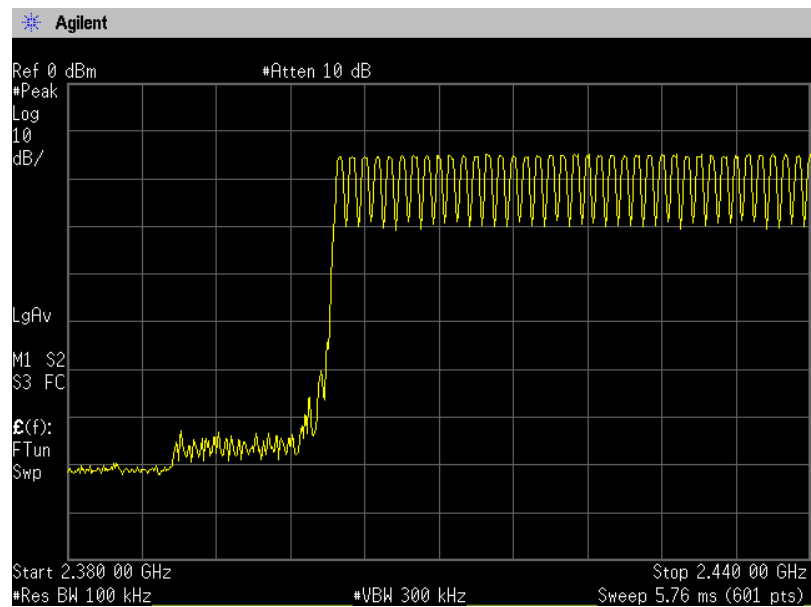

**High**

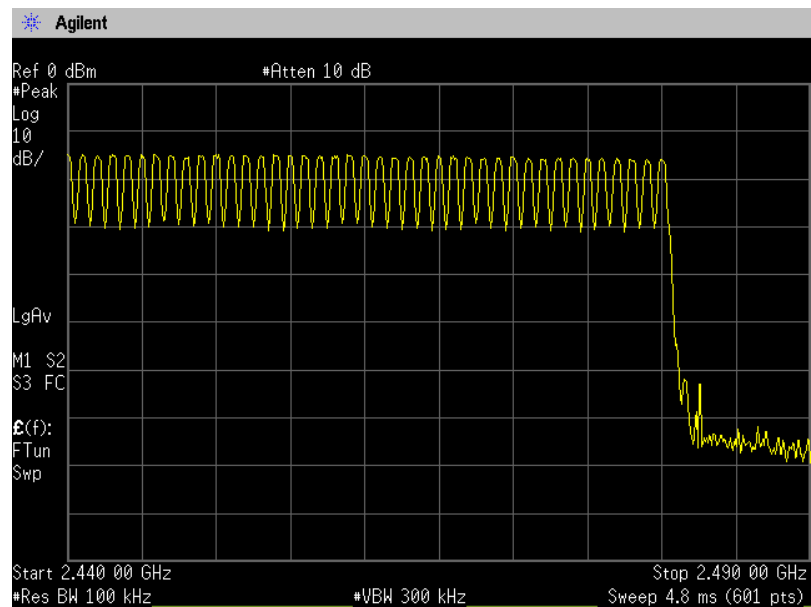

#### 4.4 Time of Occupancy (Dwell Time)

##### 4.4.1 Test Procedure [ FCC 15.247(a)(1)(iii), IC RSS-210 A8.1(d) ]

The time occupancy of hopping channel is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=1MHz, VBW=1MHz, Span=0MHz, Sweep=10ms


The EUT was set to operate with following conditions.

- Hopping [ch 0 (low), ch 39 (mid) and ch 78 (high)]

The test mode of EUT is as follows.

- Tx mode

##### 4.4.2 Measurement Setup



##### 4.4.3 Limit of Time of Occupancy (Dwell Time)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### 4.4.4 Measurement Result

Channel	Frequency (MHz)	Packet type	Dwell time (ms)	Occupancy time of 31.6 seconds (s)	Limit	Result
0	2402.00	DH5	2.900	0.309	<0.4s	PASS
		3-DH5	2.900	0.309	<0.4s	PASS
39	2441.00	DH5	2.883	0.308	<0.4s	PASS
		3-DH5	2.883	0.308	<0.4s	PASS
78	2480.00	DH5	2.900	0.309	<0.4s	PASS
		3-DH5	2.900	0.309	<0.4s	PASS

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

Calculation:

Occupancy time of 31.6 seconds \* = time domain slot length x hop rate / number of hopper channel / 79 x 31.6

EX.) For Ch. 0, DH5 = 2.900 ms x 1600 / 6 / 79 x 31.6 = 309ms

##### 4.4.5 Trace Data


###### Test Personnel:

Tested by: Taiki Watanabe


Date : Feb. 25, 2010  
Temperature : 22.0 [°C]  
Humidity : 65.0 [%]  
Test place : Shielded room

**Dwell Time**


**Channel 0: 2402.0MHz**  
**DH5**

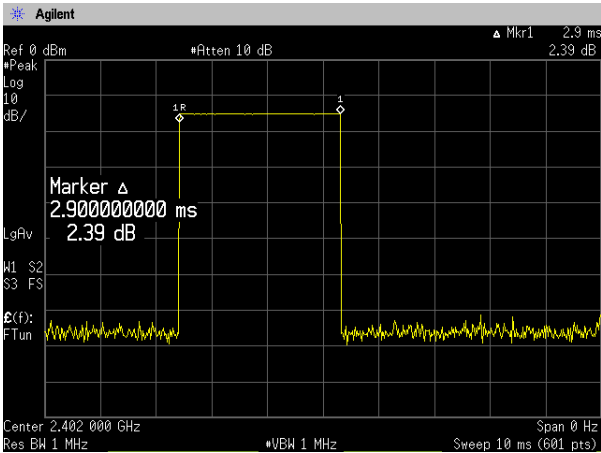


**3-DH5**

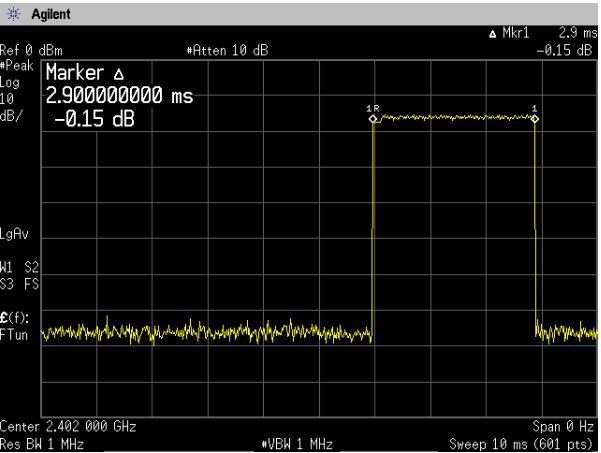


**Channel 39: 2441.0MHz**  
**DH5**

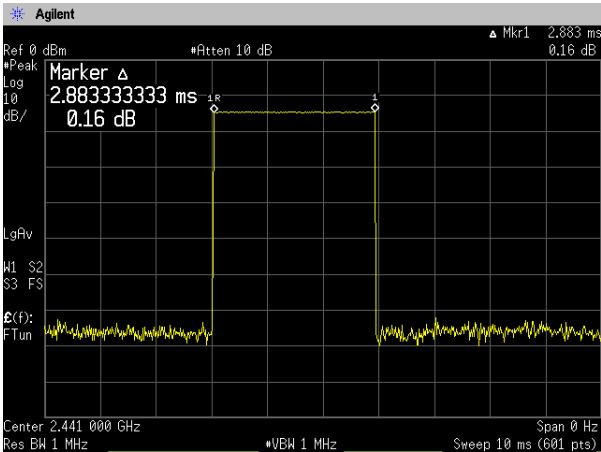


**3-DH5**

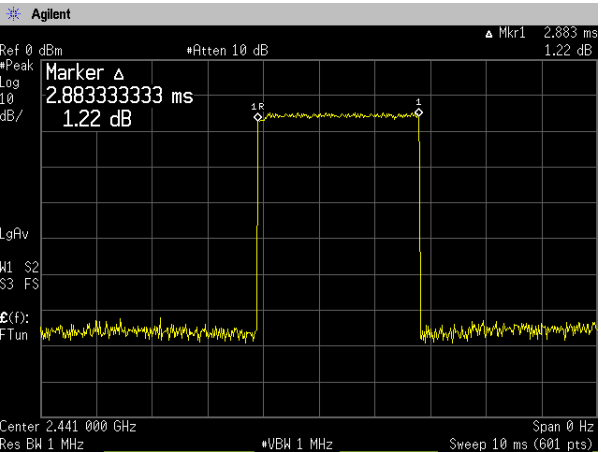

**Channel 78: 2480.0MHz**  
**DH5**

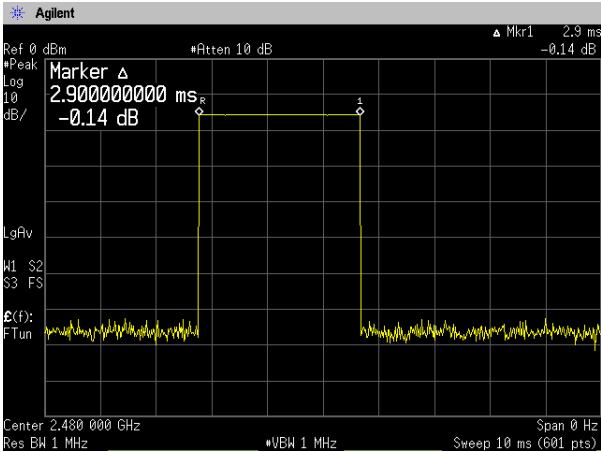

**3-DH5**

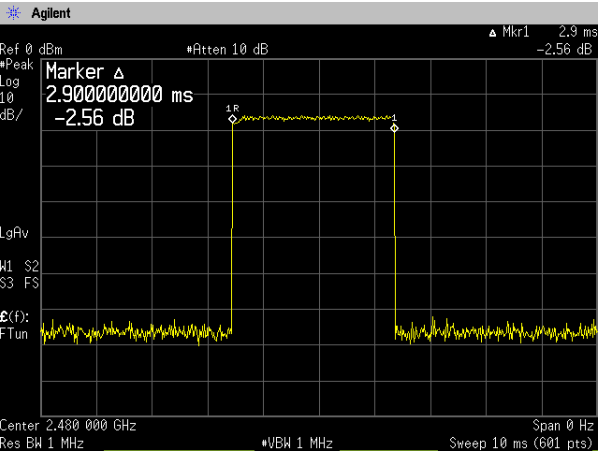



#### 4.5 Maximum Peak Output Power - Conducted -

##### 4.5.1 Test Procedure [ FCC 15.247(b)(1), 15.31(e), IC RSS-210 A8.4(2) ]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=3MHz, VBW=3MHz, Span=10MHz, Sweep=auto


The EUT was set to operate with following conditions.

- No hopping [ch 0 (low), ch 39 (mid) and ch 78 (high)]

The test mode of EUT is as follows.

- Tx mode in Battery operation. (Full charge)

##### 4.5.2 Test Instruments and Measurement Setup



##### 4.5.3 Limit of Maximum Peak Output Power

0.125 watt or less.

##### 4.5.4 Measurement Result

[Tx mode in Battery operation. (Full charge)]

Channel	Center Frequency (MHz)	Packet type	Reading (dBm)	Factor (dB)	Antenna Gain (dBi)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
0	2402.00	DH5	-14.81	10.20	2.00	-2.61	0.548	≤ 125	PASS
		3-DH5	-14.43	10.20	2.00	-2.23	0.598	≤ 125	PASS
39	2441.00	DH5	-14.32	10.20	2.00	-2.12	0.614	≤ 125	PASS
		3-DH5	-13.99	10.20	2.00	-1.79	0.662	≤ 125	PASS
78	2480.00	DH5	-15.31	10.20	2.00	-3.11	0.489	≤ 125	PASS
		3-DH5	-14.91	10.20	2.00	-2.71	0.536	≤ 125	PASS

Calculation:

Reading (dBm) + Factor (dB) + Antenna Gain of EUT (dBi) = Level (dBm)

$10\log P = \text{Level (dBm)}$

$P = 10^{(\text{Maximum Peak Output Power (dBm)} / 10)} (\text{mW})$

##### 4.5.5 Trace Data

###### Test Personnel:

Tested by:

Taiki Watanabe

Date : Feb. 25, 2010

Temperature : 22.0 [°C]


Humidity : 65.0 [%]

Test place : Shielded room


**Maximum Peak Output Power - Conducted -**

**[Battery operation Full charge]**


**Channel 0: 2402.0MHz**  
**DH5**

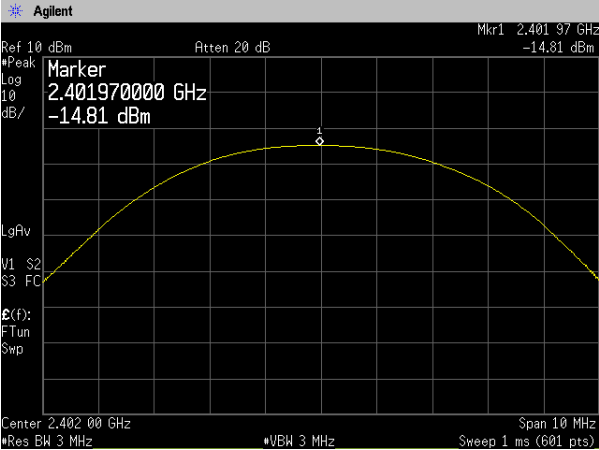


**3-DH5**

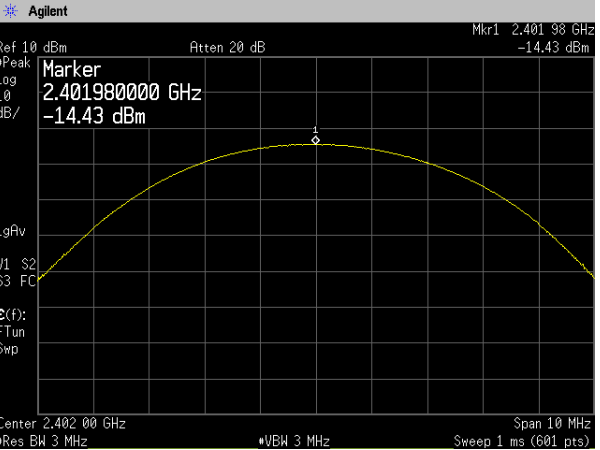


**Channel 39: 2441.0MHz**  
**DH5**

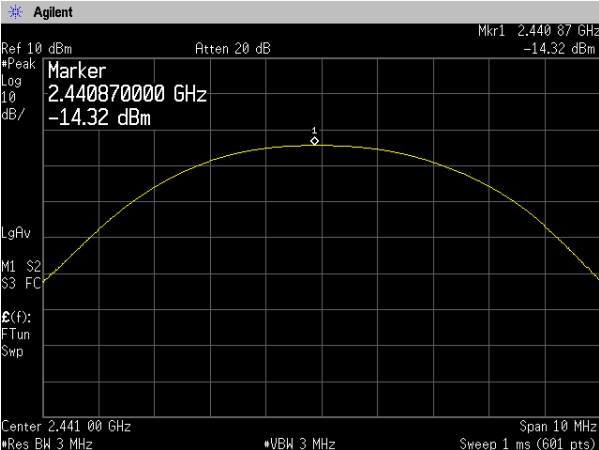


**3-DH5**

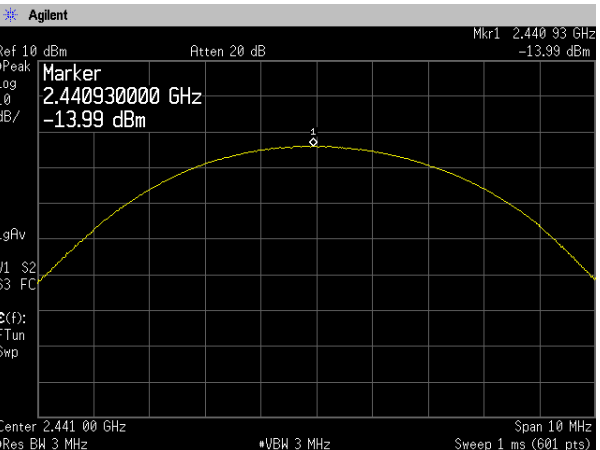

**Channel 78: 2480.0MHz**  
**DH5**

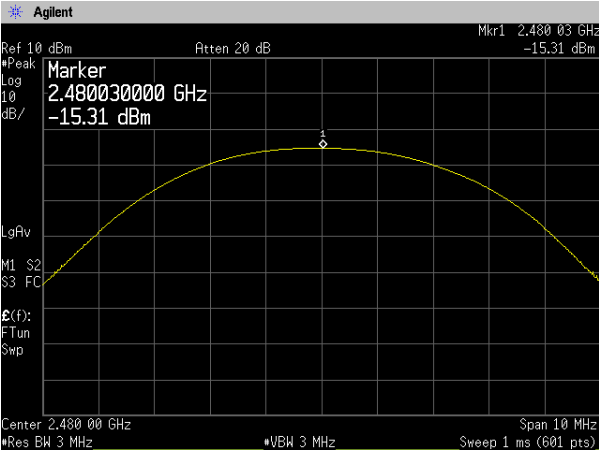

**3-DH5**

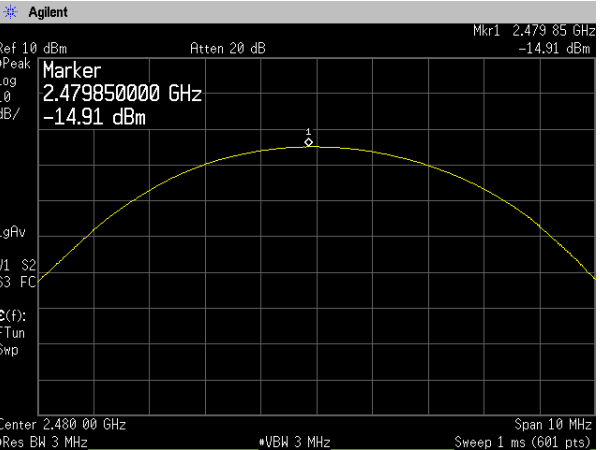

#### 4.6 Band Edge Compliance of RF Conducted Emissions

##### 4.6.1 Test Procedure [ FCC 15.247 (d), IC RSS-210 A8.5 ]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to :

- RBW=100kHz, VBW=100kHz, Span=15MHz, Sweep=Auto

The EUT was set to operate with following conditions.

- Hopping [ch 0 (low) and ch 78 (high)]


- No hopping [ch 0 (low) and ch 78 (high)]

The test mode of EUT is as follows.

- Tx mode (Hopping)

- Tx mode (No hopping)

##### 4.6.2 Test Instruments and Measurement Setup



##### 4.6.3 Limit of Band-edge Compliance of RF Conducted Emissions

In any 100KHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power.

##### 4.6.4 Measurement Results of Band-edge

[Tx mode (Hopping)]

Channel	Frequency (MHz)	Packet type	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
0	2402.00	DH5	-15.44	2400.55	-60.71	45.27	At least 20dB below from peak of RF	PASS
		3-DH5	-19.71	2395.50	-70.21	50.50		PASS
78	2480.00	DH5	-15.84	2481.52	-61.60	45.76		PASS
		3-DH5	-18.45	2482.70	-68.39	49.94		PASS

[Tx mode (No hopping)]

Channel	Frequency (MHz)	Packet type	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
0	2402.00	DH5	-15.20	2399.42	-62.62	47.42	At least 20dB below from peak of RF	PASS
		3-DH5	-17.71	2399.42	-64.90	47.19		PASS
78	2480.00	DH5	-15.74	2481.50	-60.61	44.87		PASS
		3-DH5	-18.19	2482.60	-65.74	47.55		PASS

4.6.5 Trace Data


Test Personnel:

Tested by: Taiki Watanabe


Date : Feb. 25, 2010  
Temperature : 22.0 [°C]  
Humidity : 65.0 [%]  
Test place : Shielded room

Band Edge Compliance of RF Conducted Emissions


[Tx mode (Hopping)]  
Channel 0: 2402.0MHz  
DH5

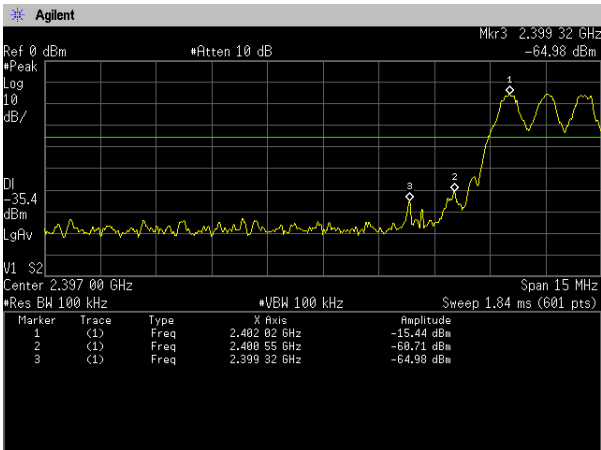


3-DH5

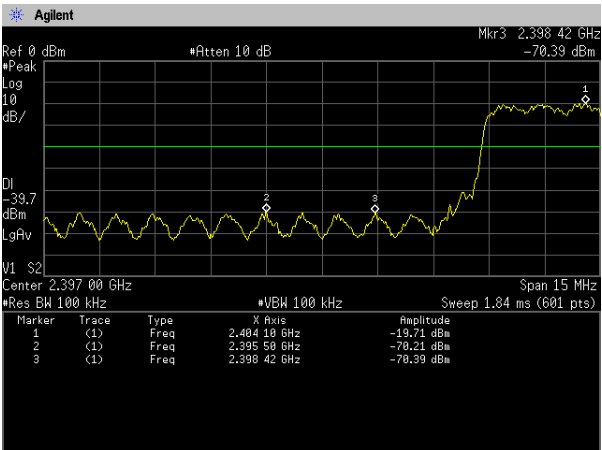

Channel 78: 2480.0MHz  
DH5

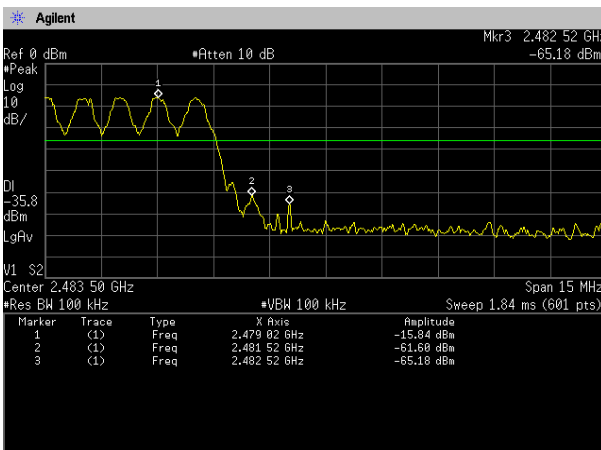

3-DH5

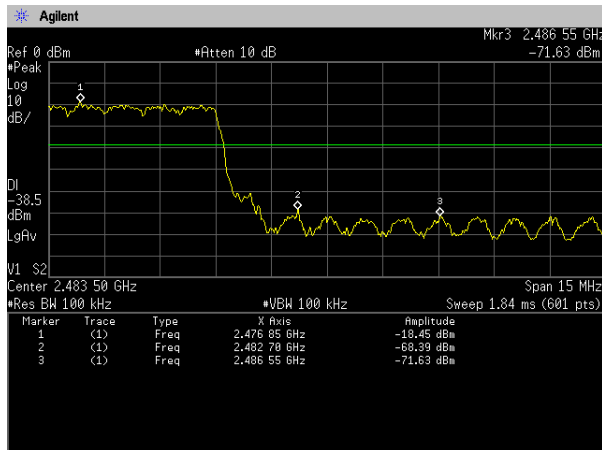


**Band Edge Compliance of RF Conducted Emissions**


[Tx mode (No hopping)]

Channel 0: 2402.0MHz

DH5

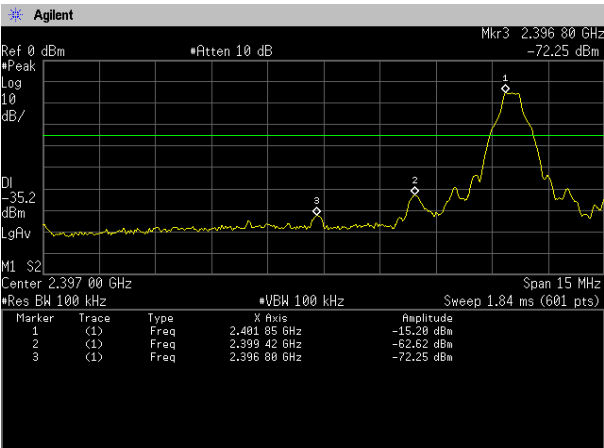


3-DH5

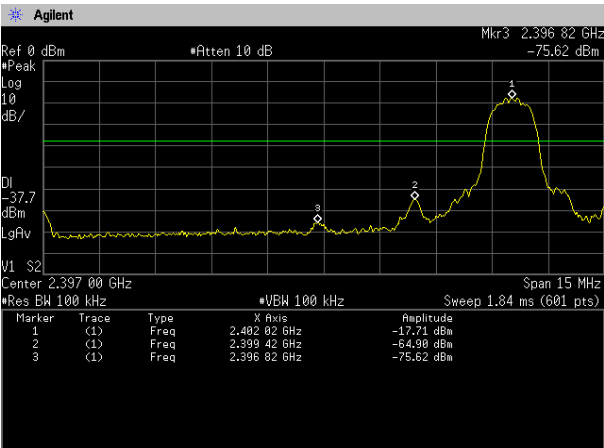


Channel 78: 2480.0MHz

DH5

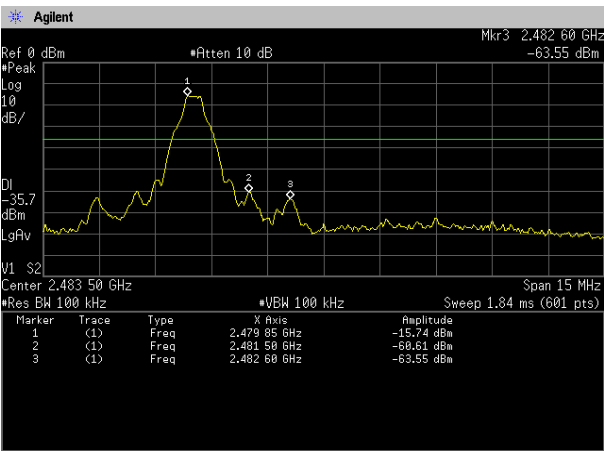

3-DH5

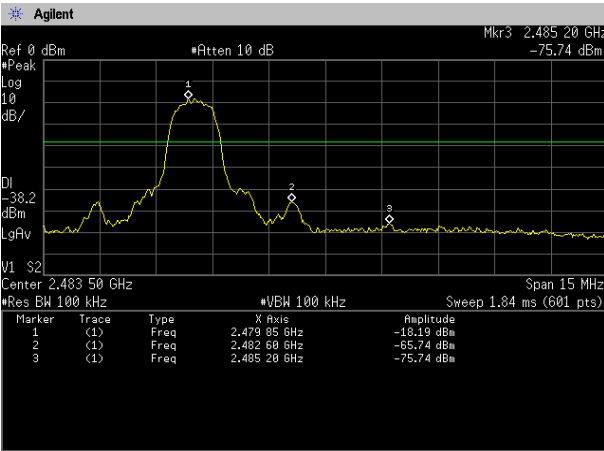

#### 4.7 Spurious Emissions - Conducted -

##### 4.7.1 Test Procedure [ FCC 15.247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10 ]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=100kHz, VBW=300kHz, Span=Arbitrary setting, Sweep=Auto


The EUT was set to operate with following conditions.

- No hopping [ch 0 (low), ch 39 (mid) and ch 78 (high)]

The test mode of EUT is as follows.

- Tx mode

##### 4.7.2 Measurement Setup



##### 4.7.3 Limit of Spurious Emissions - Conducted -

In any 100KHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power.

##### 4.7.4 Measurement Results of Spurious Emissions - Conducted -

Channel	Frequency [MHz]	Limit [dBm]	Results Chart	PASS / FAIL
0	2402.0	At least 20dB below from peak of RF.	See the Trace Data	PASS
39	2441.0	At least 20dB below from peak of RF.	See the Trace Data	PASS
78	2480.0	At least 20dB below from peak of RF.	See the Trace Data	PASS

##### 4.7.5 Trace Data

###### Test Personnel:

Tested by: Taiki Watanabe


Date : Feb. 25, 2010  
 Temperature : 22.0 [°C]  
 Humidity : 65.0 [%]  
 Test place : Shielded room

**Spurious Emissions - Conducted -**


**DH5**

**Channel 0: 2402.0MHz**

**30MHz-3GHz**

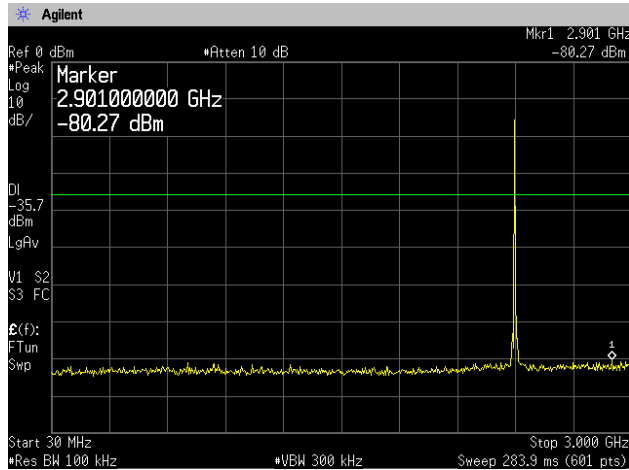


**3GHz-26.5GHz**

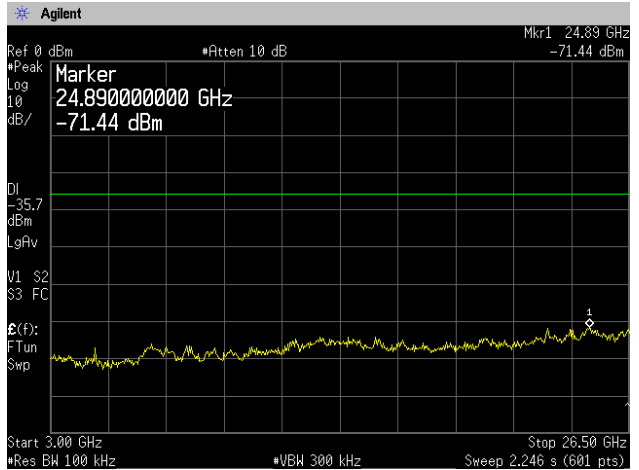


**Channel 39: 2441.0MHz**

**30MHz-3GHz**

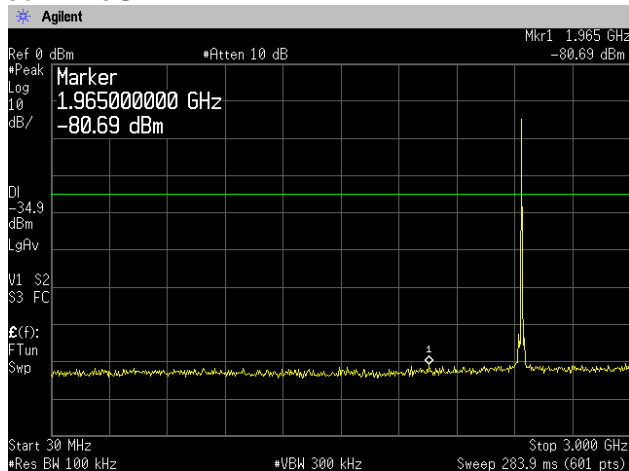


**3GHz-26.5GHz**

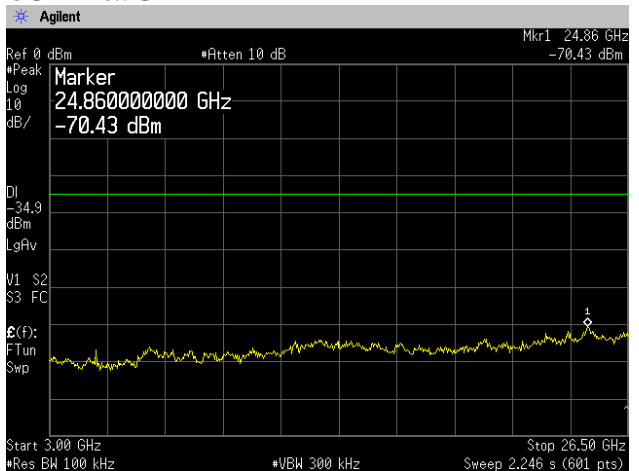


**Channel 78: 2480.0MHz**

**30MHz-3GHz**

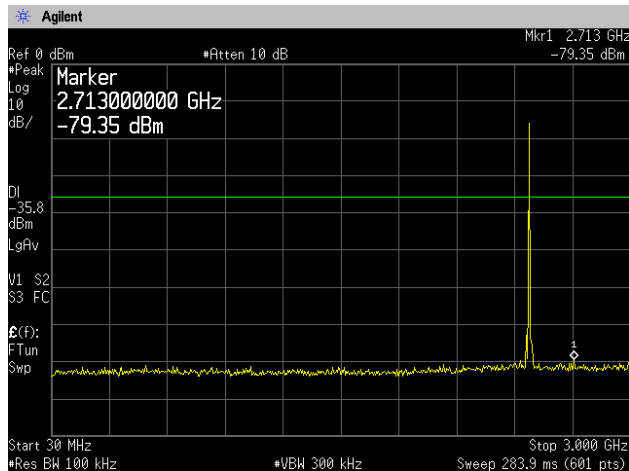

**3GHz-26.5GHz**

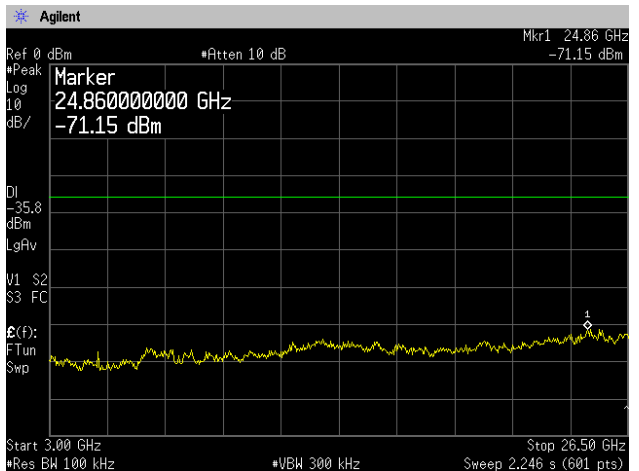


**Spurious Emissions - Conducted -**


**3-DH5**

**Channel 0: 2402.0MHz**

**30MHz-3GHz**

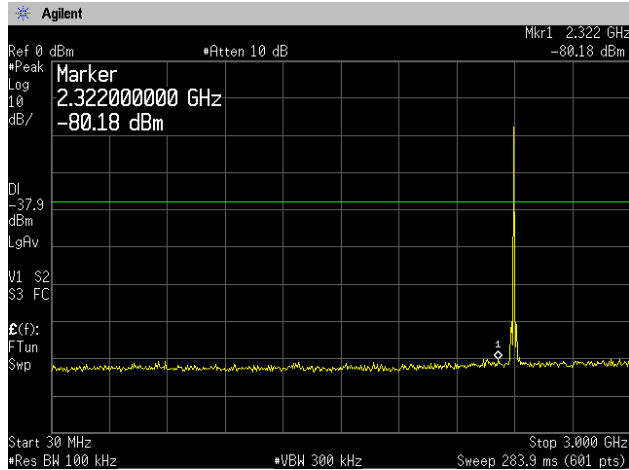


**3GHz-26.5GHz**

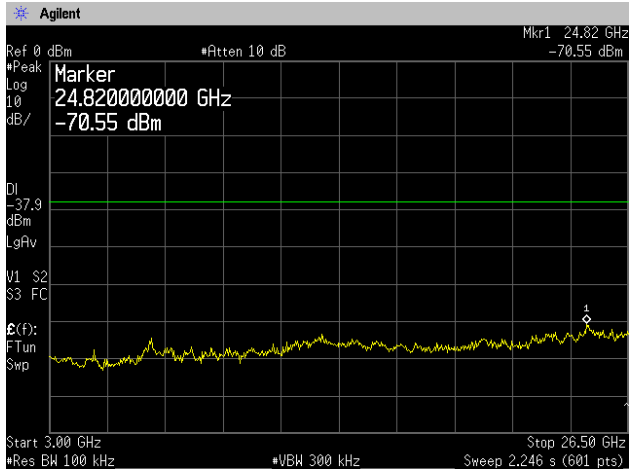


**Channel 39: 2441.0MHz**

**30MHz-3GHz**

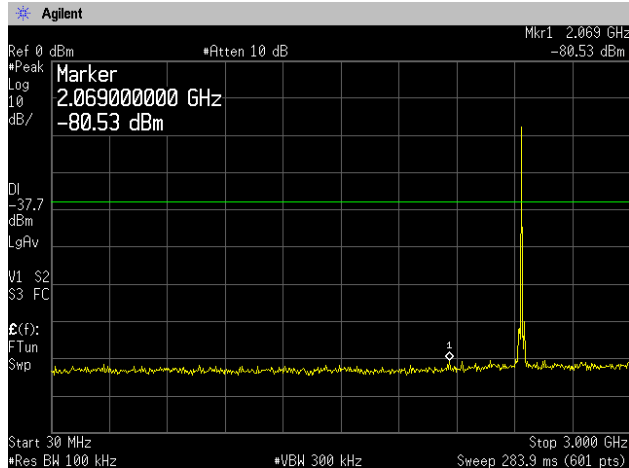


**3GHz-26.5GHz**

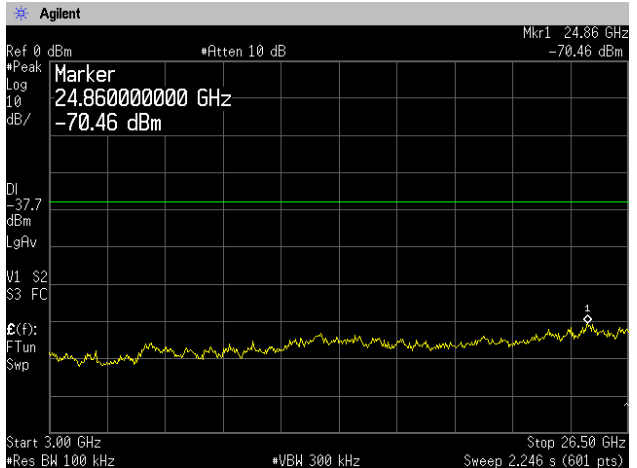


**Channel 78: 2480.0MHz**

**30MHz-3GHz**

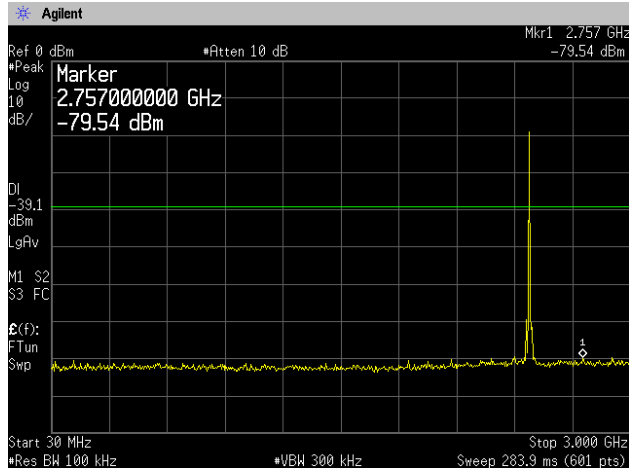

**3GHz-26.5GHz**

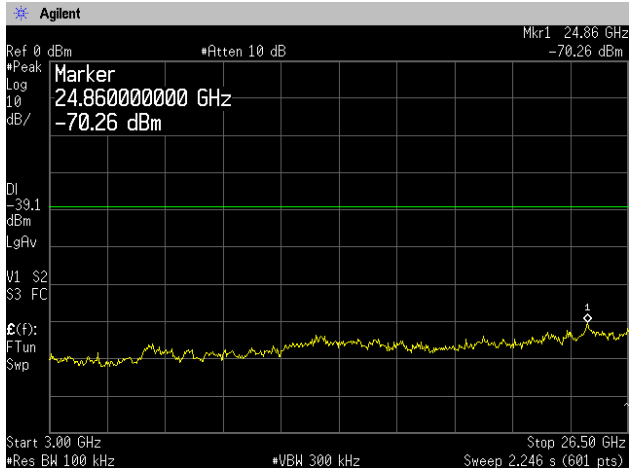



## 4.8 Spurious Emissions - Radiated - (9kHz - 25GHz)

### 4.8.1 Test Procedure [ FCC 15.205/209/247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10 ]

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, TRILOG antenna, and double-ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop is 1.0meter above the ground plane. Frequency Range: 9kHz –1GHz is scanned and investigated with the test receiver, and above 1GHz, with the spectrum analyzer. The detector function of the test receiver is set to CISPR Quasi-peak mode and the bandwidth is set to 120kHz. Peak and average detectors are used for measurements above 1GHz. The bandwidth of the spectrum analyzer is set to 1MHz.

The EUT and support equipment are placed on a 1meter x 2meter surface, 0.8meter height FRP table. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

Interconnecting cables, which hanging closer than 40cm to the horizontal metal ground plane are bundled its excess in center. The highest fundamental frequency generated in the EUT is 2402-2480MHz, therefore the frequency was investigated up to 25GHz, as specified in CFR section 15.33, and at least six highest emissions are reported. The test results represent the worst-case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation.

Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

The spectrum analyzer is set to:

- Peak: RBW=1MHz, VBW=1MHz, Span=0Hz, Sweep=auto
- Average: RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto

The EUT was set to operate with following conditions.


- No hopping [ch 0 (low), ch 39 (mid), ch 78 (high)]

The test mode of EUT is as follows.

- Tx mode, Rx mode

### 4.8.2 Measurement Setup

#### Test configuration for Spurious emissions

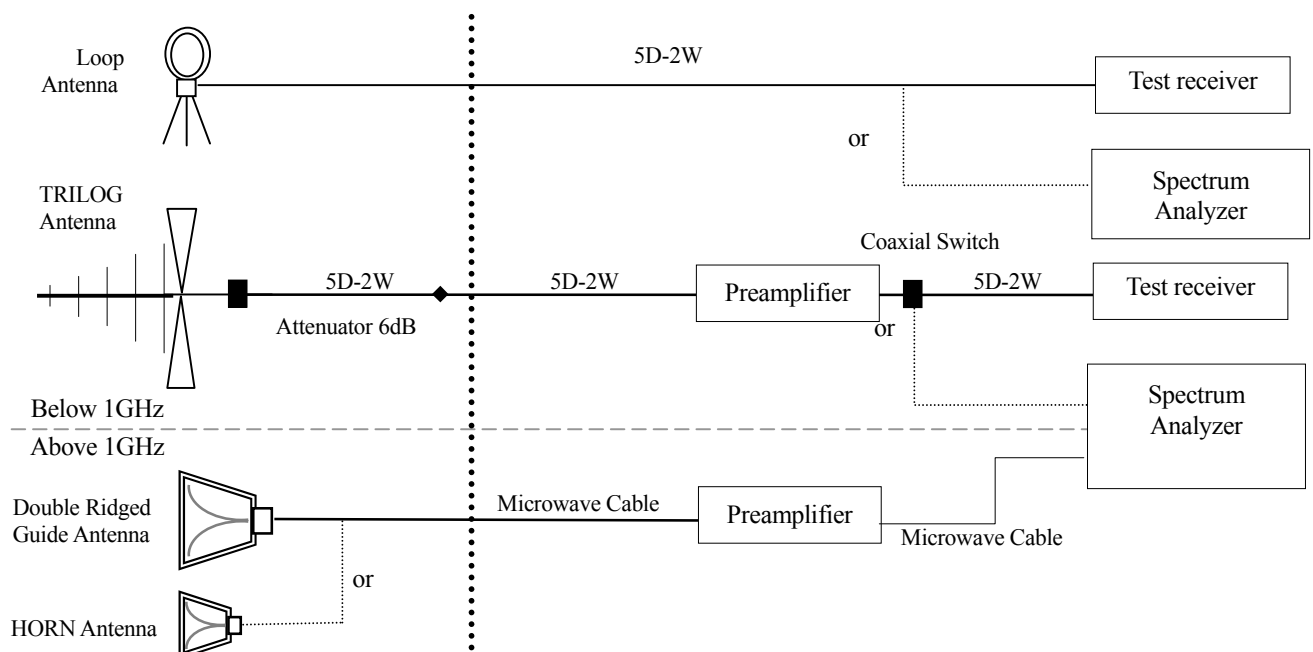

### 4.8.3 Limit of Spurious Emission Measurement

Frequency [MHz]	Field Strength	
	[uV/m]	[dBuV/m]
0.009 – 0.490	2400 / F [kHz]	20logE [uV/m]
0.490 – 1.705	24000 / F [kHz]	20logE [uV/m]
1.705-30	30	29.5
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20 log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 4.8.4 Sample of field strength calculation

$$\text{Spurious Emission} \quad \boxed{\text{dB}\mu\text{V/m} = 20\log_{10}(\mu\text{V/m})}$$

Limit @147.6MHz = 150μV/m = 43.5dBμV/m
Reading = 42.8dBμV
Ant. Factor + Cable Loss - Amp. Gain = 14.2 + 3.0 - 30.0 = -12.8dB
Total = 42.8 - 12.8 = 30.0dBμV/m
Margin = 43.5 - 30.0 = <u>13.5dB</u>

### 4.8.5 Measurement Results

#### Test Personnel:

Tested by: Hiroaki Suzuki

Date : Mar. 1, 2010  
Temperature : 24.2 [°C]  
Humidity : 55.0 [%]  
Test place : 3m Semi-anechoic chamber

#### Test Personnel:

Tested by: Hiroaki Suzuki

Date : Mar. 2, 2010  
Temperature : 22.2 [°C]  
Humidity : 57.0 [%]  
Test place : 3m Semi-anechoic chamber

#### Test Personnel:

Tested by: Hiroaki Suzuki

Date : Mar. 3, 2010  
Temperature : 21.1 [°C]  
Humidity : 55.8 [%]  
Test place : 3m Semi-anechoic chamber

**Spurious Emissions - Radiated- Host device: Nivo<sup>2.C</sup>**

**DH5**

**Tx Channel 0: 2402.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.439	H	26.4	-8.3	18.1	43.5	25.4	179.0	3.0
2	283.912	V	24.7	-8.1	16.6	46.0	29.4	192.0	0.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4804.000	H		44.0	2.8		46.8	74.0		27.2	100.0	260.0
2	4804.000	H	36.0		2.8	38.8		54.0	15.2		100.0	260.0
3	4804.000	V		43.6	2.8		46.4	74.0		27.6	100.0	253.0
4	4804.000	V	35.7		2.8	38.5		54.0	15.5		100.0	253.0
5	7206.000	H		41.8	6.6		48.4	74.0		25.6	100.0	279.0
6	7206.000	H	34.4		6.6	41.0		54.0	13.0		100.0	279.0
7	7206.000	V		42.2	6.6		48.8	74.0		25.2	100.0	286.0
8	7206.000	V	34.5		6.6	41.1		54.0	12.9		100.0	286.0

**Tx Channel 39: 2441.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.458	H	26.3	-8.3	18.0	43.5	25.5	184.0	0.0
2	283.912	V	24.7	-8.1	16.6	46.0	29.4	192.0	0.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4882.000	H		45.1	3.0		48.1	74.0		25.9	102.0	241.0
2	4882.000	H	37.5		3.0	40.5		54.0	13.5		102.0	241.0
3	4882.000	V		43.9	3.0		46.9	74.0		27.1	106.0	276.0
4	4882.000	V	35.6		3.0	38.6		54.0	15.4		106.0	276.0
5	7323.000	H		41.4	7.3		48.7	74.0		25.3	100.0	298.0
6	7323.000	H	34.2		7.3	41.5		54.0	12.5		100.0	298.0
7	7323.000	V		42.0	7.3		49.3	74.0		24.7	100.0	289.0
8	7323.000	V	34.2		7.3	41.5		54.0	12.5		100.0	289.0

**Tx Channel 78: 2480.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.458	H	26.6	-8.3	18.3	43.5	25.2	184.0	22.0
2	283.915	V	24.7	-8.1	16.6	46.0	29.4	186.0	0.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4960.000	H		45.1	3.1		48.2	74.0		25.8	100.0	254.0
2	4960.000	H	37.6		3.1	40.7		54.0	13.3		100.0	254.0
3	4960.000	V		42.4	3.1		45.5	74.0		28.5	100.0	281.0
4	4960.000	V	34.7		3.1	37.8		54.0	16.2		100.0	281.0
5	7440.000	H		42.0	7.4		49.4	74.0		24.6	100.0	295.0
6	7440.000	H	34.5		7.4	41.9		54.0	12.1		100.0	295.0
7	7440.000	V		42.4	7.4		49.8	74.0		24.2	100.0	287.0
8	7440.000	V	34.5		7.4	41.9		54.0	12.1		100.0	287.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

**Spurious Emissions - Radiated - Host device: Nivo<sup>2C</sup>**

**3-DH5**

**Tx Channel 0: 2402.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP		QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.478	H	26.5	-8.3	18.2	43.5	25.3	196.0	15.0
2	304.420	V	25.3	-7.6	17.7	46.0	28.3	185.0	0.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Margin	Margin	Height	Angle
	[MHz]		AV	PK		AV	PK		AV	PK		
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4804.000	H		43.7	2.8		46.5	74.0		27.5	103.0	261.0
2	4804.000	H	36.0		2.8	38.8		54.0	15.2		103.0	261.0
3	4804.000	V		43.2	2.8		46.0	74.0		28.0	100.0	272.0
4	4804.000	V	35.2		2.8	38.0		54.0	16.0		100.0	272.0
5	7206.000	H		41.9	6.6		48.5	74.0		25.5	100.0	295.0
6	7206.000	H	34.4		6.6	41.0		54.0	13.0		100.0	295.0
7	7206.000	V		42.4	6.6		49.0	74.0		25.0	100.0	286.0
8	7206.000	V	34.4		6.6	41.0		54.0	13.0		100.0	286.0

**Tx Channel 39: 2441.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP		QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.478	H	26.4	-8.3	18.1	43.5	25.4	206.0	14.0
2	304.420	V	25.4	-7.6	17.8	46.0	28.2	185.0	0.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Margin	Margin	Height	Angle
	[MHz]		AV	PK		AV	PK		AV	PK		
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4882.000	H		45.1	3.0		48.1	74.0		25.9	100.0	258.0
2	4882.000	H	37.4		3.0	40.4		54.0	13.6		100.0	258.0
3	4882.000	V		43.2	3.0		46.2	74.0		27.8	105.0	269.0
4	4882.000	V	35.2		3.0	38.2		54.0	15.8		105.0	269.0
5	7323.000	H		42.3	7.3		49.6	74.0		24.4	100.0	293.0
6	7323.000	H	34.4		7.3	41.7		54.0	12.3		100.0	293.0
7	7323.000	V		41.4	7.3		48.7	74.0		25.3	100.0	286.0
8	7323.000	V	34.2		7.3	41.5		54.0	12.5		100.0	286.0

**Tx Channel 78: 2480.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP		QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.478	H	26.3	-8.3	18.0	43.5	25.5	206.0	14.0
2	304.417	V	25.5	-7.6	17.9	46.0	28.1	197.0	0.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Margin	Margin	Height	Angle
	[MHz]		AV	PK		AV	PK		AV	PK		
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4960.000	H		44.5	3.1		47.6	74.0		26.4	100.0	248.0
2	4960.000	H	37.0		3.1	40.1		54.0	13.9		100.0	248.0
3	4960.000	V		42.4	3.1		45.5	74.0		28.5	105.0	271.0
4	4960.000	V	34.5		3.1	37.6		54.0	16.4		105.0	271.0
5	7440.000	H		42.9	7.4		50.3	74.0		23.7	100.0	297.0
6	7440.000	H	34.5		7.4	41.9		54.0	12.1		100.0	297.0
7	7440.000	V		42.0	7.4		49.4	74.0		24.6	100.0	284.0
8	7440.000	V	34.5		7.4	41.9		54.0	12.1		100.0	284.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

**Spurious Emissions - Radiated - Host device: Nivo<sup>2.C</sup>**

**DH5**

**Rx Channel 0: 2402.0MHz**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	165.521	H	26.1	-8.4	17.7	43.5	25.8	193.0	20.0
2	230.288	V	26.1	-10.1	16.0	46.0	30.0	100.0	327.0

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1	4802.000	H		44.1	2.8		46.9	74.0		27.1	104.0	256.0
2	4802.000	H	37.0		2.8	39.8		54.0	14.2		104.0	256.0
3	4802.000	V		42.6	2.8		45.4	74.0		28.6	100.0	271.0
4	4802.000	V	35.3		2.8	38.1		54.0	15.9		100.0	271.0

**Rx Channel 39: 2441.0MHz**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	165.521	H	26.1	-8.4	17.7	43.5	25.8	196.0	19.0
2	230.291	V	26.2	-10.1	16.1	46.0	29.9	100.0	327.0

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1	4880.000	H		44.2	3.0		47.2	74.0		26.8	102.0	241.0
2	4880.000	H	37.9		3.0	40.9		54.0	13.1		102.0	241.0
3	4880.000	V		41.1	3.0		44.1	74.0		29.9	100.0	272.0
4	4880.000	V	34.0		3.0	37.0		54.0	17.0		100.0	272.0

**Rx Channel 78: 2480.0MHz**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	165.521	H	26.0	-8.4	17.6	43.5	25.9	196.0	19.0
2	230.291	V	26.3	-10.1	16.2	46.0	29.8	100.0	343.0

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1	4958.000	H		45.7	3.1		48.8	74.0		25.2	100.0	252.0
2	4958.000	H	38.3		3.1	41.4		54.0	12.6		100.0	252.0
3	4958.000	V		42.2	3.1		45.3	74.0		28.7	100.0	282.0
4	4958.000	V	34.4		3.1	37.5		54.0	16.5		100.0	282.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

**Spurious Emissions - Radiated – Host device: Nivo<sup>2.C</sup>**

**3-DH5**

**Rx Channel 0: 2402.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP		QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.524	H	26.0	-8.4	17.6	43.5	25.9	187.0	17.0
2	230.291	V	26.3	-10.1	16.2	46.0	29.8	100.0	343.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Margin	Margin	Height	Angle
			AV	PK		AV	PK		AV	PK		
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4802.000	H		43.8	2.8		46.6	74.0		27.4	100.0	256.0
2	4802.000	H	36.7		2.8	39.5		54.0	14.5		100.0	256.0
3	4802.000	V		41.8	2.8		44.6	74.0		29.4	100.0	290.0
4	4802.000	V	34.5		2.8	37.3		54.0	16.7		100.0	290.0

**Rx Channel 39: 2441.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
			QP		QP		QP		
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.530	H	26.0	-8.4	17.6	43.5	25.9	187.0	17.0
2	230.296	V	26.3	-10.1	16.2	46.0	29.8	100.0	350.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Margin	Margin	Height	Angle
			AV	PK		AV	PK		AV	PK		
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4880.000	H		44.9	3.0		47.9	74.0		26.1	100.0	256.0
2	4880.000	H	38.2		3.0	41.2		54.0	12.8		100.0	256.0
3	4880.000	V		41.4	3.0		44.4	74.0		29.6	100.0	276.0
4	4880.000	V	34.2		3.0	37.2		54.0	16.8		100.0	276.0

**Rx Channel 78: 2480.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
			QP		QP		QP		
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	165.523	H	26.1	-8.4	17.7	43.5	25.8	187.0	16.0
2	230.290	V	26.3	-10.1	16.2	46.0	29.8	100.0	350.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Margin	Margin	Height	Angle
			AV	PK		AV	PK		AV	PK		
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4958.000	H		44.8	3.1		47.9	74.0		26.1	100.0	255.0
2	4958.000	H	38.2		3.1	41.3		54.0	12.7		100.0	255.0
3	4958.000	V		42.6	3.1		45.7	74.0		28.3	100.0	281.0
4	4958.000	V	35.0		3.1	38.1		54.0	15.9		100.0	281.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**Spurious Emissions - Radiated- Host device: Nivo<sup>5.C</sup>**

**DH5**

**Tx Channel 0: 2402.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	215.444	H	31.9	-10.7	21.2	43.5	22.3	140.0	274.0
2	235.238	H	33.4	-9.9	23.5	46.0	22.5	100.0	77.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4804.000	H		44.1	2.8		46.9	74.0		27.1	104.0	243.0
2	4804.000	H	36.4		2.8	39.2		54.0	14.8		104.0	243.0
3	4804.000	V		42.1	2.8		44.9	74.0		29.1	100.0	255.0
4	4804.000	V	34.9		2.8	37.7		54.0	16.3		100.0	255.0
5	7206.000	H		41.8	6.6		48.4	74.0		25.6	102.0	251.0
6	7206.000	H	34.4		6.6	41.0		54.0	13.0		102.0	251.0
7	7206.000	V		42.7	6.6		49.3	74.0		24.7	113.0	264.0
8	7206.000	V	35.0		6.6	41.6		54.0	12.4		113.0	264.0

**Tx Channel 39: 2441.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	215.444	H	32.0	-10.7	21.3	43.5	22.2	100.0	272.0
2	235.238	H	33.4	-9.9	23.5	46.0	22.5	100.0	77.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4882.000	H		44.0	3.0		47.0	74.0		27.0	100.0	236.0
2	4882.000	H	36.7		3.0	39.7		54.0	14.3		100.0	236.0
3	4882.000	V		42.6	3.0		45.6	74.0		28.4	104.0	270.0
4	4882.000	V	34.5		3.0	37.5		54.0	16.5		104.0	270.0
5	7323.000	H		43.0	7.3		50.3	74.0		23.7	105.0	251.0
6	7323.000	H	34.7		7.3	42.0		54.0	12.0		105.0	251.0
7	7323.000	V		42.3	7.3		49.6	74.0		24.4	100.0	252.0
8	7323.000	V	34.5		7.3	41.8		54.0	12.2		100.0	252.0

**Tx Channel 78: 2480.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	215.444	H	32.1	-10.7	21.4	43.5	22.1	147.0	273.0
2	235.238	H	33.2	-9.9	23.3	46.0	22.7	100.0	67.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4960.000	H		44.2	3.1		47.3	74.0		26.7	100.0	239.0
2	4960.000	H	36.5		3.1	39.6		54.0	14.4		100.0	239.0
3	4960.000	V		42.8	3.1		45.9	74.0		28.1	100.0	303.0
4	4960.000	V	34.7		3.1	37.8		54.0	16.2		100.0	303.0
5	7440.000	H		43.4	7.4		50.8	74.0		23.2	100.0	260.0
6	7440.000	H	35.0		7.4	42.4		54.0	11.6		100.0	260.0
7	7440.000	V		42.9	7.4		50.3	74.0		23.7	100.0	250.0
8	7440.000	V	35.0		7.4	42.4		54.0	11.6		100.0	250.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

**Spurious Emissions - Radiated - Host device: Nivo<sup>5C</sup>**

**3-DH5**

**Tx Channel 0: 2402.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	200.593	H	29.6	-11.0	18.6	43.5	24.9	114.0	266.0
2	225.349	H	33.3	-10.3	23.0	46.0	23.0	100.0	281.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4804.000	H		44.6	2.8		47.4	74.0		26.6	101.0	241.0
2	4804.000	H	37.0		2.8	39.8		54.0	14.2		101.0	241.0
3	4804.000	V		42.0	2.8		44.8	74.0		29.2	100.0	254.0
4	4804.000	V	34.7		2.8	37.5		54.0	16.5		100.0	254.0
5	7206.000	H		42.8	6.6		49.4	74.0		24.6	100.0	264.0
6	7206.000	H	34.9		6.6	41.5		54.0	12.5		100.0	264.0
7	7206.000	V		43.2	6.6		49.8	74.0		24.2	100.0	262.0
8	7206.000	V	34.9		6.6	41.5		54.0	12.5		100.0	262.0

**Tx Channel 39: 2441.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	200.593	H	30.0	-11.0	19.0	43.5	24.5	162.0	76.0
2	225.339	H	33.1	-10.3	22.8	46.0	23.2	100.0	241.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4882.000	H		44.8	3.0		47.8	74.0		26.2	101.0	238.0
2	4882.000	H	37.2		3.0	40.2		54.0	13.8		101.0	238.0
3	4882.000	V		41.8	3.0		44.8	74.0		29.2	107.0	255.0
4	4882.000	V	34.2		3.0	37.2		54.0	16.8		107.0	255.0
5	7323.000	H		42.1	7.3		49.4	74.0		24.6	100.0	251.0
6	7323.000	H	34.7		7.3	42.0		54.0	12.0		100.0	251.0
7	7323.000	V		42.6	7.3		49.9	74.0		24.1	100.0	250.0
8	7323.000	V	34.7		7.3	42.0		54.0	12.0		100.0	250.0

**Tx Channel 78: 2480.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	200.574	H	29.9	-11.0	18.9	43.5	24.6	165.0	69.0
2	225.322	H	33.3	-10.3	23.0	46.0	23.0	100.0	252.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4960.000	H		44.6	3.1		47.7	74.0		26.3	100.0	255.0
2	4960.000	H	36.9		3.1	40.0		54.0	14.0		100.0	255.0
3	4960.000	V		43.1	3.1		46.2	74.0		27.8	115.0	272.0
4	4960.000	V	35.0		3.1	38.1		54.0	15.9		115.0	272.0
5	7440.000	H		42.8	7.4		50.2	74.0		23.8	100.0	262.0
6	7440.000	H	35.0		7.4	42.4		54.0	11.6		100.0	262.0
7	7440.000	V		43.5	7.4		50.9	74.0		23.1	100.0	271.0
8	7440.000	V	35.0		7.4	42.4		54.0	11.6		100.0	271.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**Spurious Emissions - Radiated - Host device: Nivo<sup>5C</sup>**

**DH5**

**Rx Channel 0: 2402.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	235.241	H	33.1	-9.9	23.2	46.0	22.8	124.0	85.0
2	240.187	H	32.7	-9.7	23.0	46.0	23.0	119.0	70.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4802.000	H	37.0	44.5	2.8	39.8	47.3	74.0	14.2	26.7	100.0	241.0
2	4802.000	H	37.0	44.5	2.8	39.8	47.3	74.0	14.2	26.7	100.0	241.0
3	4802.000	V	34.4	42.4	2.8	37.2	45.2	74.0	16.8	28.8	100.0	256.0
4	4802.000	V	34.4	42.4	2.8	37.2	45.2	74.0	16.8	28.8	100.0	256.0

**Rx Channel 39: 2441.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	235.245	H	33.5	-9.9	23.6	46.0	22.4	120.0	56.0
2	240.194	H	32.7	-9.7	23.0	46.0	23.0	122.0	52.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4880.000	H	37.3	44.5	3.0	40.3	47.5	74.0	13.7	26.5	100.0	231.0
2	4880.000	H	37.3	44.5	3.0	40.3	47.5	74.0	13.7	26.5	100.0	231.0
3	4880.000	V	34.0	41.8	3.0	37.0	44.8	74.0	17.0	29.2	100.0	263.0
4	4880.000	V	34.0	41.8	3.0	37.0	44.8	74.0	17.0	29.2	100.0	263.0

**Rx Channel 78: 2480.0MHz**

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	235.237	H	33.5	-9.9	23.6	46.0	22.4	117.0	72.0
2	240.189	H	32.7	-9.7	23.0	46.0	23.0	122.0	57.0

No.	Frequency	(P)	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4958.000	H	36.9	43.8	3.1	40.0	46.9	74.0	14.0	27.1	100.0	253.0
2	4958.000	H	36.9	43.8	3.1	40.0	46.9	74.0	14.0	27.1	100.0	253.0
3	4958.000	V	34.7	42.6	3.1	37.8	45.7	74.0	16.2	28.3	100.0	281.0
4	4958.000	V	34.7	42.6	3.1	37.8	45.7	74.0	16.2	28.3	100.0	281.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

**Spurious Emissions - Radiated – Host device: Nivo<sup>5.C</sup>**

**3-DH5**

**Rx Channel 0: 2402.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP		QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	235.244	H	33.6	-9.9	23.7	46.0	22.3	120.0	71.0
2	240.189	H	32.7	-9.7	23.0	46.0	23.0	122.0	57.0
No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		AV		AV		AV		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	4802.000	H	37.2	2.8	40.0	74.0	14.0	100.0	241.0
2	4802.000	H	37.2	2.8	40.0	74.0	14.0	100.0	241.0
3	4802.000	V	42.7	2.8	45.5	74.0	28.5	100.0	254.0
4	4802.000	V	34.9	2.8	37.7	54.0	16.3	100.0	254.0

**Rx Channel 39: 2441.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP		QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	235.243	H	33.6	-9.9	23.7	46.0	22.3	120.0	65.0
2	240.190	H	32.8	-9.7	23.1	46.0	22.9	123.0	57.0
No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		AV		AV		AV		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	4880.000	H	44.1	3.0	47.1	74.0	26.9	100.0	236.0
2	4880.000	H	37.2	3.0	40.2	54.0	13.8	100.0	236.0
3	4880.000	V	41.6	3.0	44.6	74.0	29.4	100.0	261.0
4	4880.000	V	34.0	3.0	37.0	54.0	17.0	100.0	261.0

**Rx Channel 78: 2480.0MHz**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP		QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	235.251	H	33.5	-9.9	23.6	46.0	22.4	119.0	68.0
2	240.190	H	32.7	-9.7	23.0	46.0	23.0	120.0	57.0
No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		AV		AV		AV		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	4958.000	H	44.1	3.1	47.2	74.0	26.8	100.0	254.0
2	4958.000	H	37.0	3.1	40.1	54.0	13.9	100.0	254.0
3	4958.000	V	42.0	3.1	45.1	74.0	28.9	100.0	282.0
4	4958.000	V	34.7	3.1	37.8	54.0	16.2	100.0	282.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

## 4.9 Restricted Band of Operation

### 4.9.1 Test Procedure [ FCC 15.205, 15.209, 15.247(d), IC RSS-210 2.2 ]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- Peak: RBW=1MHz, VBW=1MHz, Span=40MHz, Sweep=auto
- Average: RBW=1MHz, VBW=10Hz, Span=40MHz, Sweep=auto


The EUT was set to operate with following conditions.

- No hopping [ch 0 (low), ch 78 (high)]

The test mode of EUT is as follows.

- Tx mode

### 4.9.2 Measurement Setup

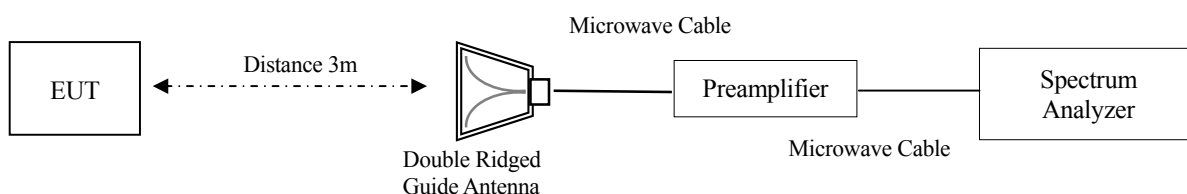

### 4.9.3 Limit of Restricted Band of Operation

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

### 4.9.4 Measurement Result

[Tx mode (Host device: Nivo<sup>2C</sup>)]

**DH5**

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]
1	2390.000	H		43.7	-4.4		39.3	74.0		34.7
2	2390.000	H	31.0		-4.4	26.6		54.0	27.4	
3	2390.000	V		44.6	-4.4		40.2	74.0		33.8
4	2390.000	V	31.9		-4.4	27.5		54.0	26.5	
5	2483.500	H		44.1	-4.3		39.8	74.0		34.2
6	2483.500	H	33.7		-4.3	29.4		54.0	24.6	
7	2483.500	V		48.1	-4.3		43.8	74.0		30.2
8	2483.500	V	39.4		-4.3	35.1		54.0	18.9	

**3-DH5**

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]
1	2390.000	H		42.8	-4.4		38.4	74.0		35.6
2	2390.000	H	31.2		-4.4	26.8		54.0	27.2	
3	2390.000	V		45.4	-4.4		41.0	74.0		33.0
4	2390.000	V	33.5		-4.4	29.1		54.0	24.9	
5	2483.500	H		44.4	-4.3		40.1	74.0		33.9
6	2483.500	H	32.8		-4.3	28.5		54.0	25.5	
7	2483.500	V		46.9	-4.3		42.6	74.0		31.4
8	2483.500	V	38.2		-4.3	33.9		54.0	20.1	

[Tx mode (Host device: Nivo<sup>5C</sup>)]  
**DH5**

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]
1	2390.000	H	-----	43.6	-4.4	-----	39.2	74.0	-----	34.8
2	2390.000	H	31.1	-----	-4.4	26.7	-----	54.0	27.3	-----
3	2390.000	V	-----	44.0	-4.4	-----	39.6	74.0	-----	34.4
4	2390.000	V	31.7	-----	-4.4	27.3	-----	54.0	26.7	-----
5	2483.500	H	-----	44.6	-4.3	-----	40.3	74.0	-----	33.7
6	2483.500	H	34.3	-----	-4.3	30.0	-----	54.0	24.0	-----
7	2483.500	V	-----	48.3	-4.3	-----	44.0	74.0	-----	30.0
8	2483.500	V	38.4	-----	-4.3	34.1	-----	54.0	19.9	-----

**3-DH5**

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]
1	2390.000	H	-----	43.6	-4.4	-----	39.2	74.0	-----	34.8
2	2390.000	H	31.4	-----	-4.4	27.0	-----	54.0	27.0	-----
3	2390.000	V	-----	45.0	-4.4	-----	40.6	74.0	-----	33.4
4	2390.000	V	32.8	-----	-4.4	28.4	-----	54.0	25.6	-----
5	2483.500	H	-----	44.3	-4.3	-----	40.0	74.0	-----	34.0
6	2483.500	H	33.2	-----	-4.3	28.9	-----	54.0	25.1	-----
7	2483.500	V	-----	48.0	-4.3	-----	43.7	74.0	-----	30.3
8	2483.500	V	37.0	-----	-4.3	32.7	-----	54.0	21.3	-----

**4.9.5 Trace Data**


**Test Personnel:**

Tested by: Hiroaki Suzuki

Date : Mar. 2, 2010  
Temperature : 22.2 [°C]  
Humidity : 57.0 [%]  
Test place : 3m Semi-anechoic chamber


**Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>**

**Frequency: 2390.0MHz -Horizontal- [DH5]**  
**Peak**

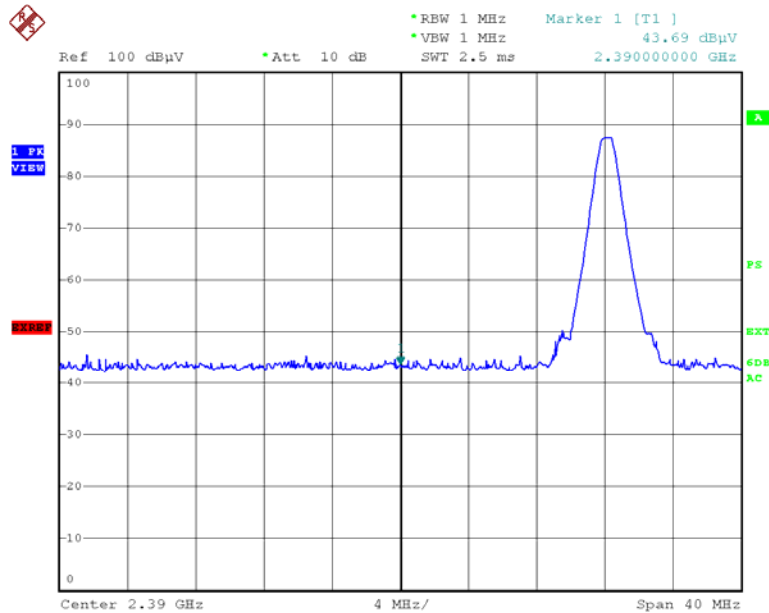

Date: 2.MAR.2010 09:52:46


**Average**

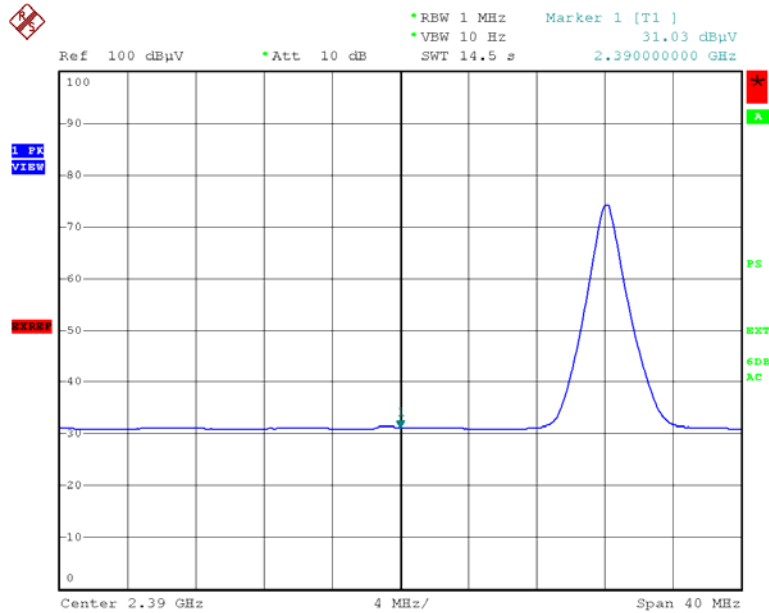

Date: 2.MAR.2010 09:53:44


**Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>**

**Frequency: 2390.0MHz -Vertical- [DH5]  
Peak**

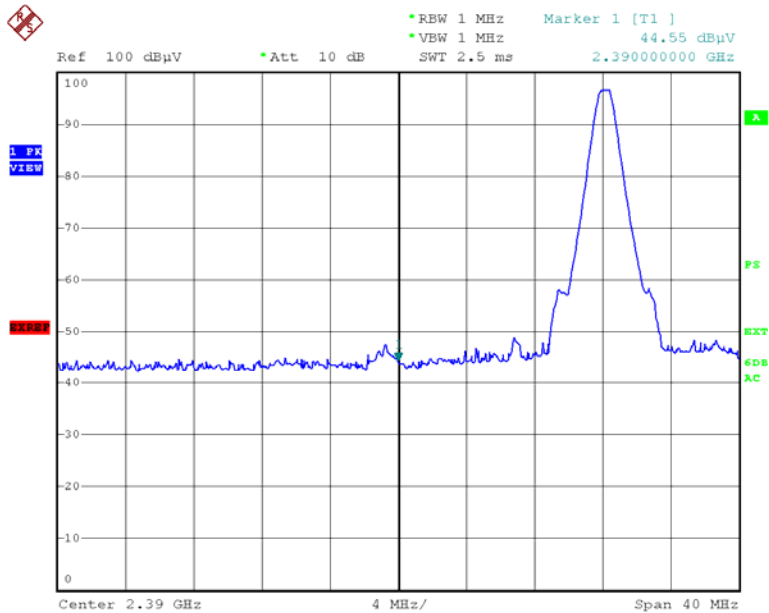

Date: 2.MAR.2010 09:56:22


**Average**

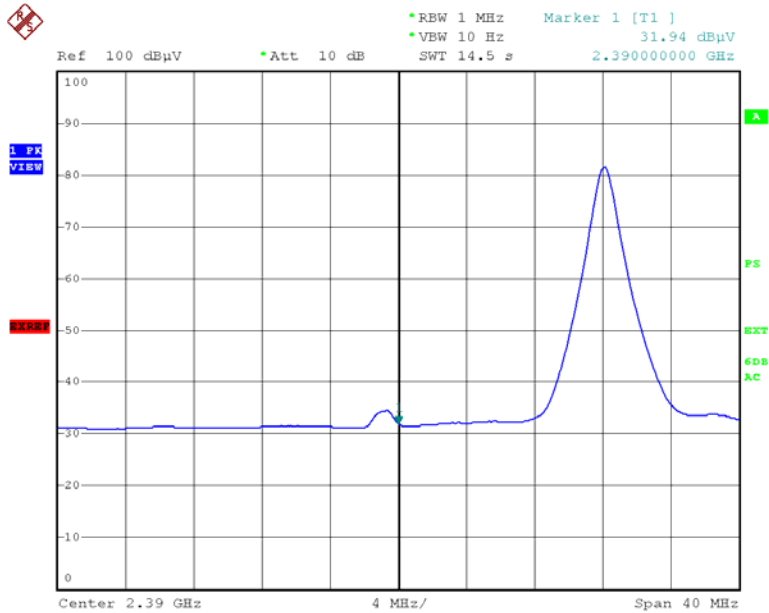

Date: 2.MAR.2010 09:57:30


***Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>***

**Frequency: 2483.5MHz    -Horizontal- [DH5]  
Peak**

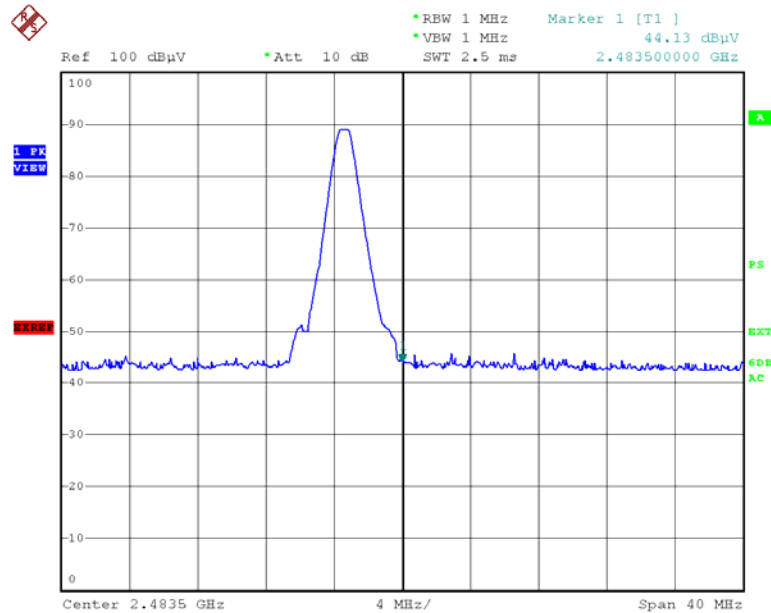

Date: 2.MAR.2010 10:00:30


**Average**

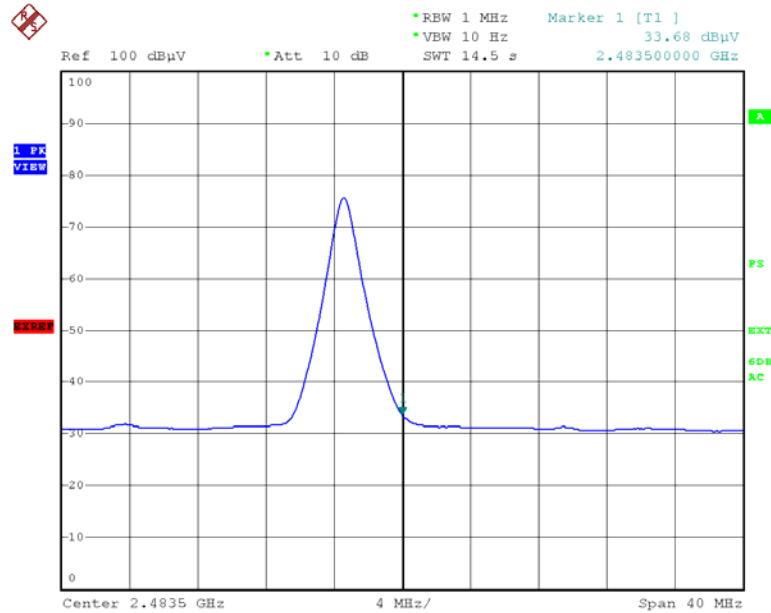

Date: 2.MAR.2010 10:01:32


**Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>**

**Frequency: 2483.5MHz -Vertical- [DH5]  
Peak**

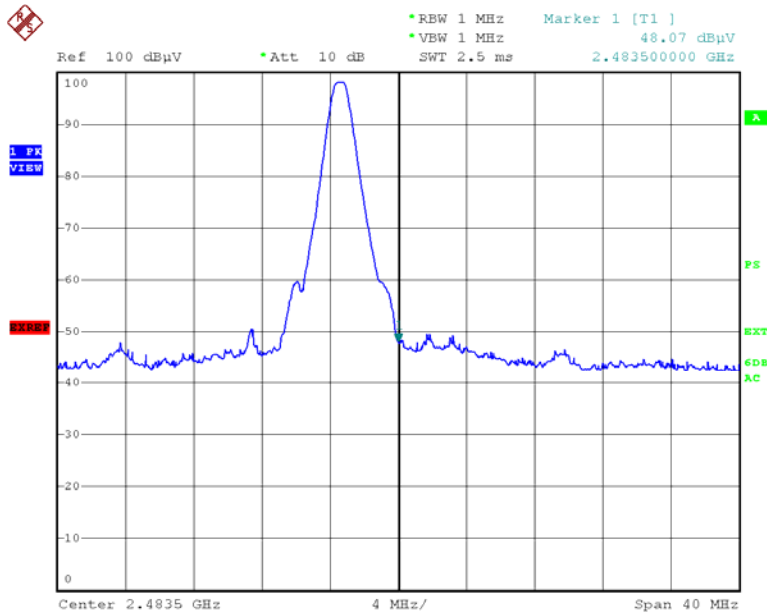

Date: 2.MAR.2010 10:03:40

**Average**

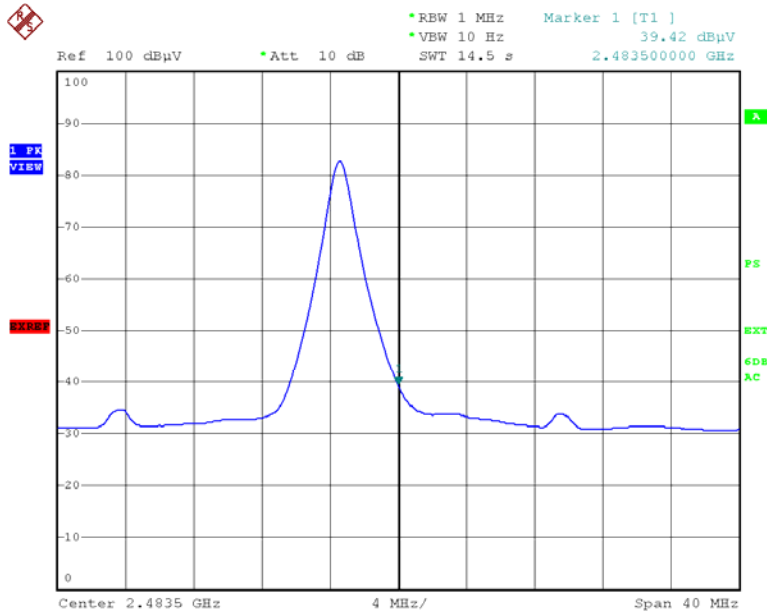


Date: 2.MAR.2010 10:09:15




**Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>**

**Frequency: 2390.0MHz -Horizontal- [3DH5]**  
**Peak**

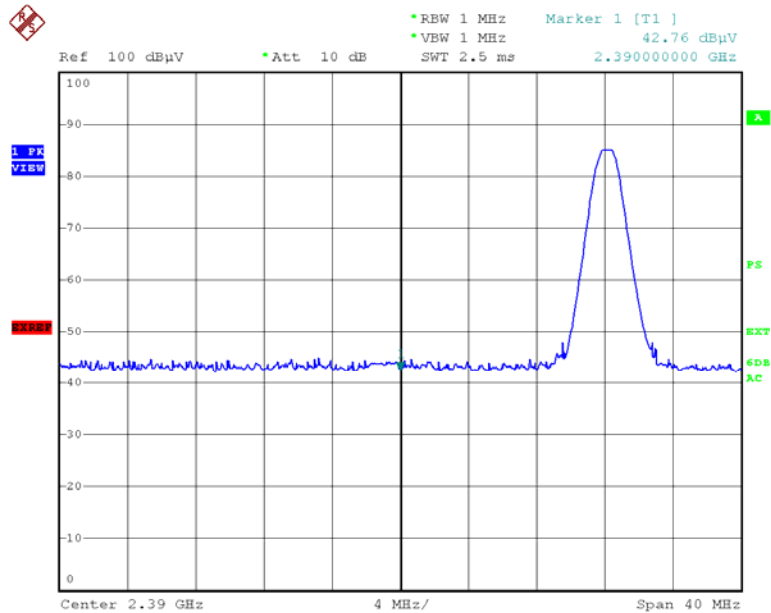

Date: 2.MAR.2010 10:22:10


**Average**

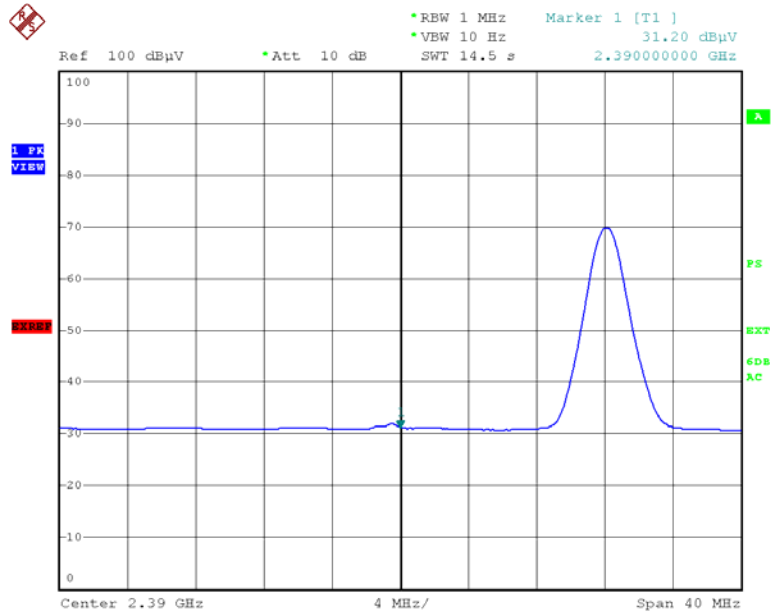

Date: 2.MAR.2010 10:23:07


**Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>**

**Frequency: 2390.0MHz -Vertical- [3DH5]  
Peak**

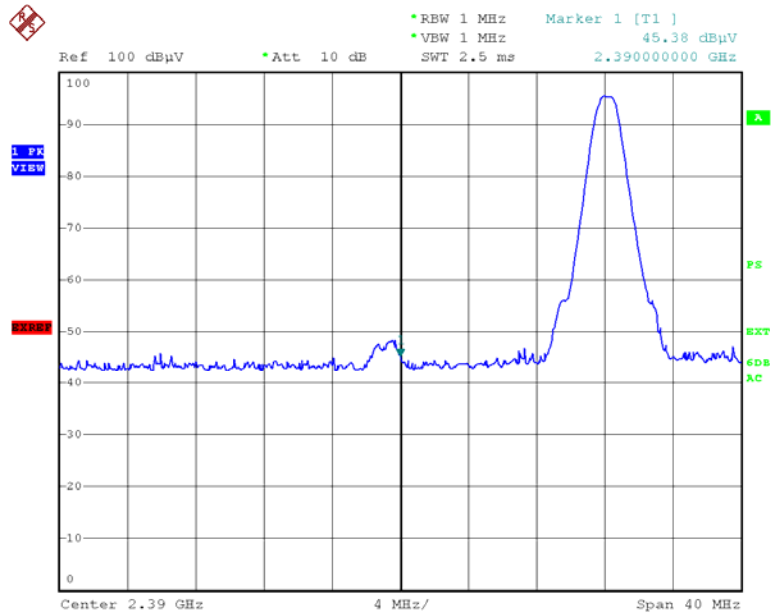

Date: 2.MAR.2010 10:25:02


**Average**

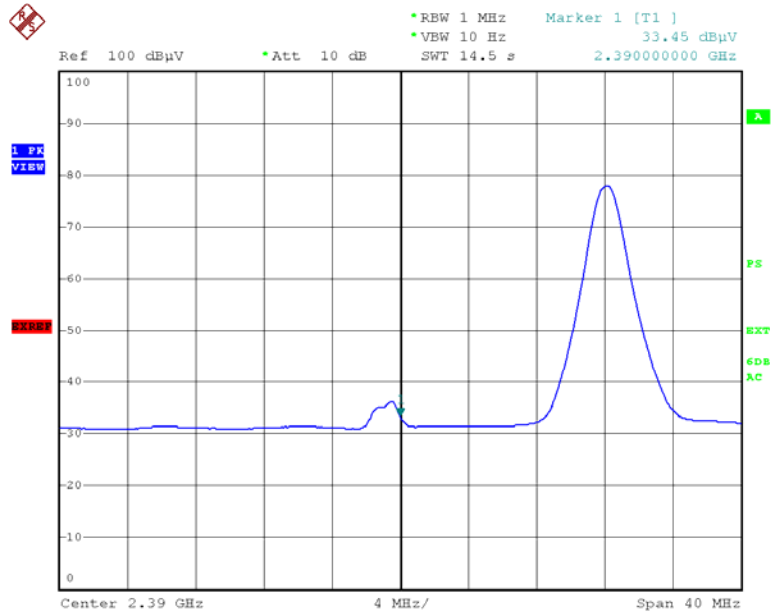

Date: 2.MAR.2010 10:26:22


**Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>**

**Frequency: 2483.5MHz -Horizontal- [3DH5]**  
**Peak**

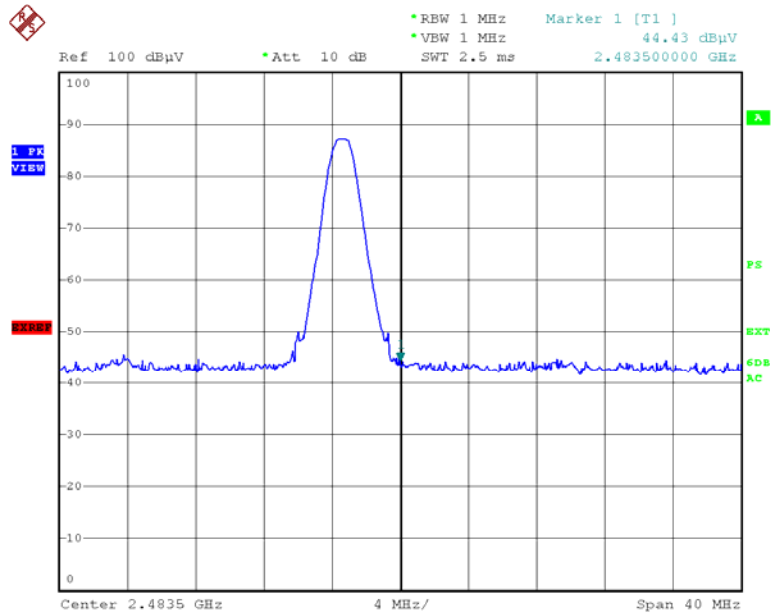

Date: 2.MAR.2010 10:15:12


**Average**

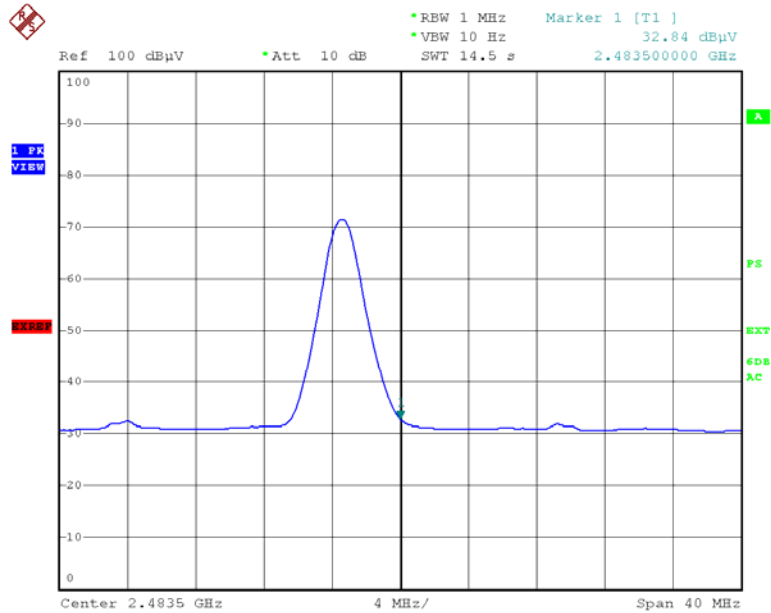

Date: 2.MAR.2010 10:19:22


**Restricted Band of Operation – Host device: Nivo<sup>2.C</sup>**

**Frequency: 2483.5MHz -Vertical- [3DH5]  
Peak**

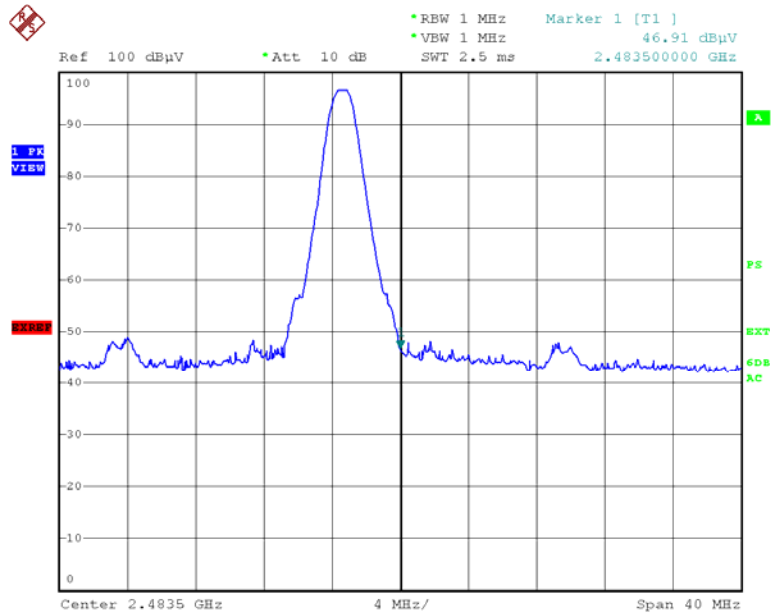

Date: 2.MAR.2010 10:12:22


**Average**

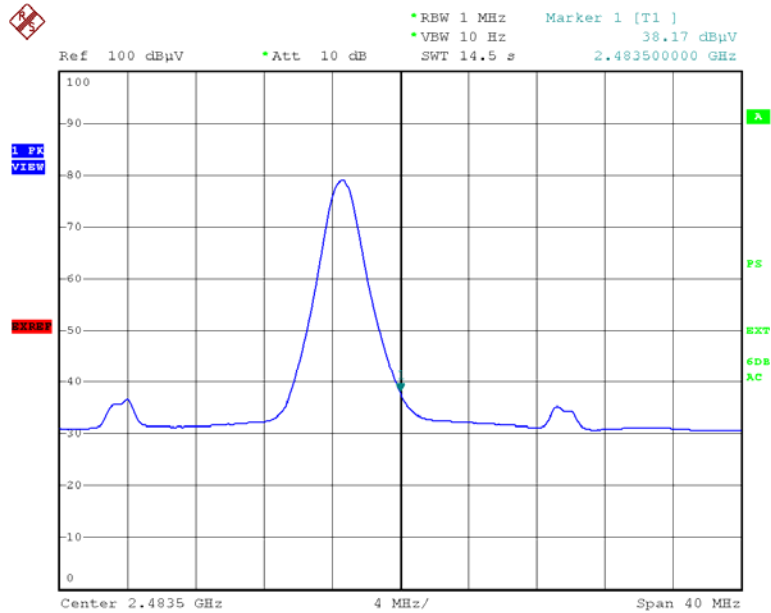

Date: 2.MAR.2010 10:13:27


**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2390.0MHz    -Horizontal- [DH5]  
Peak**

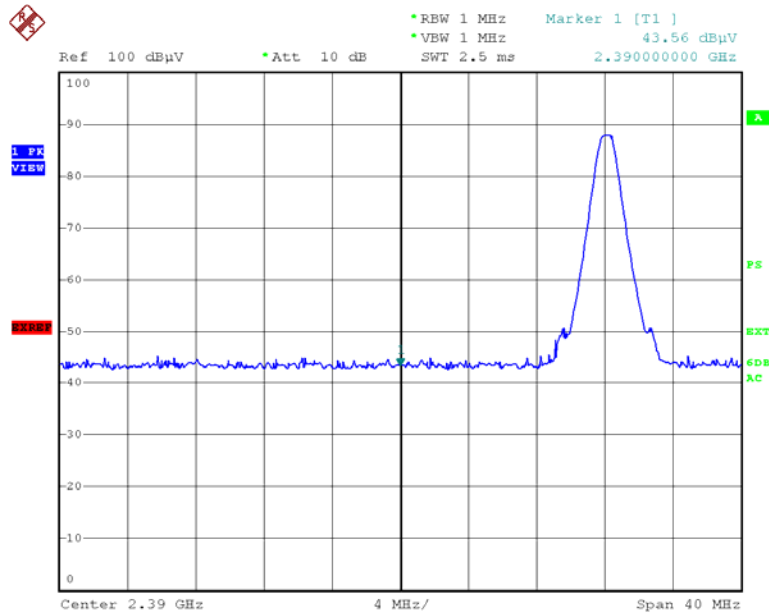

Date: 2.MAR.2010 08:10:45


**Average**

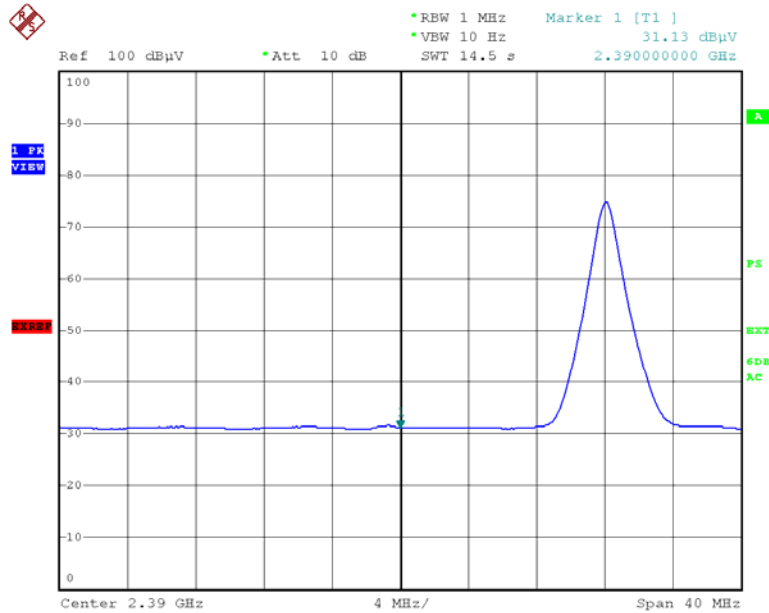

Date: 2.MAR.2010 08:13:00


**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2390.0MHz -Vertical- [DH5]  
Peak**

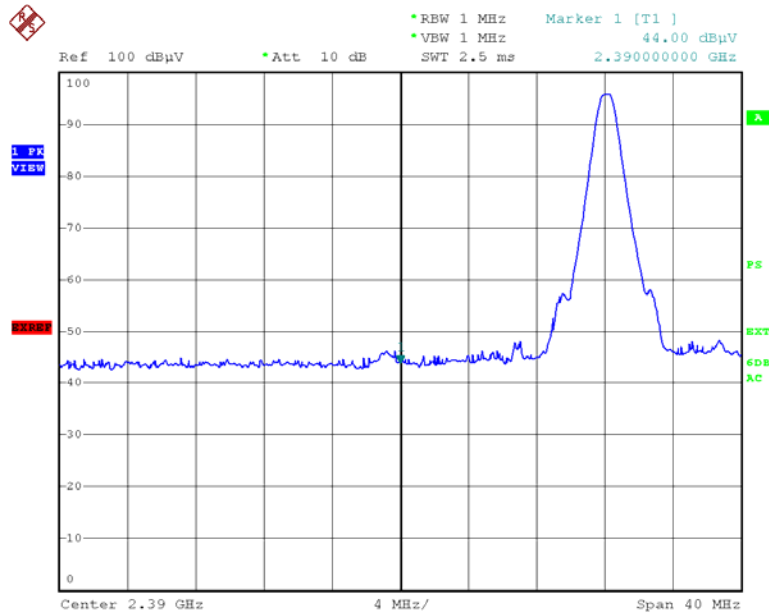

Date: 2.MAR.2010 08:16:35


**Average**

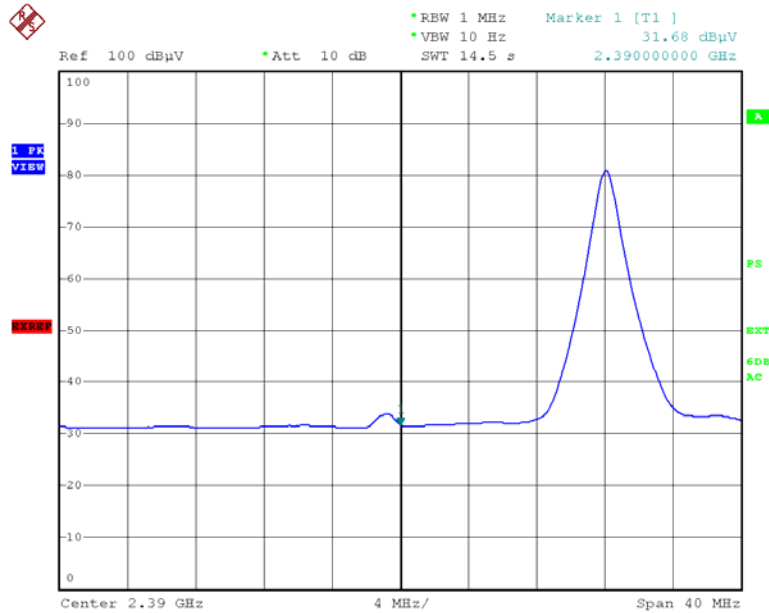

Date: 2.MAR.2010 08:18:01


**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2483.5MHz -Horizontal- [DH5]  
Peak**

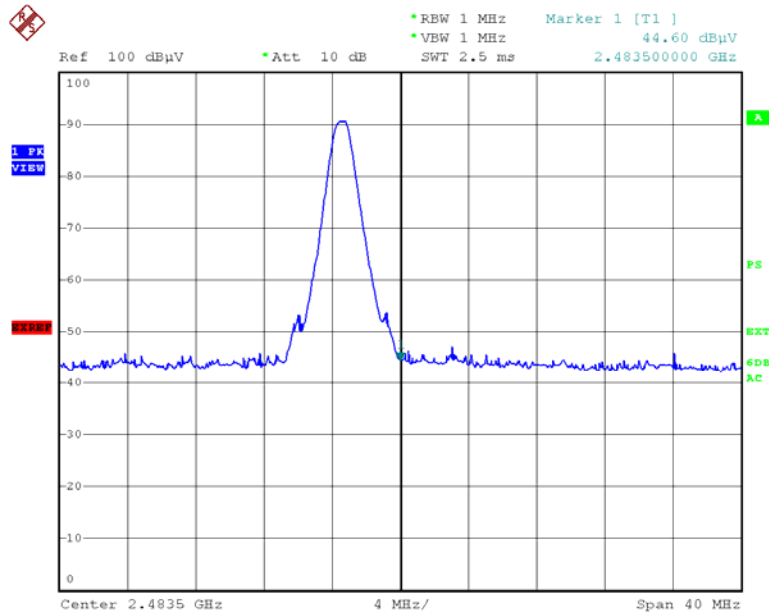

Date: 2.MAR.2010 08:22:32


**Average**

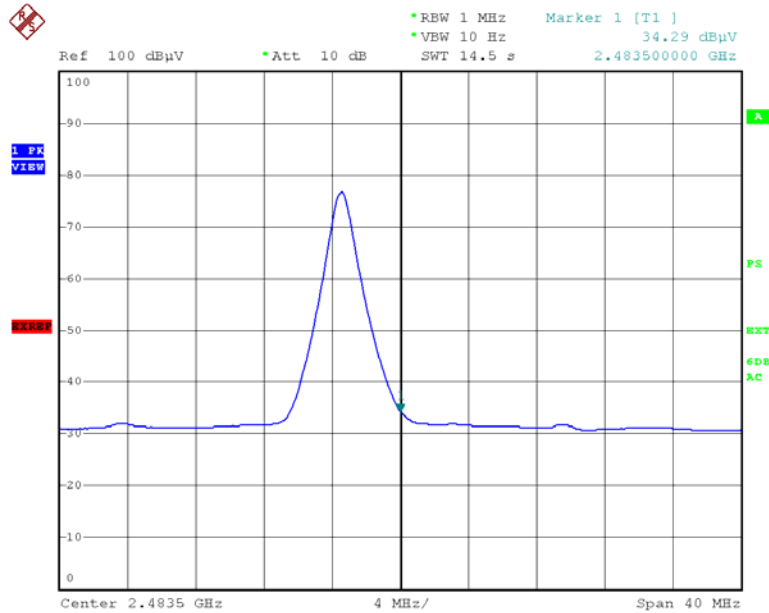

Date: 2.MAR.2010 08:24:03


**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2483.5MHz -Vertical- [DH5]  
Peak**

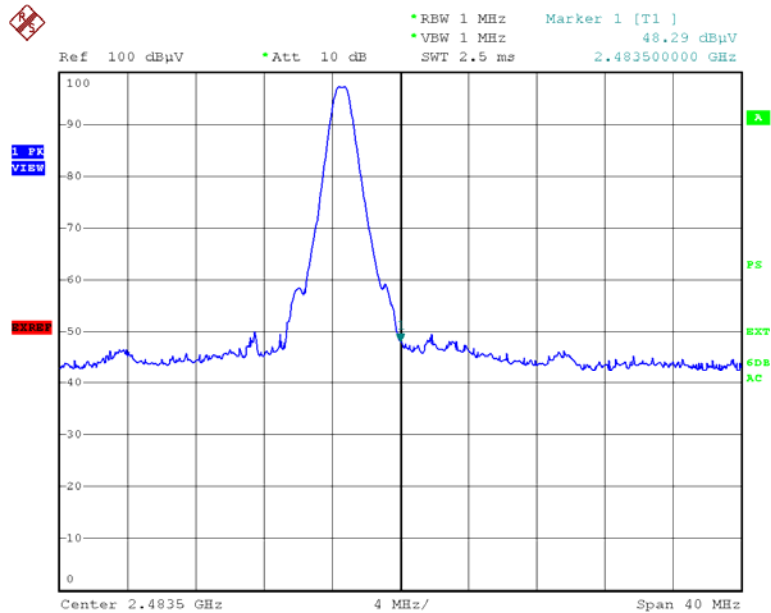

Date: 2.MAR.2010 08:27:56

**Average**

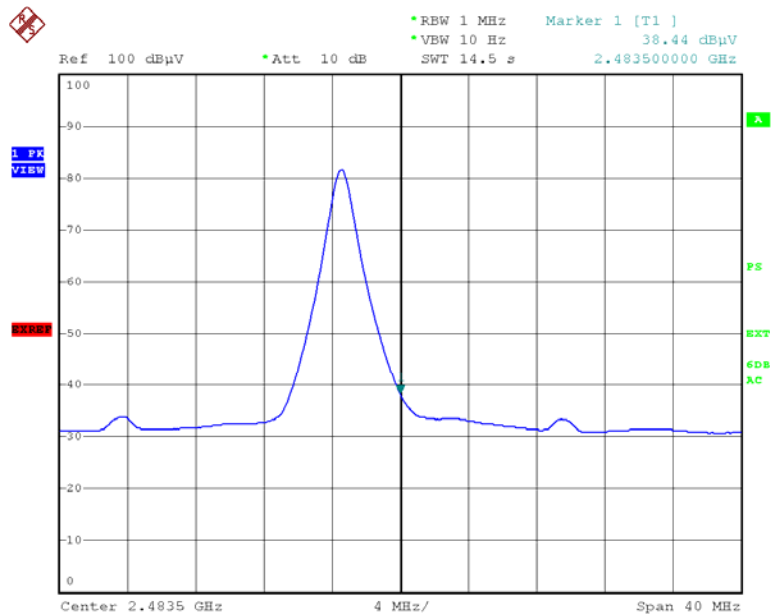


Date: 2.MAR.2010 08:59:40




**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2390.0MHz -Horizontal- [3DH5]**  
**Peak**

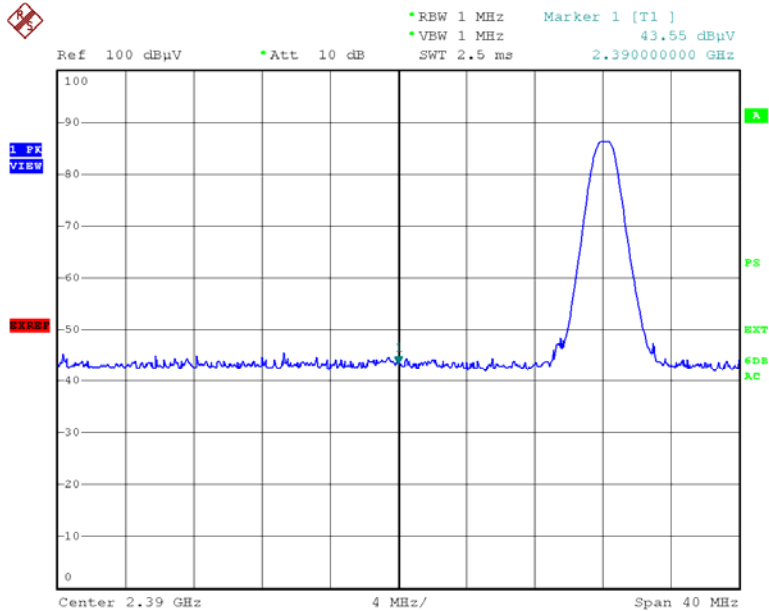

Date: 2.MAR.2010 08:37:16


**Average**

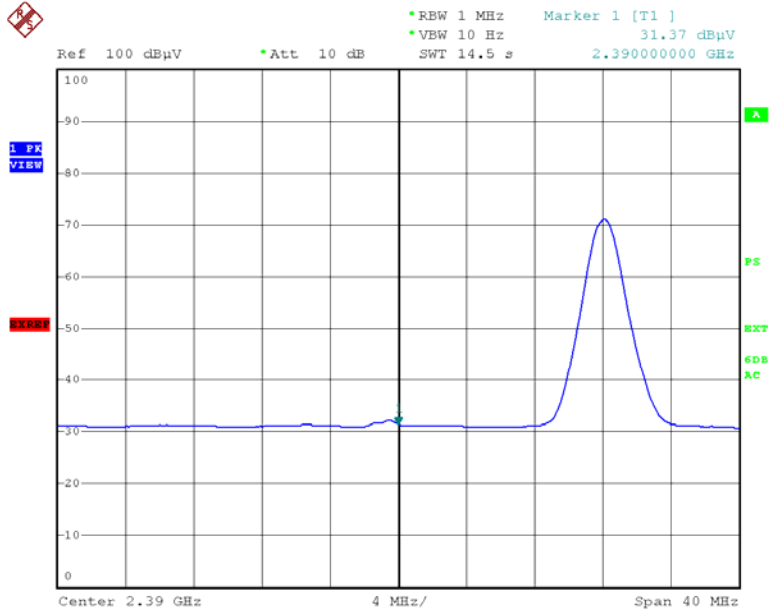

Date: 2.MAR.2010 08:44:31


**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2390.0MHz -Vertical- [3DH5]  
Peak**

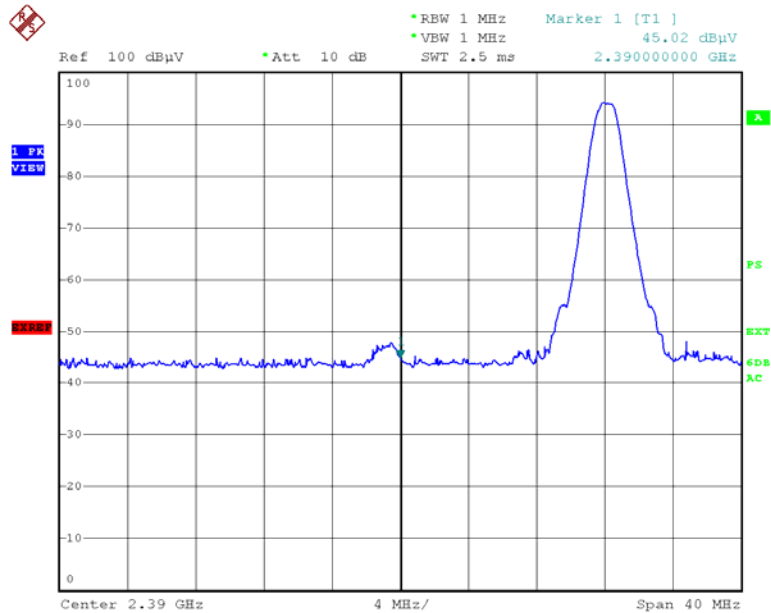

Date: 2.MAR.2010 08:41:35


**Average**

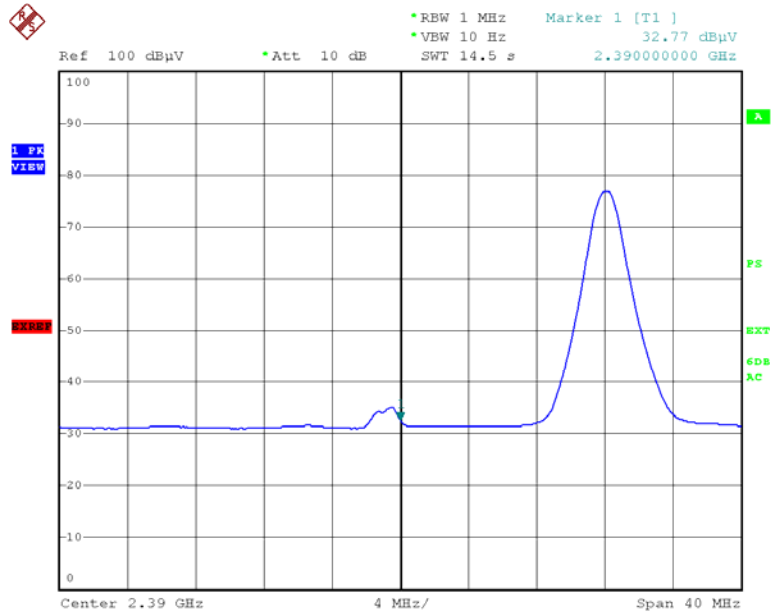

Date: 2.MAR.2010 08:42:54


**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2483.5MHz -Horizontal- [3DH5]  
Peak**

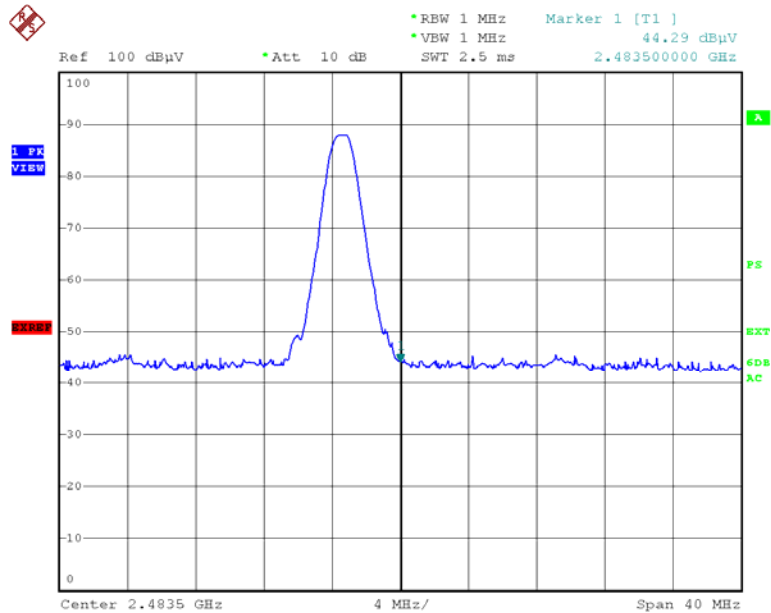

Date: 2.MAR.2010 08:48:18


**Average**

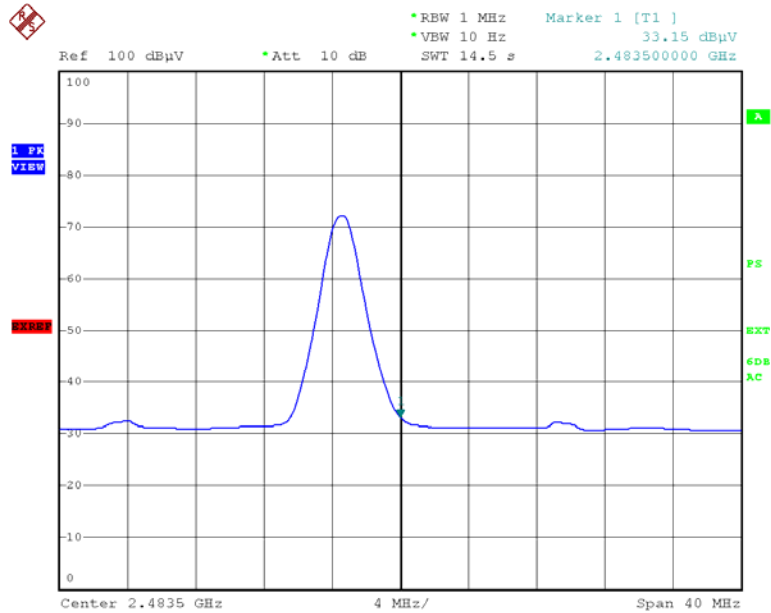

Date: 2.MAR.2010 08:50:38


**Restricted Band of Operation – Host device: Nivo<sup>5.C</sup>**

**Frequency: 2483.5MHz -Vertical- [3DH5]  
Peak**

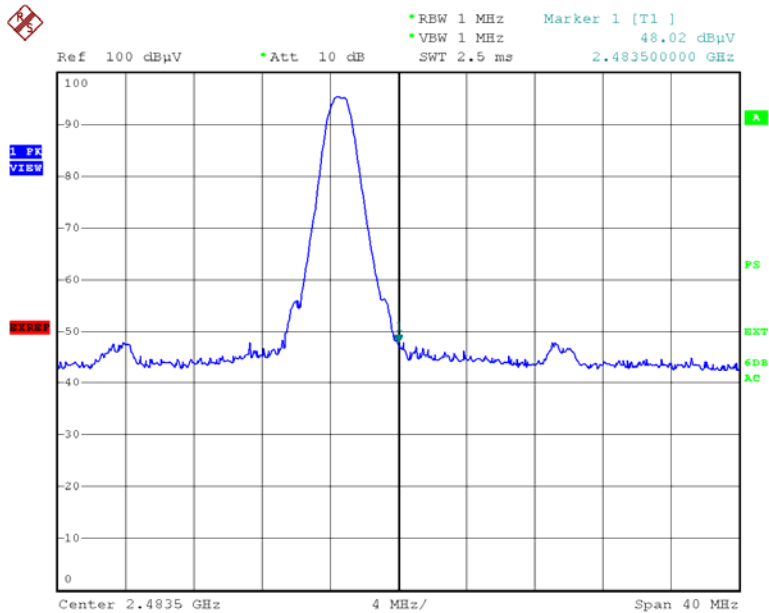

Date: 2.MAR.2010 08:53:34

**Average**

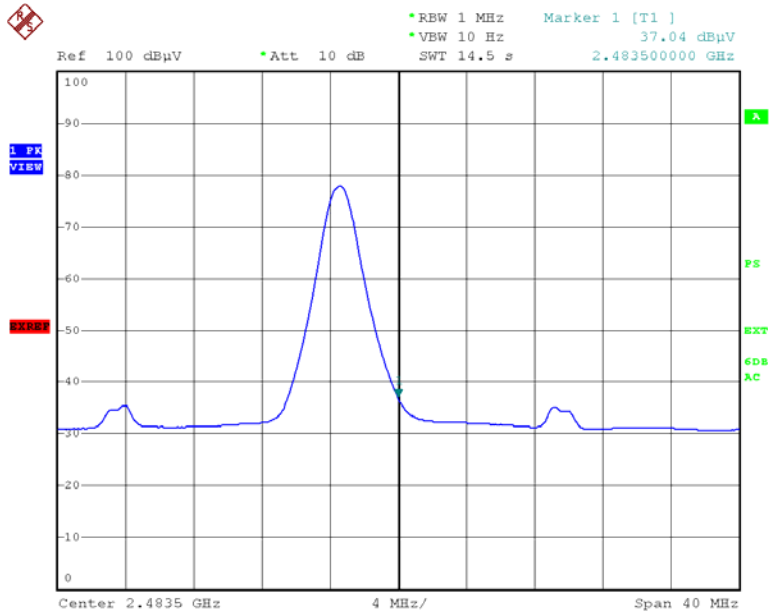

Date: 2.MAR.2010 08:54:58

## ***5. Uncertainty of measurement***

---

Expanded uncertainties stated were calculated with a coverage Factor  $k=2$ .

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port (150kHz - 30MHz)	$\pm 2.9\text{dB}$
Radiated emission (9kHz - 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 5.2\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.6\text{dB}$

## 6. Laboratory description

**6.1 Location:** ZACTA Technology Corporation Yonezawa Testing Center  
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
Phone: +81-238-28-2880 Fax: +81-238-28-2888

### 6.2 Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) FCC filing:

Site name	Registration Number	Expiry Date
Site 2, Site3	91065	November 19, 2011
3m Semi-anechoic chamber 10m Semi-anechoic chamber Shielded room No.1	540072	February 16, 2013

3) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 2	4224A-2	February 16, 2012
Site 3	4224A-3	February 16, 2012
3m Semi-anechoic chamber	4224A-4	February 16, 2012
10m Semi-anechoic chamber	4224A-5	February 16, 2012

4) VCCI site filing:

Site name	Radiated emission	Conducted Emission for mains port	Expiry Date	Conducted emission for telecom port	Expiry Date
Site 2	R-137	C-133	Nov. 16, 2011	T-1477	Oct. 8, 2011
Site 3	R-138	C-134	Nov. 16, 2011	T-1478	Oct. 8, 2011
10m Semi-anechoic chamber	R-2480	C-2722	Jul. 3, 2011	T-1474	Oct. 8, 2011
3m Semi-anechoic chamber	R-2481	C-2723	Jul. 3, 2011	T-1475	Oct. 8, 2011
Shielded room No.1	-	C-2724	Jul. 3, 2011	T-1476	Oct. 8, 2011

5) Intertek authorization:

Authorized as an EMC test laboratory.

6) TUV Rheinland authorization:

Authorized as an EMC test laboratory.

7) BUREAU VERITAS certification:

Certified as an EMC test laboratory.

## Appendix A: Test equipment

### List of Measuring Instruments

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum Analyzer (3Hz – 42.98GHz)	Agilent Technologies	E4447A	MY46180188	Feb. 2010	Feb. 27, 2009
Spectrum Analyzer (9kHz – 26.5GHz)	ADVANTEST	R3271	35050045	Jul. 2011	Jul. 1, 2009
Preamplifier (100kHz-1.2GHz)	ANRITSU	MH648A	M08067	Jun. 2010	Jun. 13, 2009
Preamplifier (1GHz-26.5GHz)	Agilent Technologies	8449B	3008A00589	Nov. 2010	Nov. 5, 2009
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	May. 2010	May. 27, 2009
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Feb. 2011	Feb. 25, 2010
TRILOG Antenna	Schwarzbeck	VULB9160	9160-3221	Apr. 2010	Apr. 13, 2009
Attenuator (6dB)	TDC	TAT-43B-06	N/A	Jun. 2010	Jun. 13, 2009
Double Ridged Guide Antenna	EMCO	3115	4328	Dec. 2010	Dec. 10, 2008
Broad-Band Horn antenna	Schwarzbeck	BBHA9170	BBHA9170189	Mar. 2010	Mar. 23, 2008
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Mar. 2010	Mar. 23, 2008
Microwave cable	SUHNER	SUCOFLEX 106	60929/6 (15m)	Nov. 2010	Nov. 5, 2009
	SUHNER	SUCOFLEX 106	60959/6 (1m)	Nov. 2010	Nov. 5, 2009
Coaxial cable	Fujikura	5D-2W/10m	#AEC3R-001	Feb. 2011	Feb. 5, 2010
		5D-2W/1.5m	#AEC3R-003	Feb. 2011	Feb. 5, 2010
		5D-2W/0.5m	#AEC3R-004	Feb. 2011	Feb. 5, 2010
	SUHNER	SUCOFLEX 106/7m	#AEC3R-002	Feb. 2011	Feb. 5, 2010
Microwave cable	SUHNER	SUCOFLEX104	199511/4	Nov. 2010	Nov. 12, 2009
Attenuator	Weinschel	56-10	J4180	Nov. 2010	Nov. 12, 2009
PC	DELL	DIMENSION E521	85465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V3.4	N/A	N/A
Site attenuation	ZACTA Technology	3m Semi-anechoic chamber	5192Z	May. 2010	May. 18, 2009

\*The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.