

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**PC-MAX Wireless Automotive Diagnostic System**

**MODEL No.: PC-MAX**

**Trademark: AUTOBOSS**

**FCC ID: W52PC-MAX**

**REPORT No.: E0902021F**

**ISSUE DATE: February 19, 2009**

*Prepared for*

**AUTOBOSS TECH. INC.**

**5/F, Bldg.304, Shangbu Industrial Park, Zhenxing Rd.,  
Futian, Shenzhen 518028, P.R.China.**

*Prepared by*

**SHENZHEN EMTEK CO., LTD**

**Bldg 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China**

**TEL: 86-755-26954280**

**FAX: 86-755-26954282**

**This report shall not be reproduced, except in full, without the written approval  
of  
SHENZHEN EMTEK CO., LTD**

## VERIFICATION OF COMPLIANCE

Applicant:	AUTOBOSS TECH. INC. 5/F, Bldg. 304, Shangbu Industrial Park, Zhenxing Rd., Futian, Shenzhen 518028, P.R.China.
Product Description:	PC-MAX Wireless Automotive Diagnostic System
Trademark:	AUTOBOSS
Model Number:	PC-MAX
Serial Number:	N/A
File Number:	E0902021F
Date of Test:	February 09, 2009 to February 18, 2009

### We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

*Approved By*



**David Lee / Q.A. Manager  
SHENZHEN EMTEK CO., LTD.**

## Table of Contents

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	Product Description.....	5
1.2	Related Submittal(s) / Grant (s).....	5
1.3	Test Methodology .....	5
1.4	Special Accessories .....	5
1.5	Equipment Modifications .....	5
1.6	Test Facility .....	6
<b>2.</b>	<b>System Test Configuration.....</b>	<b>7</b>
2.1	EUT Configuration.....	7
2.2	EUT Exercise .....	7
2.3	Test Procedure .....	7
2.4	Limitation .....	7
2.5	Configuration of Tested System.....	11
<b>3.</b>	<b>Summary of Test Results.....</b>	<b>12</b>
<b>4.</b>	<b>Description of test modes.....</b>	<b>12</b>
<b>5.</b>	<b>Conducted Emissions Test .....</b>	<b>13</b>
5.1	Measurement Procedure: .....	13
5.2	Test SET-UP (Block Diagram of Configuration).....	13
5.3	Measurement Equipment Used: .....	13
5.4	Measurement Result: .....	14
5.5	Conducted Measurement Photos: .....	15
<b>6.</b>	<b>Radiated Emission Test .....</b>	<b>16</b>
6.1	Measurement Procedure .....	16
6.2	Test SET-UP (Block Diagram of Configuration).....	17
6.3	Measurement Equipment Used: .....	18
6.4	Measurement Result .....	18
6.5	Radiated Measurement Photos: .....	22
<b>7.</b>	<b>Channel Separation test .....</b>	<b>23</b>
7.1	Measurement Procedure .....	23
7.2	Test SET-UP (Block Diagram of Configuration).....	23
7.3	Measurement Equipment Used: .....	23
7.4	Measurement Results: .....	23
<b>8.</b>	<b>20dB Bandwidth test.....</b>	<b>26</b>
8.1	Measurement Procedure .....	26
8.2	Test SET-UP (Block Diagram of Configuration).....	26
8.3	Measurement Equipment Used: .....	26
8.4	Measurement Results: .....	26

<b>9.</b>	<b>Quantity of Hopping Channel Test .....</b>	<b>29</b>
9.1	Measurement Procedure .....	29
9.2	Test SET-UP (Block Diagram of Configuration).....	29
9.3	Measurement Equipment Used: .....	29
9.4	Measurement Results: .....	29
<b>10.</b>	<b>Time of Occupancy (Dwell Time) test.....</b>	<b>31</b>
10.1	Measurement Procedure .....	31
10.2	Test SET-UP (Block Diagram of Configuration).....	31
10.3	Measurement Equipment Used: .....	31
10.4	Measurement Results: .....	31
<b>11.</b>	<b>MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>33</b>
11.1	Measurement Procedure .....	33
11.2	Test SET-UP (Block Diagram of Configuration).....	33
11.3	Measurement Equipment Used: .....	33
11.4	Measurement Results: .....	33
<b>12.</b>	<b>Band EDGE test .....</b>	<b>36</b>
12.1	Measurement Procedure .....	36
12.2	Test SET-UP (Block Diagram of Configuration).....	36
12.3	Measurement Equipment Used: .....	36
12.4	Measurement Results: .....	36
<b>13.</b>	<b>Antenna Application .....</b>	<b>38</b>
13.1	Antenna requirement .....	38
13.2.	Result.....	38
<b>14.</b>	<b>RF EXPOSURE EVALUATION .....</b>	<b>39</b>
14.1	Friis transmission formula: $P_d=(P_{out}*G)/(4*\pi*R^2)$ .....	39
14.2	Measurement Result.....	39

## **1. GENERAL INFORMATION**

### **1.1 Product Description**

The AUTOBOSS TECH. INC. Model: PC-MAX (referred to as the EUT in this report) The EUT is an short range, lower power, PC-MAX Wireless Automotive Diagnostic System designed as an " Input Device. It is designed by way of utilizing the FHSS modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402-2480MHz
- B). Modulation: FHSS
- C). Number of Channel: 79
- D). Channel space: 1MHz
- E). Rated RF Output Power: 4dBm
- F). BIT Rate of Transmission: 2Mbps
- G). Antenna Type: PCB antenna
- H). Antena GAIN: 0.3dBi
- I). Power Supply: DC 12V With external adaptor

### **1.2 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: W52PC-MAX filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a DoC procedure.

### **1.3 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

### **1.4 Special Accessories**

Not available for this EUT intended for grant.

### **1.5 Equipment Modifications**

Not available for this EUT intended for grant.

## 1.6 Test Facility

Site Description  
EMC Lab.

: Accredited by CNAS, 2005.11.02  
The certificate is valid until 2010.11  
The Laboratory has been assessed and proved to be in compliance  
with CNAS-CL01:2006(identical to ISO/IEC17025:2005)  
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen, 2008.3  
The Laboratory has been assessed according to the requirements  
ISO/IEC 17025

Accredited by FCC, March 18, 2008  
The Certificate Registration Number is 709623.

Accredited by Industry May 24, 2008  
The Certificate Registration Number is 46405-4480.

Name of Firm  
Site Location

: SHENZHEN EMTEK Co., Ltd.  
: Bldg 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

### 2.4 Limitation

#### (1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2)	20dB Bandwidth						
	Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)	50	25	15	75
		902-928		<250	>250	NA	NA
		2400-2483.5		NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

**Note:** The “()”is all channel’s average time of occupancy.

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)



**(6) Band edge**

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

**(7) Conducted Emission**

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

**(8) Radiated Emission**

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in  $\text{dB}\mu\text{V/m}=20 \log (\text{uV/m})$   
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

**FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz**

Frequency(MHz)	Class A( $\text{dB}\mu\text{V/m}$ )(at 3m)		Class B( $\text{dB}\mu\text{V/m}$ )(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

## 2.5 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	PC-MAX Wireless Automotive Diagnostic System	AUTOBOSS	PC-MAX	W52PC-MAX	N/A	<b>EUT</b>
2.	Adaptor	DEEVAN	DSA-120050	N/A	N/A	

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

### 3. Summary of Test Results

FCC Rules	Description Of Test	Result
§ 15.247(a)(1)	Channel Separation test	Compliant
§ 15.247(a)(1)	20dB Bandwidth	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§ 15.247(b)	Max Peak output Power test	Compliant
§ 15.247(d)	Band edge test	Compliant
§ 15.207	AC Power Conducted Emission	Compliant
§ 15.247(d), § 15.209	Radiated Emission	Compliant
§ 15.203	Antenna Requirement	Compliant
§ 1.1310	RF Exposure	Compliant

### 4. Description of test modes

The EUT (PC-MAX Wireless Automotive Diagnostic System ) has been tested under normal operating condition. This EUT is a FHSS system, we use blue test to control the EUT with LPT1, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for best.


Channel	Frequency(MHz)
1	2402
40	2441
79	2480

## 5. Conducted Emissions Test

### 5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the three highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

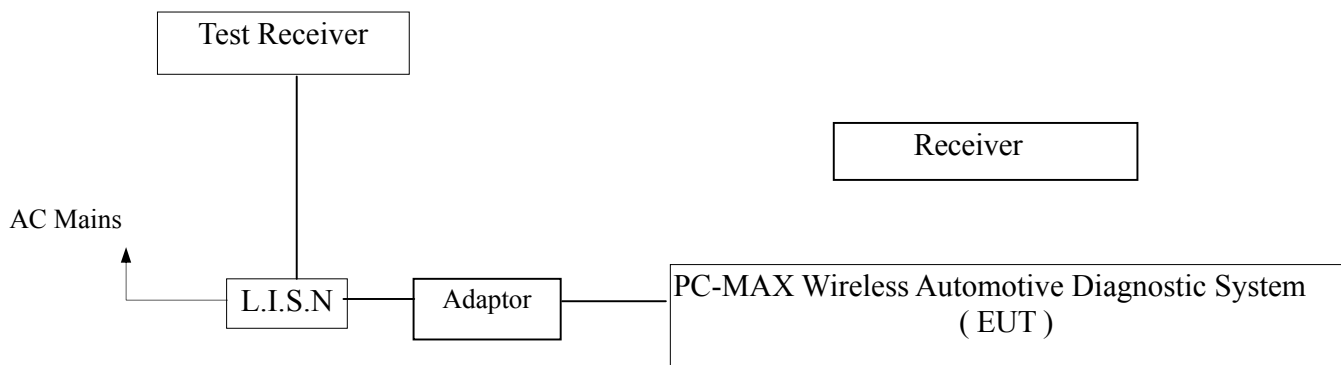

### 5.3 Measurement Equipment Used:


Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2008	05/29/2009
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2008	05/29/2009
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2008	05/29/2009
50ΩCoaxial Switch	Anritsu	MP59B	M20531	05/29/2008	05/29/2009

#### 5.4 Measurement Result:

Date of Test:	February 10, 2009	Temperature:	22°C
Frequency Detector:	0.15~30MHz	Humidity:	50%
Test Result:	PASS	Test Mode:	On

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Margin QP dB(μV)	Margin AV dB(μV)
Neutral	0.298	46.80	40.80	60.30	50.30	-13.50	-9.50
	0.418	41.90	33.80	57.49	47.49	-15.59	-13.69
	0.654	40.50	34.50	56.00	46.00	-15.50	-11.50
	1.430	42.20	32.20	56.00	46.00	-13.80	-13.80
	2.806	42.20	32.20	56.00	46.00	-13.80	-13.80
	<b>3.514</b>	<b>51.60</b>	<b>35.90</b>	<b>56.00</b>	<b>46.00</b>	<b>-4.40</b>	<b>-10.10</b>
Line	0.178	49.30	37.90	64.58	54.58	-15.28	-16.68
	0.298	50.60	41.90	60.30	50.30	-9.70	-8.40
	0.478	45.60	36.90	56.37	46.37	-10.77	-9.47
	0.654	44.50	36.80	56.00	46.00	-11.50	-9.20
	1.430	48.30	37.80	56.00	46.00	-7.70	-8.20
	3.562	46.50	33.80	56.00	46.00	-9.50	-12.20
Remark: The worst emission is detected at <b>3.514MHz</b> with corrected <b>QP</b> signal Level of <b>51.60 dBμV</b> (Limit is 56.00 dBμV).When the Neutral of the EUT is connected to L.I.S.N							

### 5.5 Conducted Measurement Photos:

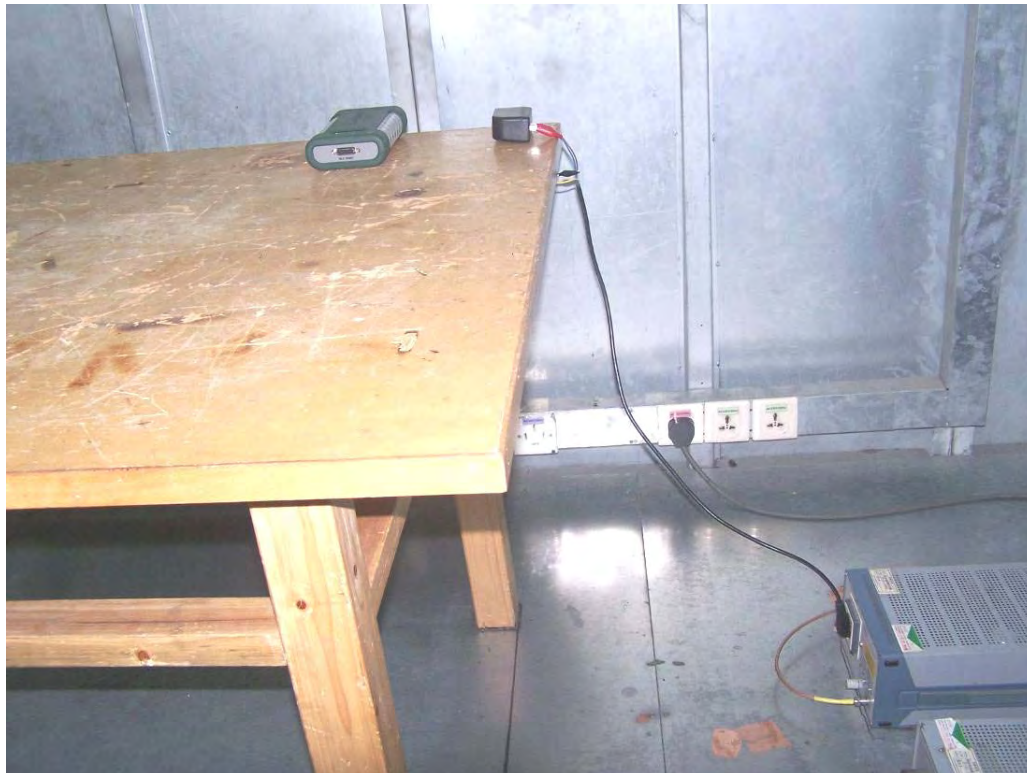

## **6. Radiated Emission Test**


### **6.1 Measurement Procedure**

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.




## 6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

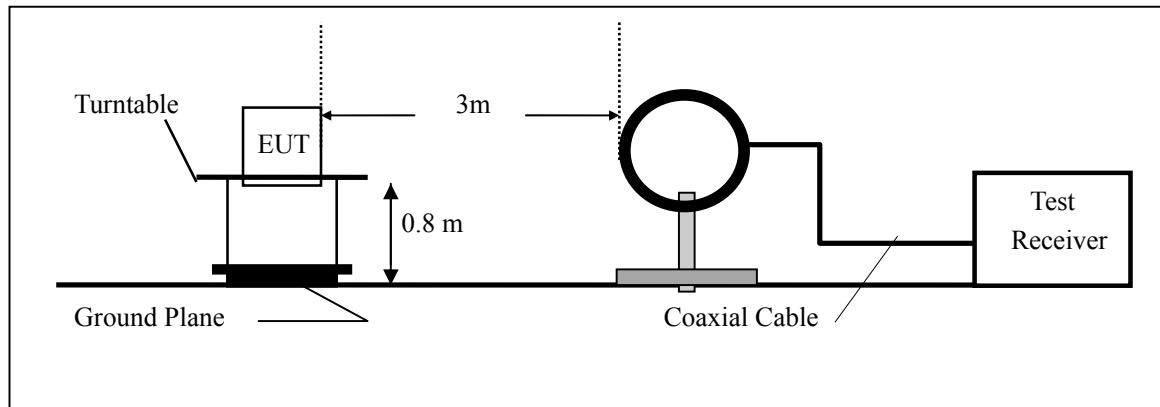

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

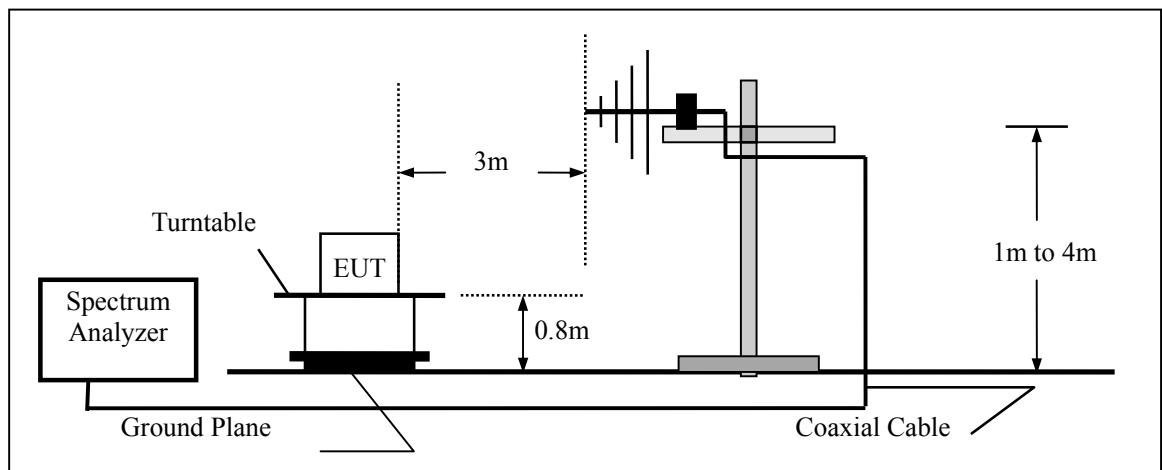

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

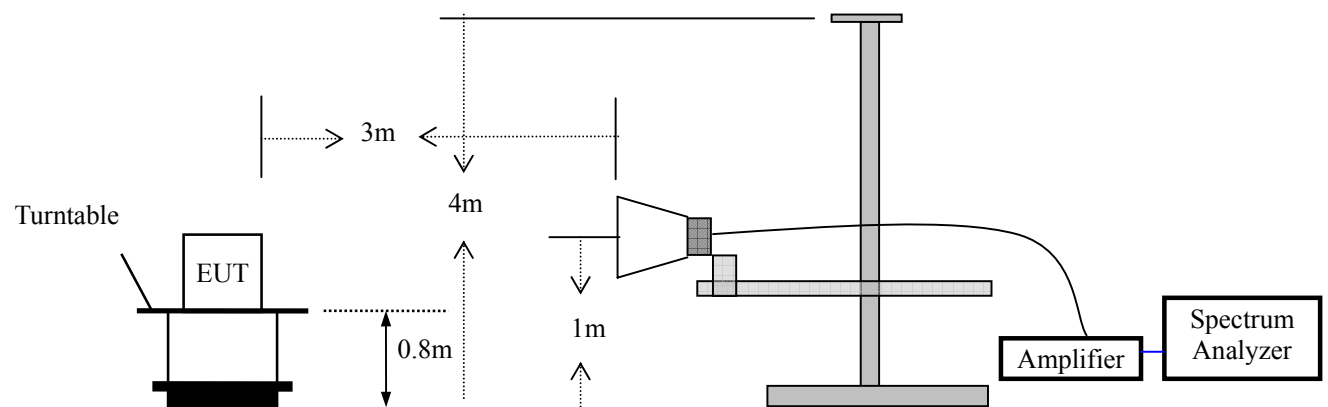

### 6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/29/2008	05/29/2009
Pre-Amplifier	HP	8447D	2944A07999	05/29/2008	05/29/2009
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2008	05/29/2009
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2008	05/29/2009
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/29/2008	05/29/2009
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/29/2008	05/29/2009

### 6.4 Measurement Result

Operation Mode: ON                      Test Date : February 13, 2009  
Frequency Range: 30~1000MHz        Temperature : 28 °C  
Test Result: PASS                      Humidity : 65 %  
Measured Distance: 3m                Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
101.506	V	35.47	43.50	-8.03	QP
168.350	V	39.78	43.50	-3.72	QP
317.580	V	27.32	46.00	-18.68	QP
432.612	V	30.39	46.00	-15.61	QP
497.901	V	35.73	46.00	-10.27	QP
751.282	V	34.06	46.00	-11.94	QP
101.506	H	34.61	43.50	-8.89	QP
179.231	H	38.72	43.50	-4.78	QP
432.612	H	33.31	46.00	-12.69	QP
667.340	H	36.01	46.00	-9.99	QP
751.282	H	38.60	46.00	-7.40	QP
811.907	H	34.64	46.00	-11.36	QP

**No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.209.**

**Note:** (1) All Readings are QP Value.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: CH1: 2402MHz Test Date : February 13, 2009  
Frequency Range: 1-25GHz Temperature : 28 °C  
Test Result: PASS Humidity : 65 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2402.00(F)	V	88.52	65.34	114.00	94.00	-25.48	-28.66
2256.12	V	58.31	45.34	74.00	54.00	-15.69	-8.66
2954.65	V	51.33	42.77	74.00	54.00	-22.67	-11.23
4804.00	V	49.31	39.24	74.00	54.00	-24.69	-14.76
7206.00	V	51.91	43.22	74.00	54.00	-22.09	-10.78
9608.00	V	48.26	41.35	74.00	54.00	-25.74	-12.65
12010.00	V	46.35	40.12	74.00	54.00	-27.65	-13.88
2402.00(F)	H	91.45	70.66	114.00	94.00	-22.55	-23.34
2673.35	H	57.31	45.31	74.00	54.00	-16.69	-8.69
2948.43	H	54.33	42.67	74.00	54.00	-19.67	-11.33
4804.00	H	52.48	46.73	74.00	54.00	-21.52	-7.27
7206.00	H	52.61	44.11	74.00	54.00	-21.39	-9.89
9608.00	H	46.65	34.32	74.00	54.00	-27.35	-19.68
12010.00	H	47.39	42.06	74.00	54.00	-26.61	-11.94

**No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.**

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: CH40: 2441MHz Test Date : February 13, 2009  
Frequency Range: 1-25GHz Temperature : 28 °C  
Test Result: PASS Humidity : 65 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2441.00(F)	V	91.56	71.32	114.00	94.00	-22.44	-22.68
2389.45	V	52.14	44.65	74.00	54.00	-21.86	-9.35
2674.56	V	52.45	42.10	74.00	54.00	-21.55	-11.90
4882.00	V	52.45	42.10	74.00	54.00	-21.55	-11.90
7323.00	V	53.54	44.63	74.00	54.00	-20.46	-9.37
9764.00	V	50.17	38.67	74.00	54.00	-23.83	-15.33
12205.00	V	49.68	43.69	74.00	54.00	-24.32	-10.31
2441.00(F)	H	92.78	71.46	114.00	94.00	-21.22	-22.54
2547.67	H	53.11	44.22	74.00	54.00	-20.89	-9.78
3354.85	H	52.54	43.56	74.00	54.00	-21.46	-10.44
4882.00	H	49.32	40.35	74.00	54.00	-24.68	-13.65
7323.00	H	54.37	45.43	74.00	54.00	-19.63	-8.57
9764.00	H	50.36	41.05	74.00	54.00	-23.64	-12.95
12205.00	H	49.82	40.78	74.00	54.00	-24.18	-13.22

**No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.**

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.


Operation Mode: CH79: 2480MHz Test Date : February 13, 2009  
Frequency Range: 1-25GHz Temperature : 28 °C  
Test Result: PASS Humidity : 65 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2480.00(F)	V	89.45	70.12	114.00	94.00	-24.55	-23.88
2572.34	V	52.14	43.64	74.00	54.00	-21.86	-10.36
3126.64	V	50.67	42.14	74.00	54.00	-23.33	-11.86
4960.00	V	47.36	39.32	74.00	54.00	-26.64	-14.68
7440.00	V	51.63	42.96	74.00	54.00	-22.37	-11.04
9920.00	V	48.75	40.25	74.00	54.00	-25.25	-13.75
12400.00	V	49.34	39.34	74.00	54.00	-24.66	-14.66
2480.00(F)	H	91.46	73.65	114.00	94.00	-22.54	-20.35
2423.54	H	52.46	42.87	74.00	54.00	-21.54	-11.13
3484.36	H	54.64	41.24	74.00	54.00	-19.36	-12.76
4960.00	H	49.34	40.21	74.00	54.00	-24.66	-13.79
7440.00	H	48.36	39.24	74.00	54.00	-25.64	-14.76
9920.00	H	45.37	38.54	74.00	54.00	-28.63	-15.46
12400.00	H	48.45	40.78	74.00	54.00	-25.55	-13.22

**No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.**

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

### 6.5 Radiated Measurement Photos:

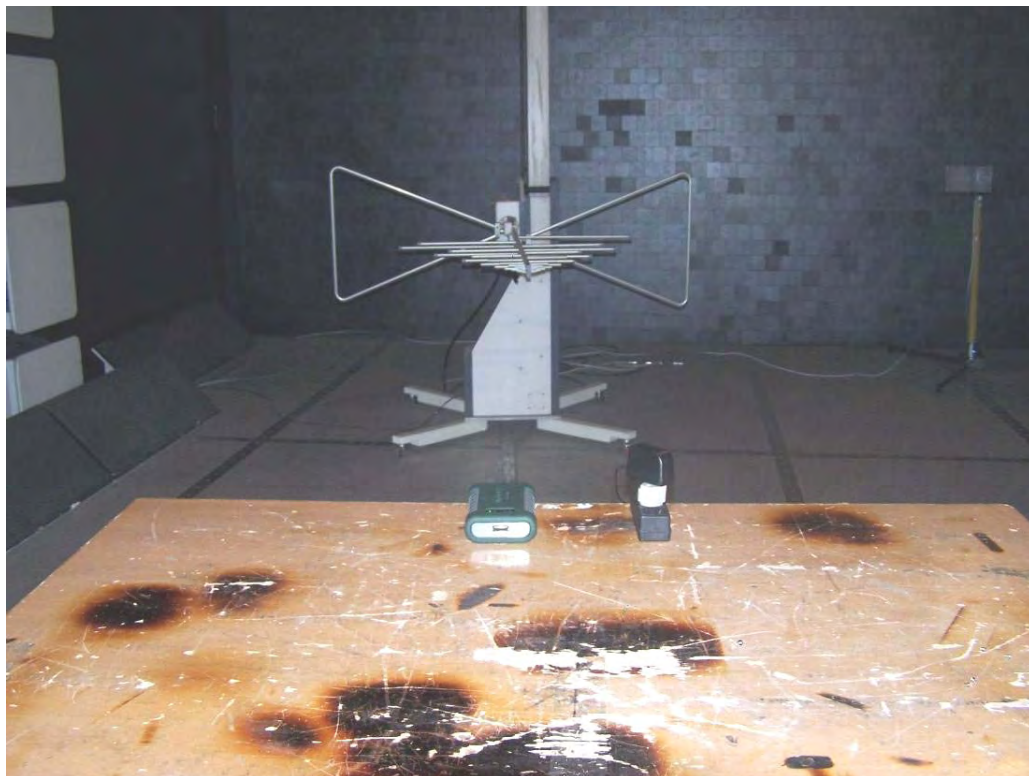


## 7. Channel Separation test

### 7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Equipment Used:



Same as 6.3 Radiated Emission Measurement.

### 7.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 13, 2009
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)
1	2402	1000.00	>25 kHz
40	2441	1000.00	>25 kHz
79	2480	1000.00	>25 kHz

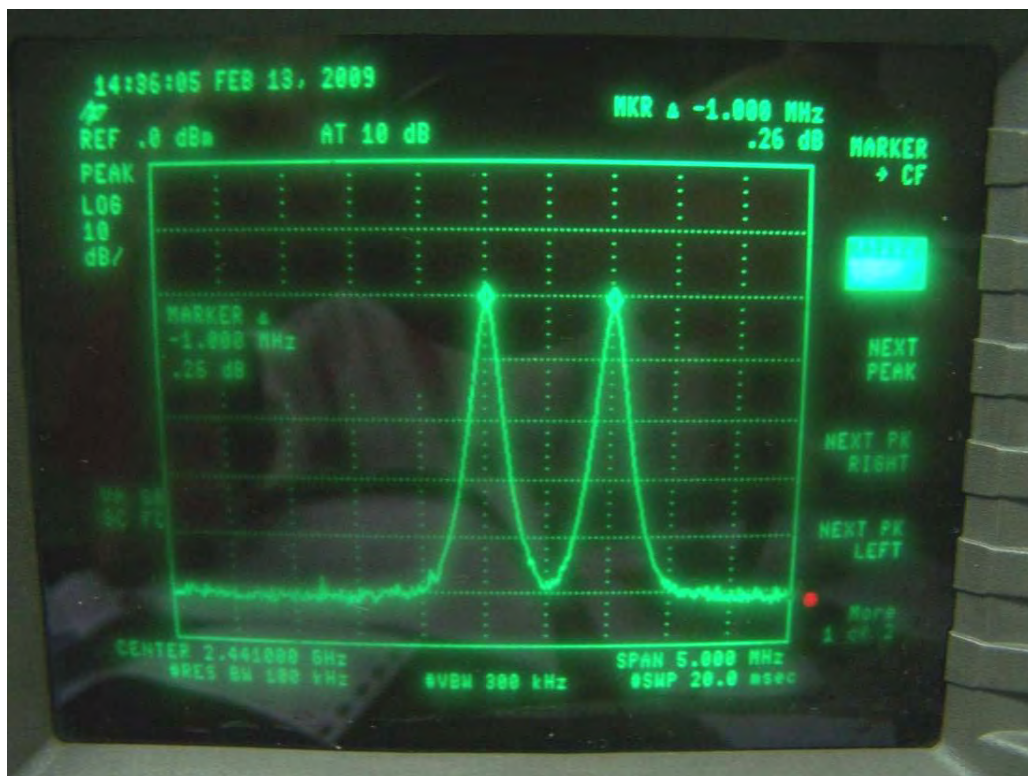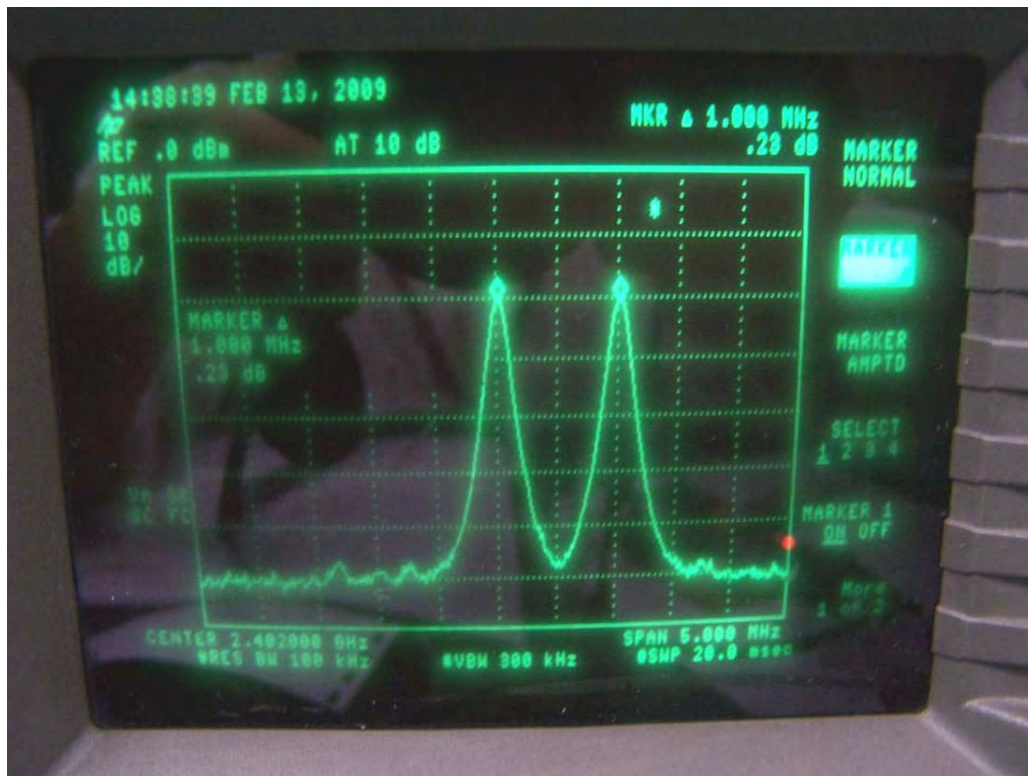






## 8. 20dB Bandwidth test

### 8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.


### 8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 13, 2009
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	350
40	2441	325
79	2480	330



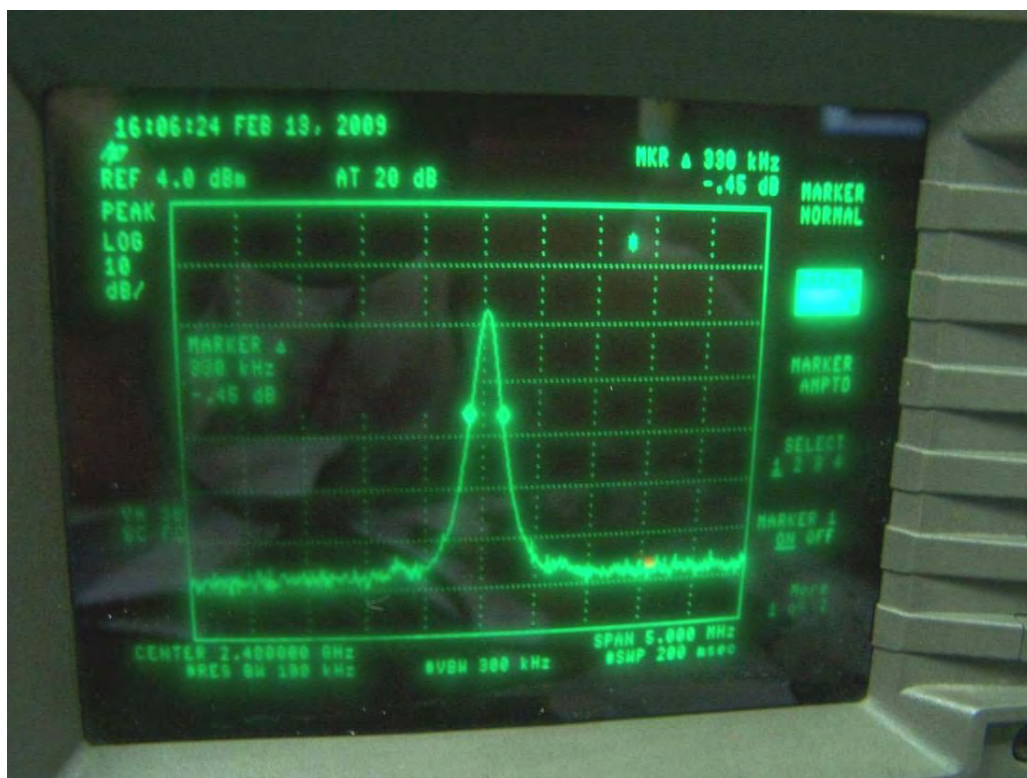


## 9. Quantity of Hopping Channel Test

### 9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 9.2 Test SET-UP (Block Diagram of Configuration)



### 9.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.


### 9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 12, 2009
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Hopping Channel Limit
2402-2480	79	75



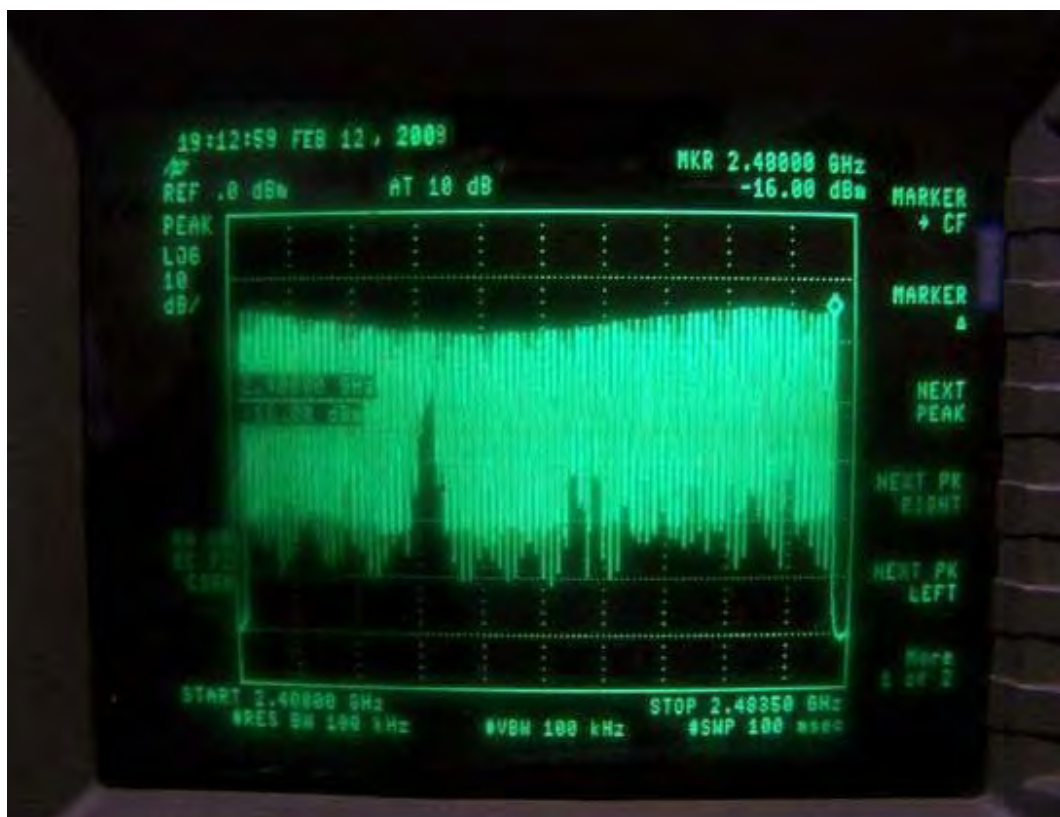


## 10. Time of Occupancy (Dwell Time) test

### 10.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

### 10.2 Test SET-UP (Block Diagram of Configuration)



### 10.3 Measurement Equipment Used:



Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 29, 08	1 Year
2.	Amp	HP	8449B	3008A00863	May 29, 08	1 Year
3.	Antenna	EMCO	3115	9607-4877	May 29, 08	1 Year
4.	HF Cable	Hubersuhne	Sucoflex104	N/A	May 29, 08	1 Year

### 10.4 Measurement Results:



Spectrum Detector:	PK	Test Date :	February 13, 2009
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Mode	Numbers of emission in 31.6s(79*0.4s)	Single transmission time(ms)	Result (msec)	Limit (msec)
DH1	50/5*31.6	0.4446	140.50ms	400
DH3	25/5*31.6	1.710	270.18ms	400
DH5	17/5*31.6	2.967	318.78ms	400



### DH1

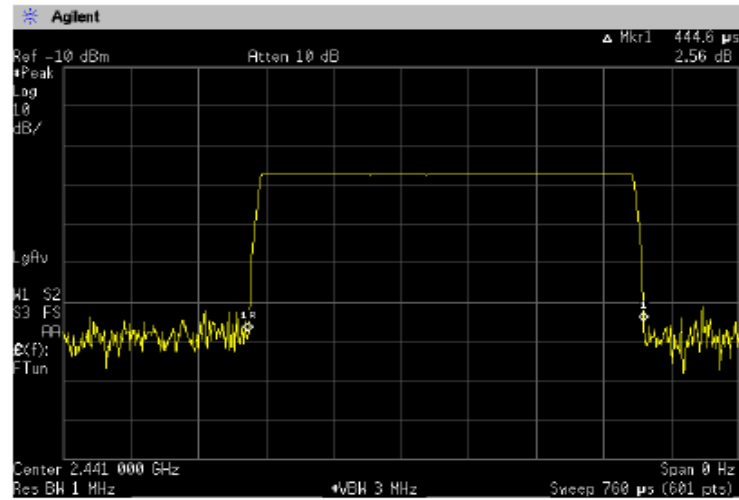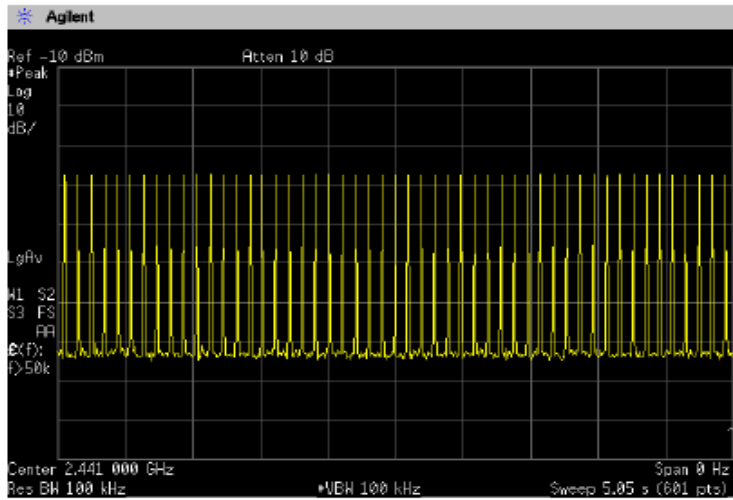

### DH3

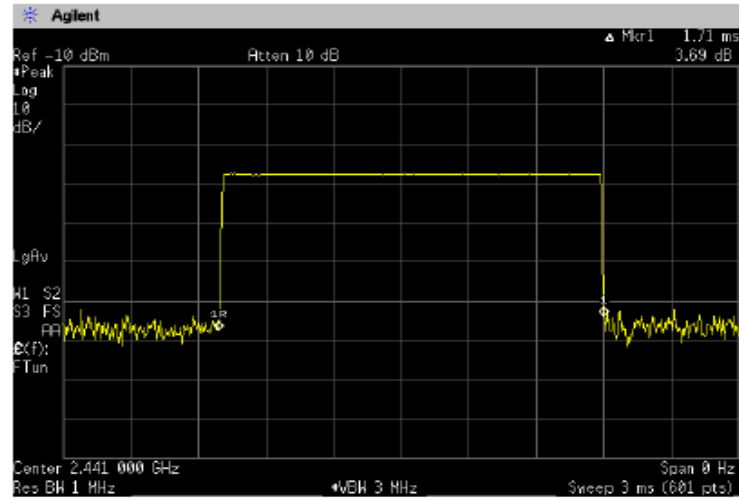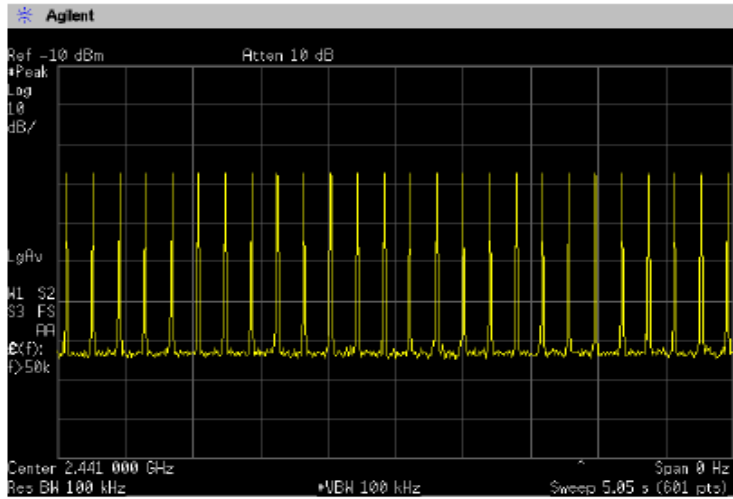

### DH5

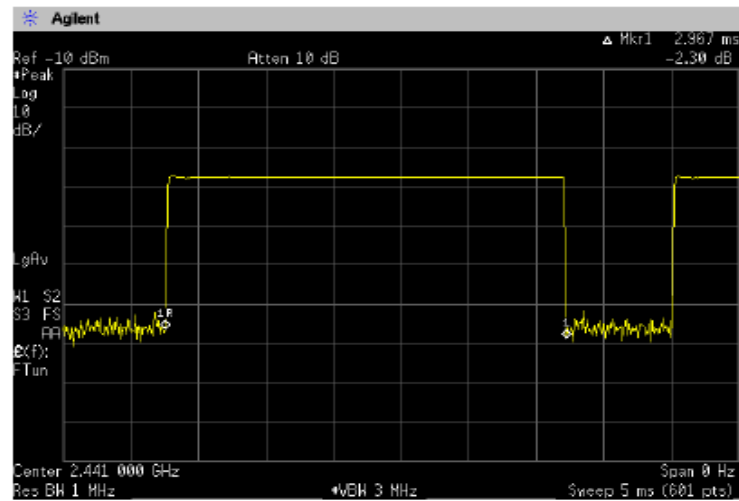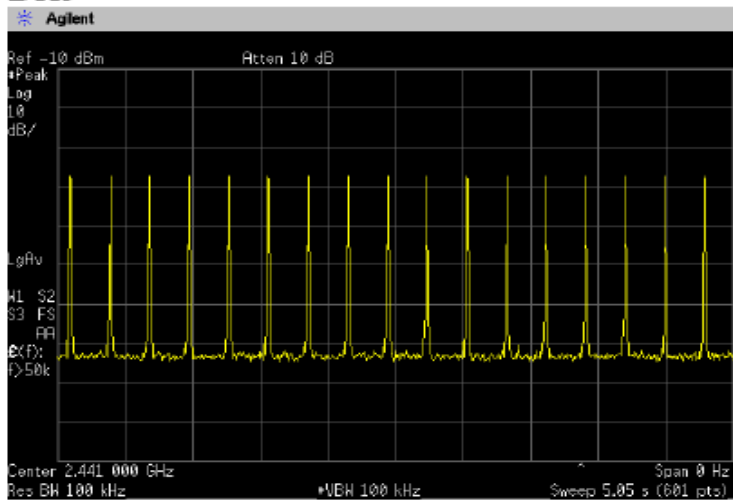




## 11. MAXIMUM PEAK OUTPUT POWER TEST

### 11.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

### 11.2 Test SET-UP (Block Diagram of Configuration)



### 11.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

### 11.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 13, 2009
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel Frequency (MHz)	Reading dBm	Limit dBm	Pass/Fail
1	2402.00	-13.78	21	PASS
40	2441.00	-13.15	21	PASS
79	2480.00	-14.43	21	PASS






## 12. Band EDGE test

### 12.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

### 12.2 Test SET-UP (Block Diagram of Configuration)



### 12.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

### 12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 13, 2009
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

#### 1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
<2400	-14.89	-55.80	40.91	>20dBc
>2483.5	-12.17	-56.38	44.21	>20dBc

#### 2. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV
<2400	V	51.20	36.76	74.00	54.00
>2483.5	V	50.62	35.23	74.00	54.00





## **13. Antenna Application**

### **13.1 Antenna requirement**

The EUT's antenna is met the requirement of FCC part 15C section 15.203 and 15.240.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **13.2. Result**

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0.3dBi and meets the requirement.

## 14. RF EXPOSURE EVALUATION

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in § 1.1307(b)

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm <sup>2</sup> )	Average Time
<b>(A) Limits for Occupational/Control Exposures</b>				
<b>300-1500</b>	--	--	<b>F/300</b>	<b>6</b>
<b>1500-100000</b>	--	--	<b>5</b>	<b>6</b>
<b>(B) Limits for General Population/Uncontrol Exposures</b>				
<b>300-1500</b>	--	--	<b>F/1500</b>	<b>6</b>
<b>1500-100000</b>	--	--	<b>1</b>	<b>30</b>

### 14.1 Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

$P_d$ = Power density in mW/cm<sup>2</sup>

$P_{out}$ =output power to antenna in Mw

$G$ = gain of antenna in linear scale

$\pi$ =3.1416

$R$ = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

### 14.2 Measurement Result

Channel	Channel Frequency (MHz)	Output Peak power (mW)	Antenna Gain (dBi)	Power density at 25cm (mW/ cm <sup>2</sup> )	Power density Limits (mW/cm <sup>2</sup> )
Low	2402	0.0419	0.3	4.001e-7	1
Middle	2441	0.0484	0.3	4.622e-7	1
High	2480	0.0361	0.3	3.447e-7	1