

FCC 47 CFR PART 15 SUBPART C

Product Type : Tobii Dynavox I-12+
Applicant : Tobii Technology AB
Address : Karlsrovagen 2D, 182 53 Danderyd, SWEDEN
Trade Name : tobii dynavox
Model Number : 12003611 I-12+ ETR-01, xxxxxxxx I-12+ ETR-xx (x=0~9, A~Z, a~z or blank or slash; for marketing purpose only and no impact safety related constructions and critical components)
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2014
ANSI C63.10:2009
Receive Date : Dec. 27, 2014
Test Period : Feb. 07~Feb.10, 2015
Issue Date : Mar. 27, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Feb. 26, 2015	Initial Issue	
01	Mar. 27, 2015	Revised report Information.	Snow Wang

Verification of Compliance

Issued Date: 03/27/2015

Product Type : Tobii Dynavox I-12+
Applicant : Tobii Technology AB
Address : Karlsrovagen 2D, 182 53 Danderyd, SWEDEN
Trade Name : tobii dynavox
Model Number : 12003611 I-12+ ETR-01, xxxxxxxx I-12+ ETR-xx (x=0~9, A~Z, a~z or blank or slash; for marketing purpose only and no impact safety related constructions and critical components)
FCC ID : W5M-TDI12A
EUT Rated Voltage : DC 24V, 2.71A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2014
ANSI C63.10:2009

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Fly Lu

(Manager)

(Fly Lu)

Reviewed By

: Eric Ou Yang

(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	10
4	Conducted Emission Measurement	11
4.1.	Limit	11
4.2.	Test Instruments	11
4.3.	Test Setup	11
4.4.	Test Procedure	12
4.5.	Test Result	13
5	Radiated Emission Measurement	15
5.1.	Limit	15
5.2.	Test Instruments	15
5.3.	Setup	16
5.4.	Test Procedure	18
5.5.	Test Result	20
6	Maximum Conducted Output Power Measurement	27
6.1.	Limit	27
6.2.	Test Setup	27
6.3.	Test Instruments	27
6.4.	Test Procedure	27
6.5.	Test Result	28
7	6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement	30
7.1.	Limit	30
7.2.	Test Setup	30
7.3.	Test Instruments	30
7.4.	Test Procedure	30
7.5.	Test Result	31
7.6.	Test Graphs	32
8	Maximum Power Density Measurement	40
8.1.	Limit	40
8.2.	Test Setup	40
8.3.	Test Instruments	40
8.4.	Test Procedure	40
8.5.	Test Result	41
8.6.	Test Graphs	42

9	Out of Band Conducted Emissions Measurement	46
9.1.	Limit	46
9.2.	Test Setup.....	46
9.3.	Test Instruments	46
9.4.	Test Procedure	46
9.5.	Test Graphs	47
10	Band Edges Measurement	59
10.1.	Limit	59
10.2.	Test Setup.....	59
10.3.	Test Instruments	59
10.4.	Test Procedure	60
10.5.	Test Result.....	61
11	Antenna Measurement.....	65
11.1.	Limit	65
11.2.	Antenna Connector Construction	65

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	Band Edge Measurement	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	Tobii Dynavox I-12+
Trade Name	tobii dynavox
Model No.	12003611 I-12+ ETR-01, xxxxxxxx I-12+ ETR-xx (x=0~9, A~Z, a~z or blank or slash; for marketing purpose only and no impact safety related constructions and critical components)
Applicant	Tobii Technology AB Karlsrovagen 2D, 182 53 Danderyd, SWEDEN
Manufacturer	ONYX Healthcare 2F., No.135, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
FCC ID	W5M-TDI12A
Frequency Range	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz: 2412 ~ 2462 MHz IEEE 802.11n 2.4GHz 40MHz: 2422 ~ 2452 MHz
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM IEEE 802.11n 2.4GHz 20MHz: OFDM IEEE 802.11n 2.4GHz 40MHz: OFDM
Antenna Type	PCB Antenna
Antenna Gain	6.27 dBi
Antenna Delivery	1TX + 2RX
RF Output Power	IEEE 802.11b: 0.061 W / 17.84 dBm IEEE 802.11g: 0.258 W / 24.11 dBm IEEE 802.11n 2.4GHz 20MHz: 0.121 W / 20.84 dBm IEEE 802.11n 2.4GHz 40MHz: 0.118 W / 20.71 dBm
99 % Occupied Bandwidth	IEEE 802.11b: 14.96 MHz IEEE 802.11g: 16.87 MHz IEEE 802.11n 2.4GHz 20MHz: 17.85 MHz IEEE 802.11n 2.4GHz 40MHz: 36.21 MHz
Emission Designator	IEEE 802.11b: 14M9G1D IEEE 802.11g: 16M8D1D IEEE 802.11n 2.4GHz 20MHz: 17M8D1D IEEE 802.11n 2.4GHz 40MHz: 36M2D1D

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	TX/RX Function	Test Channel	Data Rate
Mode 2: IEEE 802.11b Link Mode	1TX / 2RX	1, 6, 11	1
Mode 3: IEEE 802.11g Link Mode	1TX / 2RX	1, 6, 11	6
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode	1TX / 2RX	1, 6, 11	6.5
Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode	1TX / 2RX	3, 6, 9	13.5


Note1: Duty cycle of test signal is >98%

3.2. EUT Exercise Software


1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

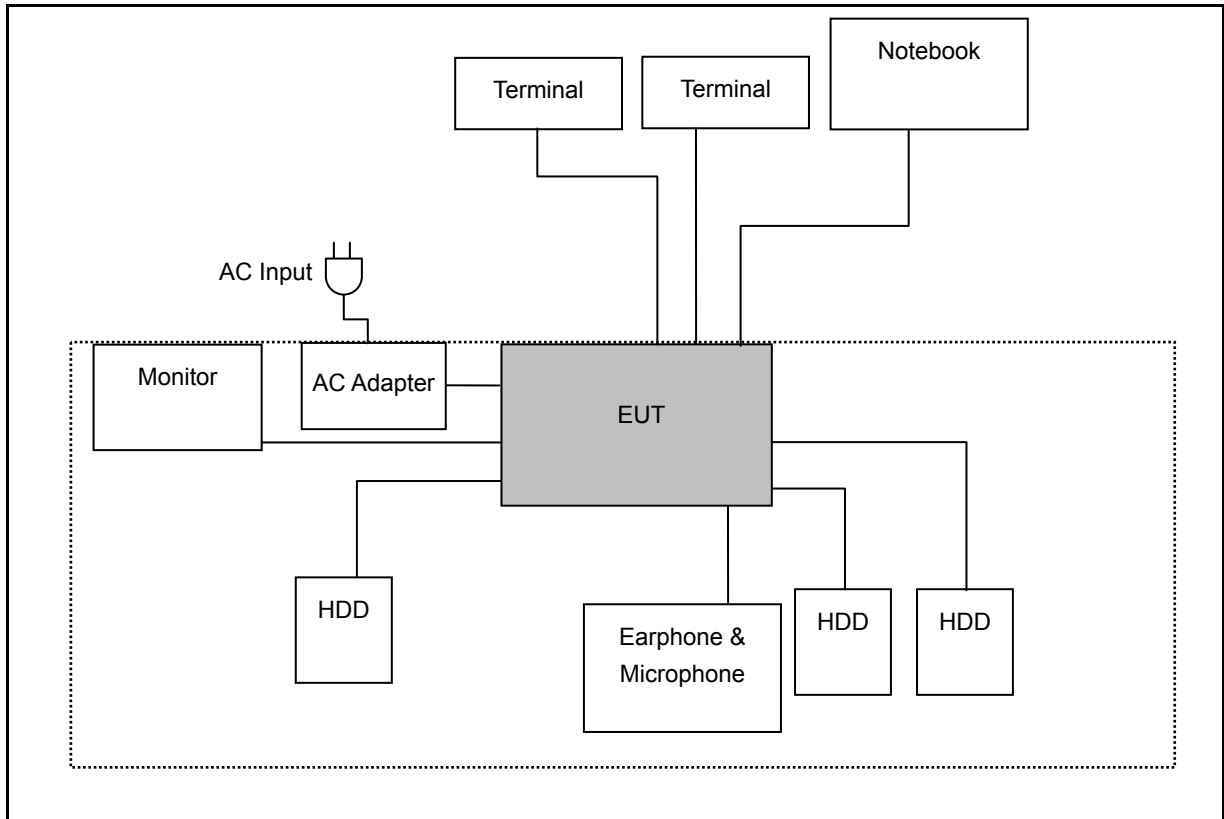

Radiated Emission

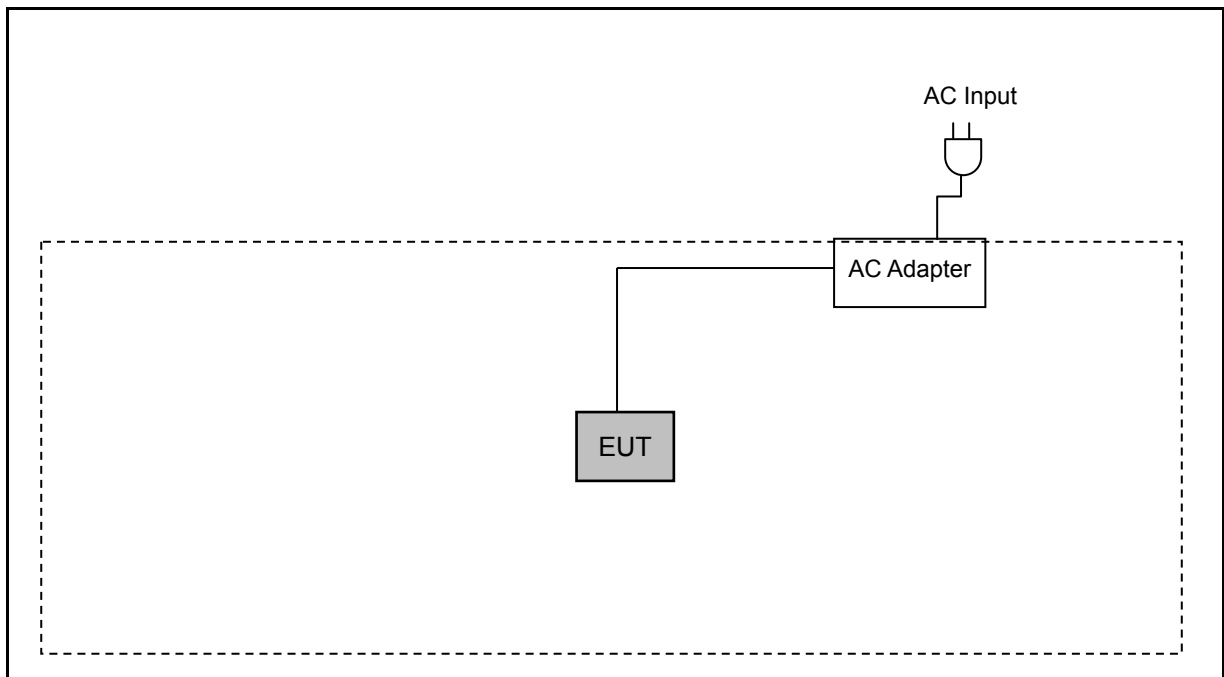

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/12/2014	(1)
LISN	R&S	ENV216	101040	03/07/2014	(1)
LISN	R&S	ENV216	101041	03/07/2014	(1)
RF Cable	EMCI	RG 214/U	TE-02	06/30/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

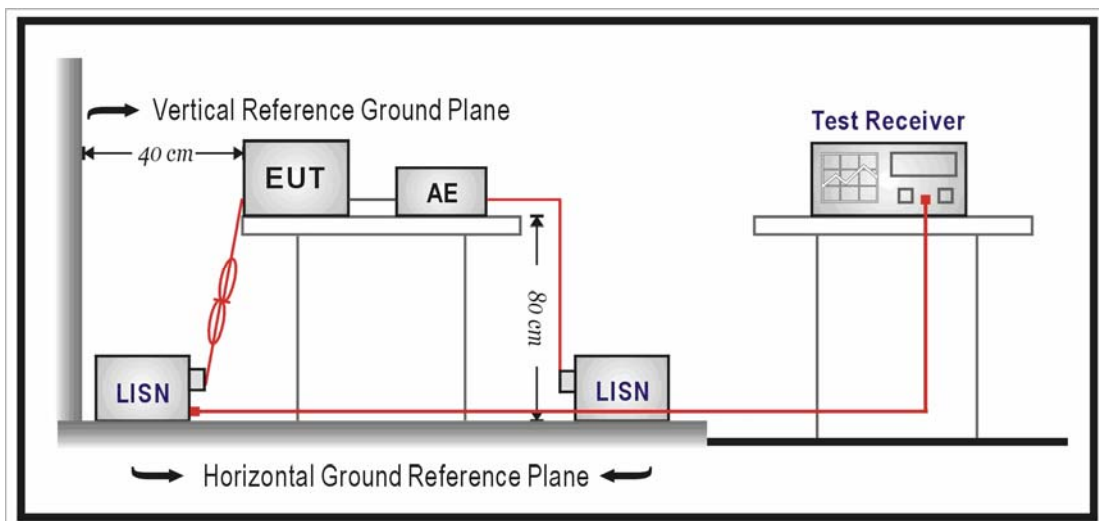

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	12003611 I-12+ ETR-01	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	02/07/2015
		Test By:	Eric Ou Yang
Description:			

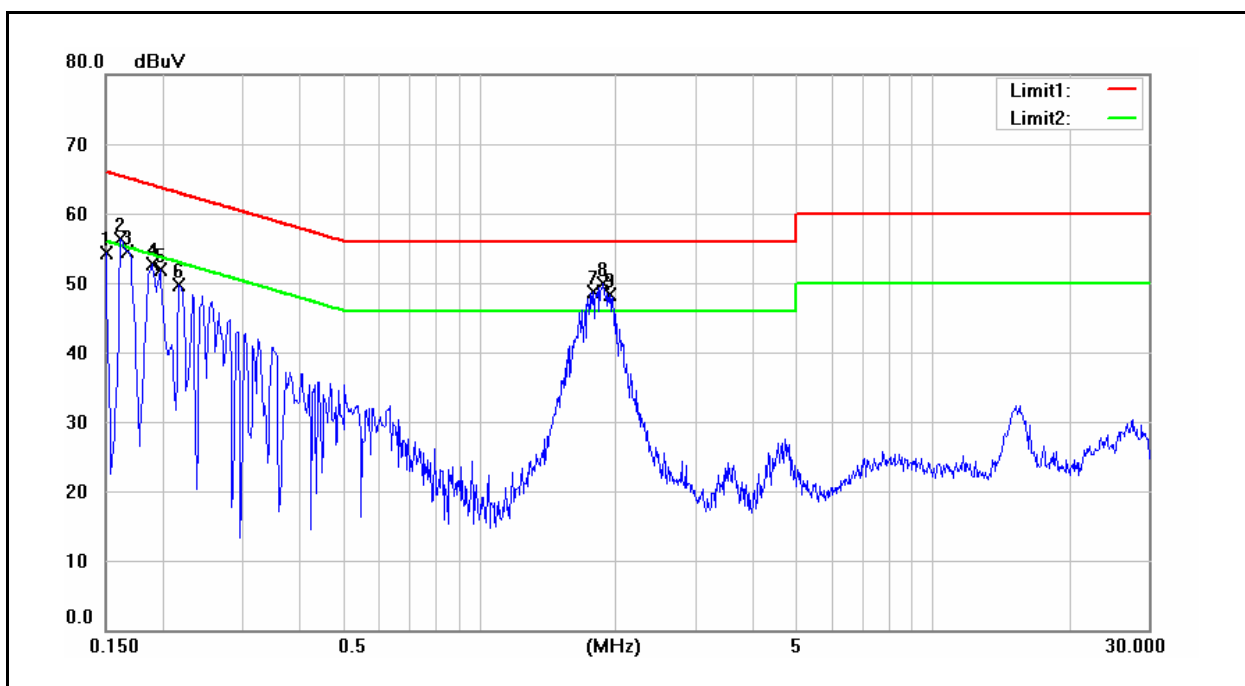


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	41.78	13.39	9.59	51.37	22.98	66.00	56.00	-14.63	-33.02	Pass
2	0.1620	40.10	11.34	9.60	49.70	20.94	65.36	55.36	-15.66	-34.42	Pass
3	0.1685	39.36	10.93	9.60	48.96	20.53	65.03	55.03	-16.07	-34.50	Pass
4	0.1900	38.79	26.21	9.60	48.39	35.81	64.04	54.04	-15.65	-18.23	Pass
5	0.1980	38.16	26.01	9.60	47.76	35.61	63.69	53.69	-15.93	-18.08	Pass
6	0.2180	33.95	7.71	9.60	43.55	17.31	62.89	52.89	-19.34	-35.58	Pass
7	1.7900	33.25	25.34	9.68	42.93	35.02	56.00	46.00	-13.07	-10.98	Pass
8	1.8820	35.47	25.41	9.69	45.16	35.10	56.00	46.00	-10.84	-10.90	Pass
9	1.9420	28.62	21.37	9.69	38.31	31.06	56.00	46.00	-17.69	-14.94	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	12003611 I-12+ ETR-01	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	02/07/2015
		Test By:	Eric Ou Yang

Description:

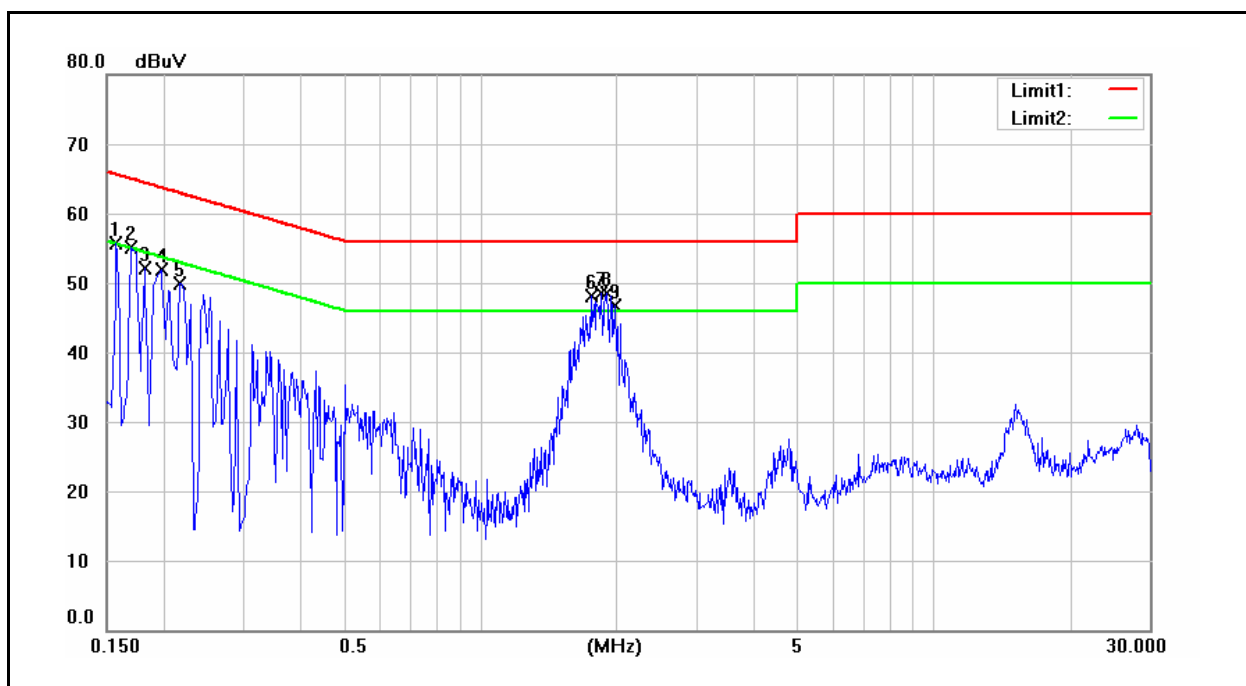

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	40.36	11.84	9.60	49.96	21.44	65.57	55.57	-15.61	-34.13	Pass
2	0.1700	38.95	10.57	9.60	48.55	20.17	64.96	54.96	-16.41	-34.79	Pass
3	0.1820	37.35	16.47	9.60	46.95	26.07	64.39	54.39	-17.44	-28.32	Pass
4	0.1980	38.06	25.90	9.60	47.66	35.50	63.69	53.69	-16.03	-18.19	Pass
5	0.2180	33.82	7.56	9.60	43.42	17.16	62.89	52.89	-19.47	-35.73	Pass
6	1.7580	28.69	21.30	9.69	38.38	30.99	56.00	46.00	-17.62	-15.01	Pass
7	1.8500	33.96	25.96	9.69	43.65	35.65	56.00	46.00	-12.35	-10.35	Pass
8	1.8980	36.67	25.74	9.70	46.37	35.44	56.00	46.00	-9.63	-10.56	Pass
9	1.9900	27.52	20.20	9.70	37.22	29.90	56.00	46.00	-18.78	-16.10	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2014	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/22/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/02/2014	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/02/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/19/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	03/03/2014	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)


Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.


5.3. Setup

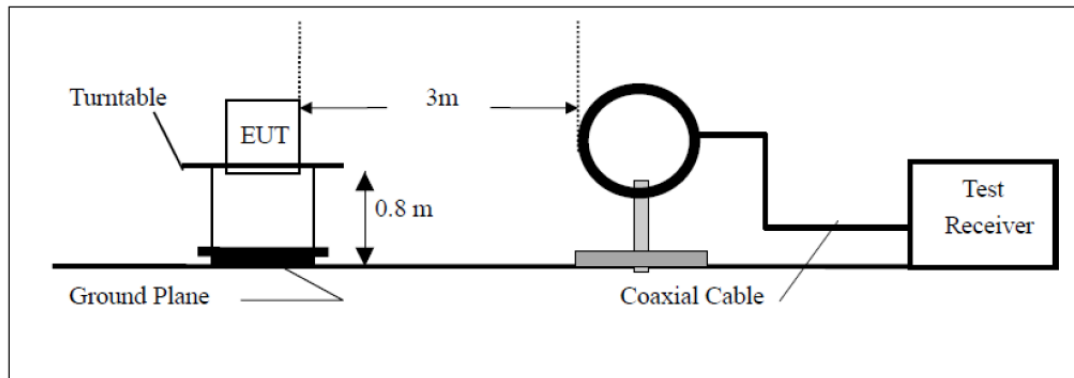

Below 1GHz

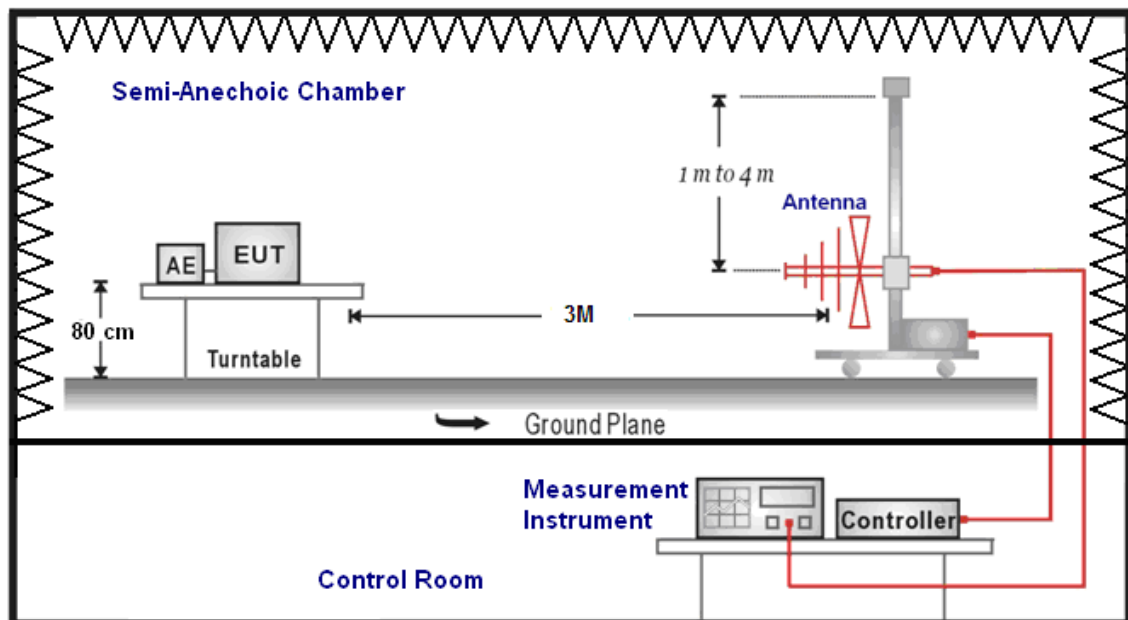

Above 1GHz

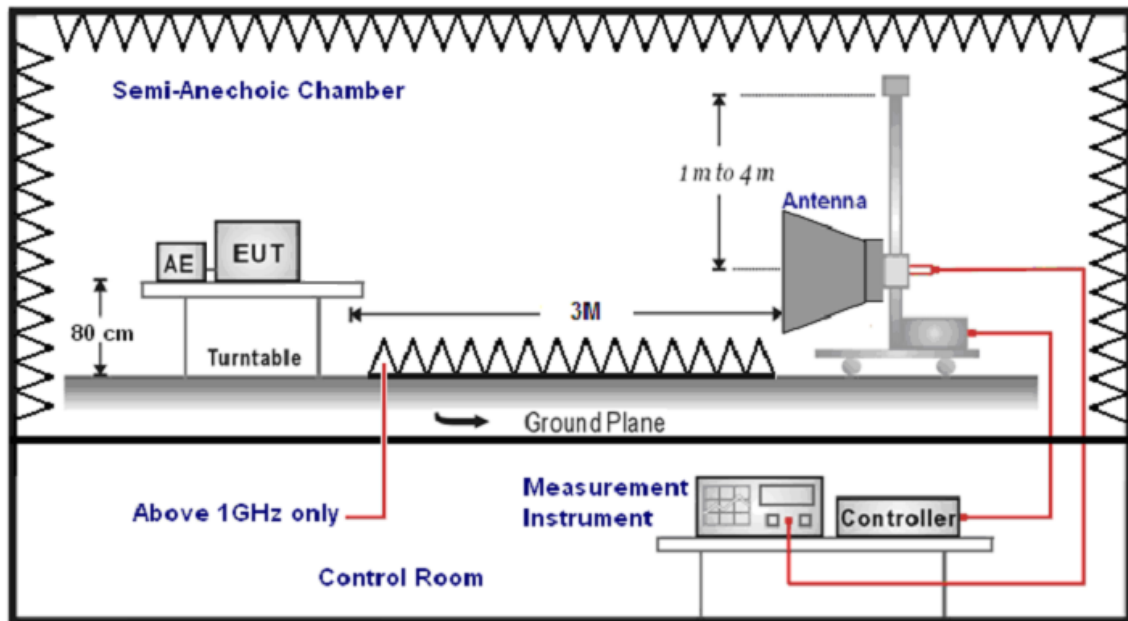

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		12003611 I-12+ ETR-01		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		02/10/2015	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
129.5000	40.37	-13.63	26.74	43.50	-16.76	QP	H
260.0000	46.17	-13.10	33.07	46.00	-12.93	QP	H
387.0000	44.27	-8.77	35.50	46.00	-10.50	QP	H
562.5000	37.09	-5.30	31.79	46.00	-14.21	QP	H
750.0000	35.47	-1.38	34.09	46.00	-11.91	QP	H
832.0000	36.10	0.08	36.18	46.00	-9.82	QP	H
92.5000	45.98	-18.11	27.87	43.50	-15.63	QP	V
260.5000	42.34	-13.02	29.32	46.00	-16.68	QP	V
452.0000	41.11	-7.38	33.73	46.00	-12.27	QP	V
585.0000	36.74	-4.67	32.07	46.00	-13.93	QP	V
715.0000	33.28	-2.25	31.03	46.00	-14.97	QP	V
839.5000	35.56	0.21	35.77	46.00	-10.23	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	2			Date:	02/10/2015		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3058.000	37.76	-0.38	37.38	74.00	-36.62	peak	H
4577.000	33.73	3.98	37.71	74.00	-36.29	peak	H
6705.000	33.78	9.54	43.32	74.00	-30.68	peak	H
2981.000	37.55	-0.59	36.96	74.00	-37.04	peak	V
4591.000	34.94	4.01	38.95	74.00	-35.05	peak	V
6691.000	34.16	9.50	43.66	74.00	-30.34	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	2			Date:	02/10/2015		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	38.79	-0.40	38.39	74.00	-35.61	peak	H
4591.000	34.66	4.01	38.67	74.00	-35.33	peak	H
6677.000	34.34	9.46	43.80	74.00	-30.20	peak	H
3002.000	38.83	-0.54	38.29	74.00	-35.71	peak	V
4591.000	35.57	4.01	39.58	74.00	-34.42	peak	V
6663.000	33.59	9.43	43.02	74.00	-30.98	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	2			Date:	02/10/2015		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	36.14	-0.51	35.63	74.00	-38.37	peak	H
4591.000	34.59	4.01	38.60	74.00	-35.40	peak	H
6705.000	33.18	9.54	42.72	74.00	-31.28	peak	H
3030.000	38.00	-0.45	37.55	74.00	-36.45	peak	V
4535.000	33.96	3.88	37.84	74.00	-36.16	peak	V
6663.000	33.56	9.43	42.99	74.00	-31.01	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	3			Date:	02/10/2015		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.37	-0.44	36.93	74.00	-37.07	peak	H
4591.000	34.47	4.01	38.48	74.00	-35.52	peak	H
6663.000	33.42	9.43	42.85	74.00	-31.15	peak	H
3009.000	36.33	-0.51	35.82	74.00	-38.18	peak	V
4591.000	33.70	4.01	37.71	74.00	-36.29	peak	V
6698.000	34.07	9.53	43.60	74.00	-30.40	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	3			Date:	02/10/2015		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.34	-0.44	36.90	74.00	-37.10	peak	H
4577.000	34.48	3.98	38.46	74.00	-35.54	peak	H
6677.000	34.23	9.46	43.69	74.00	-30.31	peak	H
3030.000	37.15	-0.45	36.70	74.00	-37.30	peak	V
4605.000	33.96	4.05	38.01	74.00	-35.99	peak	V
6719.000	33.57	9.58	43.15	74.00	-30.85	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	3			Date:	02/10/2015		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	37.52	-0.45	37.07	74.00	-36.93	peak	H
4577.000	34.11	3.98	38.09	74.00	-35.91	peak	H
6698.000	33.63	9.53	43.16	74.00	-30.84	peak	H
3037.000	36.38	-0.44	35.94	74.00	-38.06	peak	V
4563.000	34.26	3.95	38.21	74.00	-35.79	peak	V
6677.000	33.46	9.46	42.92	74.00	-31.08	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	02/10/2015		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	36.84	-0.44	36.40	74.00	-37.60	peak	H
4577.000	34.51	3.98	38.49	74.00	-35.51	peak	H
6691.000	33.26	9.50	42.76	74.00	-31.24	peak	H
3023.000	37.52	-0.48	37.04	74.00	-36.96	peak	V
4549.000	34.95	3.92	38.87	74.00	-35.13	peak	V
6698.000	34.11	9.53	43.64	74.00	-30.36	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	4			Date:	02/10/2015		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.50	-0.45	36.05	74.00	-37.95	peak	H
4626.000	33.64	4.10	37.74	74.00	-36.26	peak	H
6747.000	33.43	9.65	43.08	74.00	-30.92	peak	H
3009.000	37.43	-0.51	36.92	74.00	-37.08	peak	V
4605.000	34.48	4.05	38.53	74.00	-35.47	peak	V
6677.000	33.36	9.46	42.82	74.00	-31.18	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	02/10/2015		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.43	-0.48	36.95	74.00	-37.05	peak	H
4570.000	34.54	3.97	38.51	74.00	-35.49	peak	H
6670.000	34.04	9.45	43.49	74.00	-30.51	peak	H
3058.000	38.16	-0.38	37.78	74.00	-36.22	peak	V
4598.000	34.76	4.04	38.80	74.00	-35.20	peak	V
6649.000	33.88	9.39	43.27	74.00	-30.73	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	02/10/2015		
Frequency:	2422MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	36.98	-0.54	36.44	74.00	-37.56	peak	H
4577.000	33.93	3.98	37.91	74.00	-36.09	peak	H
6698.000	34.00	9.53	43.53	74.00	-30.47	peak	H
3051.000	37.93	-0.40	37.53	74.00	-36.47	peak	V
4577.000	34.90	3.98	38.88	74.00	-35.12	peak	V
6677.000	33.60	9.46	43.06	74.00	-30.94	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	5			Date:	02/10/2015		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	36.40	-0.51	35.89	74.00	-38.11	peak	H
4626.000	33.95	4.10	38.05	74.00	-35.95	peak	H
6677.000	33.47	9.46	42.93	74.00	-31.07	peak	H
3030.000	36.75	-0.45	36.30	74.00	-37.70	peak	V
4570.000	34.21	3.97	38.18	74.00	-35.82	peak	V
6663.000	33.66	9.43	43.09	74.00	-30.91	peak	V


Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	5			Date:	02/10/2015		
Frequency:	2452MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2981.000	36.32	-0.59	35.73	74.00	-38.27	peak	H
4605.000	35.50	4.05	39.55	74.00	-34.45	peak	H
6663.000	33.48	9.43	42.91	74.00	-31.09	peak	H
3023.000	36.80	-0.48	36.32	74.00	-37.68	peak	V
4577.000	33.85	3.98	37.83	74.00	-36.17	peak	V
6670.000	32.70	9.45	42.15	74.00	-31.85	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

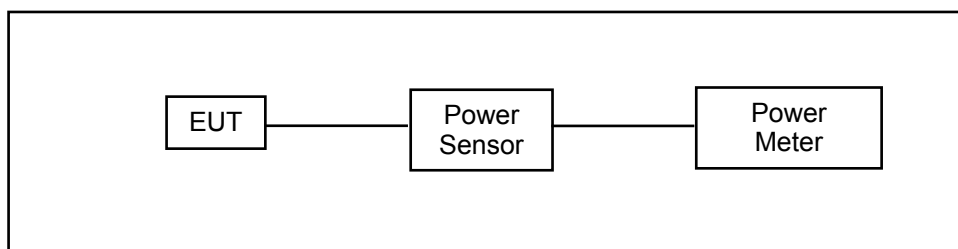

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/21/2014	(1)
Power Meter	Anritsu	ML2495A	1135009	08/21/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	03/03/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	12003611 I-12+ ETR-01			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 2: IEEE 802.11b Link Mode			
Date of Test	02/07/2015		Test Site	TE05
Frequency (MHz)	Data Rate	Peak Power		Limit (dBm)
		(dBm)	(W)	
2412	1M	17.62	0.058	< 30
2437		17.58	0.057	< 30
2462		17.84	0.061	< 30
2437	2M	17.55	0.057	< 30
2437	5.5M	17.52	0.056	< 30
2437	11M	17.50	0.056	< 30

Model Number	12003611 I-12+ ETR-01			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 3: IEEE 802.11g Link Mode			
Date of Test	02/07/2015		Test Site	TE05
Frequency (MHz)	Data Rate	Peak Power		Limit (dBm)
		(dBm)	(W)	
2412	6M	23.94	0.248	< 30
2437		24.11	0.258	< 30
2462		23.86	0.243	< 30
2437	9M	23.84	0.242	< 30
2437	12M	23.80	0.240	< 30
2437	18M	23.78	0.239	< 30
2437	24M	23.75	0.237	< 30
2437	36M	23.74	0.237	< 30
2437	48M	23.71	0.235	< 30
2437	54M	23.68	0.233	< 30

Note: The relevant measured result has the offset with cable loss already.

Model Number	12003611 I-12+ ETR-01			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode			
Date of Test	02/07/2015		Test Site	TE05
Frequency (MHz)	Data Rate	Peak Power		Limit (dBm)
		(dBm)	(W)	
2412	MCS0	20.51	0.112	< 30
2437		20.84	0.121	< 30
2462		20.69	0.117	< 30
2437	MCS1	20.75	0.119	< 30
2437	MCS2	20.73	0.118	< 30
2437	MCS3	20.70	0.117	< 30
2437	MCS4	20.68	0.117	< 30
2437	MCS5	20.65	0.116	< 30
2437	MCS6	20.64	0.116	< 30
2437	MCS7	20.61	0.115	< 30

Model Number	12003611 I-12+ ETR-01			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode			
Date of Test	02/07/2015		Test Site	TE05
Frequency (MHz)	Data Rate	Peak Power		Limit (dBm)
		(dBm)	(W)	
2422	MCS0	20.71	0.118	< 30
2437		20.50	0.112	< 30
2452		20.45	0.111	< 30
2437	MCS1	20.48	0.112	< 30
2437	MCS2	20.46	0.111	< 30
2437	MCS3	20.42	0.110	< 30
2437	MCS4	20.41	0.110	< 30
2437	MCS5	20.39	0.109	< 30
2437	MCS6	20.37	0.109	< 30
2437	MCS7	20.35	0.108	< 30

Note: The relevant measured result has the offset with cable loss already.


7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

7.2. Test Setup

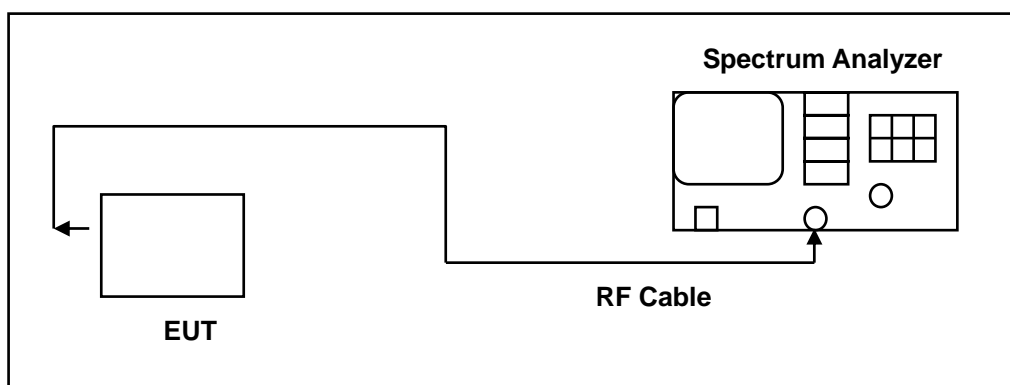

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	03/03/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	12003611 I-12+ ETR-01		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	10.035	14.935	> 0.500
2437	10.089	14.956	> 0.500
2462	10.066	14.955	> 0.500

Model Number	12003611 I-12+ ETR-01		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	16.588	16.871	> 0.500
2437	16.544	16.834	> 0.500
2462	16.563	16.857	> 0.500




Model Number	12003611 I-12+ ETR-01		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	17.786	17.846	> 0.500
2437	17.808	17.847	> 0.500
2462	17.769	17.835	> 0.500

Model Number	12003611 I-12+ ETR-01		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2422	36.339	36.167	> 0.500
2437	36.397	36.212	> 0.500
2452	36.336	36.170	> 0.500

7.6. Test Graphs


6dB RF Bandwidth

Mode 2: IEEE 802.11b Link Mode

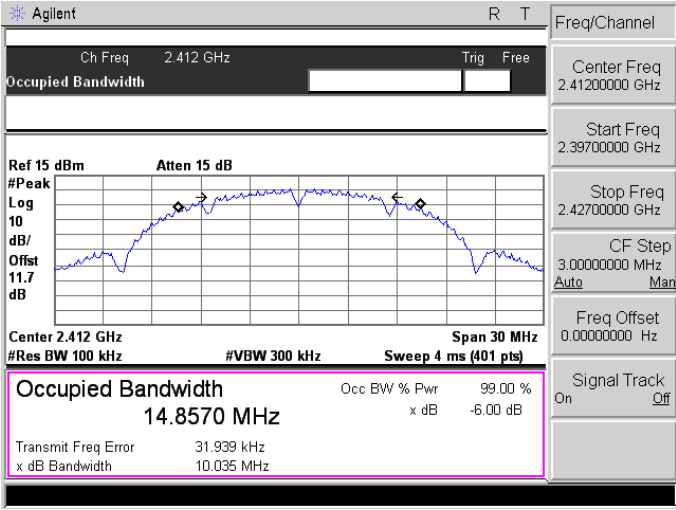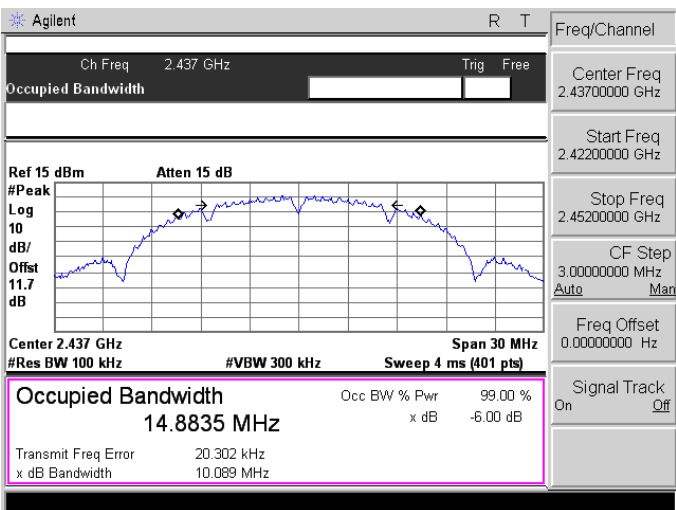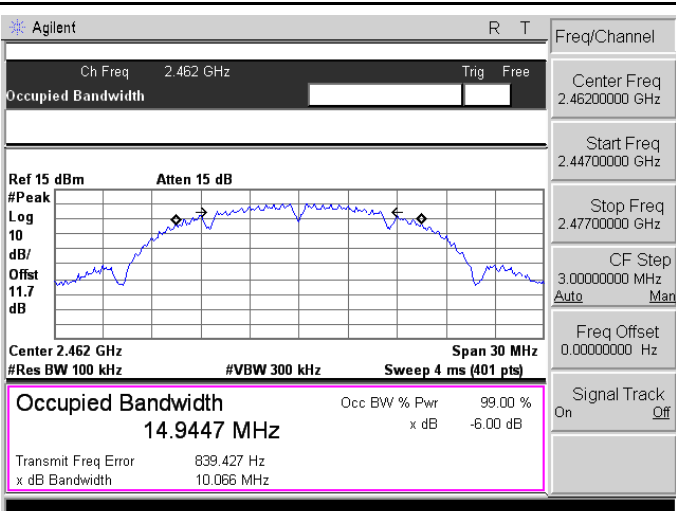
2412	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 15 dB</p> <p>#Peak Log 10 dB/Offset 11.7 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.8570 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 31.939 kHz</p> <p>x dB Bandwidth 10.035 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 15 dB</p> <p>#Peak Log 10 dB/Offset 11.7 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.8835 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 20.302 kHz</p> <p>x dB Bandwidth 10.089 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 15 dB</p> <p>#Peak Log 10 dB/Offset 11.7 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9447 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 839.427 Hz</p> <p>x dB Bandwidth 10.066 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode


2412

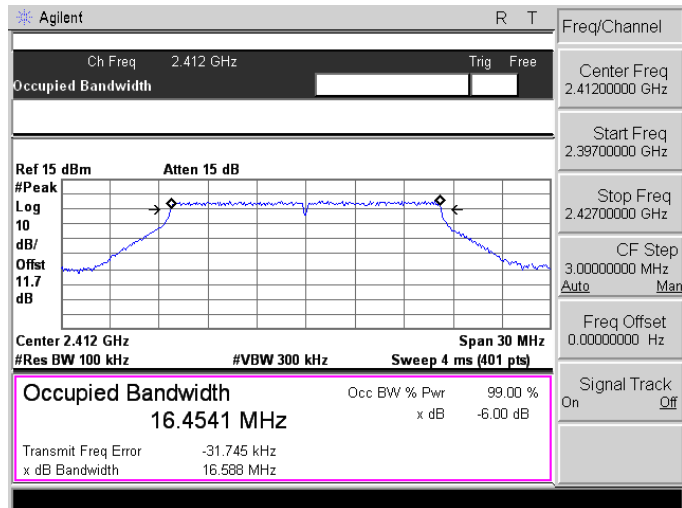

2437

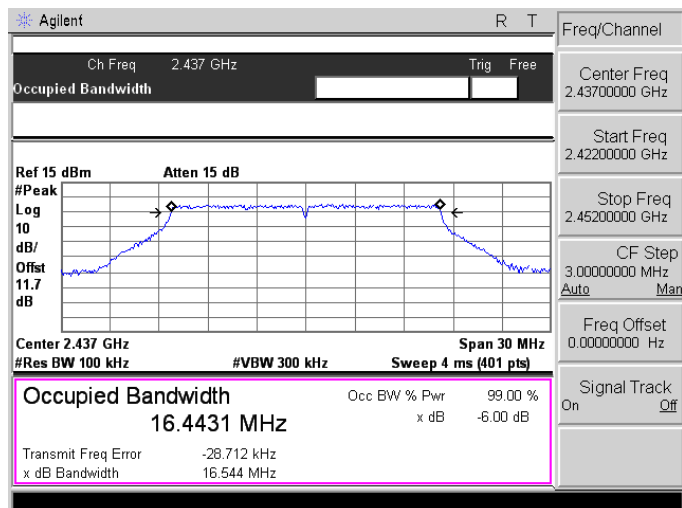


2462

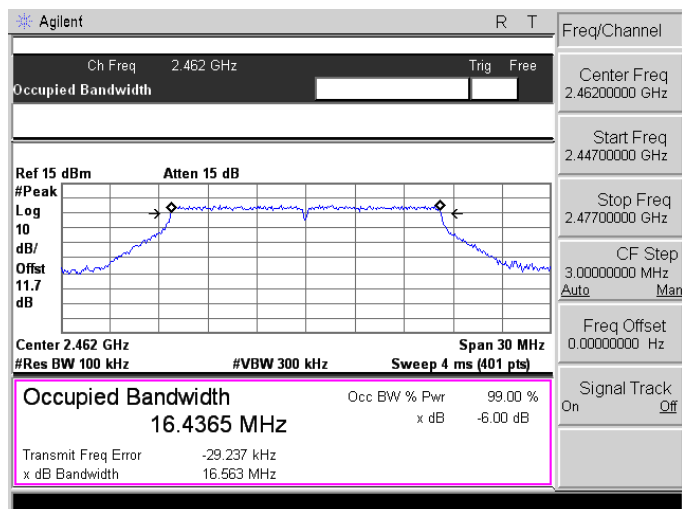


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode


2412

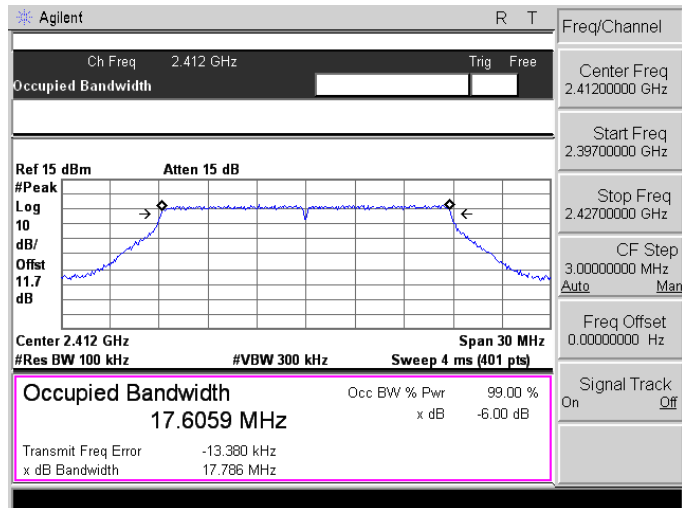

2437

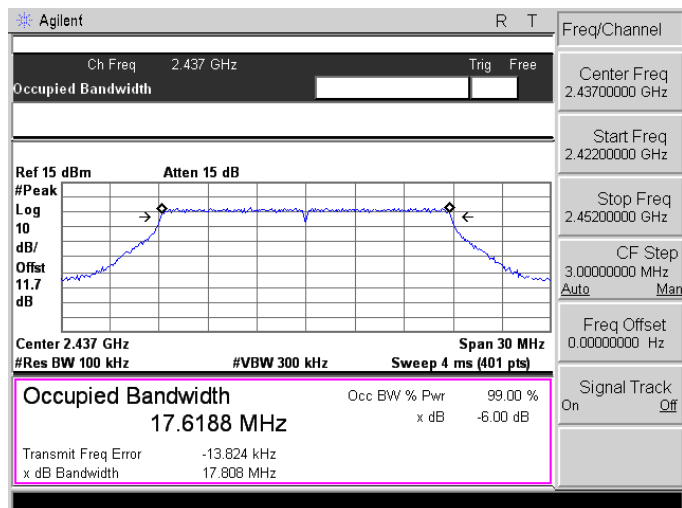


2462

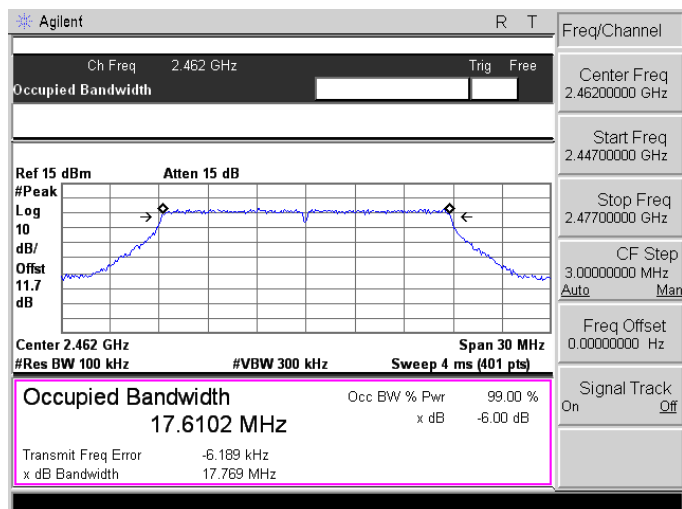


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode


2422

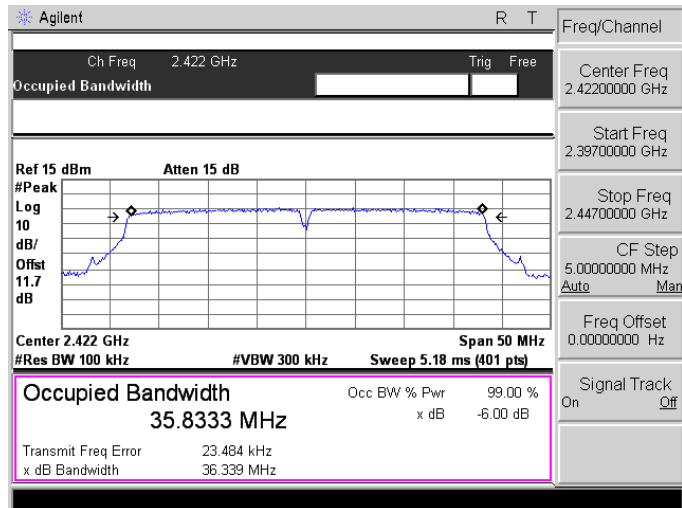

2437



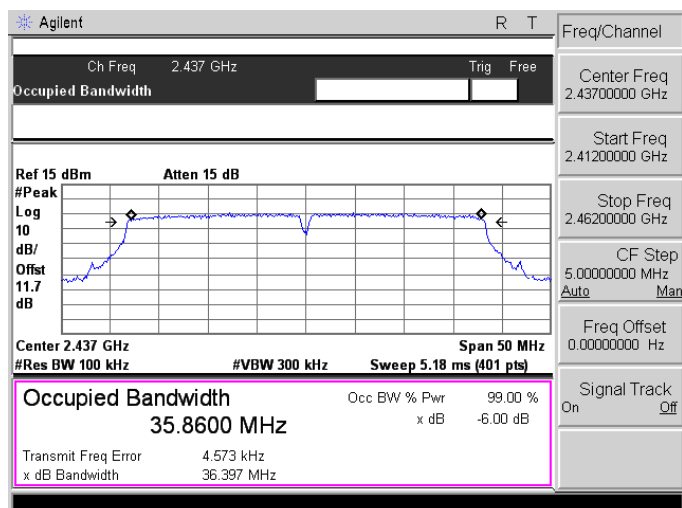


2452

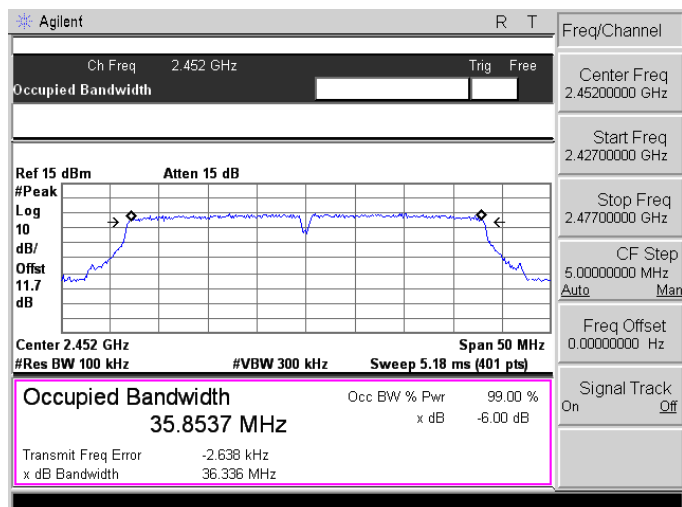


99 % Occupied Bandwidth

Mode 2: IEEE 802.11b Link Mode

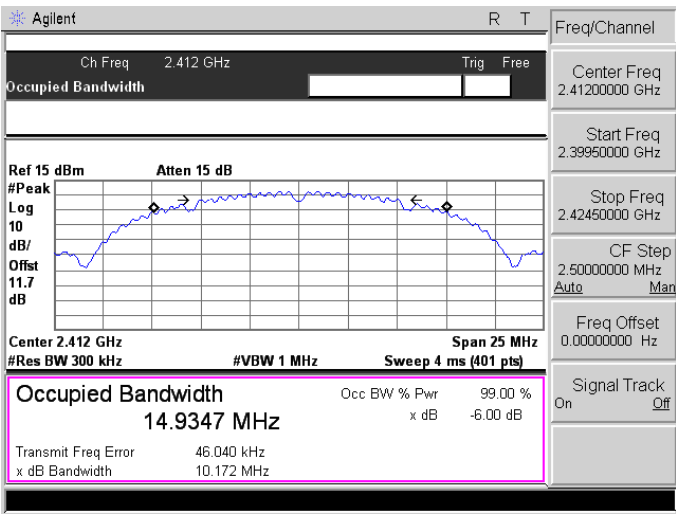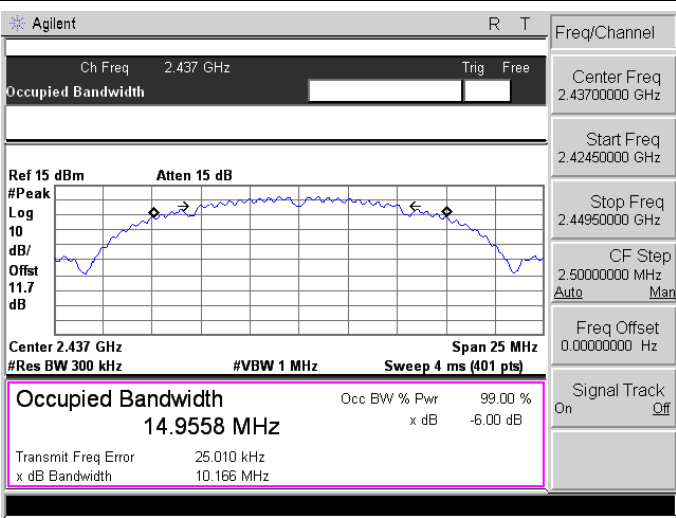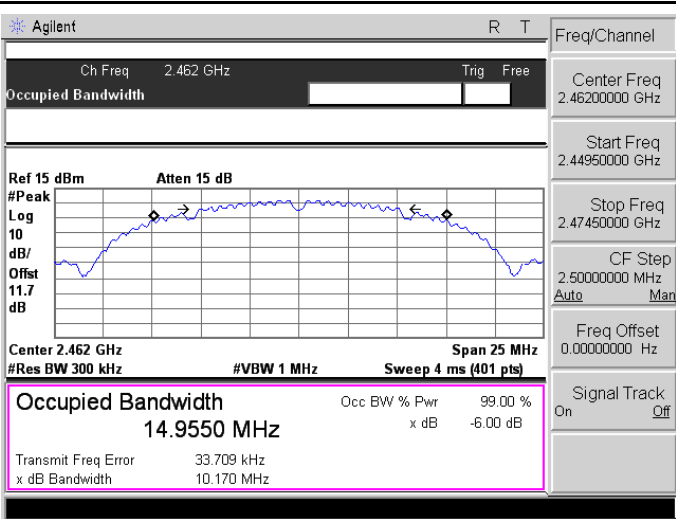
2412	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 15 dB</p> <p>#Peak Log 10 dB/Offset 11.7 dB</p> <p>Center 2.412 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9347 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 46.040 kHz</p> <p>x dB Bandwidth 10.172 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39950000 GHz</p> <p>Stop Freq 2.42450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 15 dB</p> <p>#Peak Log 10 dB/Offset 11.7 dB</p> <p>Center 2.437 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9558 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 25.010 kHz</p> <p>x dB Bandwidth 10.166 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42450000 GHz</p> <p>Stop Freq 2.44950000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 15 dB</p> <p>#Peak Log 10 dB/Offset 11.7 dB</p> <p>Center 2.462 GHz Span 25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9550 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 33.709 kHz</p> <p>x dB Bandwidth 10.170 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44950000 GHz</p> <p>Stop Freq 2.47450000 GHz</p> <p>CF Step 2.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode


2412

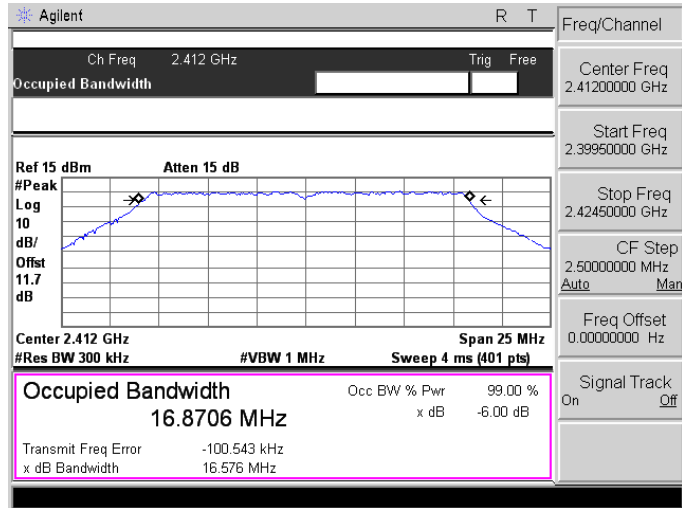

2437

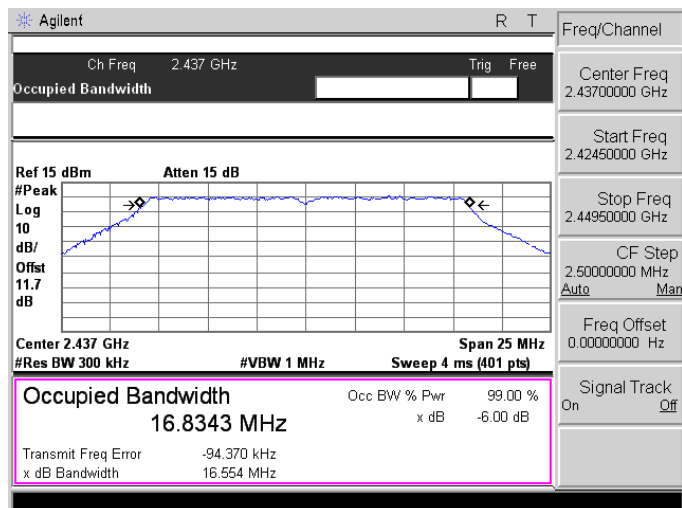


2462

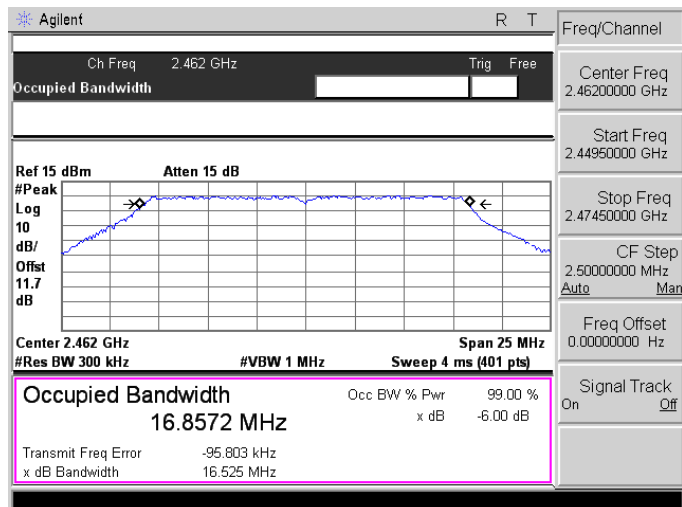


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode


2412

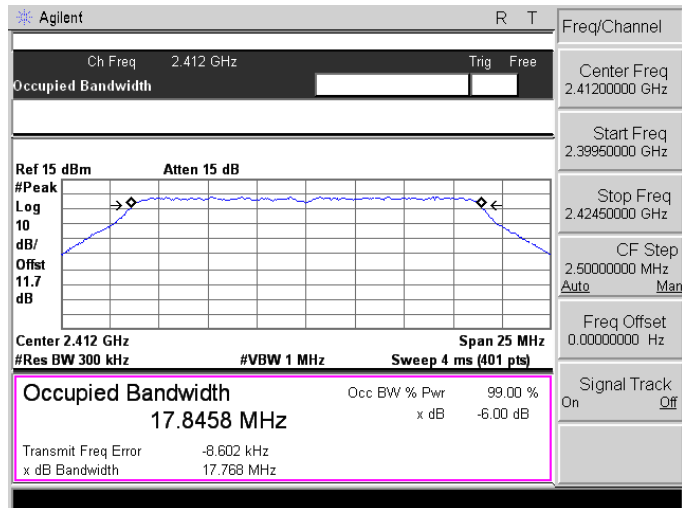

2437

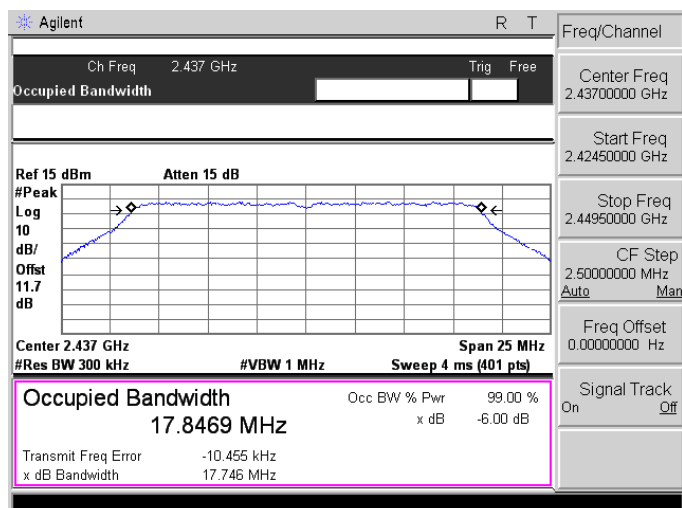


2462

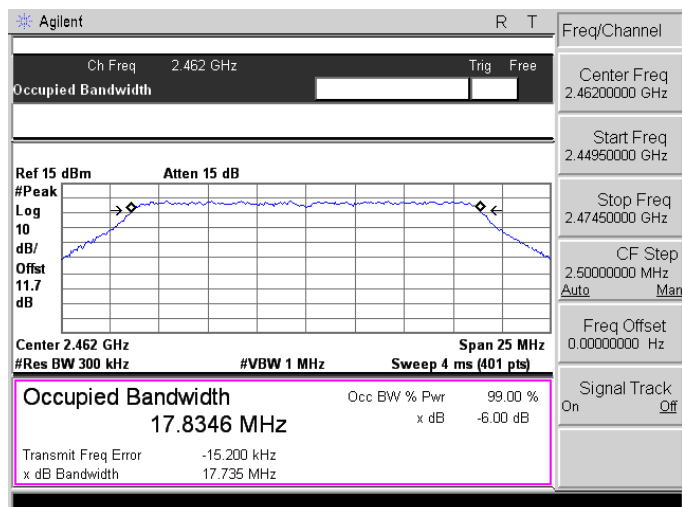


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode


2422

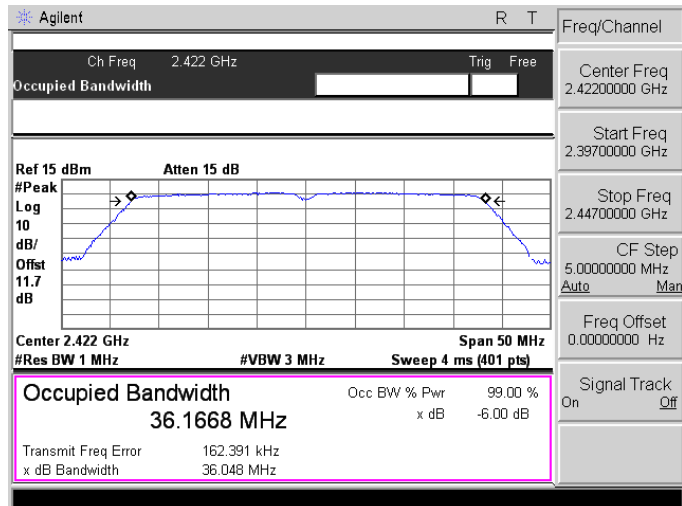

2437

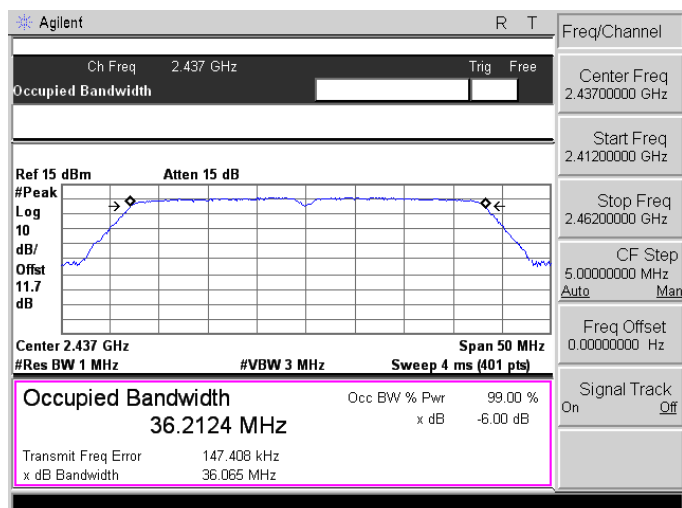

2452

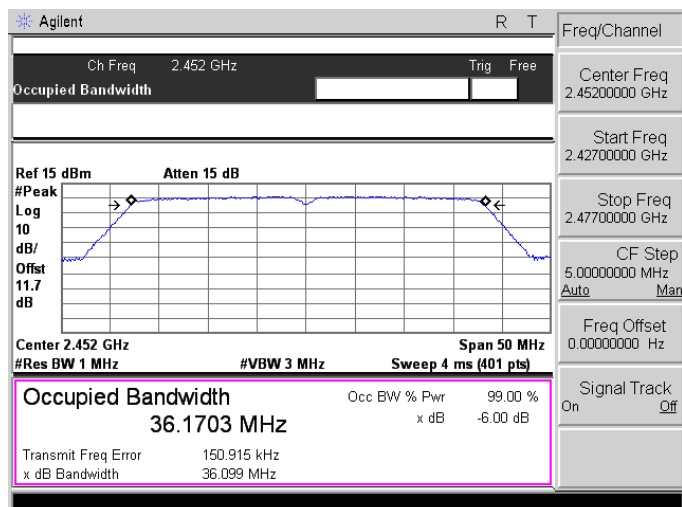


8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

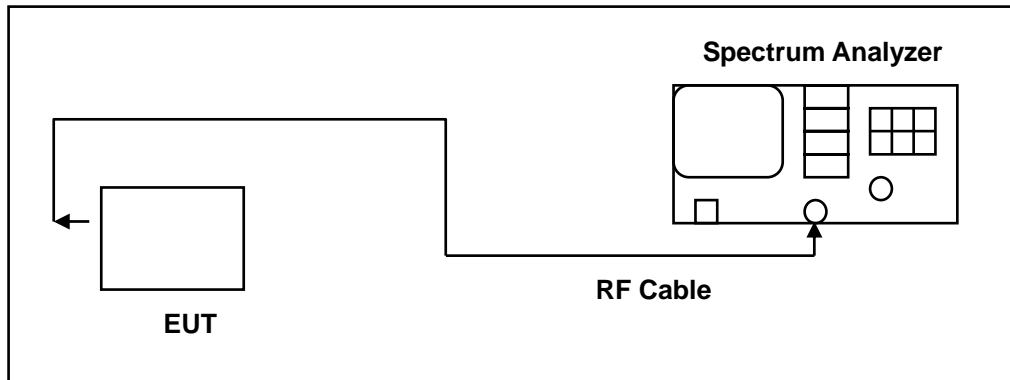

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	03/03/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result




Model Number	12003611 I-12+ ETR-01		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-13.67		< 8
2437	-13.73		< 8
2462	-13.98		< 8

Model Number	12003611 I-12+ ETR-01		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-13.89		< 8
2437	-13.95		< 8
2462	-14.18		< 8

Model Number	12003611 I-12+ ETR-01		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-15.38		< 8
2437	-14.29		< 8
2462	-15.42		< 8


Model Number	12003611 I-12+ ETR-01		
Test Item	Maximum Power Density		
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode		
Date of Test	02/08/2015	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2422	-15.36		< 8
2437	-16.31		< 8
2452	-15.54		< 8

8.6. Test Graphs

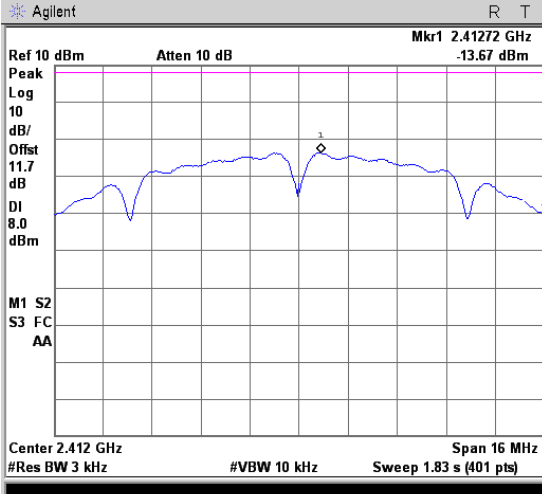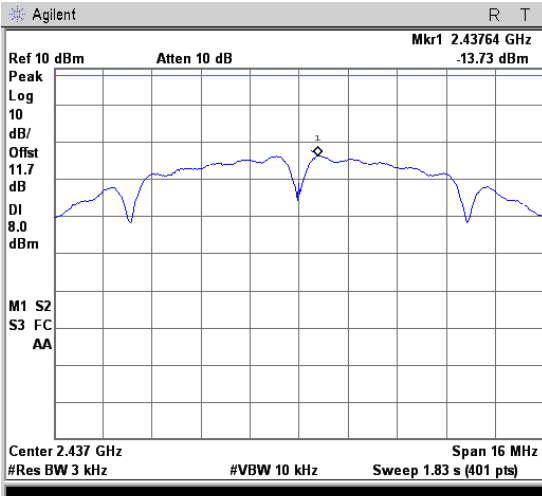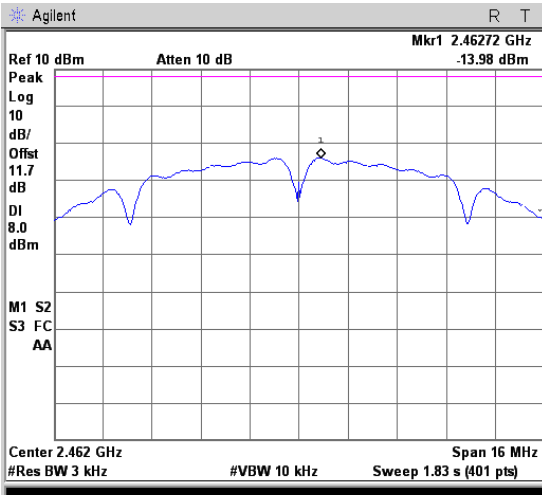
Mode 2: IEEE 802.11b Link Mode	
2412	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.41272 GHz -13.67 dBm</p> <p>Peak Log 10 dB/Offset 11.7 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz Span 16 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.83 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40400000 GHz</p> <p>Stop Freq 2.42000000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.43764 GHz -13.73 dBm</p> <p>Peak Log 10 dB/Offset 11.7 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 16 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.83 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42900000 GHz</p> <p>Stop Freq 2.44500000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.46272 GHz -13.98 dBm</p> <p>Peak Log 10 dB/Offset 11.7 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 16 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.83 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45400000 GHz</p> <p>Stop Freq 2.47000000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode


2412

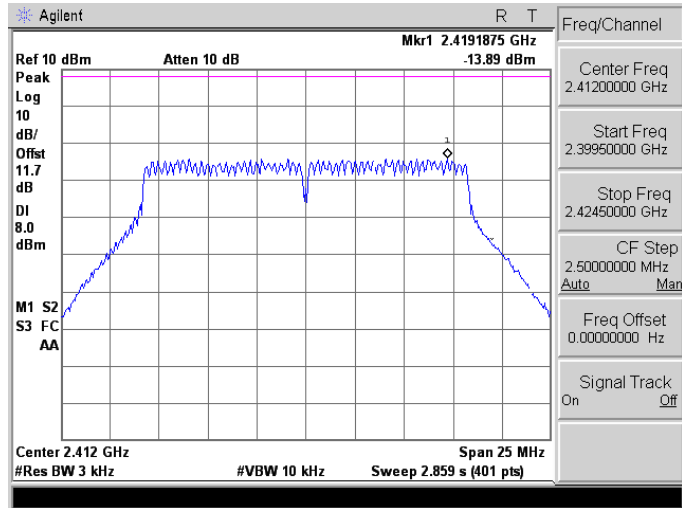

2437

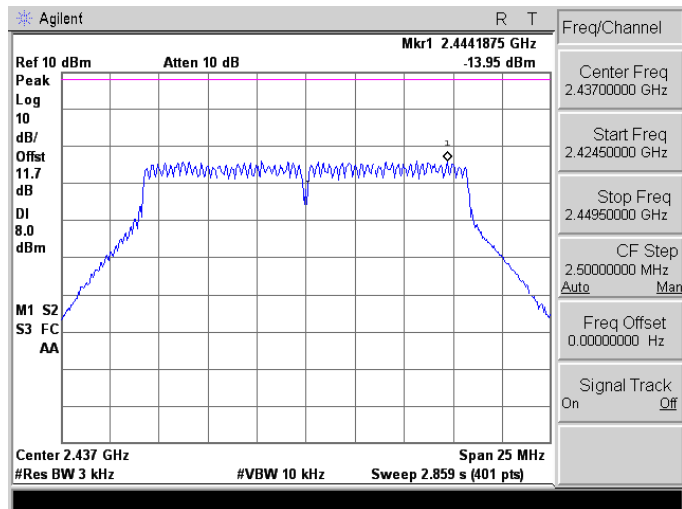


2462

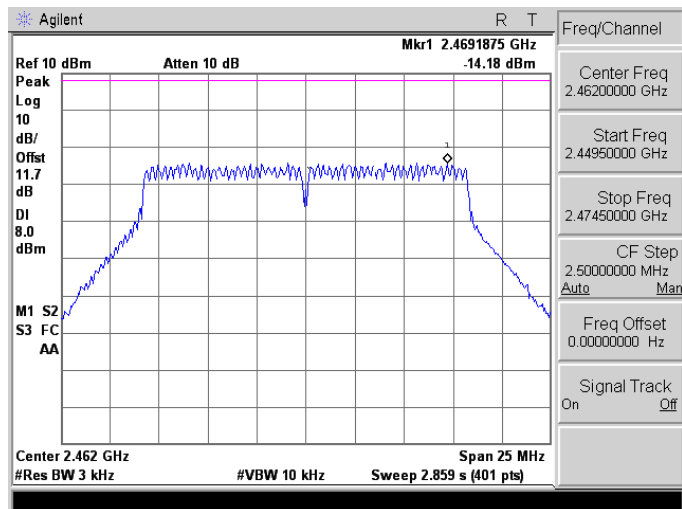


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode


2412

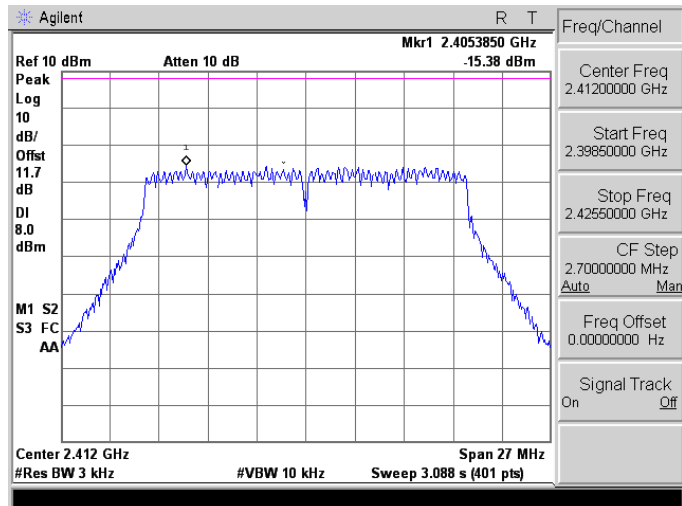

2437

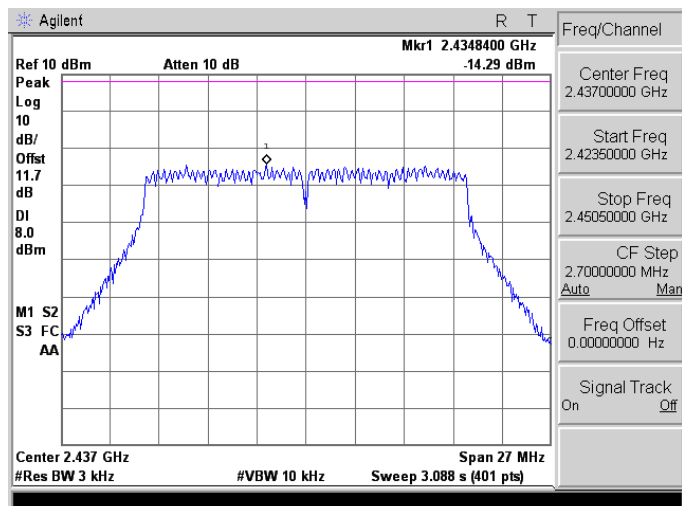


2462

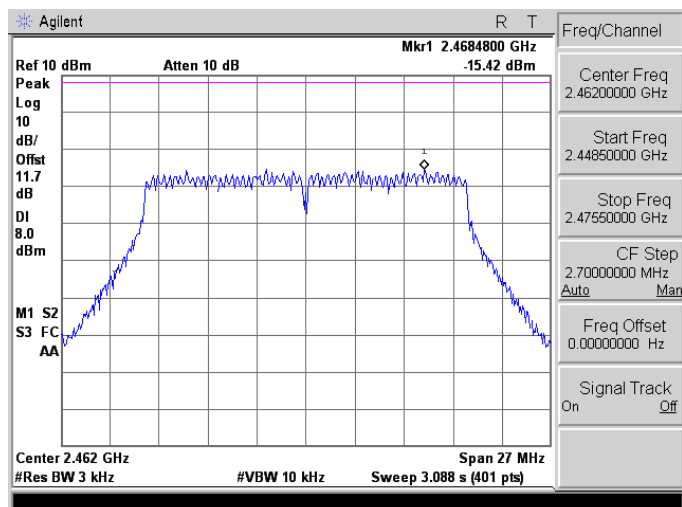


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode


2422

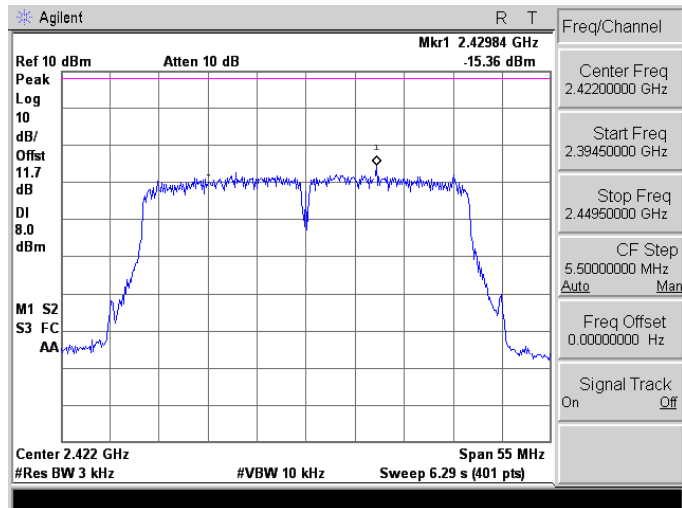

2437

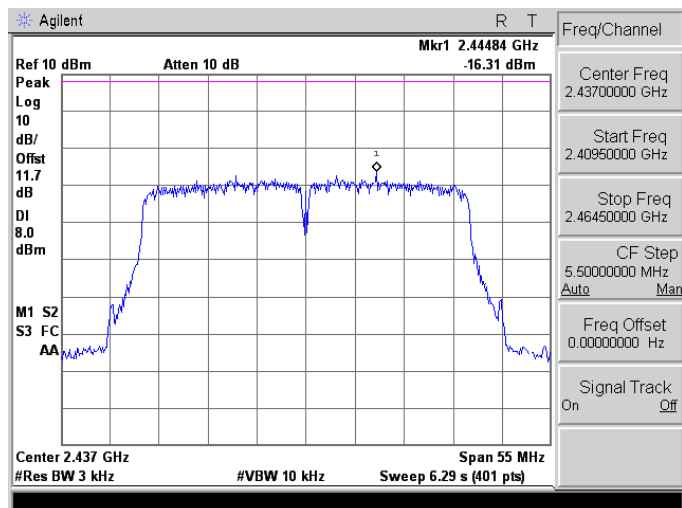

2452

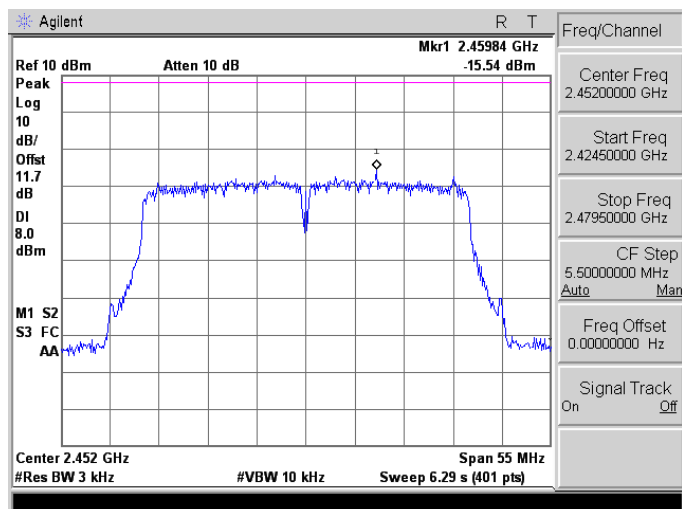


9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

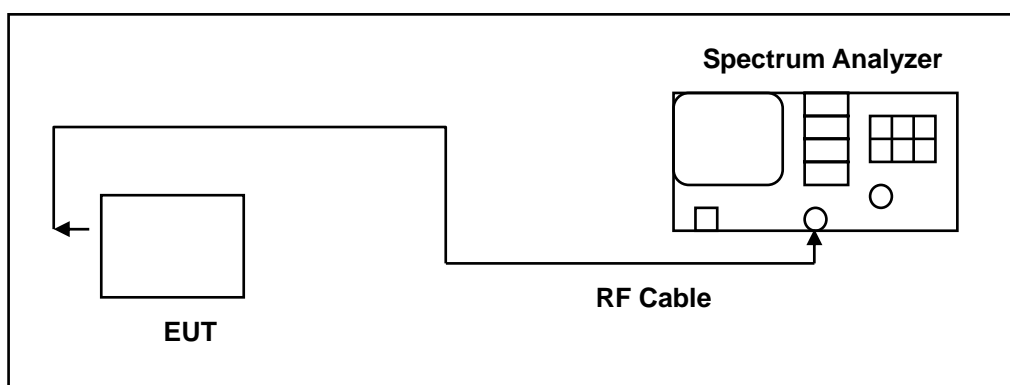

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/24/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	03/03/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.


9.5. Test Graphs

Reference level


Mode 2: IEEE 802.11b Link Mode	
2412	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.41300 GHz 5.533 dBm</p> <p>Peak Log 10 dB/Offset 11.7 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz Span 16 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40400000 GHz</p> <p>Stop Freq 2.42000000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.43648 GHz 5.603 dBm</p> <p>Peak Log 10 dB/Offset 11.7 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 16 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42900000 GHz</p> <p>Stop Freq 2.44500000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.46148 GHz 4.994 dBm</p> <p>Peak Log 10 dB/Offset 11.7 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 16 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45400000 GHz</p> <p>Stop Freq 2.47000000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode


2412

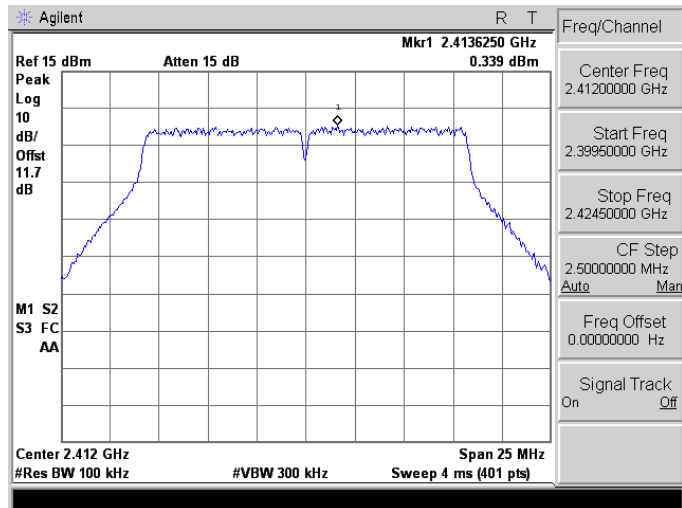

2437

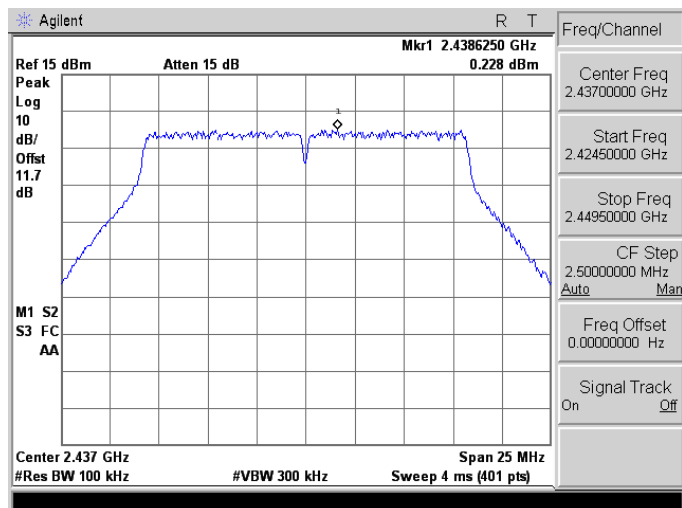


2462

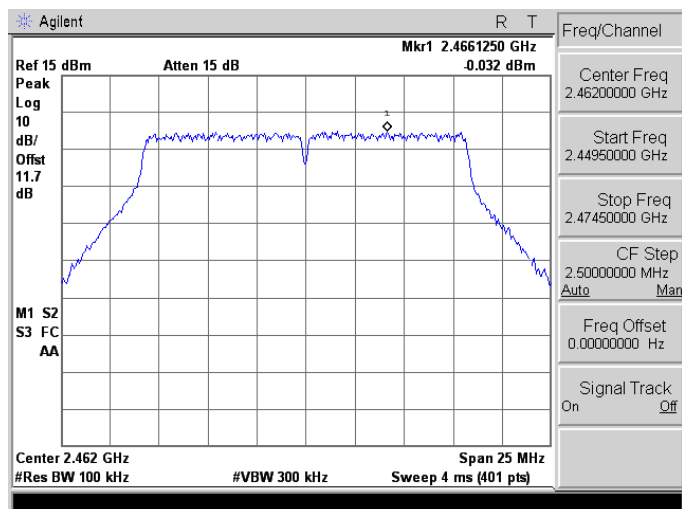


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode


2412

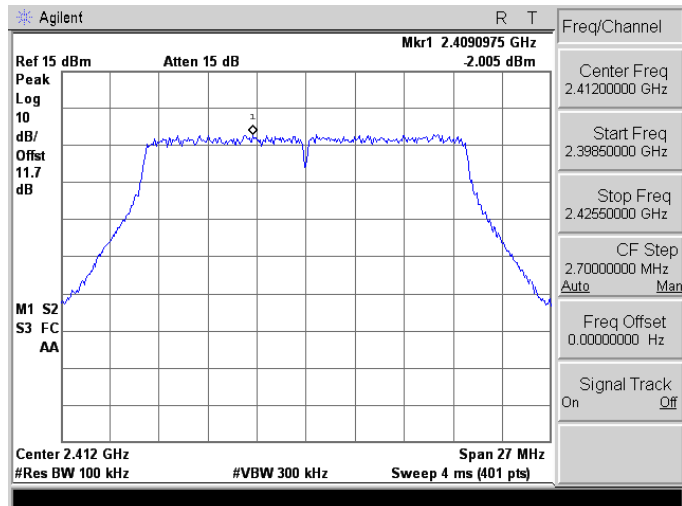

2437

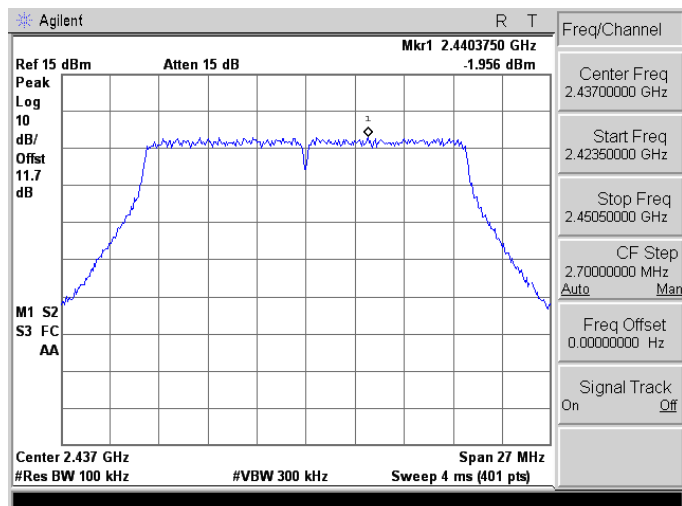


2462

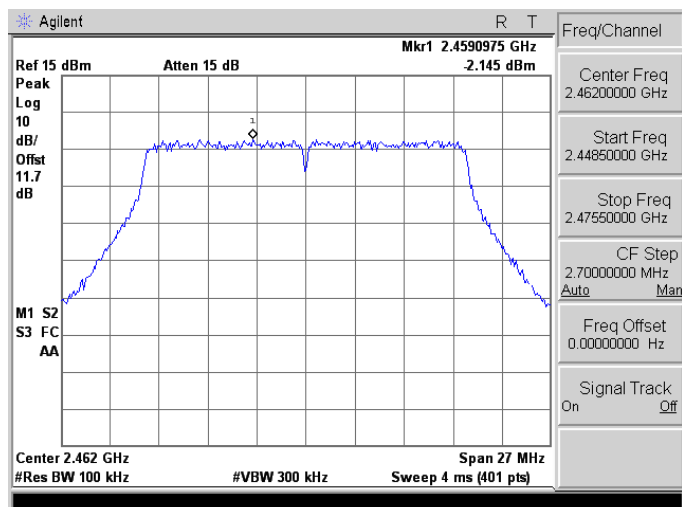


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode


2422

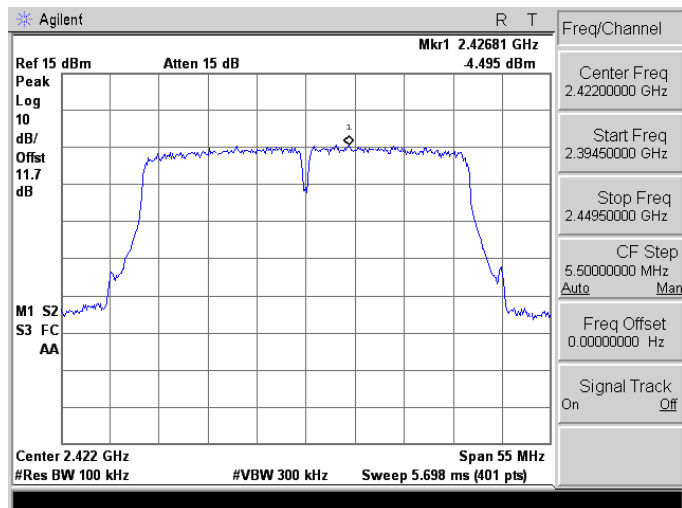

2437

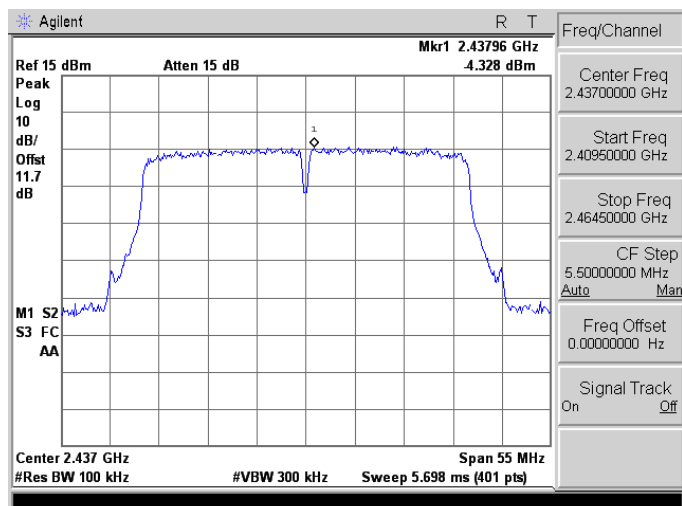


2452

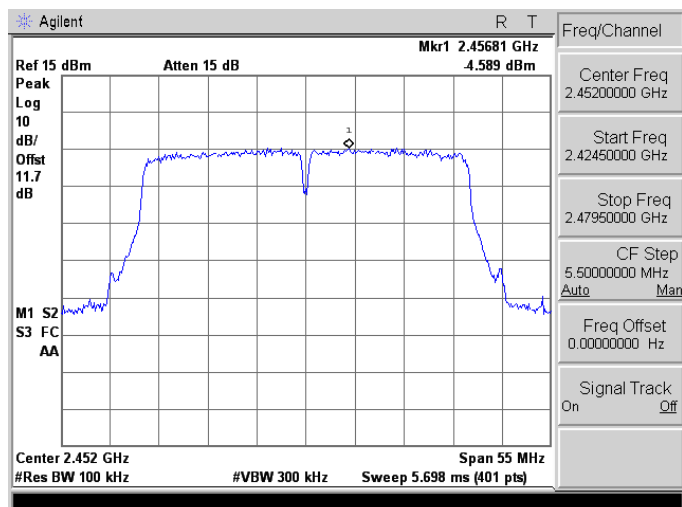


Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Link Mode


2412

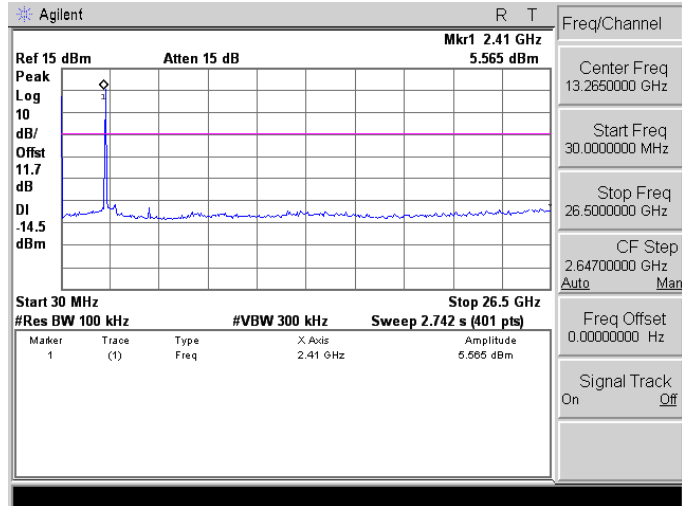

2437

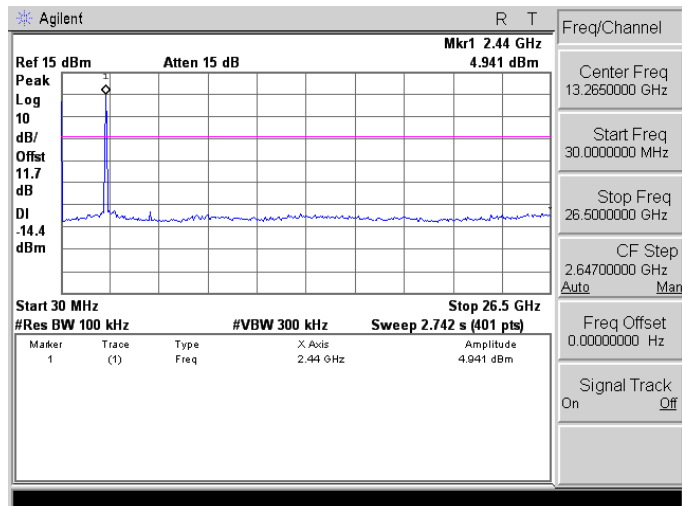


2462

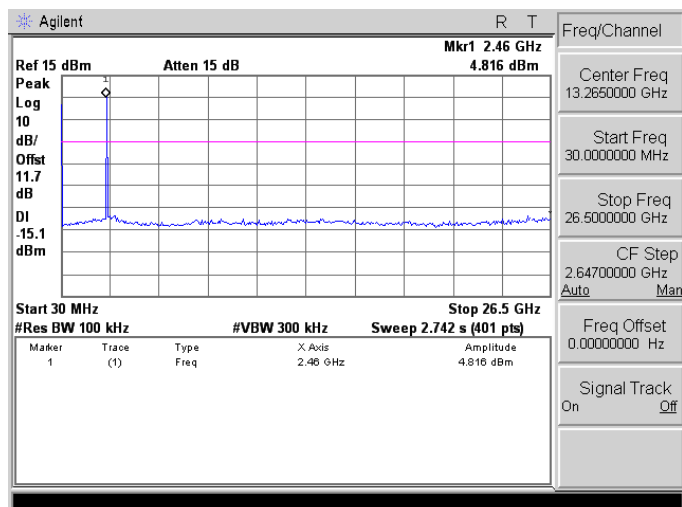


Mode 3: IEEE 802.11g Link Mode


2412

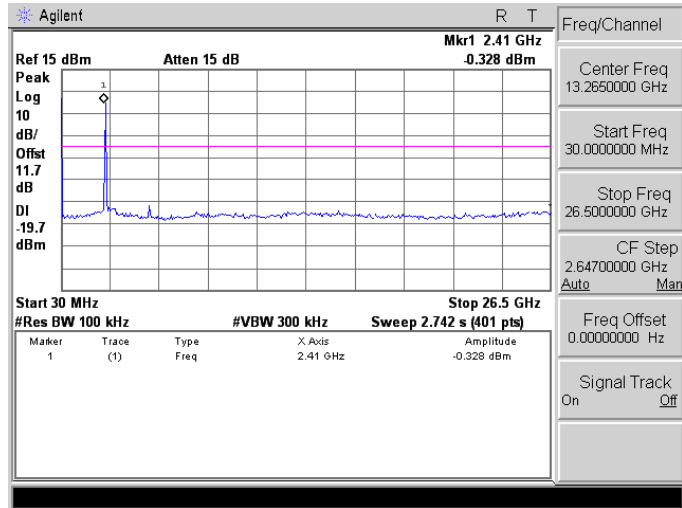

2437

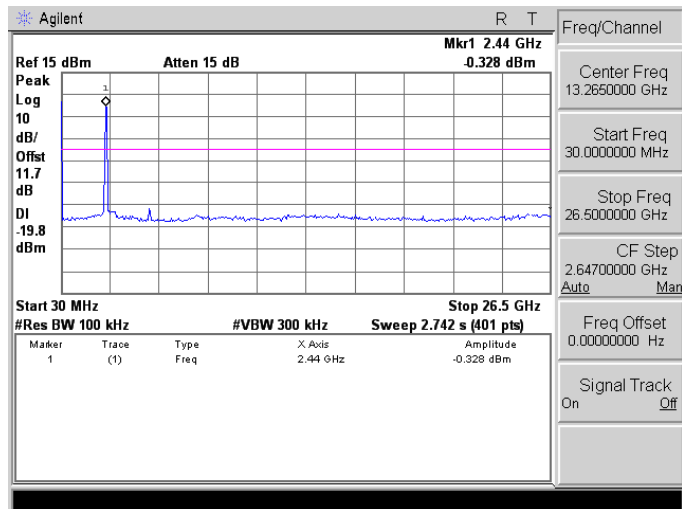


2462

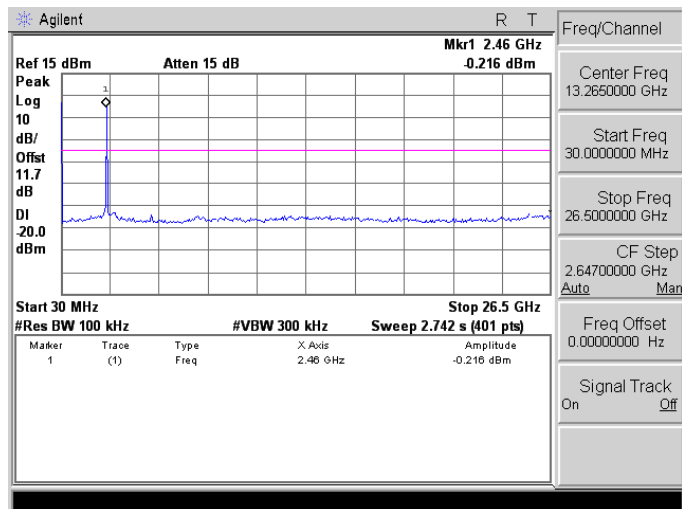


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode


2412

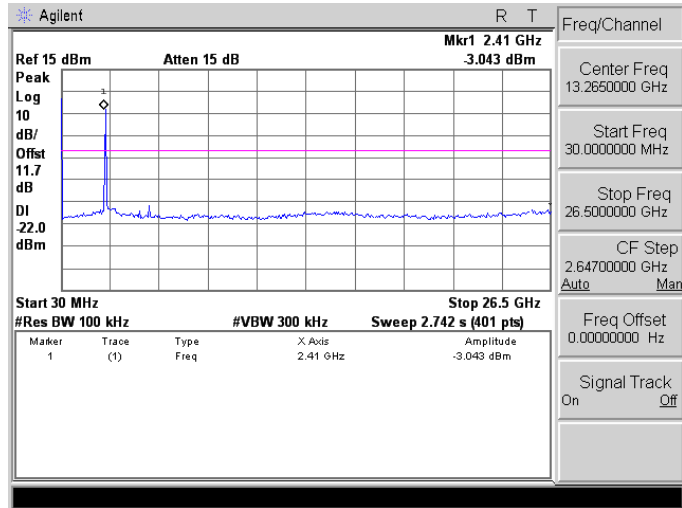

2437

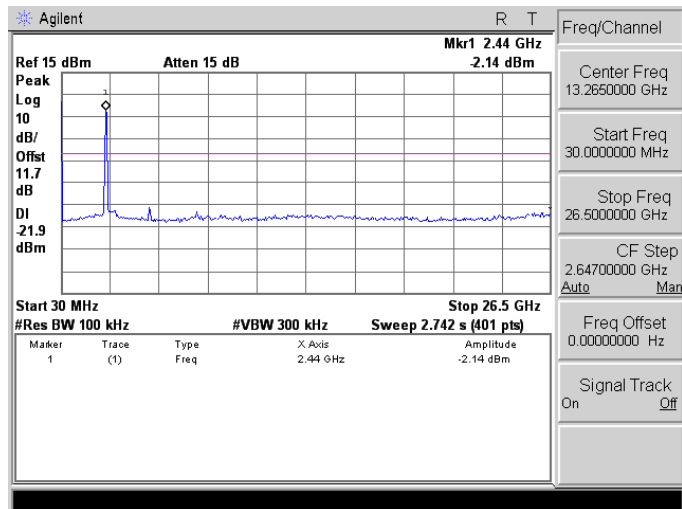


2462

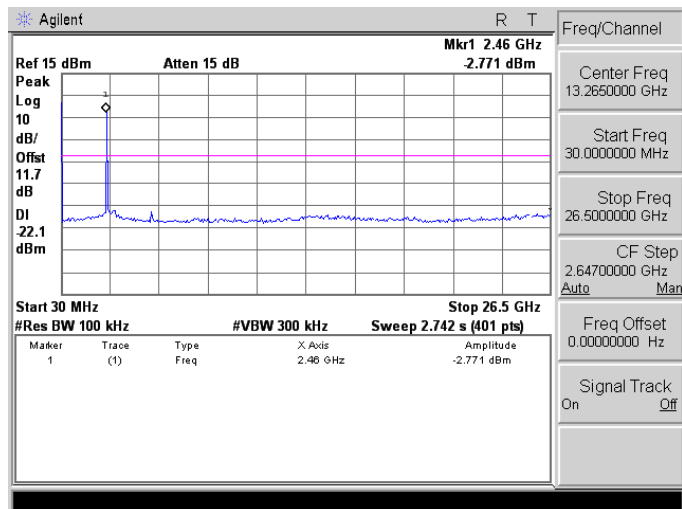


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode


2422

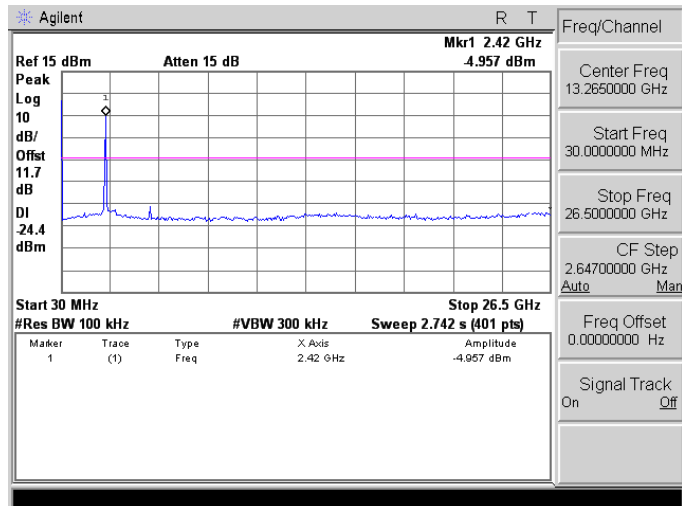

2437

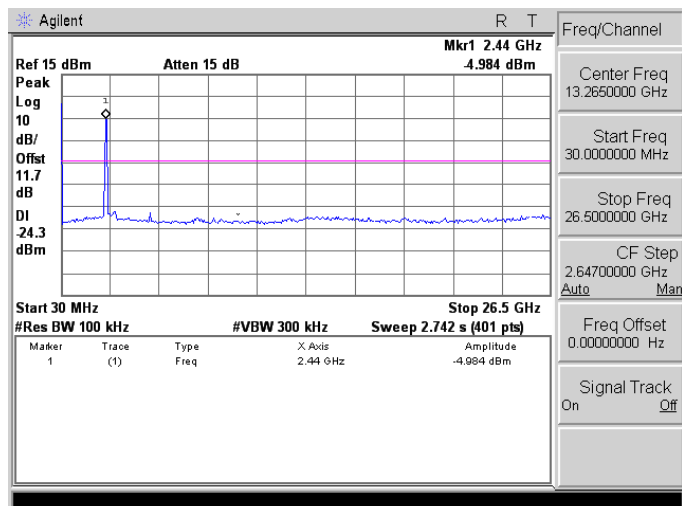


2452

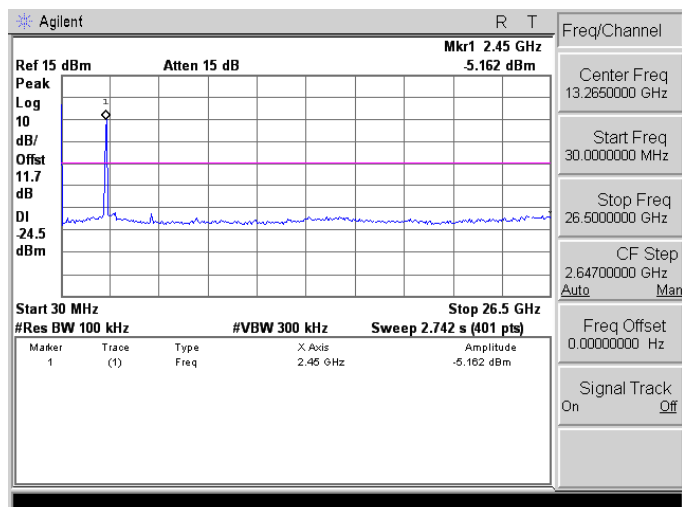


Conducted Band Edge

Mode 2: IEEE 802.11b Link Mode

2412

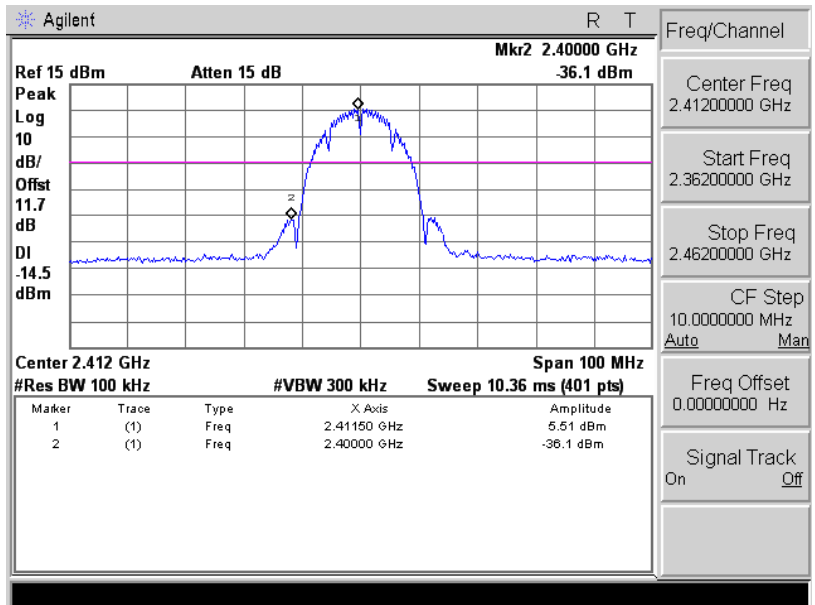


2462

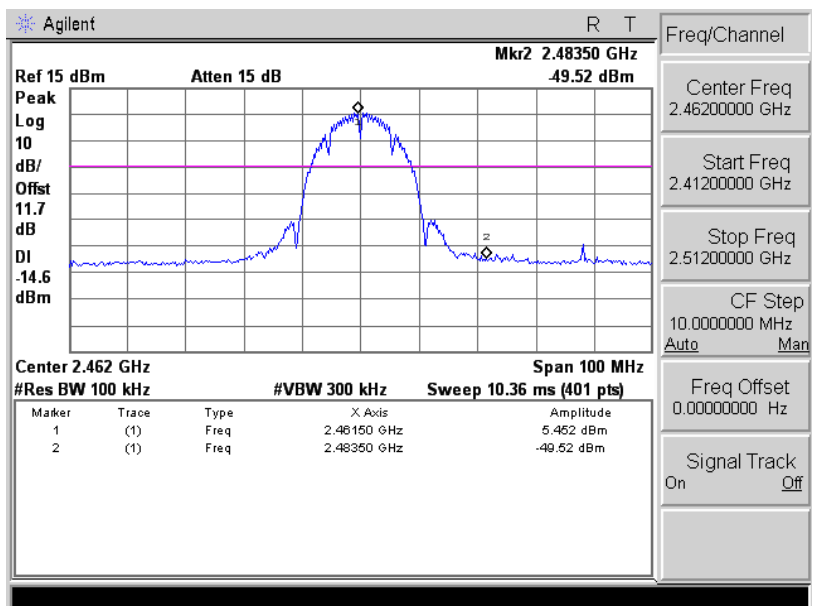


Mode 3: IEEE 802.11g Link Mode

2412

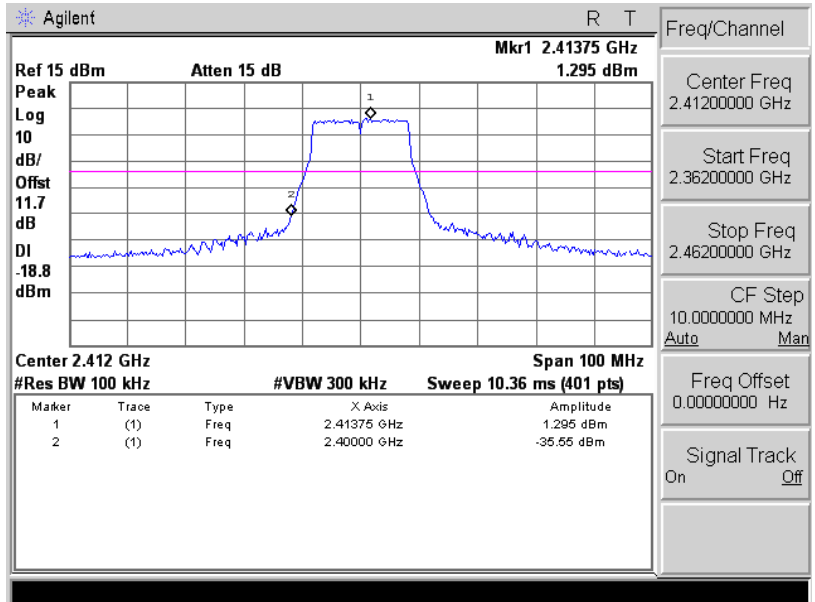


2462

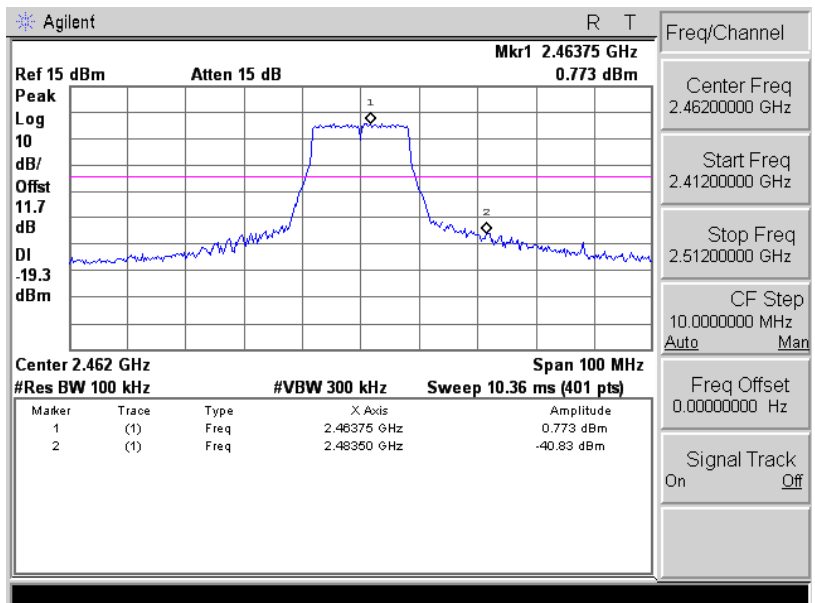


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode

2412

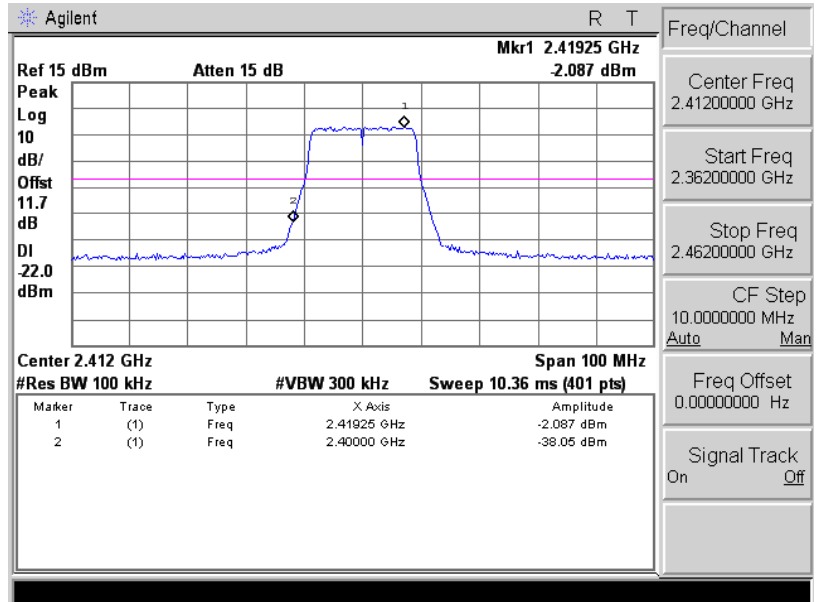


2462

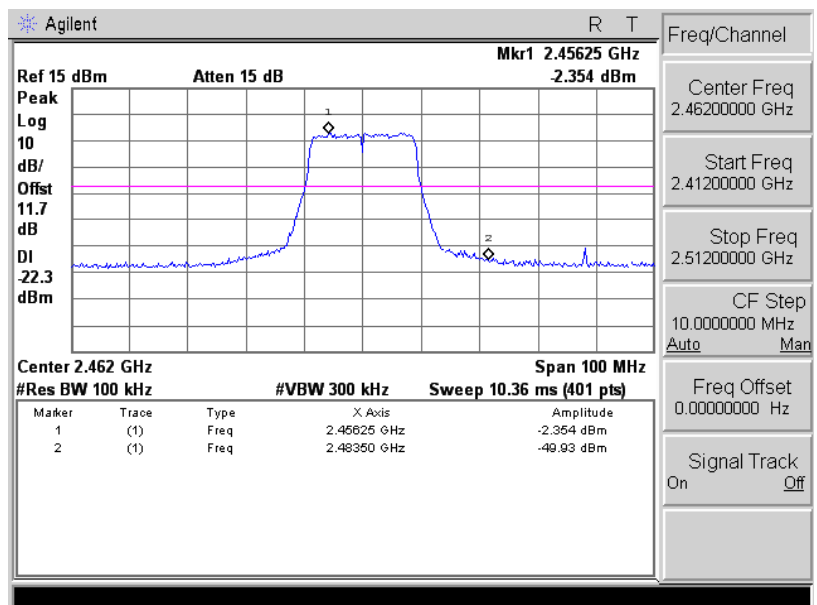


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode

2422

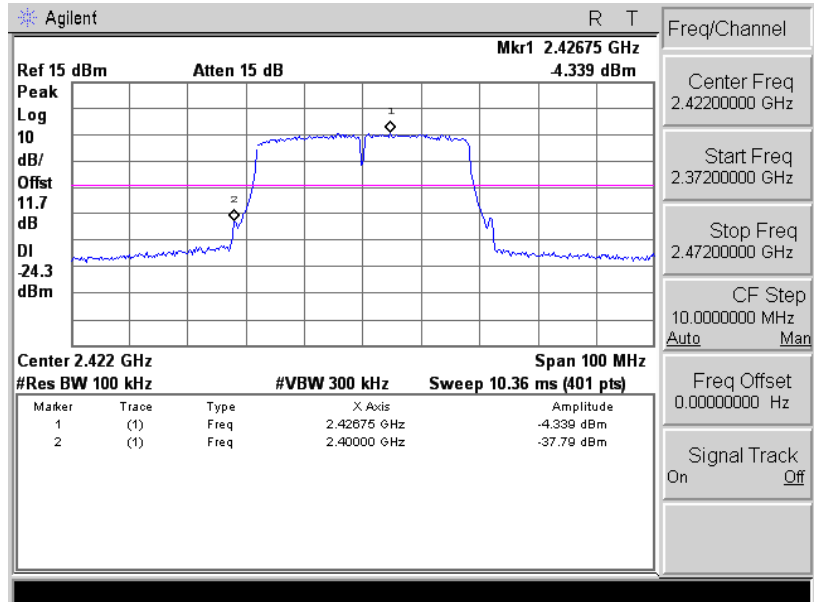

2452

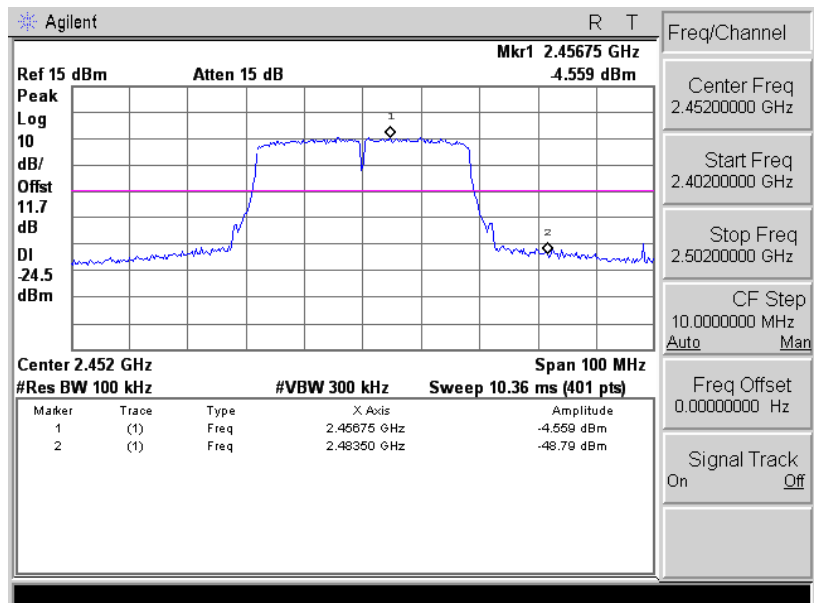


10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

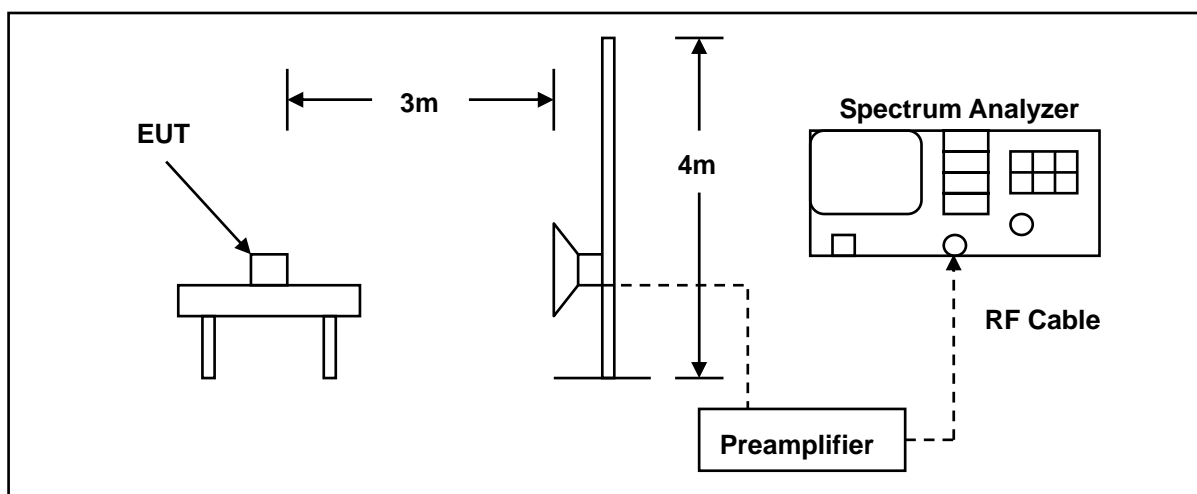

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/19/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	03/03/2014	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

10.5. Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	12003611 I-12+ ETR-01	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	02/10/2015
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2385.790	52.62	-2.27	50.35	74.00	-23.65	peak	H
2390.000	51.12	-2.24	48.88	74.00	-25.12	peak	H
2388.210	56.55	-2.25	54.30	74.00	-19.70	peak	V
2388.210	47.39	-2.25	45.14	54.00	-8.86	AVG	V
2390.000	53.65	-2.24	51.41	74.00	-22.59	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	12003611 I-12+ ETR-01	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	2	Date:	02/10/2015				
Frequency:	2462 MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	51.62	-1.83	49.79	74.00	-24.21	peak	H
2488.120	53.28	-1.80	51.48	74.00	-22.52	peak	H
2483.500	56.22	-1.83	54.39	74.00	-19.61	peak	V
2483.500	48.18	-1.83	46.35	54.00	-7.65	AVG	V
2485.440	58.61	-1.82	56.79	74.00	-17.21	peak	V
2485.440	47.33	-1.82	45.51	54.00	-8.49	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	3			Date:	02/10/2015		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2338.600	53.80	-2.47	51.33	74.00	-22.67	peak	H
2390.000	50.47	-2.24	48.23	74.00	-25.77	peak	H
2378.530	56.69	-2.29	54.40	74.00	-19.60	peak	V
2378.530	46.57	-2.29	44.28	54.00	-9.72	AVG	V
2390.000	52.78	-2.24	50.54	74.00	-23.46	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	3			Date:	02/10/2015		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	60.45	-1.83	58.62	74.00	-15.38	peak	H
2483.500	43.51	-1.83	41.68	54.00	-12.32	AVG	H
2483.920	67.67	-1.82	65.85	74.00	-8.15	peak	H
2483.920	43.46	-1.82	41.64	54.00	-12.36	AVG	H
2483.500	68.33	-1.83	66.50	74.00	-7.50	peak	V
2483.500	50.52	-1.83	48.69	54.00	-5.31	AVG	V
2483.760	74.02	-1.83	72.19	74.00	-1.81	peak	V
2483.760	50.38	-1.83	48.55	54.00	-5.45	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	4			Date:	02/10/2015		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2336.180	53.79	-2.48	51.31	74.00	-22.69	peak	H
2390.000	50.30	-2.24	48.06	74.00	-25.94	peak	H
2388.650	53.99	-2.25	51.74	74.00	-22.26	peak	V
2388.650	45.52	-2.25	43.27	54.00	-10.73	AVG	V
2390.000	55.19	-2.24	52.95	74.00	-21.05	peak	V
2390.000	46.03	-2.24	43.79	54.00	-10.21	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	4			Date:	02/10/2015		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	50.64	-1.83	48.81	74.00	-25.19	peak	H
2484.200	53.40	-1.82	51.58	74.00	-22.42	peak	H
2483.500	55.44	-1.83	53.61	74.00	-20.39	peak	V
2483.500	47.14	-1.83	45.31	54.00	-8.69	AVG	V
2484.600	61.68	-1.82	59.86	74.00	-14.14	peak	V
2484.600	46.89	-1.82	45.07	54.00	-8.93	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	5			Date:	02/10/2015		
Frequency:	2422 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.720	56.47	-2.25	54.22	74.00	-19.78	peak	H
2388.720	45.64	-2.25	43.39	54.00	-10.61	AVG	H
2390.000	53.38	-2.24	51.14	74.00	-22.86	peak	H
2388.840	60.74	-2.25	58.49	74.00	-15.51	peak	V
2388.840	47.33	-2.25	45.08	54.00	-8.92	AVG	V
2390.000	58.91	-2.24	56.67	74.00	-17.33	peak	V
2390.000	47.67	-2.24	45.43	54.00	-8.57	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	12003611 I-12+ ETR-01			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	5			Date:	02/10/2015		
Frequency:	2452 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	51.87	-1.83	50.04	74.00	-23.96	peak	H
2483.700	53.72	-1.83	51.89	74.00	-22.11	peak	H
2483.500	58.31	-1.83	56.48	74.00	-17.52	peak	V
2483.500	48.76	-1.83	46.93	54.00	-7.07	AVG	V
2489.800	62.64	-1.79	60.85	74.00	-13.15	peak	V
2489.800	47.50	-1.79	45.71	54.00	-8.29	AVG	V

11 Antenna Measurement

11.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Antenna Connector Construction

The antenna used in this product is PCB Antenna. And the maximum Gain of this antenna is only 6.27 dBi.