

# FCC Part 15C Test Report

## FCC ID:W6R-AC2030PCE

Product Name:	AC2030 Wireless Dual Band PCI-Express Adapter
Trademark:	Rosewill
Model Name :	RNX-AC2030PCE
Prepared For :	Rosewill Inc.
Address :	17708 Rowland Street, City of Industry, CA 91748, USA
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Jan. 02, 2019 to Jan. 29, 2019
Date of Report :	Jan. 29, 2019
Report No.:	BCTC-LH181203522E

## TEST RESULT CERTIFICATION

**Applicant's name** ..... Rosewill Inc.

**Address** ..... 17708 Rowland Street, City of Industry, CA 91748, USA

**Manufacture's Name** ..... Rosewill Inc.

**Address** ..... 17708 Rowland Street, City of Industry, CA 91748, USA

### Product description

**Product name** ..... AC2030 Wireless Dual Band PCI-Express Adapter

**Trademark** ..... Rosewill

**Model and/or type**  
**reference** ..... RNX-AC2030PCE

**Standards** ..... FCC Part15.247

ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Leke Xie

*Leke Xie*

Reviewer(Supervisor): Eric Yang

*Eric Yang*

Approved(Manager): Zero Zhou

*Zero Zhou*



<b>Table of Contents</b>	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2 . GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	13
3.1.3 DEVIATION FROM TEST STANDARD	13
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 RADIATED EMISSION LIMITS	19
3.2.2 TEST PROCEDURE	19
3.2.3 DEVIATION FROM TEST STANDARD	20
3.2.4 TEST SETUP	20
3.2.5 EUT OPERATING CONDITIONS	21
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	22
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	23
3.2.8 TEST RESULTS (1GHZ~25GHZ)	27
3.3 RADIATED BAND EMISSION MEASUREMENT	31
3.3.1 TEST REQUIREMENT:	31
3.3.2 TEST PROCEDURE	31
3.3.3 DEVIATION FROM TEST STANDARD	32
3.3.4 TEST SETUP	32
3.3.5 EUT OPERATING CONDITIONS	32
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>34</b>

<b>Table of Contents</b>	<b>Page</b>
<b>4.1 APPLIED PROCEDURES / LIMIT</b>	<b>34</b>
4.1.1 TEST PROCEDURE	34
4.1.2 DEVIATION FROM STANDARD	34
4.1.3 TEST SETUP	34
4.1.4 EUT OPERATION CONDITIONS	34
4.1.5 TEST RESULTS	35
<b>5 . BANDWIDTH TEST</b>	<b>43</b>
5.1 APPLIED PROCEDURES / LIMIT	43
5.1.1 TEST PROCEDURE	43
5.1.2 DEVIATION FROM STANDARD	43
5.1.3 TEST SETUP	43
5.1.4 EUT OPERATION CONDITIONS	43
5.1.5 TEST RESULTS	44
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>52</b>
6.1 APPLIED PROCEDURES/LIMIT	52
6.1.1 TEST PROCEDURE	52
6.1.2 DEVIATION FROM STANDARD	52
6.1.3 TEST SETUP	52
6.1.4 EUT OPERATION CONDITIONS	52
6.1.5 TEST RESULTS	53
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>54</b>
7.1 APPLICABLE STANDARD	54
7.2 TEST PROCEDURE	54
7.3 DEVIATION FROM STANDARD	54
7.4 TEST SETUP	54
7.5 EUT OPERATION CONDITIONS	54
7.1 TEST RESULTS	54
<b>8 . DUTY CYCLE OF TEST SIGNAL</b>	<b>63</b>
8.1 STANDARD REQUIREMENT	63
8.2 FORMULA:	63
<b>9 . ANTENNA REQUIREMENT</b>	<b>66</b>
9.1 STANDARD REQUIREMENT	66
9.2 EUT ANTENNA	66



<b>Table of Contents</b>	<b>Page</b>
<b>10 . EUT TEST PHOTO</b>	<b>67</b>
<b>11 . EUT PHOTO</b>	<b>70</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (d)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	AC2030 Wireless Dual Band PCI-Express Adapter	
Trade Name	Rosewill	
Model Name	RNX-AC2030PCE	
Model Difference	N/A	
Product Description	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
	Modulation Type:	WIFI: OFDM/DSSS
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Power	DC 5V form PC	
hardware version	N/A	
Software version	N/A	
Serial number	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3.

Table for Filed Antenna

Antenna	Antenna Type	Antenna Gain(dBi)
Antenna 1(long)	External antenna	2
Antenna 2(Box)	External antenna	2

The Antenna 1 support for 2.4G, the Antenna 2 support for 2.4G, 2.4G transmitting do not support MIMO.

## 2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

### Conducted Emission Test

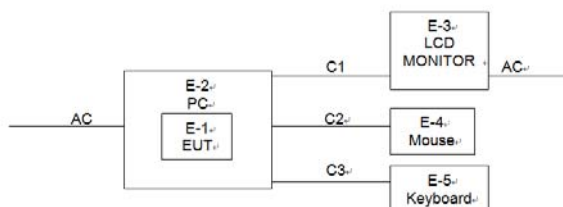

### Radiated Spurious Emission

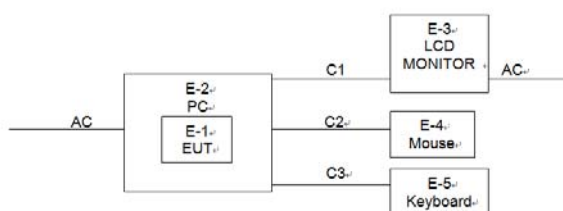

## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AC2030 Wireless Dual Band PCI-Express Adapter	N/A	RNX-AC2030PCE	N/A	EUT
E-2	PC	N/A	T4900C	N/A	Auxiliary
E-3	LCD MONITOR	N/A	P72P	N/A	Auxiliary
E-4	Mouse	N/A	LW300	N/A	Auxiliary
E-5	Keyboard	N/A	KB4721	N/A	Auxiliary



Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	HDMI cable shielded
C-2	NO	NO	1M	USB cable unshielded
C-3	NO	NO	1M	USB cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	2018.06.20	2019.06.20
2	Test Receiver (9kHz-7GHz)	R&S	ESRP	101154	2018.06.20	2019.06.20
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBEC K	VULB9163	VULB9163-942	2018.06.23	2019.06.23
4	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	2018.06.23	2021.06.22
5	Horn Antenna (18GHz-40GHz)	SCHWARZBEC K	BBHA9170	822	2018.08.06	2019.08.06
6	Amplifier (9KHz-6GHz)	SCHWARZBEC K	BBV9744	9744-0037	2018.06.20	2019.06.20
7	Amplifier (0.5GHz-18GHz)	SCHWARZBEC K	BBV9718	9718-309	2018.06.20	2019.06.20
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-H G	2034381	2018.08.06	2019.08.06
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	2018.06.23	2019.06.23
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	2018.03.27	2019.03.27
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	2018.06.19	2019.06.19
13	Power Metter	Keysight	E4419	\	2018.04.15	2019.04.15
14	Power Sensor (AV)	Keysight	E9300A	\	2018.04.15	2019.04.15
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	2018.07.11	2019.07.11
16	Test Receiver 9kHz-40GHz	R&S	FSP40	100550	2018.06.13	2019.06.12
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

### Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	2018.06.20	2019.06.20
2	LISN	SCHWARZBECK	NSLK8127	8127739	2018.06.19	2019.06.19
3	LISN	R&S	ENV216	101375	2018.06.20	2019.06.20
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2018.02.12	2019.02.12
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

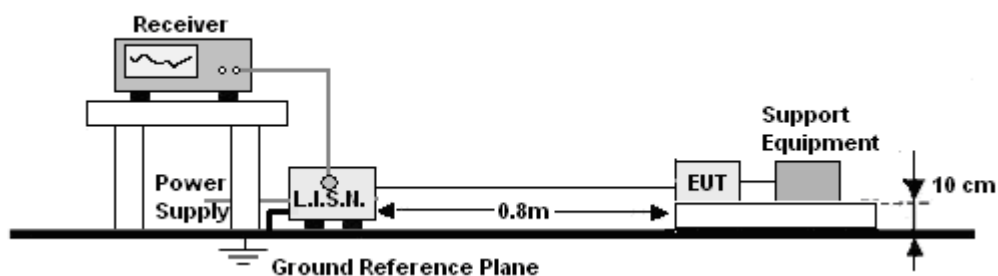


### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

### 3.1.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	DC 5V form PC AC 120V/60Hz (ANT 1)	Test Mode :	Mode 5

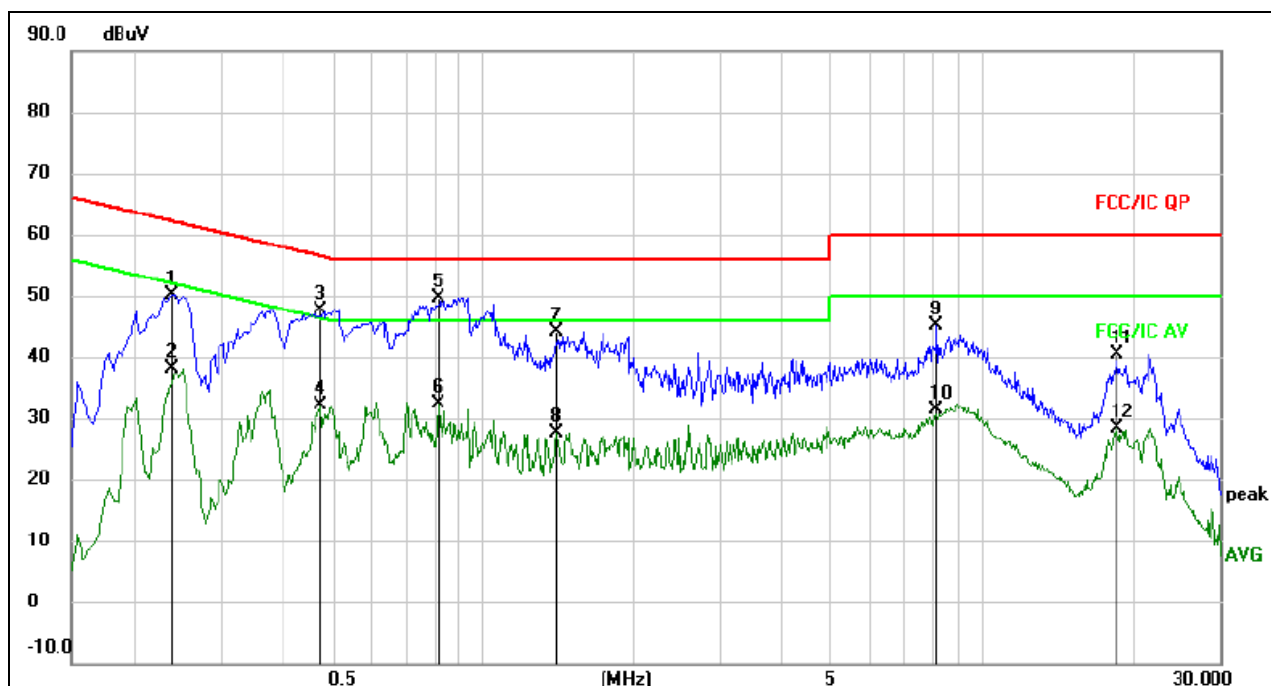


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2380	40.72	9.51	50.23	62.17	-11.94	QP	
2		0.2380	28.64	9.51	38.15	52.17	-14.02	AVG	
3		0.4740	38.03	9.57	47.60	56.44	-8.84	QP	
4		0.4740	22.66	9.57	32.23	46.44	-14.21	AVG	
5	*	0.8139	40.08	9.63	49.71	56.00	-6.29	QP	
6		0.8139	22.71	9.63	32.34	46.00	-13.66	AVG	
7		1.4060	34.50	9.58	44.08	56.00	-11.92	QP	
8		1.4060	18.06	9.58	27.64	46.00	-18.36	AVG	
9		8.1380	35.37	9.71	45.08	60.00	-14.92	QP	
10		8.1380	21.70	9.71	31.41	50.00	-18.59	AVG	
11		18.6980	30.51	9.77	40.28	60.00	-19.72	QP	
12		18.6980	18.67	9.77	28.44	50.00	-21.56	AVG	

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	DC 5V form PC AC 120V/60H z(ANT 1)	Test Mode :	Mode 5

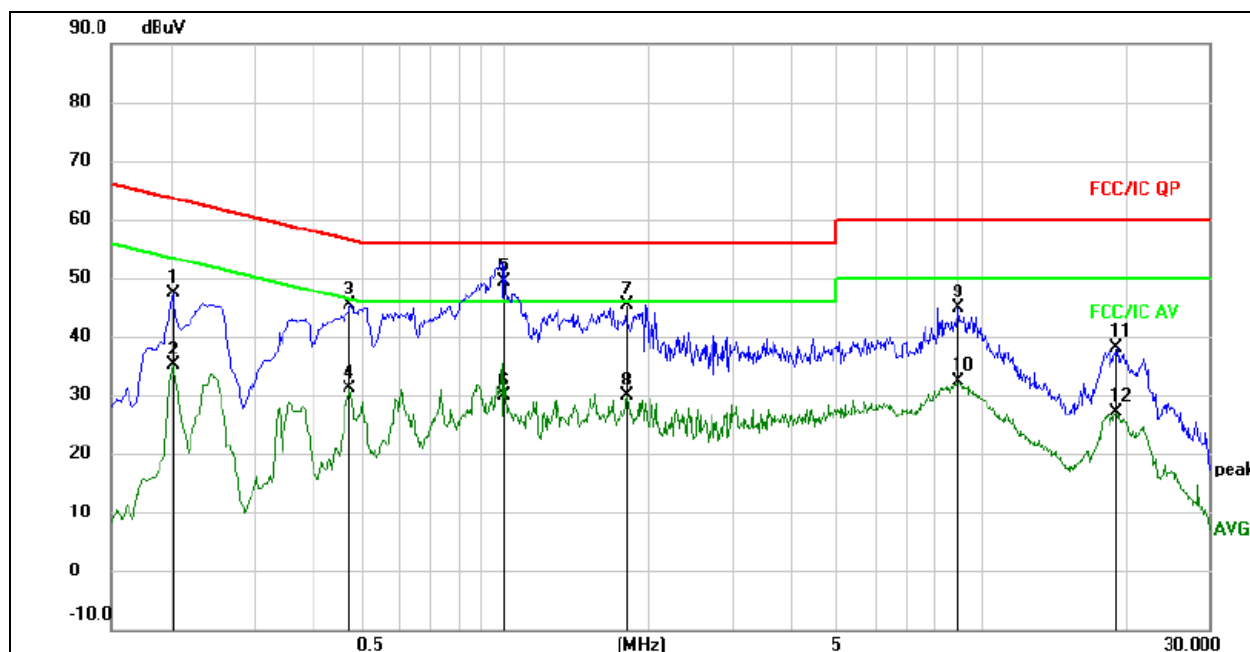

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2020	37.89	9.46	47.35	63.53	-16.18	QP	
2		0.2020	25.77	9.46	35.23	53.53	-18.30	AVG	
3		0.4740	35.90	9.57	45.47	56.44	-10.97	QP	
4		0.4740	21.62	9.57	31.19	46.44	-15.25	AVG	
5	*	1.0010	39.90	9.57	49.47	56.00	-6.53	QP	
6		1.0010	20.26	9.57	29.83	46.00	-16.17	AVG	
7		1.8140	35.79	9.59	45.38	56.00	-10.62	QP	
8		1.8140	20.29	9.59	29.88	46.00	-16.12	AVG	
9		8.9220	35.13	9.70	44.83	60.00	-15.17	QP	
10		8.9220	22.59	9.70	32.29	50.00	-17.71	AVG	
11		19.1820	28.29	9.78	38.07	60.00	-21.93	QP	
12		19.1820	17.28	9.78	27.06	50.00	-22.94	AVG	





Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	DC 5V form PC AC 120V/60Hz (ANT 2)	Test Mode :	Mode 5

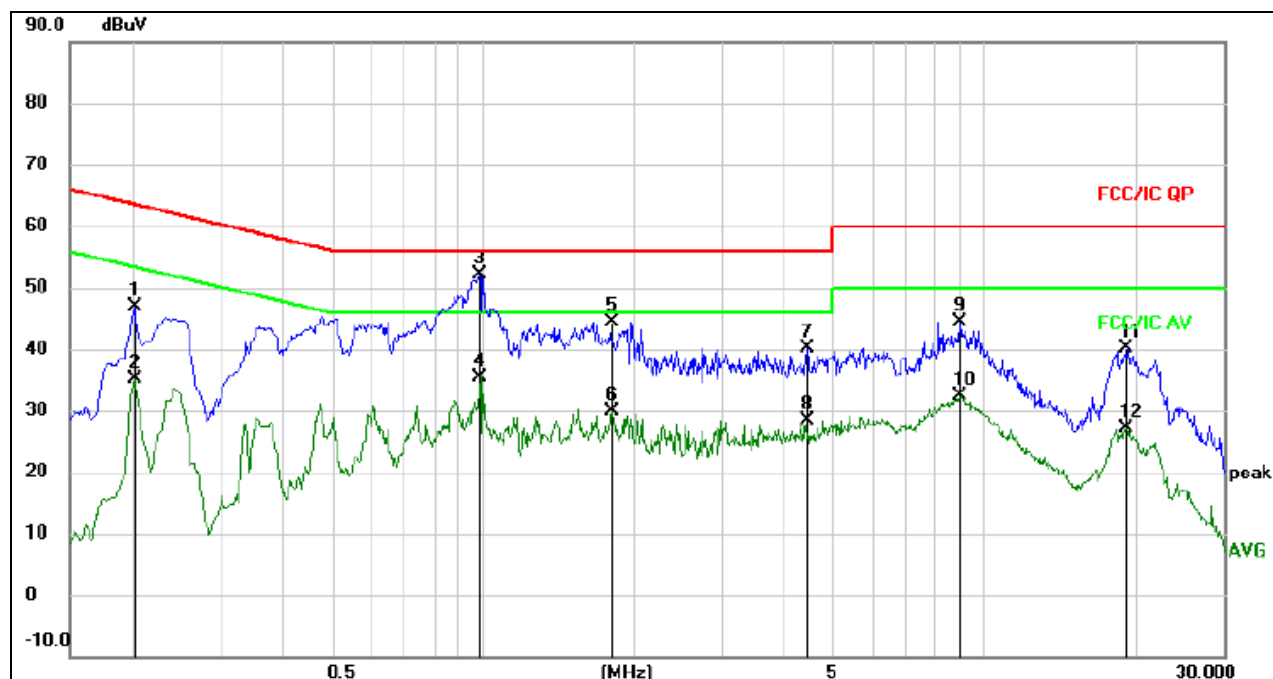


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2020	37.39	9.46	46.85	63.53	-16.68	QP	
2		0.2020	25.77	9.46	35.23	53.53	-18.30	AVG	
3	*	0.9859	42.65	9.57	52.22	56.00	-3.78	QP	
4		0.9859	25.87	9.57	35.44	46.00	-10.56	AVG	
5		1.8140	34.79	9.59	44.38	56.00	-11.62	QP	
6		1.8140	20.29	9.59	29.88	46.00	-16.12	AVG	
7		4.4339	30.26	9.76	40.02	56.00	-15.98	QP	
8		4.4339	18.68	9.76	28.44	46.00	-17.56	AVG	
9		8.9219	34.63	9.70	44.33	60.00	-15.67	QP	
10		8.9219	22.59	9.70	32.29	50.00	-17.71	AVG	
11		19.1818	30.30	9.77	40.07	60.00	-19.93	QP	
12		19.1818	17.29	9.77	27.06	50.00	-22.94	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	DC 5V form PC AC 120V/60Hz (ANT 2)	Test Mode :	Mode 5

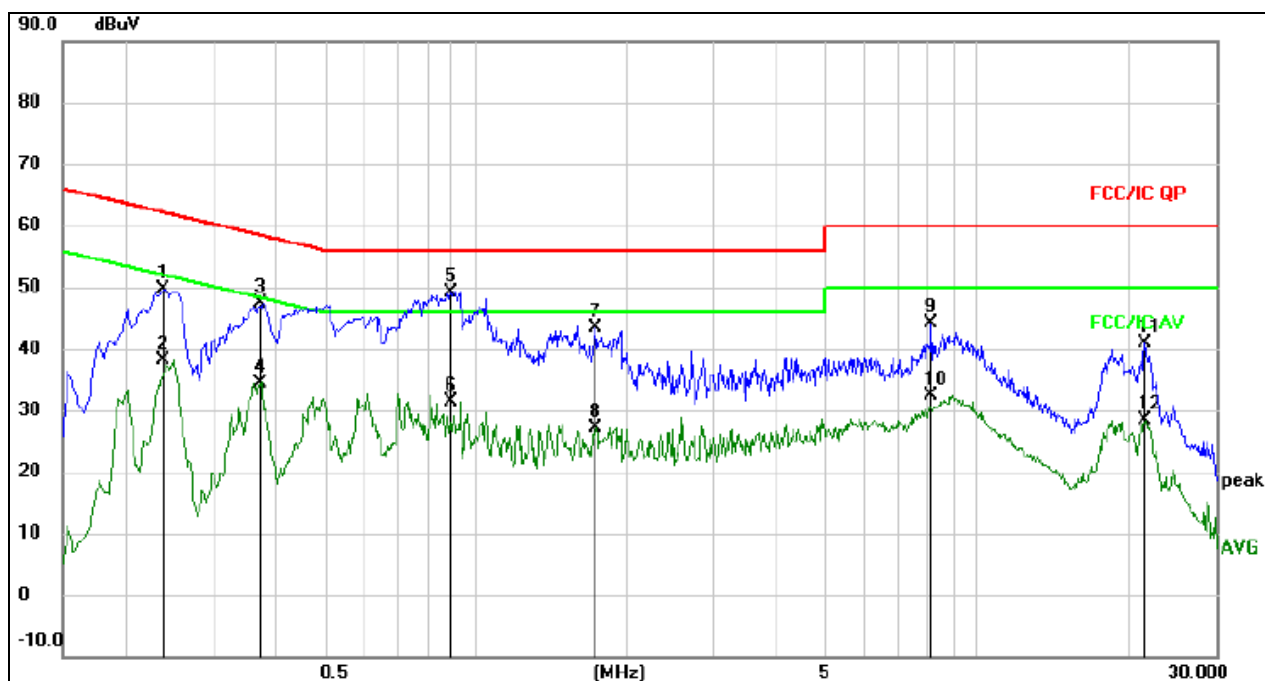

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2379	40.22	9.51	49.73	62.17	-12.44	QP	
2	0.2379	28.64	9.51	38.15	52.17	-14.02	AVG	
3	0.3738	37.87	9.52	47.39	58.42	-11.03	QP	
4	0.3738	24.98	9.52	34.50	48.42	-13.92	AVG	
5 *	0.8980	39.61	9.60	49.21	56.00	-6.79	QP	
6	0.8980	21.85	9.60	31.45	46.00	-14.55	AVG	
7	1.7419	33.90	9.58	43.48	56.00	-12.52	QP	
8	1.7419	17.67	9.58	27.25	46.00	-18.75	AVG	
9	8.1379	34.37	9.71	44.08	60.00	-15.92	QP	
10	8.1379	22.61	9.71	32.32	50.00	-17.68	AVG	
11	21.6179	31.00	9.78	40.78	60.00	-19.22	QP	
12	21.6179	18.64	9.78	28.42	50.00	-21.58	AVG	

## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested  
and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

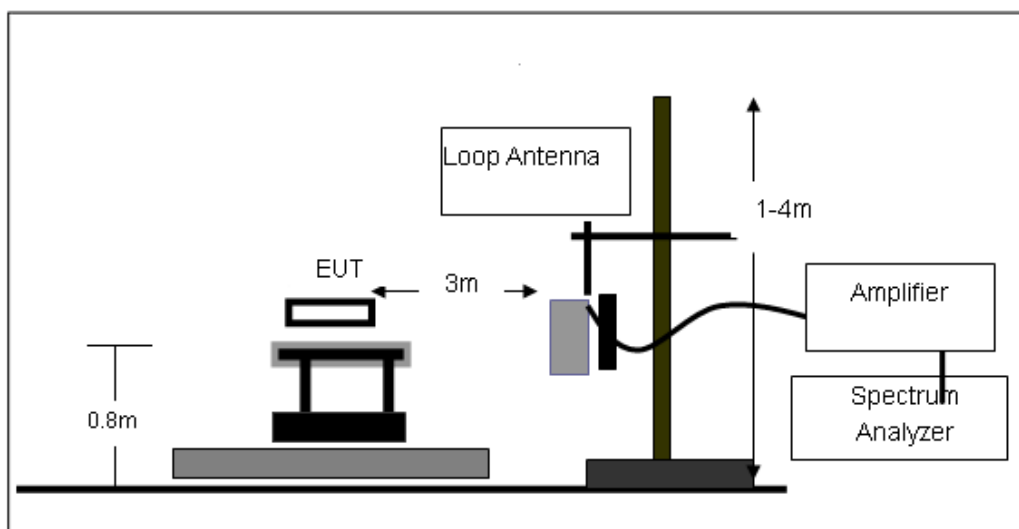

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

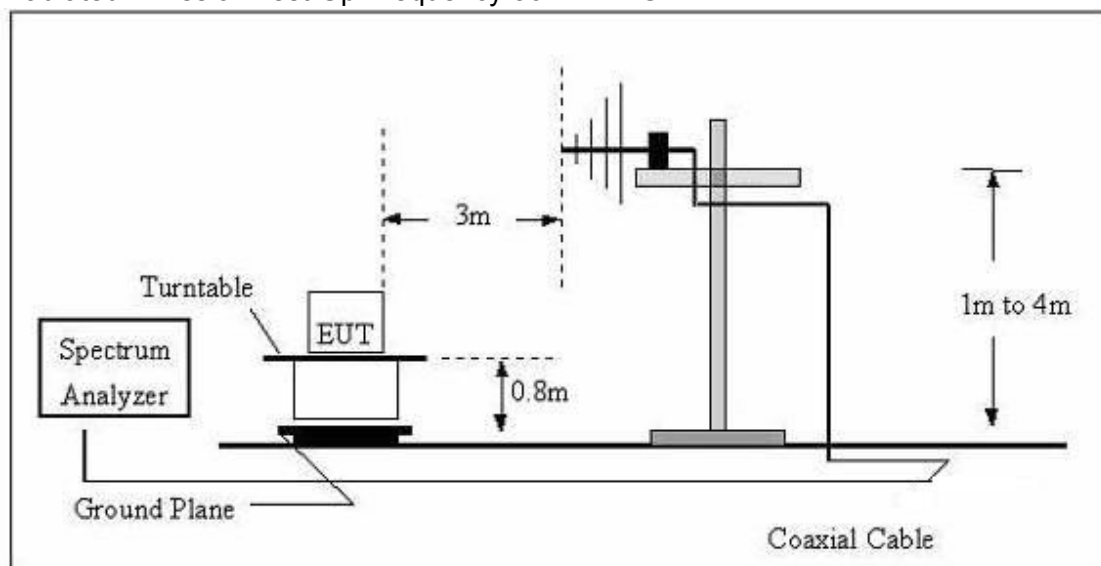

(C) Radiated Emission Test-Up Frequency Above 1GHz

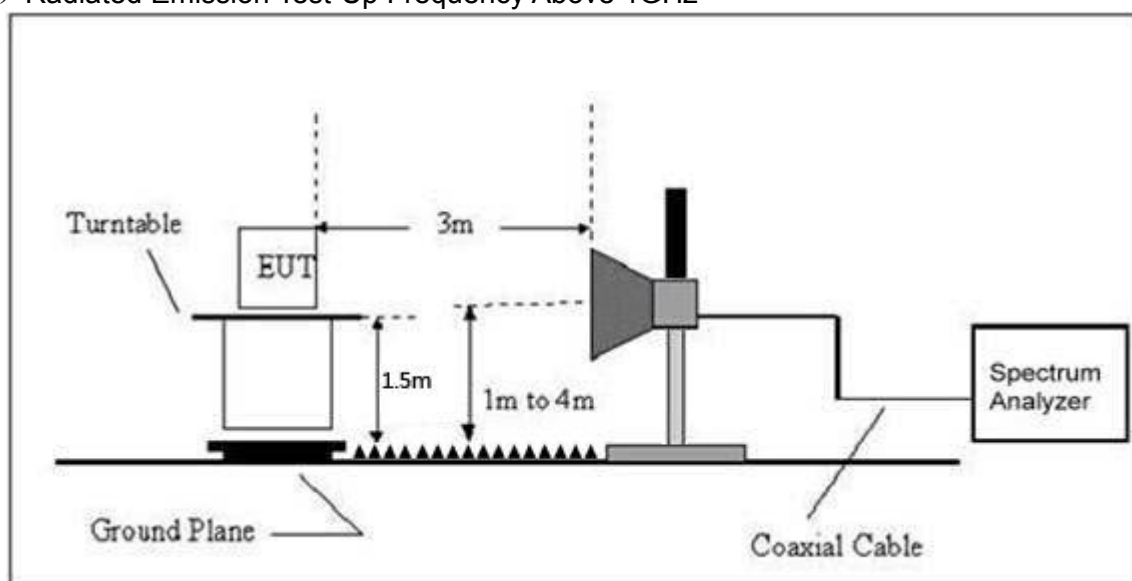

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 5V form PC AC 12 0V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 5V form PC AC 120V/60Hz		
Test Mode :	Mode 5(ANT 1)		

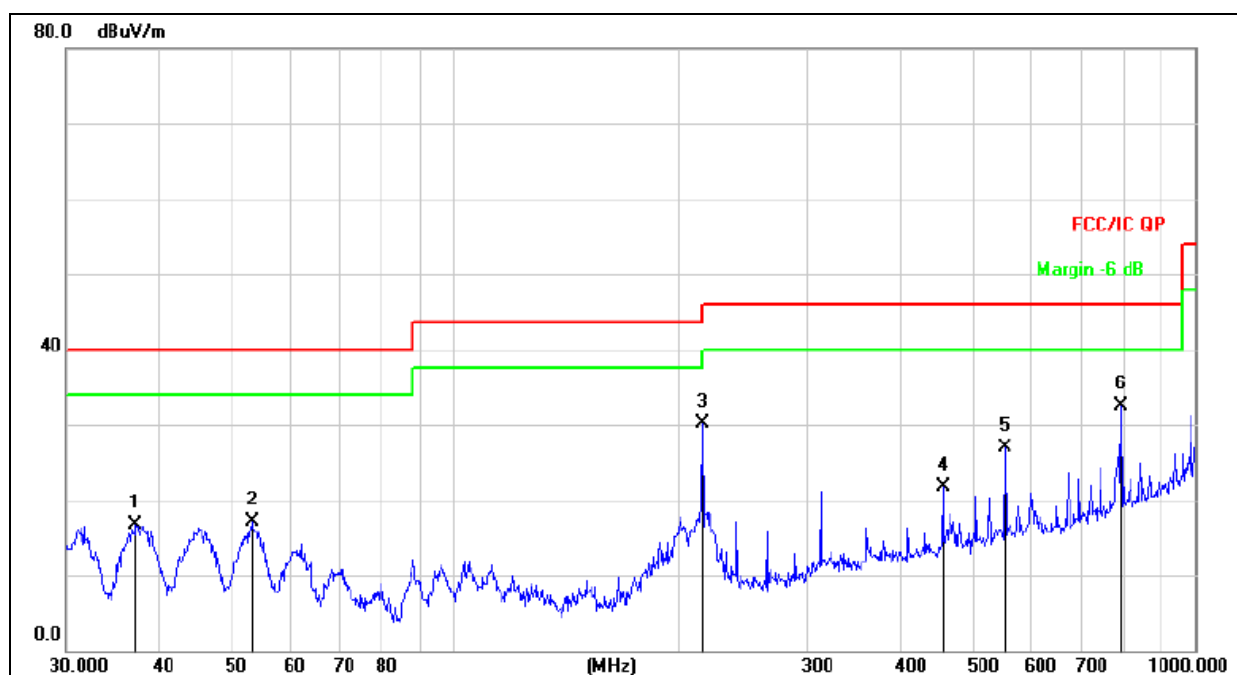


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.1550	32.58	-15.94	16.64	40.00	-23.36	QP
2		53.3179	32.23	-15.20	17.03	40.00	-22.97	QP
3		216.0240	46.02	-15.93	30.09	46.00	-15.91	QP
4		455.9058	31.63	-9.85	21.78	46.00	-24.22	QP
5		552.8832	34.55	-7.61	26.94	46.00	-19.06	QP
6	*	793.3960	36.20	-3.73	32.47	46.00	-13.53	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V form PC AC 120V/60Hz		
Test Mode :	Mode 5(ANT 1)		

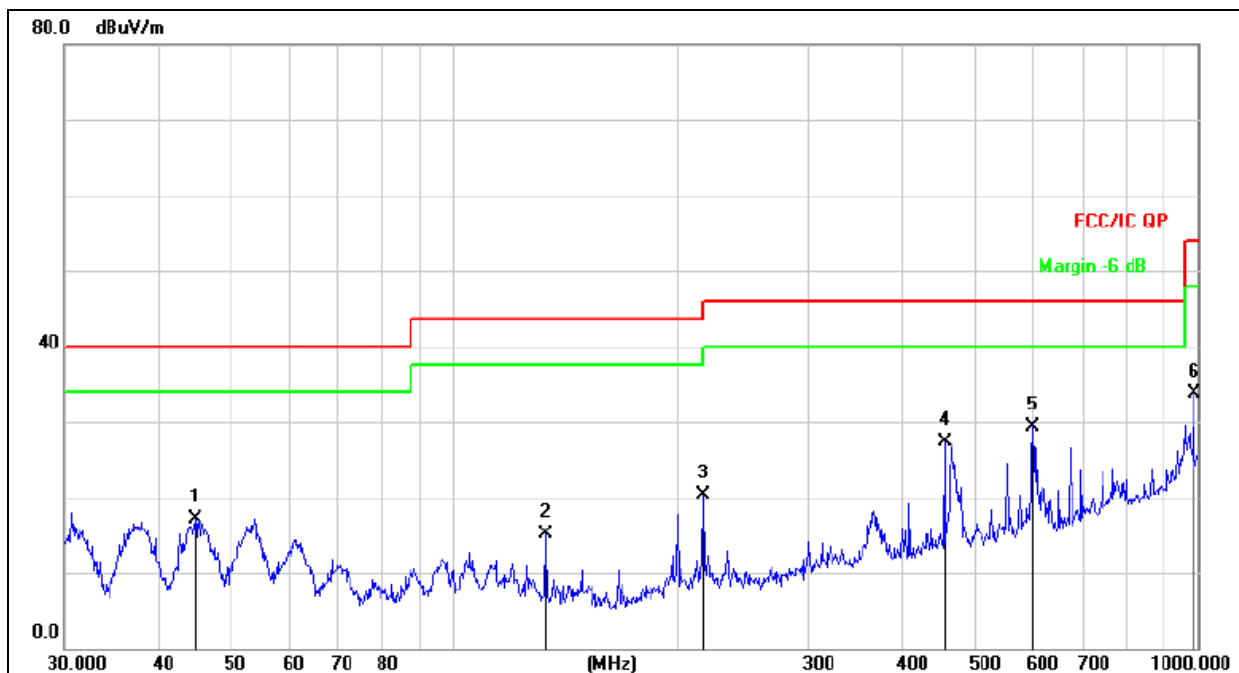


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.9006	32.34	-15.14	17.20	40.00	-22.80	QP
2		132.6850	33.54	-18.38	15.16	43.50	-28.34	QP
3		216.0240	36.26	-15.93	20.33	46.00	-25.67	QP
4		455.9058	37.07	-9.85	27.22	46.00	-18.78	QP
5	*	599.3212	35.94	-6.54	29.40	46.00	-16.60	QP
6		986.0717	34.56	-0.89	33.67	54.00	-20.33	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 5V form PC AC 120V/60Hz		
Test Mode :	Mode 5(ANT 2)		

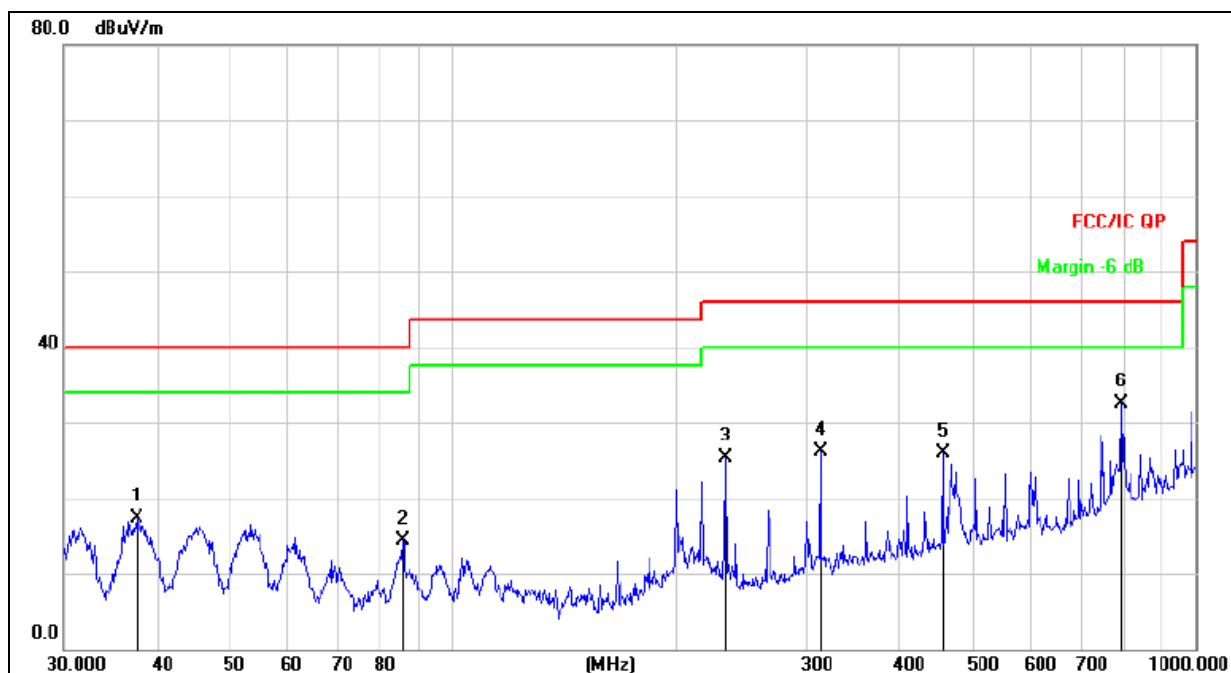


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.6798	33.08	-15.84	17.24	40.00	-22.76	QP
2		85.5977	33.34	-19.12	14.22	40.00	-25.78	QP
3		232.5318	40.91	-15.55	25.36	46.00	-20.64	QP
4		312.1794	39.34	-13.27	26.07	46.00	-19.93	QP
5		455.9058	35.71	-9.85	25.86	46.00	-20.14	QP
6	*	793.3960	36.20	-3.73	32.47	46.00	-13.53	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V form PC AC 120V/60Hz		
Test Mode :	Mode 5(ANT 2)		

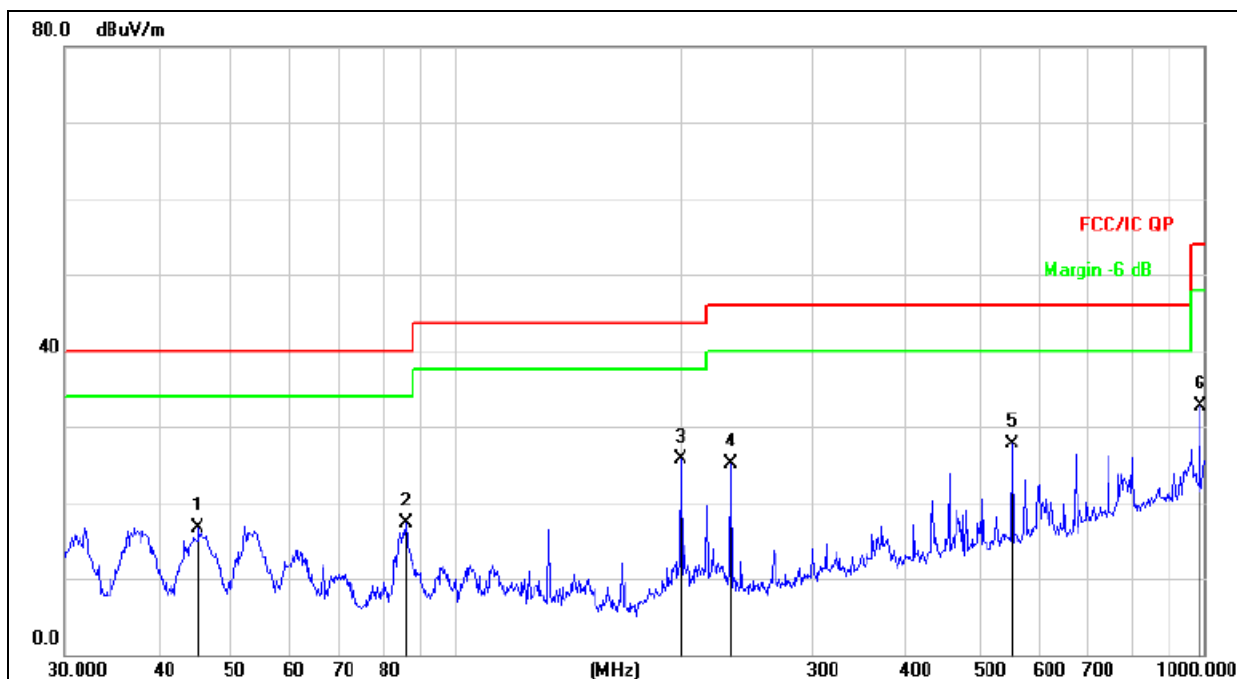

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		45.2166	31.79	-15.12	16.67	40.00	-23.33	QP
2		85.5977	36.37	-19.12	17.25	40.00	-22.75	QP
3	*	199.9856	42.07	-16.30	25.77	43.50	-17.73	QP
4		232.5318	40.64	-15.55	25.09	46.00	-20.91	QP
5		552.8832	35.34	-7.61	27.73	46.00	-18.27	QP
6		986.0717	33.57	-0.89	32.68	54.00	-21.32	QP

### 3.2.8 TEST RESULTS (1GHZ~25GHZ)

#### 802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	66.41	39.55	7.85	25.66	60.37	74.00	-13.63	PK
V	4824.00	51.18	39.55	7.85	25.66	45.14	54.00	-8.86	AV
V	7236.00	67.12	38.33	7.52	24.55	60.86	74.00	-13.14	PK
V	7236.00	49.36	38.33	7.52	24.55	43.10	54.00	-10.90	AV
V	15450.00	52.29	35.23	6.75	26.59	50.40	74.00	-23.60	PK
H	4824.00	64.92	39.55	7.85	25.66	58.88	74.00	-15.12	PK
H	4824.00	51.37	39.55	7.85	25.66	45.33	54.00	-8.67	AV
H	7236.00	65.95	38.33	7.52	23.55	58.69	74.00	-15.31	PK
H	7236.00	48.03	38.33	7.52	23.22	40.44	54.00	-13.56	AV
H	15450.00	52.42	35.45	6.75	27.88	51.60	74.00	-22.40	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	65.36	38.89	7.57	25.45	59.49	74.00	-14.51	Pk
V	4874.00	51.30	38.89	7.57	25.45	45.43	54.00	-8.57	AV
V	7311.00	67.17	38.78	7.35	24.78	60.52	74.00	-13.48	Pk
V	7311.00	50.70	38.78	7.35	24.78	44.05	54.00	-9.95	AV
V	15450.00	51.48	35.89	6.42	26.47	48.48	74.00	-25.52	Pk
H	4874.00	65.84	38.89	7.57	25.45	59.97	74.00	-14.03	Pk
H	4874.00	50.42	38.89	7.57	25.45	44.55	54.00	-9.45	AV
H	7311.00	67.00	38.78	7.35	24.78	60.35	74.00	-13.65	Pk
H	7311.00	48.38	38.78	7.35	24.78	41.73	54.00	-12.27	AV
H	15450.00	53.46	36.68	6.42	26.65	49.85	74.00	-24.15	Pk

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2462MHz									
V	4924.00	63.91	38.75	7.46	25.45	58.07	74.00	-15.93	PK
V	4924.00	51.10	38.75	7.46	25.45	45.26	54.00	-8.74	AV
V	7386.00	67.45	38.65	7.22	24.78	60.80	74.00	-13.20	PK
V	7386.00	50.98	38.65	7.22	24.78	44.33	54.00	-9.67	AV
V	15450.00	51.28	35.58	6.35	26.47	48.52	74.00	-25.48	PK
H	4924.00	65.93	38.75	7.46	25.45	60.09	74.00	-13.91	PK
H	4924.00	50.71	38.75	7.46	25.45	44.87	54.00	-9.13	AV
H	7386.00	67.31	38.65	7.22	24.78	60.66	74.00	-13.34	PK
H	7386.00	47.62	38.65	7.22	24.78	40.97	54.00	-13.03	AV
H	15450.00	52.43	36.42	6.32	26.65	48.98	74.00	-25.02	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is ANT1 and record the report.

## 802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	63.66	39.55	7.85	25.66	57.62	74.00	-16.38	PK
V	4824.00	52.39	39.55	7.85	25.66	46.35	54.00	-7.65	AV
V	7236.00	66.35	38.33	7.52	24.55	60.09	74.00	-13.91	PK
V	7236.00	52.30	38.33	7.52	24.55	46.04	54.00	-7.96	AV
V	15450.00	50.09	35.23	6.75	26.59	48.20	74.00	-25.80	PK
H	4824.00	64.89	39.55	7.85	25.66	58.85	74.00	-15.15	PK
H	4824.00	49.89	39.55	7.85	25.66	43.85	54.00	-10.15	AV
H	7236.00	66.89	38.33	7.52	23.55	59.63	74.00	-14.37	PK
H	7236.00	48.00	38.33	7.52	23.22	40.41	54.00	-13.59	AV
H	15450.00	52.32	35.45	6.75	27.88	51.50	74.00	-22.50	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	65.07	38.89	7.57	25.45	59.20	74.00	-14.80	PK
V	4874.00	53.17	38.89	7.57	25.45	47.30	54.00	-6.70	AV
V	7311.00	65.28	38.78	7.35	24.78	58.63	74.00	-15.37	PK
V	7311.00	52.52	38.78	7.35	24.78	45.87	54.00	-8.13	AV
V	15450.00	49.57	35.89	6.42	26.47	46.57	74.00	-27.43	PK
H	4874.00	63.43	38.89	7.57	25.45	57.56	74.00	-16.44	PK
H	4874.00	49.02	38.89	7.57	25.45	43.15	54.00	-10.85	AV
H	7311.00	66.86	38.78	7.35	24.78	60.21	74.00	-13.79	PK
H	7311.00	46.51	38.78	7.35	24.78	39.86	54.00	-14.14	AV
H	15450.00	51.75	36.68	6.42	26.65	48.14	74.00	-25.86	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2462MHz									
V	4924.00	65.41	38.75	7.46	25.45	59.57	74.00	-14.43	PK
V	4924.00	51.87	38.75	7.46	25.45	46.03	54.00	-7.97	AV
V	7386.00	63.90	38.65	7.22	24.78	57.25	74.00	-16.75	PK
V	7386.00	52.23	38.65	7.22	24.78	45.58	54.00	-8.42	AV
V	15450.00	49.60	35.58	6.35	26.47	46.84	74.00	-27.16	PK
H	4924.00	64.15	38.75	7.46	25.45	58.31	74.00	-15.69	PK
H	4924.00	49.14	38.75	7.46	25.45	43.30	54.00	-10.70	AV
H	7386.00	66.55	38.65	7.22	24.78	59.90	74.00	-14.10	PK
H	7386.00	45.49	38.65	7.22	24.78	38.84	54.00	-15.16	AV
H	15450.00	52.07	36.42	6.32	26.65	48.62	74.00	-25.38	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is ANT1 and record the report.

## 802.11n(20MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	66.19	39.55	7.85	25.66	60.15	74.00	-13.85	PK
V	4824.00	52.07	39.55	7.85	25.66	46.03	54.00	-7.97	AV
V	7236.00	64.46	38.33	7.52	24.55	58.20	74.00	-15.80	PK
V	7236.00	53.17	38.33	7.52	24.55	46.91	54.00	-7.09	AV
V	15450.00	49.52	35.23	6.75	26.59	47.63	74.00	-26.37	PK
H	4824.00	65.30	39.55	7.85	25.66	59.26	74.00	-14.74	PK
H	4824.00	49.74	39.55	7.85	25.66	43.70	54.00	-10.30	AV
H	7236.00	67.85	38.33	7.52	23.55	60.59	74.00	-13.41	PK
H	7236.00	45.20	38.33	7.52	23.22	37.61	54.00	-16.39	AV
H	15450.00	50.88	35.45	6.75	27.88	50.06	74.00	-23.94	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	65.82	38.89	7.57	25.45	59.95	74.00	-14.05	PK
V	4874.00	52.73	38.89	7.57	25.45	46.86	54.00	-7.14	AV
V	7311.00	63.13	38.78	7.35	24.78	56.48	74.00	-17.52	PK
V	7311.00	53.72	38.78	7.35	24.78	47.07	54.00	-6.93	AV
V	15450.00	50.80	35.89	6.42	26.47	47.80	74.00	-26.20	PK
H	4874.00	64.47	38.89	7.57	25.45	58.60	74.00	-15.40	PK
H	4874.00	49.13	38.89	7.57	25.45	43.26	54.00	-10.74	AV
H	7311.00	66.75	38.78	7.35	24.78	60.10	74.00	-13.90	PK
H	7311.00	46.13	38.78	7.35	24.78	39.48	54.00	-14.52	AV
H	15450.00	51.22	36.68	6.42	26.65	47.61	74.00	-26.39	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2462MHz									
V	4924.00	66.66	38.75	7.46	25.45	60.82	74.00	-13.18	PK
V	4924.00	52.91	38.75	7.46	25.45	47.07	54.00	-6.93	AV
V	7386.00	63.25	38.65	7.22	24.78	56.60	74.00	-17.40	PK
V	7386.00	52.56	38.65	7.22	24.78	45.91	54.00	-8.09	AV
V	15450.00	49.93	35.58	6.35	26.47	47.17	74.00	-26.83	PK
H	4924.00	66.02	38.75	7.46	25.45	60.18	74.00	-13.82	PK
H	4924.00	48.96	38.75	7.46	25.45	43.12	54.00	-10.88	AV
H	7386.00	67.06	38.65	7.22	24.78	60.41	74.00	-13.59	PK
H	7386.00	45.23	38.65	7.22	24.78	38.58	54.00	-15.42	AV
H	15450.00	51.69	36.42	6.32	26.65	48.24	74.00	-25.76	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is ANT1 and record the report.

**802.11n(40MHz)**

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2422MHz									
V	4844.00	67.75	39.55	7.77	25.66	61.63	74.00	-12.37	Pk
V	4844.00	54.20	39.55	7.77	25.66	48.08	54.00	-5.92	AV
V	7266.00	64.72	38.33	7.3	24.55	58.24	74.00	-15.76	Pk
V	7266.00	52.61	38.33	7.3	24.55	46.13	54.00	-7.87	AV
V	15450.00	49.80	35.23	6.6	26.59	47.76	74.00	-26.24	Pk
H	4844.00	66.61	39.55	7.77	25.66	60.49	74.00	-13.51	Pk
H	4844.00	47.73	39.55	7.77	25.66	41.61	54.00	-12.39	AV
H	7266.00	66.84	38.33	7.3	23.55	59.36	74.00	-14.64	Pk
H	7266.00	46.23	38.33	7.3	23.22	38.42	54.00	-15.58	AV
H	15450.00	50.62	35.45	6.6	27.88	49.65	74.00	-24.35	Pk

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	68.27	38.89	7.57	25.45	62.40	74.00	-11.60	PK
V	4874.00	55.06	38.89	7.57	25.45	49.19	54.00	-4.81	AV
V	7311.00	64.31	38.78	7.35	24.78	57.66	74.00	-16.34	PK
V	7311.00	52.68	38.78	7.35	24.78	46.03	54.00	-7.97	AV
V	15450.00	50.53	35.89	6.42	26.47	47.53	74.00	-26.47	PK
H	4874.00	65.21	38.89	7.57	25.45	59.34	74.00	-14.66	PK
H	4874.00	47.71	38.89	7.57	25.45	41.84	54.00	-12.16	AV
H	7311.00	66.77	38.78	7.35	24.78	60.12	74.00	-13.88	PK
H	7311.00	45.40	38.78	7.35	24.78	38.75	54.00	-15.25	AV
H	15450.00	51.40	36.68	6.42	26.65	47.79	74.00	-26.21	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2452MHz									
V	4904.00	68.85	38.75	7.38	25.45	62.93	74.00	-11.07	PK
V	4904.00	56.07	38.75	7.38	25.45	50.15	54.00	-3.85	AV
V	7356.00	64.80	38.65	7.15	24.78	58.08	74.00	-15.92	PK
V	7356.00	53.54	38.65	7.15	24.78	46.82	54.00	-7.18	AV
V	15450.00	51.61	35.58	6.25	26.47	48.75	74.00	-25.25	PK
H	4904.00	66.72	38.75	7.38	25.45	60.80	74.00	-13.20	PK
H	4904.00	47.13	38.75	7.38	25.45	41.21	54.00	-12.79	AV
H	7356.00	67.74	38.65	7.15	24.78	61.02	74.00	-12.98	PK
H	7356.00	46.83	38.65	7.15	24.78	40.11	54.00	-13.89	AV
H	15450.00	51.23	36.42	6.25	26.65	47.71	74.00	-26.29	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is ANT1 and record the report.

### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

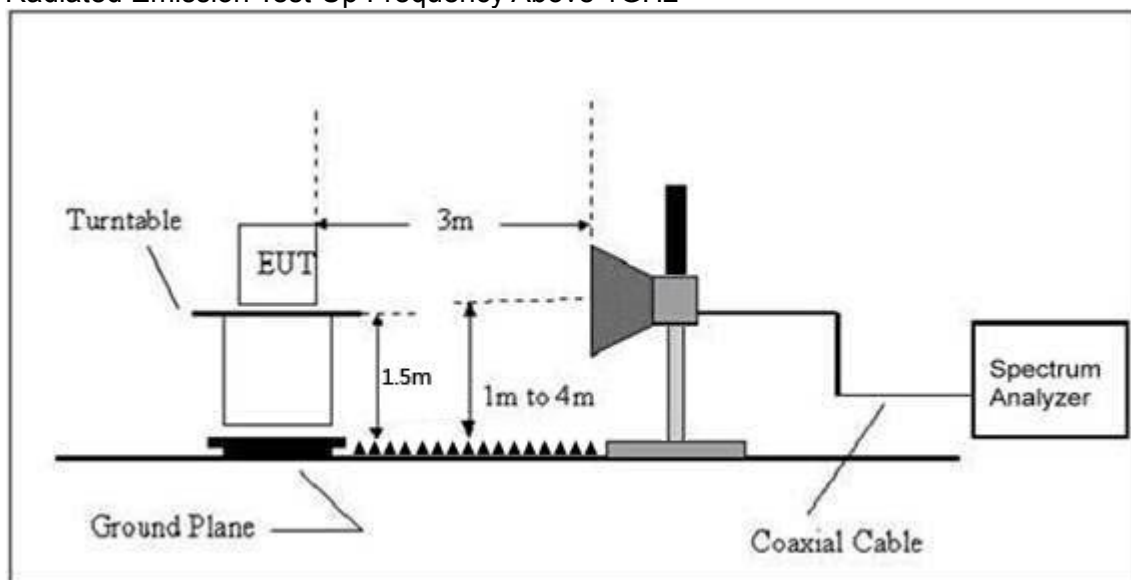

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	60.73	38.06	7.42	20.15	50.24	74.00	54.00	PASS
	H	2400.00	52.46	38.06	7.42	20.15	41.97	74.00	54.00	PASS
	V	2390.00	60.48	38.06	7.42	20.15	49.99	74.00	54.00	PASS
	V	2400.00	52.31	38.06	7.42	20.15	41.82	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	62.28	38.17	7.45	20.54	52.10	74.00	54.00	PASS
	H	2485.50	52.81	38.17	7.45	20.54	42.63	74.00	54.00	PASS
	V	2483.50	60.89	38.2	7.45	20.54	50.68	74.00	54.00	PASS
	V	2485.50	51.42	38.2	7.45	20.54	41.21	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	63.05	38.06	7.42	20.15	52.56	74.00	54.00	PASS
	H	2400.00	55.63	38.06	7.42	20.15	45.14	74.00	54.00	PASS
	V	2390.00	64.30	38.06	7.42	20.15	53.81	74.00	54.00	PASS
	V	2400.00	51.99	38.06	7.42	20.15	41.50	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	59.79	38.17	7.45	20.54	49.61	74.00	54.00	PASS
	H	2485.50	54.82	38.17	7.45	20.54	44.64	74.00	54.00	PASS
	V	2483.50	60.43	38.2	7.45	20.54	50.22	74.00	54.00	PASS
	V	2485.50	52.77	38.2	7.45	20.54	42.56	74.00	54.00	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	60.84	38.06	7.42	20.15	50.35	74.00	54.00	PASS
	H	2400.00	52.36	38.06	7.42	20.15	41.87	74.00	54.00	PASS
	V	2390.00	63.22	38.06	7.42	20.15	52.73	74.00	54.00	PASS
	V	2400.00	53.97	38.06	7.42	20.15	43.48	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	59.79	38.17	7.45	20.54	49.61	74.00	54.00	PASS
	H	2485.50	54.98	38.17	7.45	20.54	44.80	74.00	54.00	PASS
	V	2483.50	62.79	38.2	7.45	20.54	52.58	74.00	54.00	PASS
	V	2485.50	54.13	38.2	7.45	20.54	43.92	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz									
	H	2390.00	61.60	38.06	7.42	20.15	51.11	74.00	54.00	PASS
	H	2400.00	52.78	38.06	7.42	20.15	42.29	74.00	54.00	PASS
	V	2390.00	61.68	38.06	7.42	20.15	51.19	74.00	54.00	PASS
	V	2400.00	51.72	38.06	7.42	20.15	41.23	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	61.07	38.17	7.45	20.54	50.89	74.00	54.00	PASS
	H	2485.50	52.75	38.17	7.45	20.54	42.57	74.00	54.00	PASS
	V	2483.50	63.83	38.2	7.45	20.54	53.62	74.00	54.00	PASS
	V	2485.50	50.69	38.2	7.45	20.54	40.48	74.00	54.00	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. * is stand for AV measured.										
3. The worst case is ANT1 and record the report.										

## 4. POWER SPECTRAL DENSITY TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


#### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP

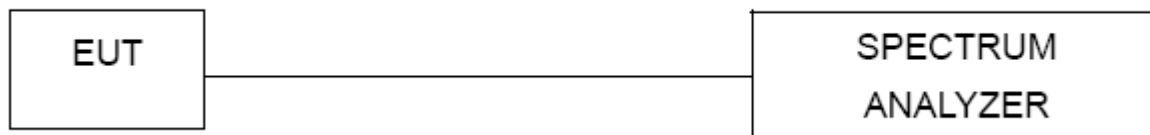

#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

#### 4.1.5 TEST RESULTS

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX b Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-17.638	8	PASS
2437 MHz	-15.316	8	PASS
2462 MHz	-16.152	8	PASS

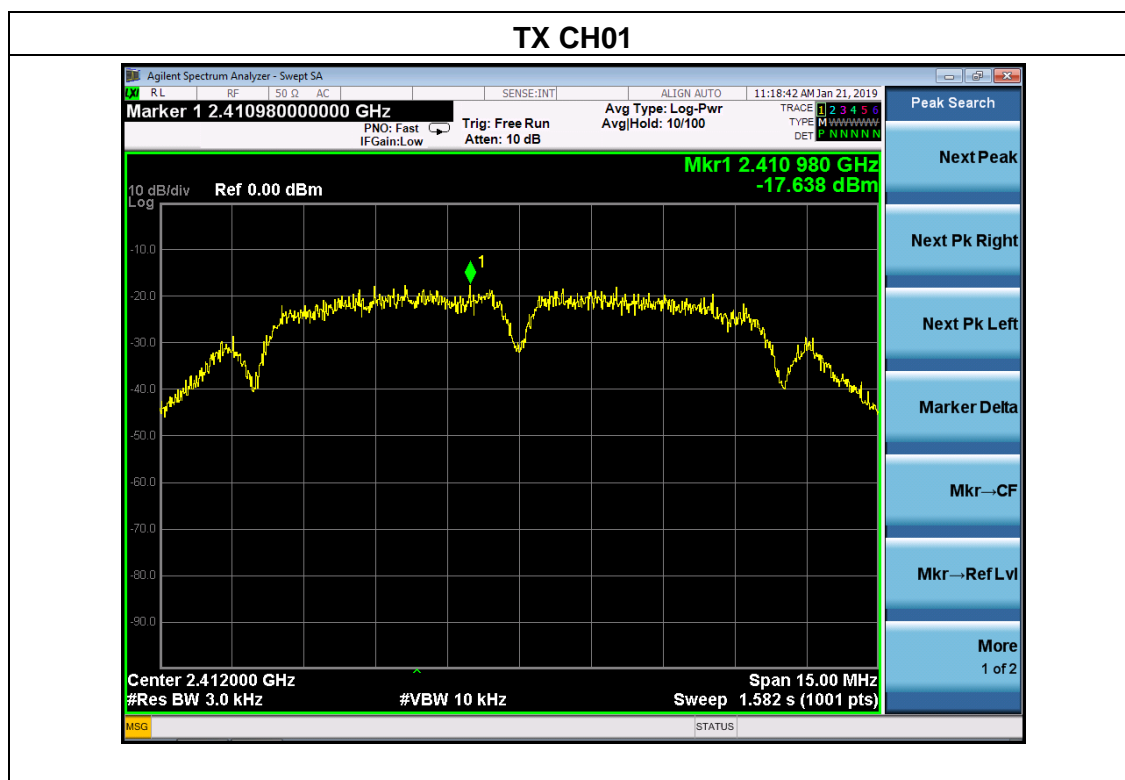



### TX CH06




### TX CH11




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX g Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-17.702	8	PASS
2437 MHz	-15.820	8	PASS
2462 MHz	-14.887	8	PASS

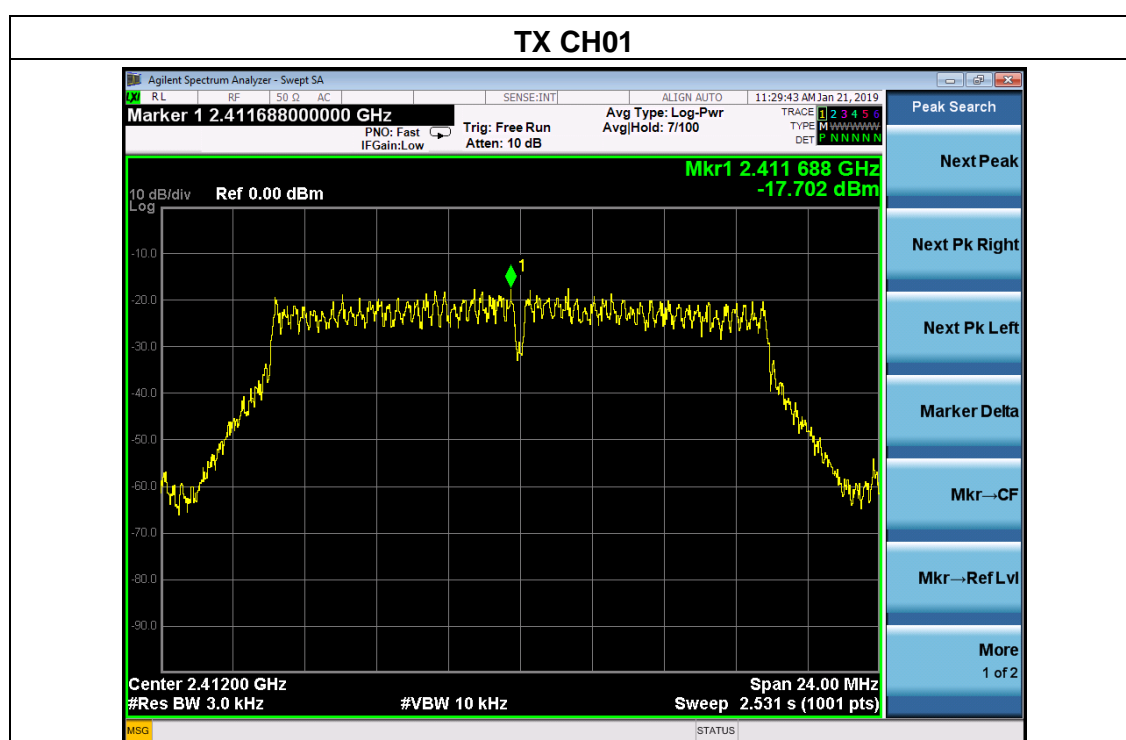




### TX CH06

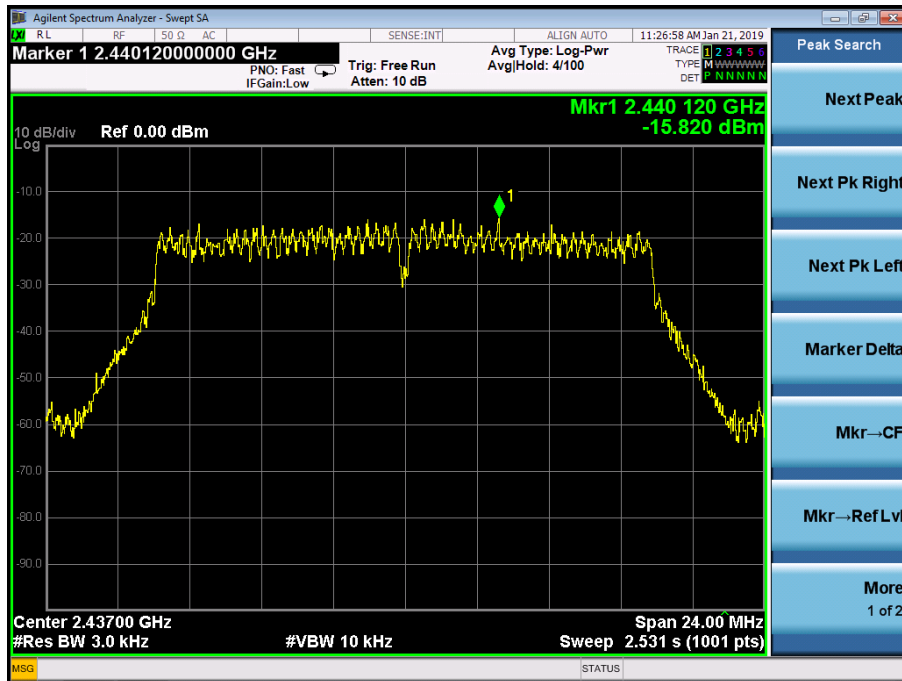


### TX CH11

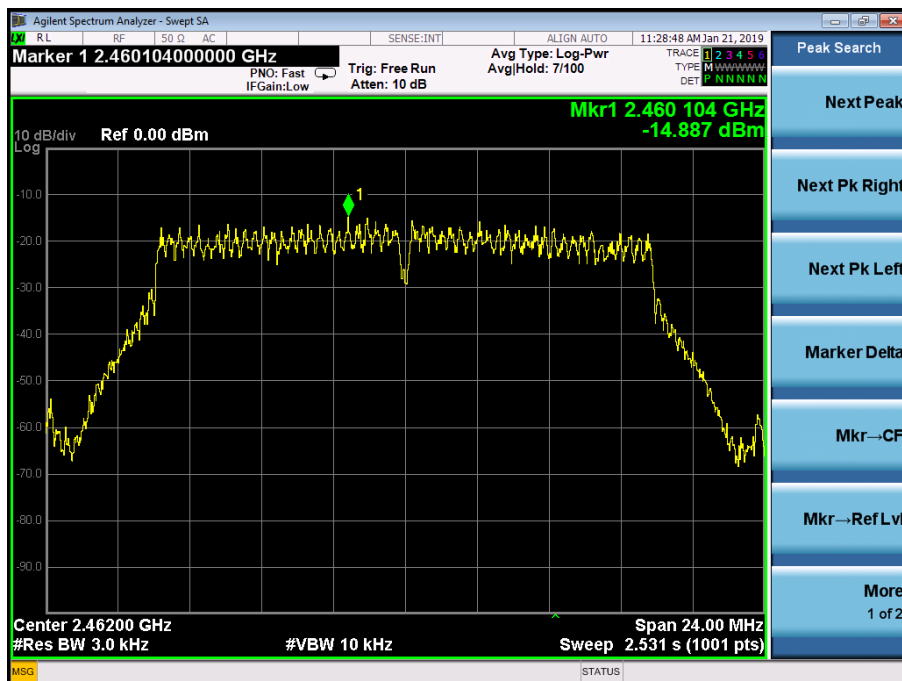


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-23.765	8	PASS
2437 MHz	-23.464	8	PASS
2462 MHz	-25.499	8	PASS

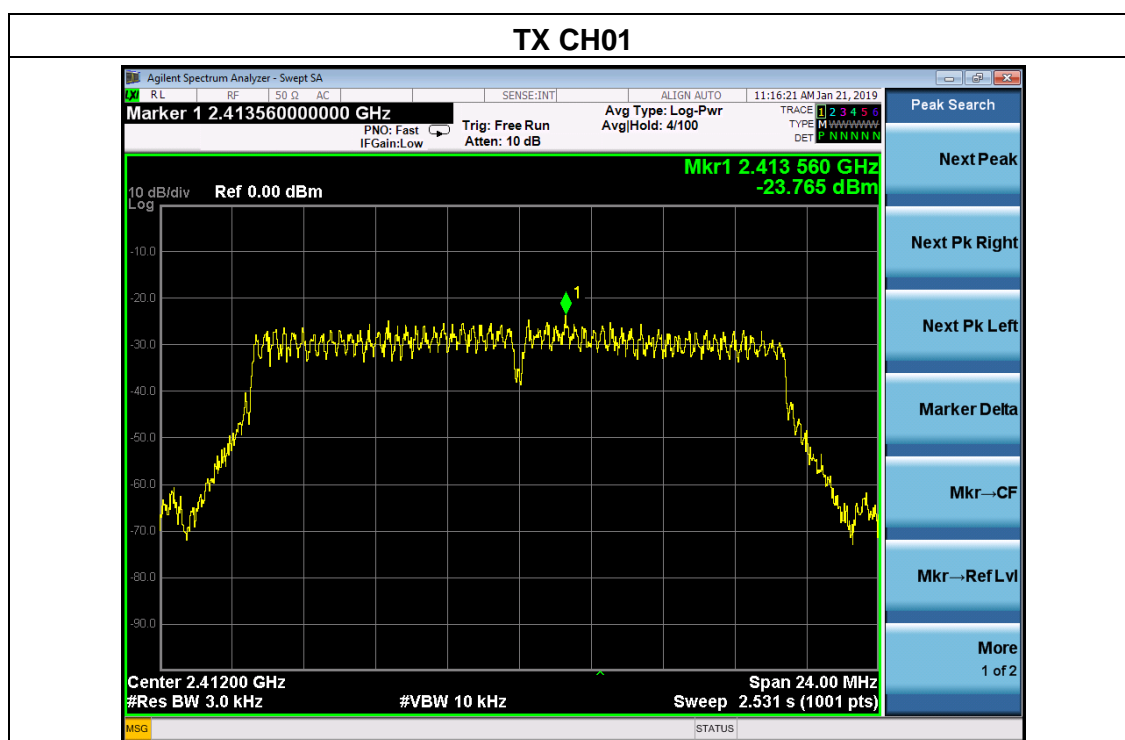




### TX CH06

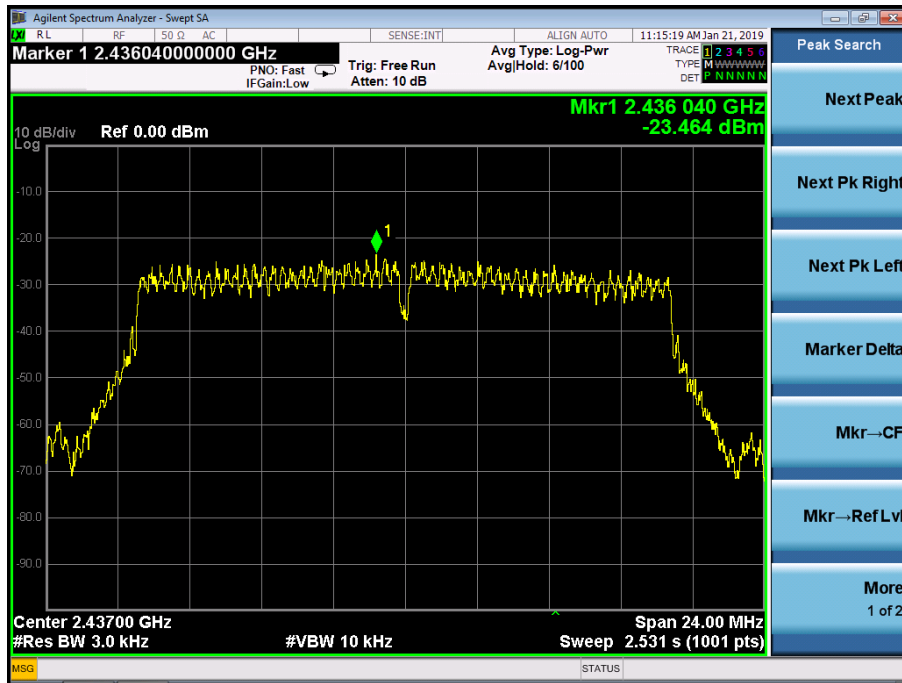


### TX CH11

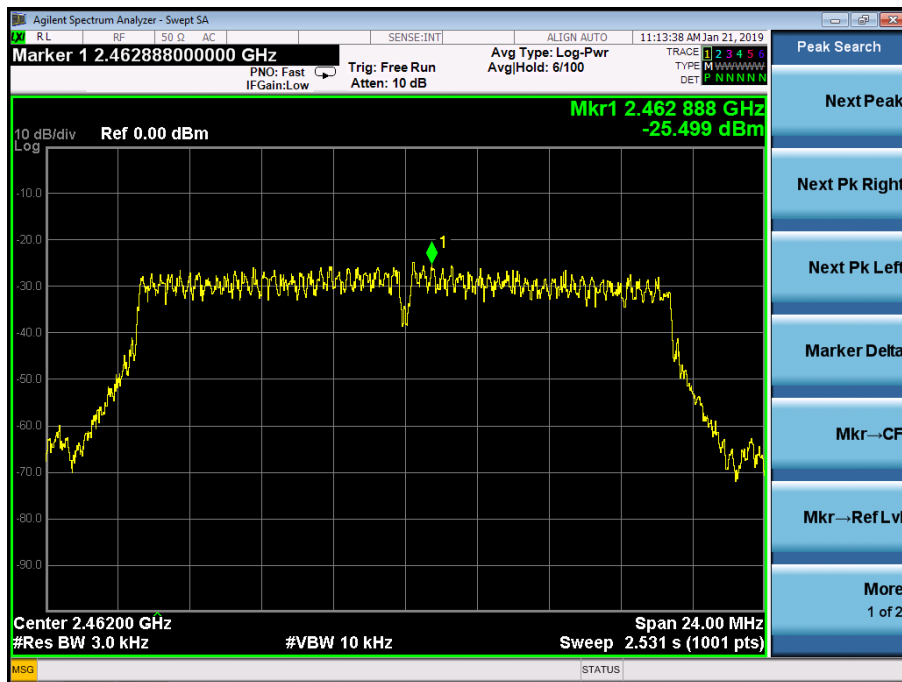



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2422 MHz	-19.110	8	PASS
2437 MHz	-21.435	8	PASS
2452 MHz	-21.198	8	PASS

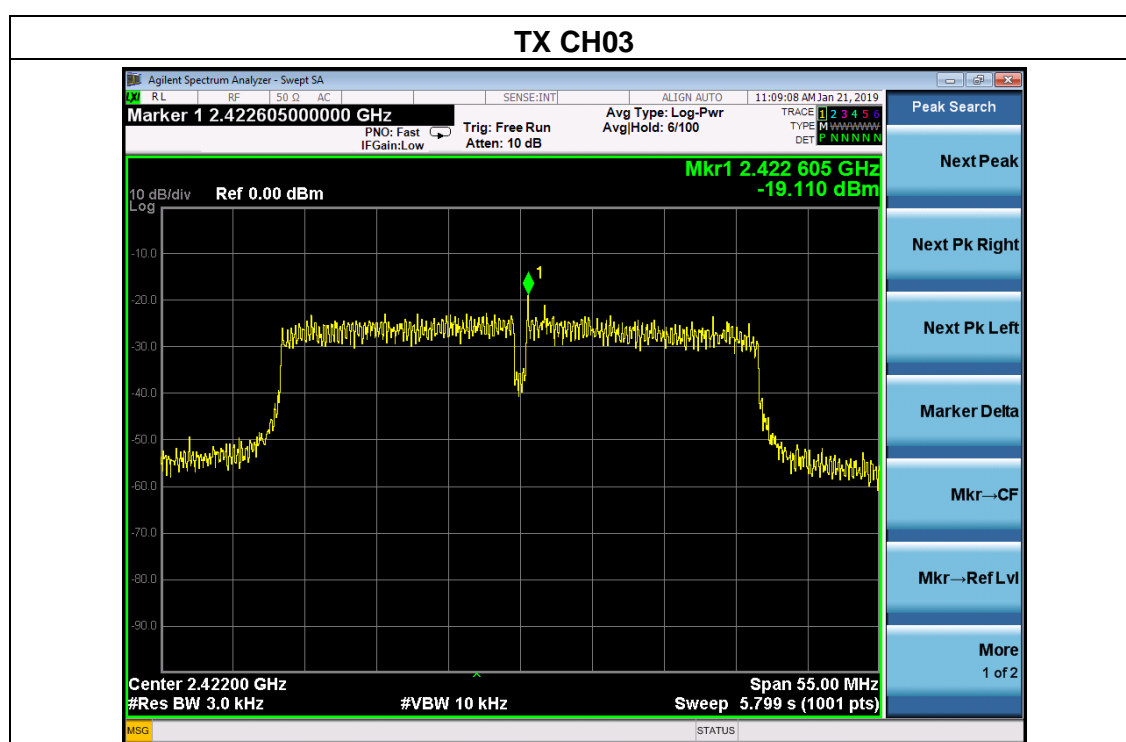




### TX CH06



### TX CH09

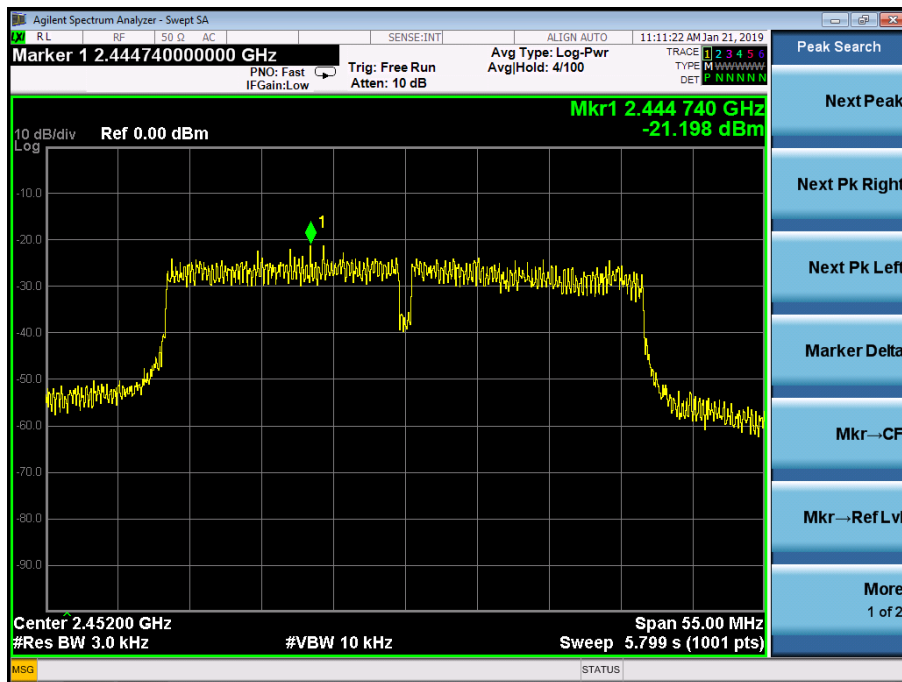

## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP




#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.5 TEST RESULTS


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX b Mode		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	10.050	500	Pass
2437	9.566	500	Pass
2462	9.605	500	Pass

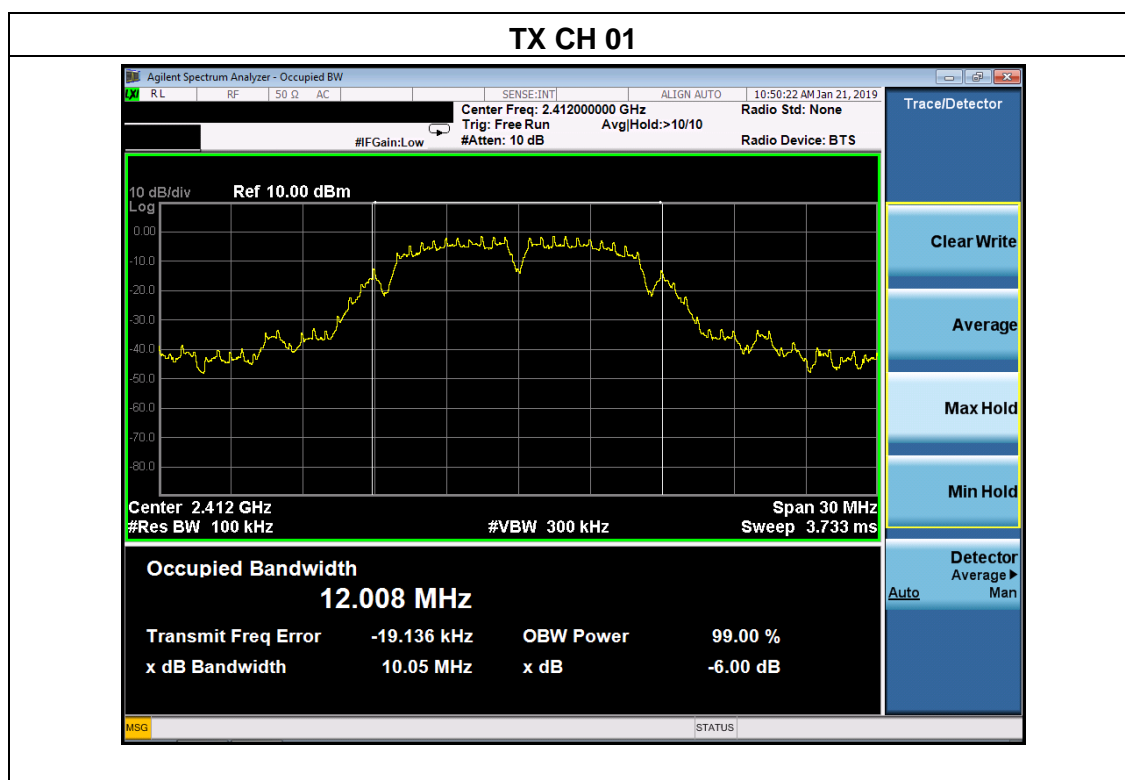




### TX CH 06

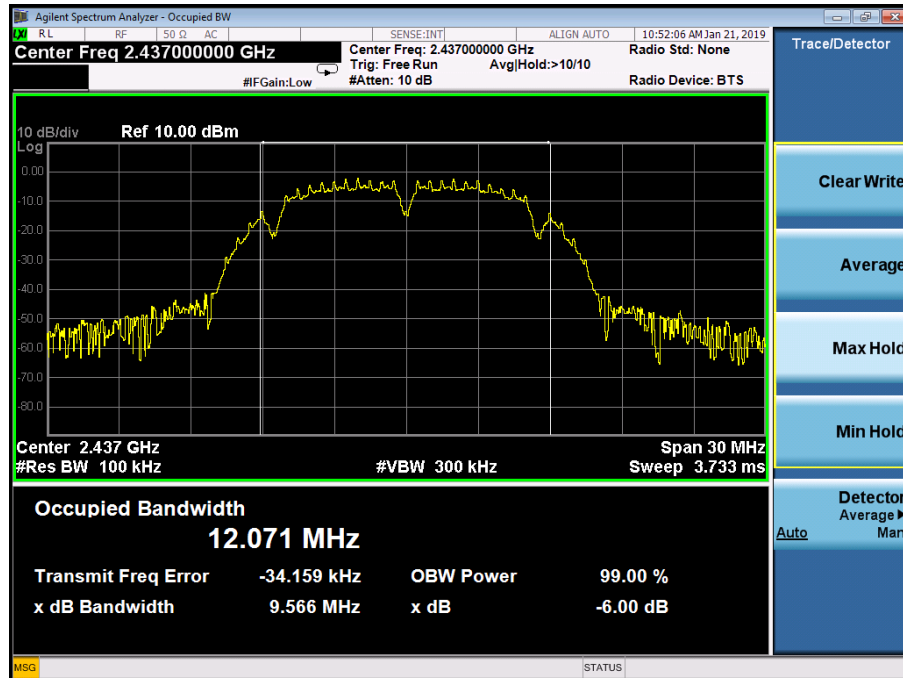


### TX CH 11

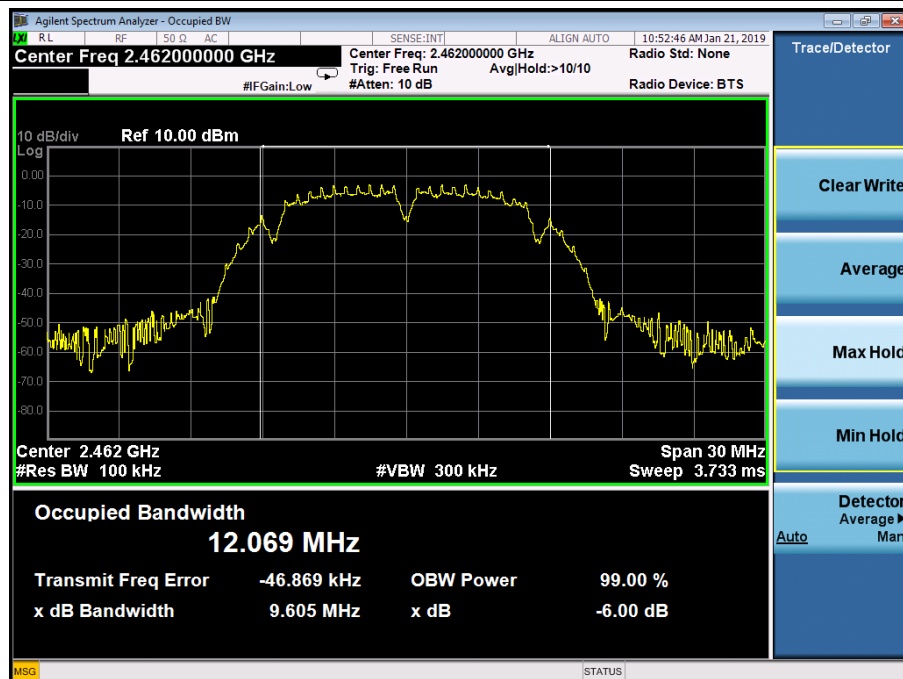




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX g Mode		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	15.650	500	Pass
2437	16.280	500	Pass
2462	16.300	500	Pass

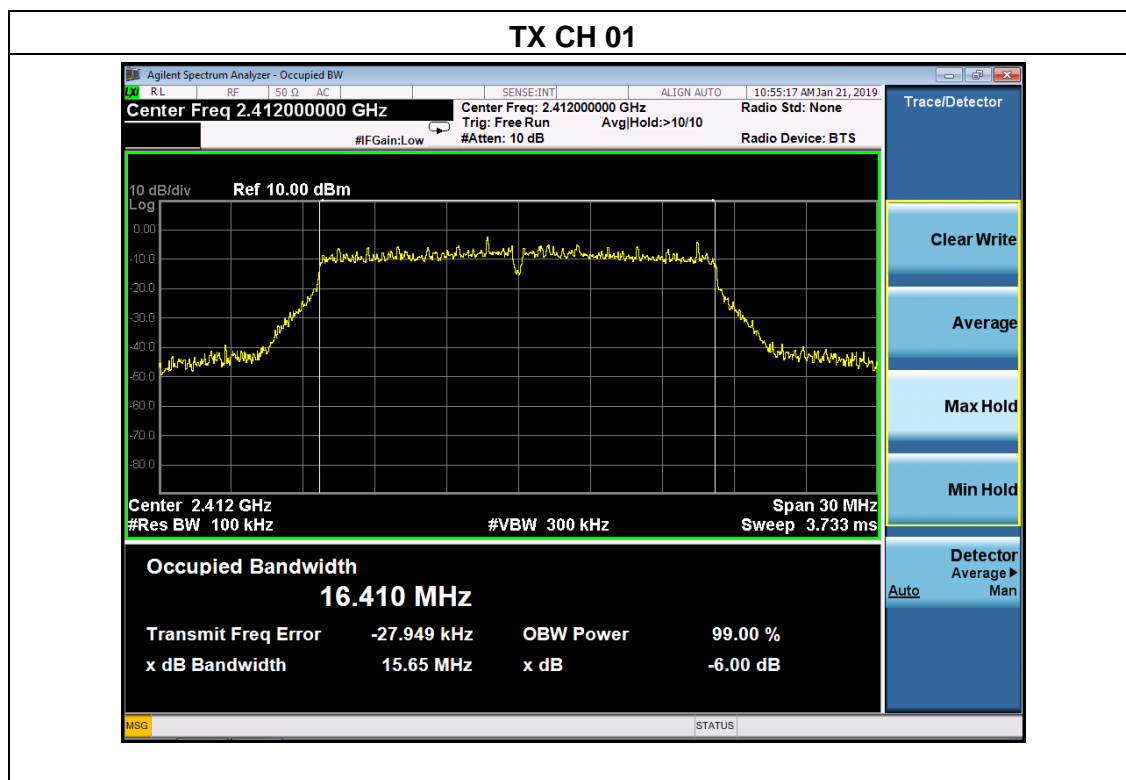




### TX CH 06

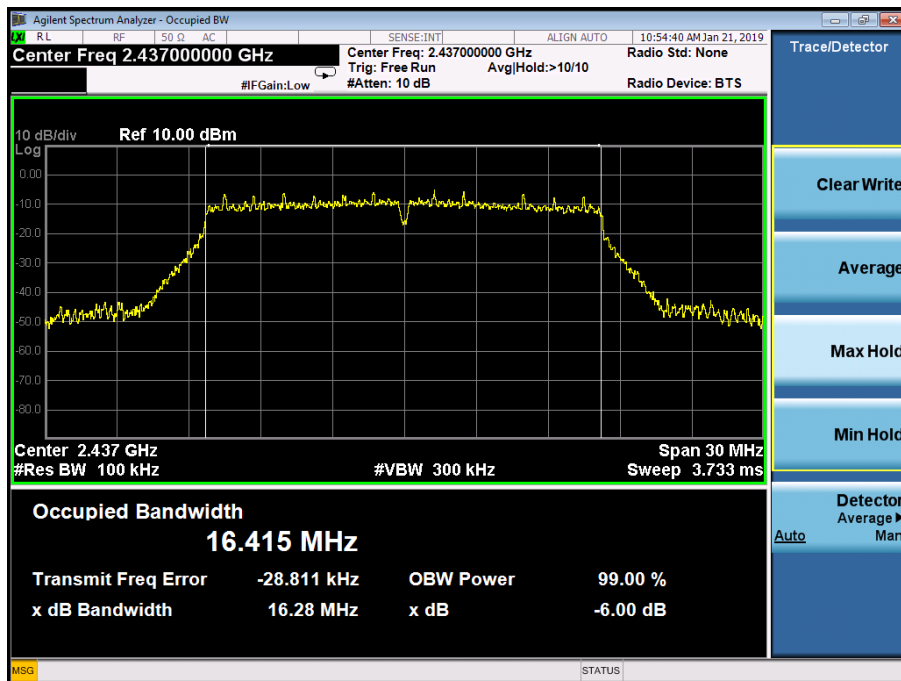


### TX CH 11

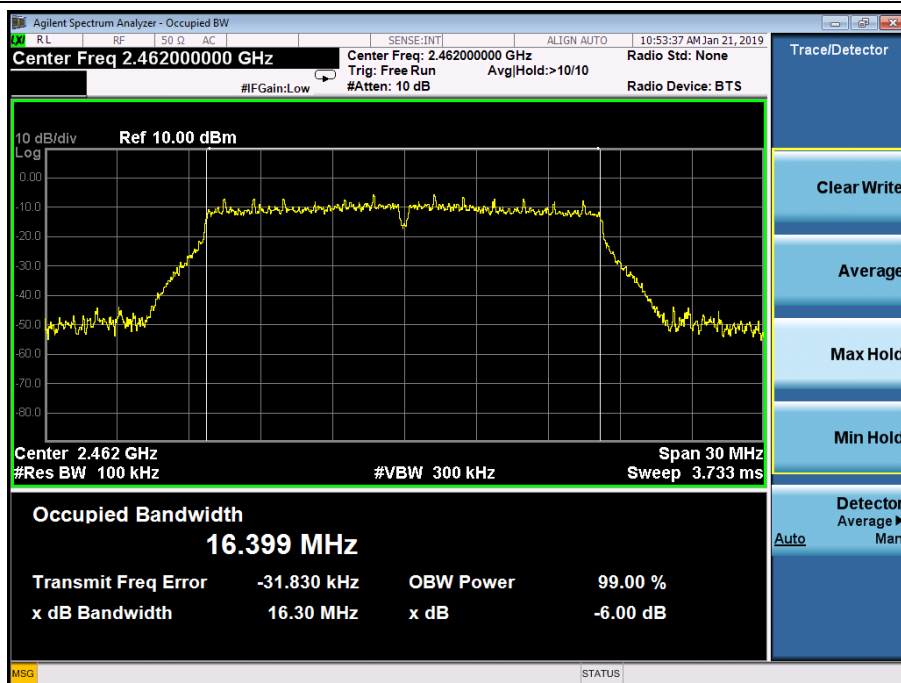



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(20M)		


Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	16.910	500	Pass
2437	16.870	500	Pass
2462	16.900	500	Pass

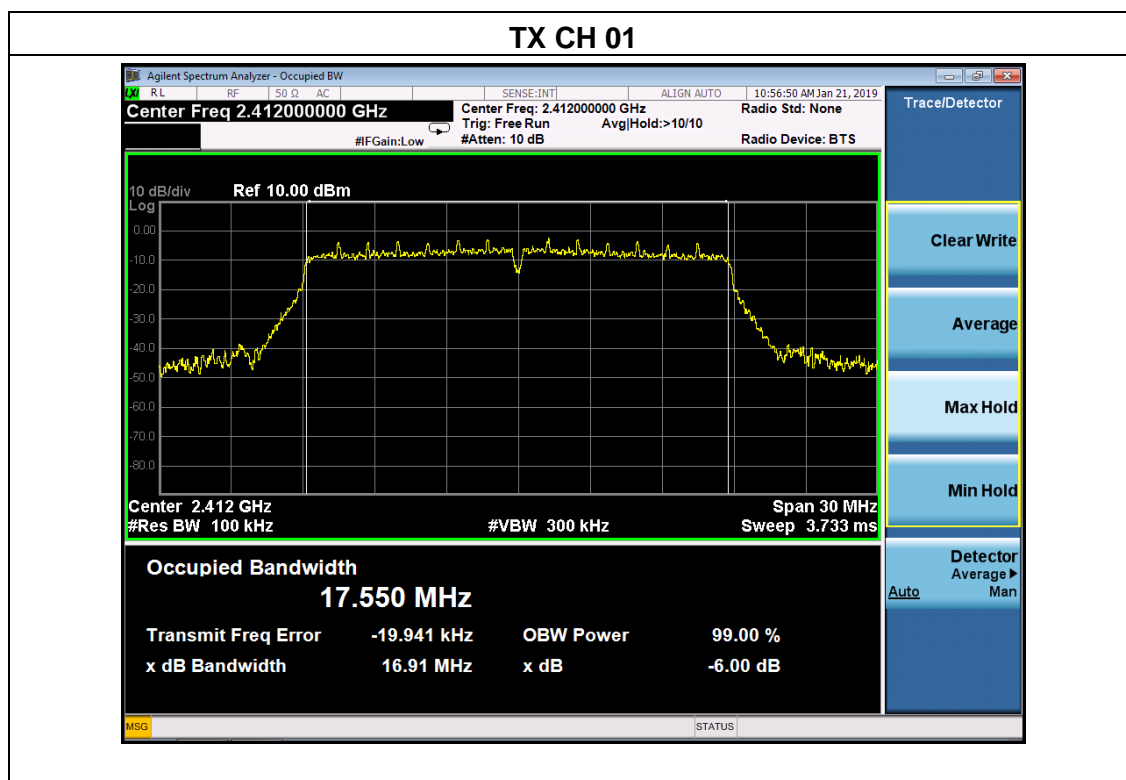






### TX CH 06

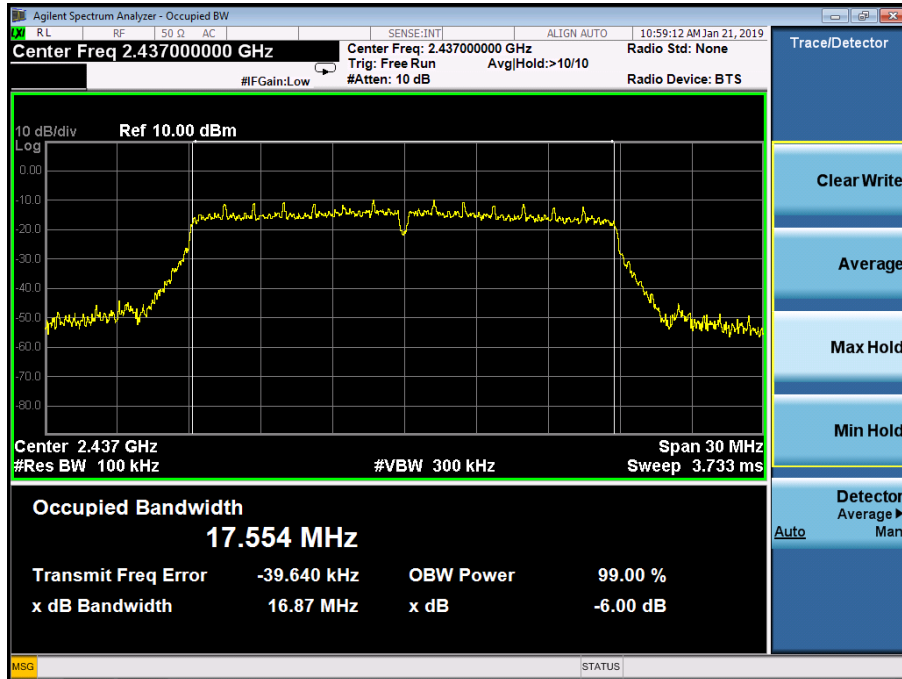


### TX CH 11

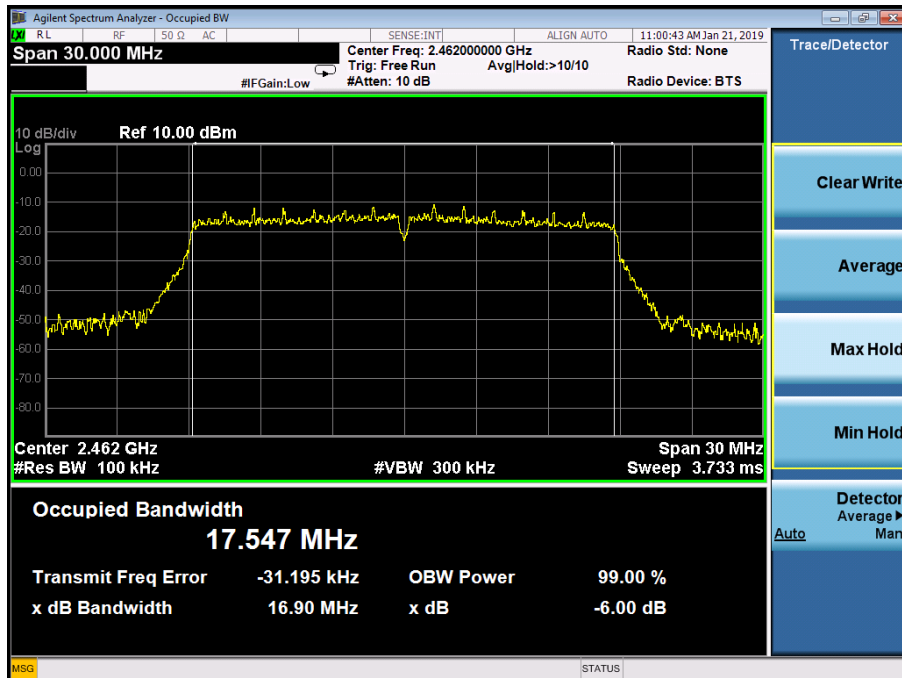




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(40M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2422	35.140	500	Pass
2437	35.130	500	Pass
2452	35.690	500	Pass

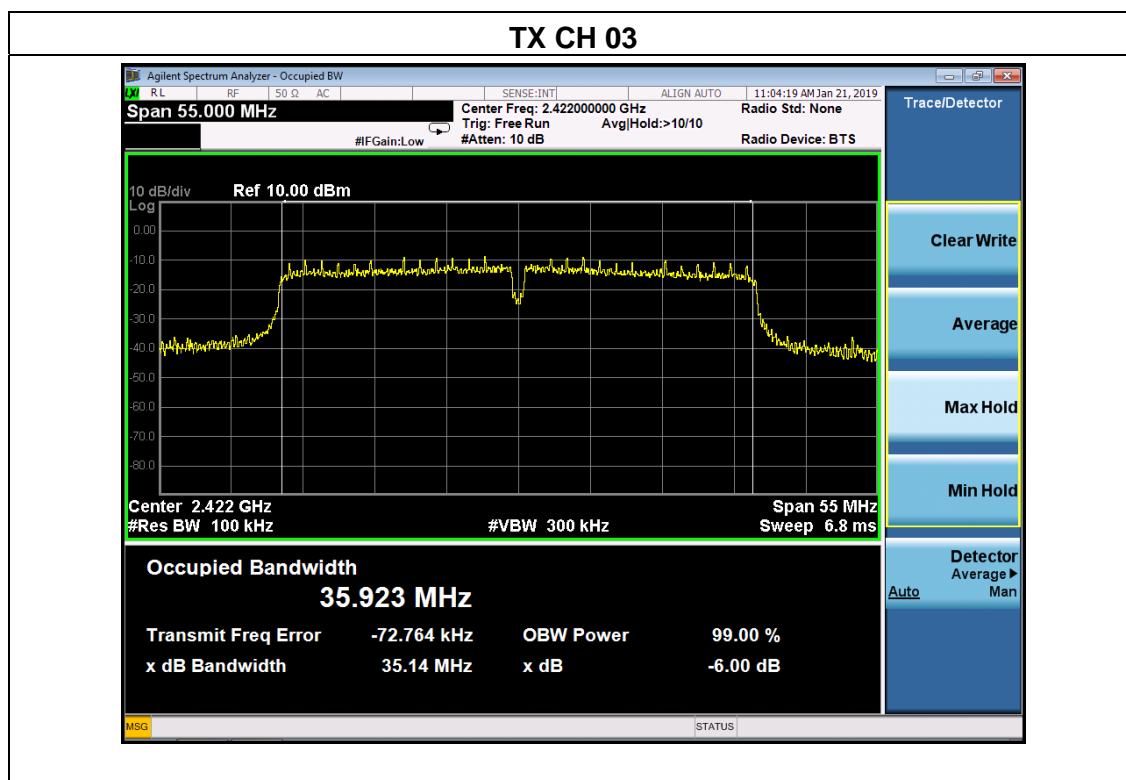




### TX CH 06

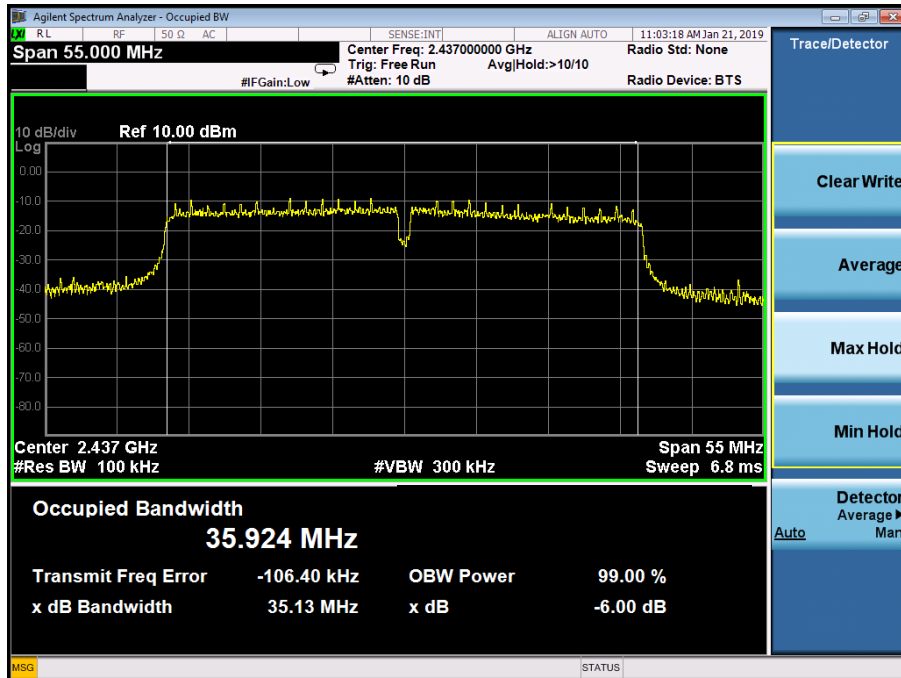

### TX CH 09

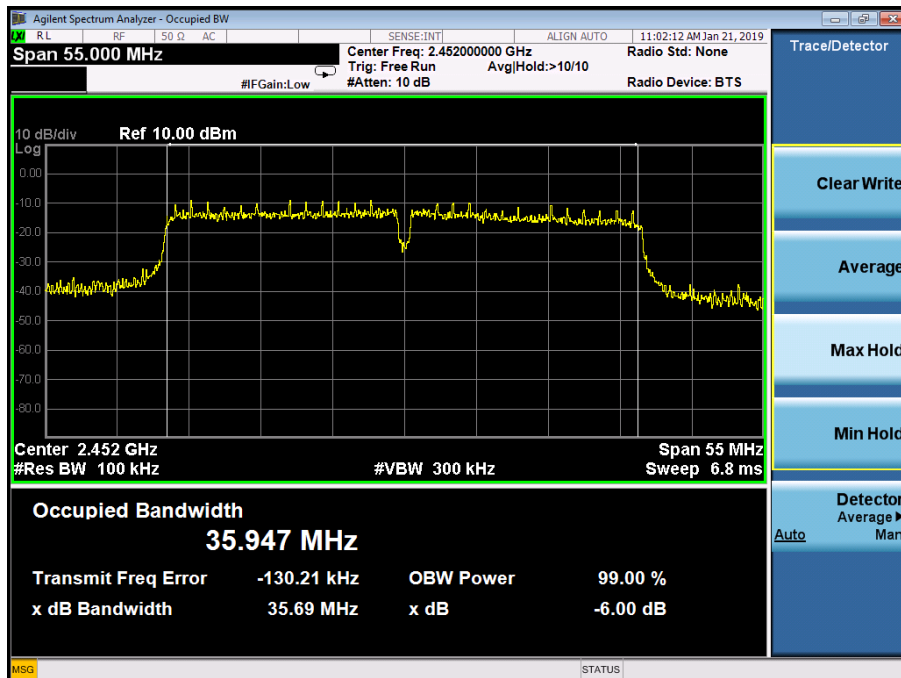

## 6. PEAK OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 6.1.5 TEST RESULTS

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	10.46	30
	2437	10.41	30
	2462	10.38	30
802.11g	2412	10.23	30
	2437	10.27	30
	2462	10.15	30
802.11n20	2412	9.58	30
	2437	9.35	30
	2462	9.47	30
802.11n40	2422	8.21	30
	2437	8.11	30
	2452	8.15	30

## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### 7.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

### 7.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP




### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


### 7.1 TEST RESULTS



802.11b: Band Edge, Left Side

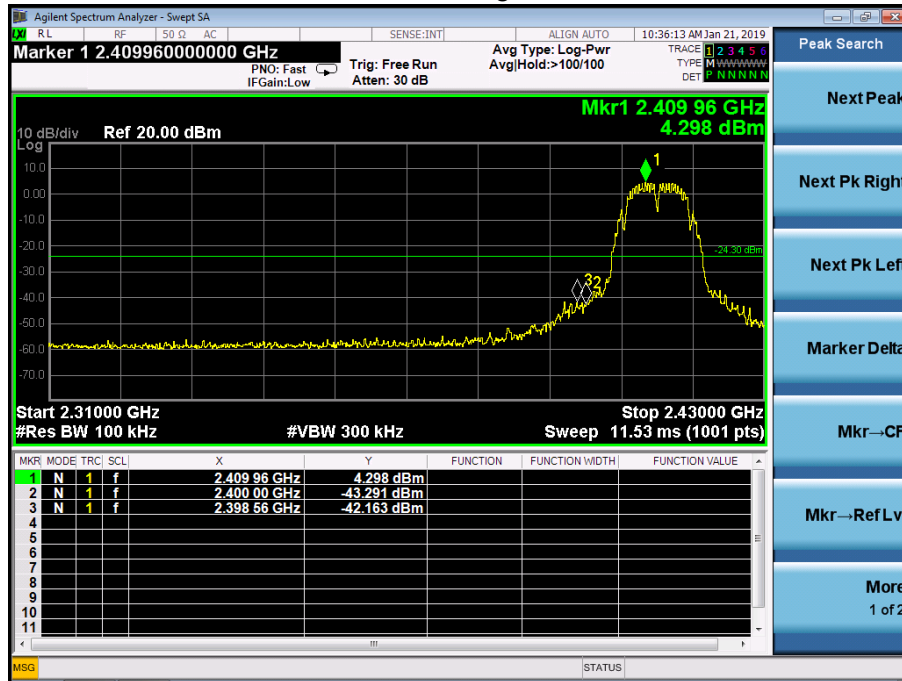


802.11b: Band Edge, Right Side

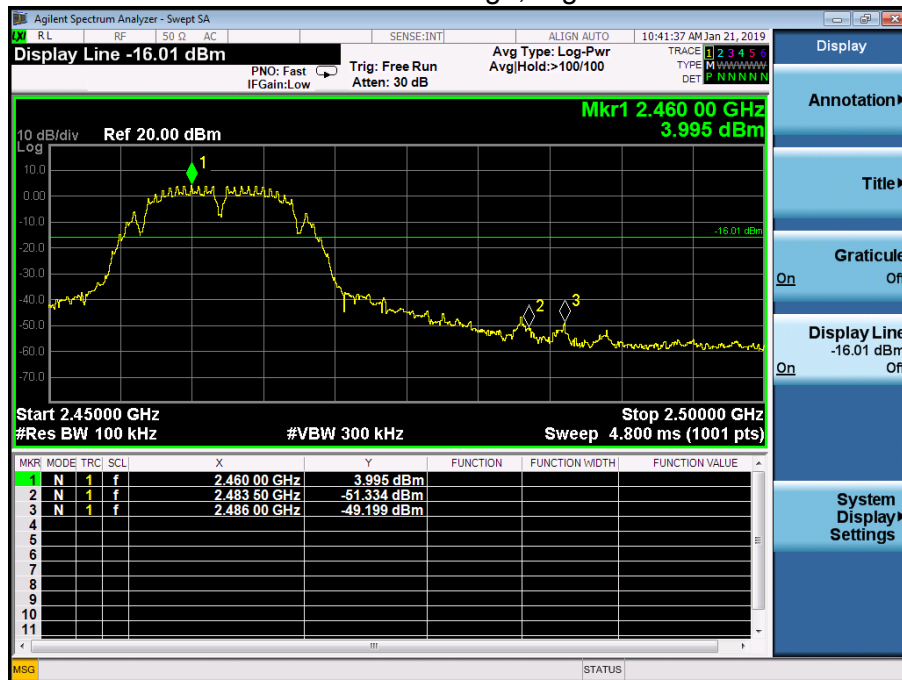




802.11g: Band Edge, Left Side

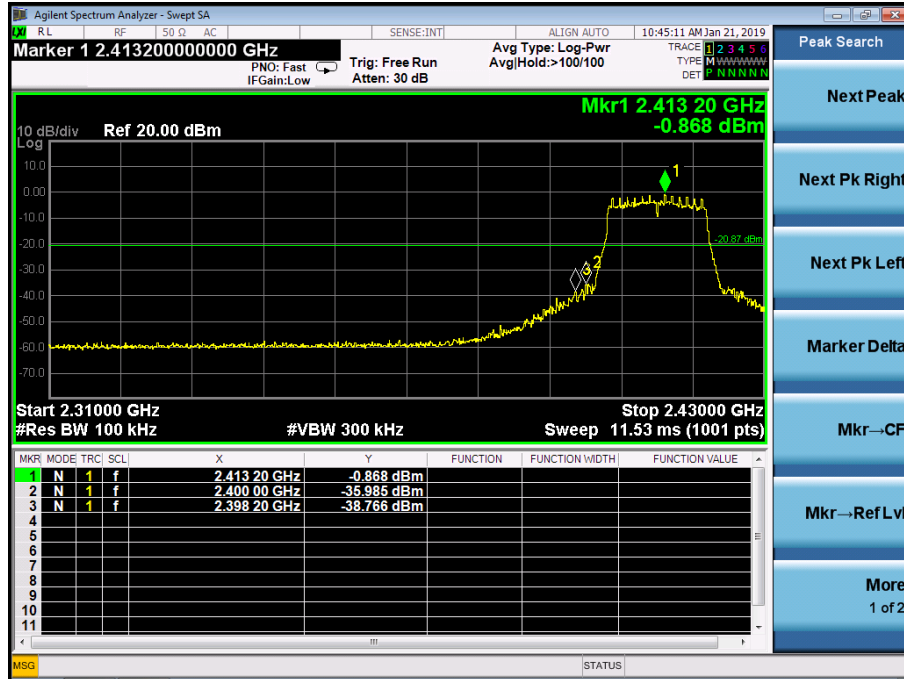


802.11g: Band Edge, Right Side

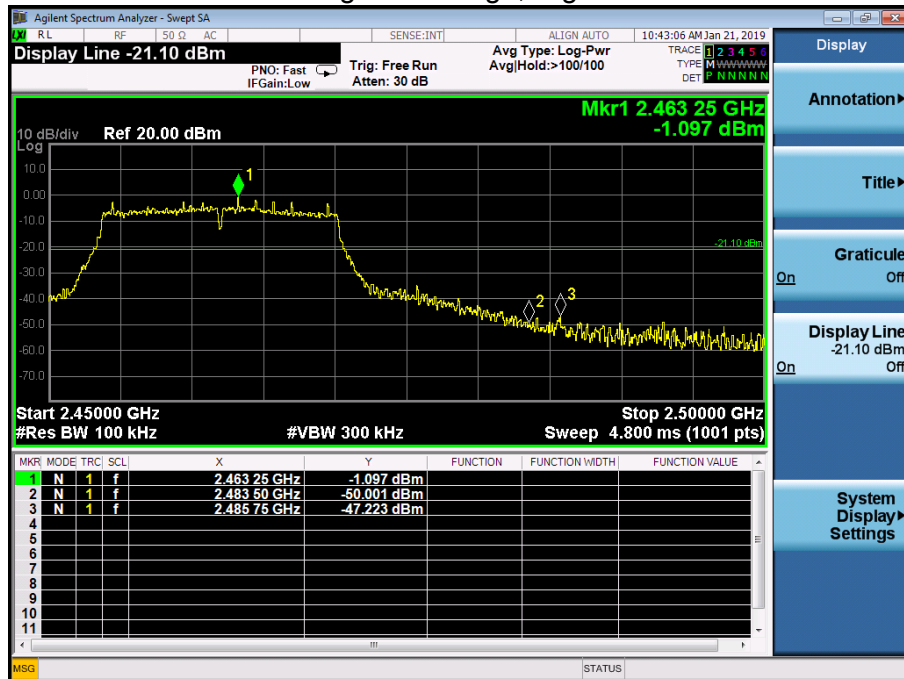





802.11n-HT20: Band Edge, Left Side

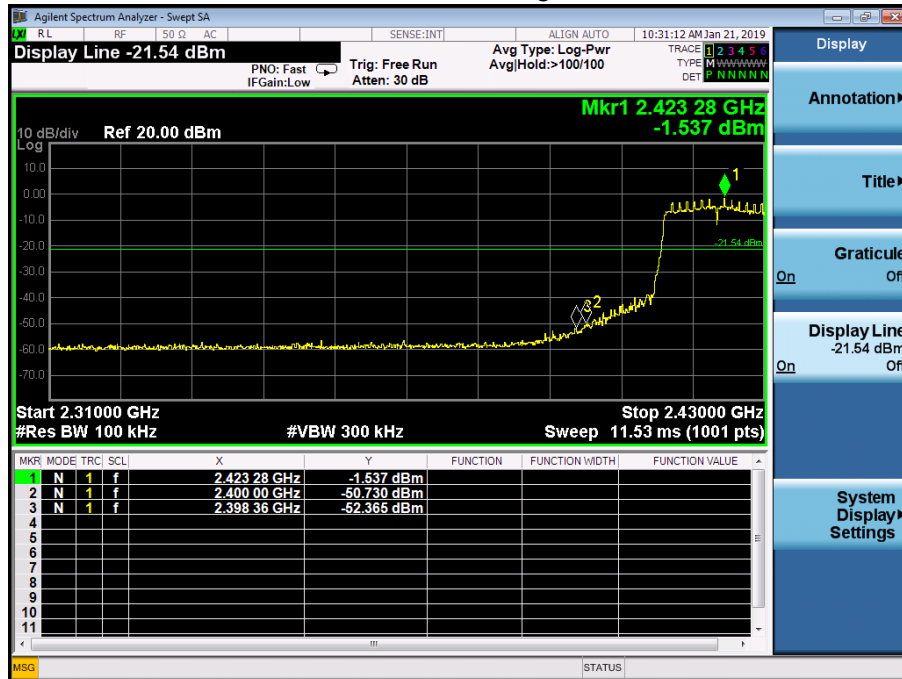


802.11n-HT20: Band Edge, Right Side






802.11n-HT40: Band Edge, Left Side

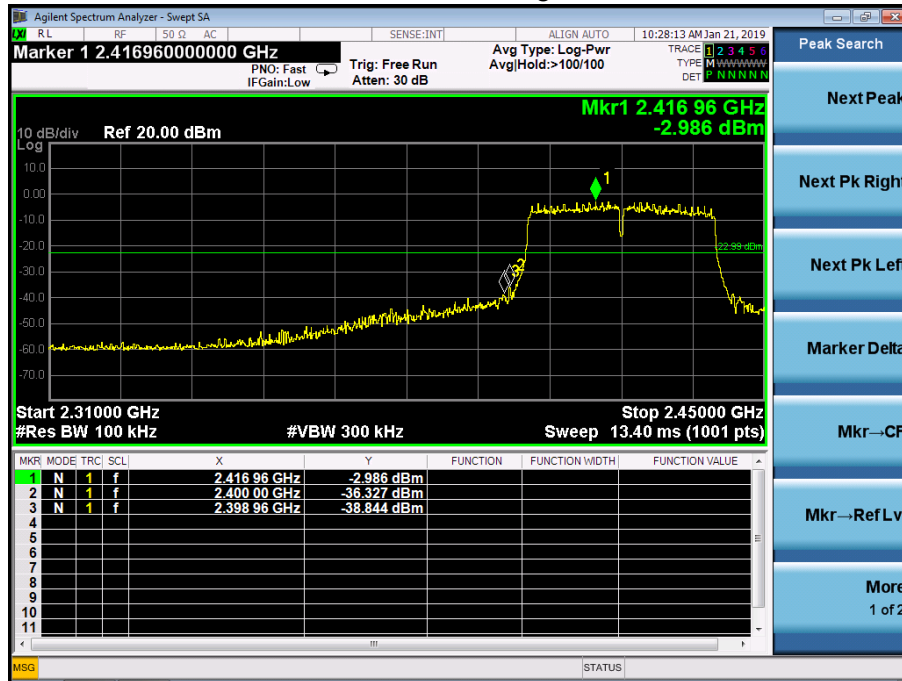

802.11n-HT40: Band Edge, Right Side

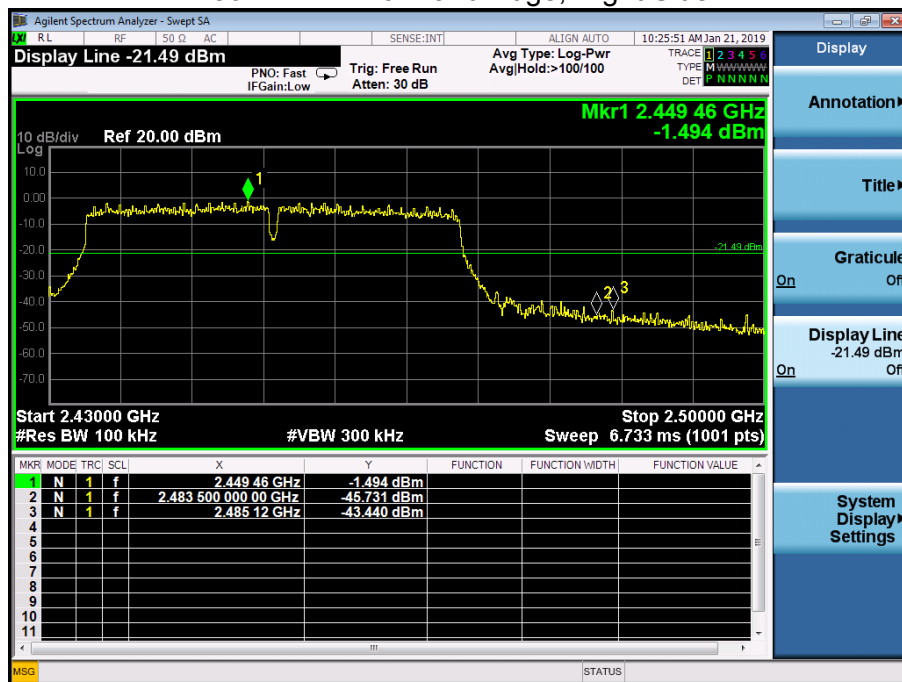


## CONDUCTED EMISSION MEASUREMENT

802.11b


### Low Channel 2412MHz



### Middle Channel 2437MHz

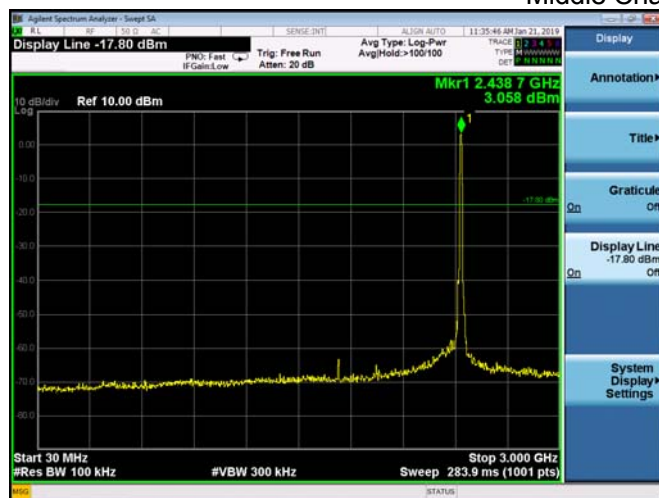


### High Channel 2462MHz

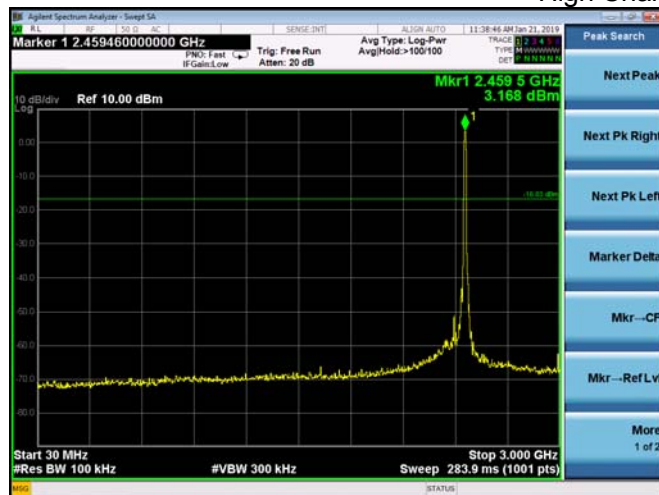




802.11g


### Low Channel 2412MHz

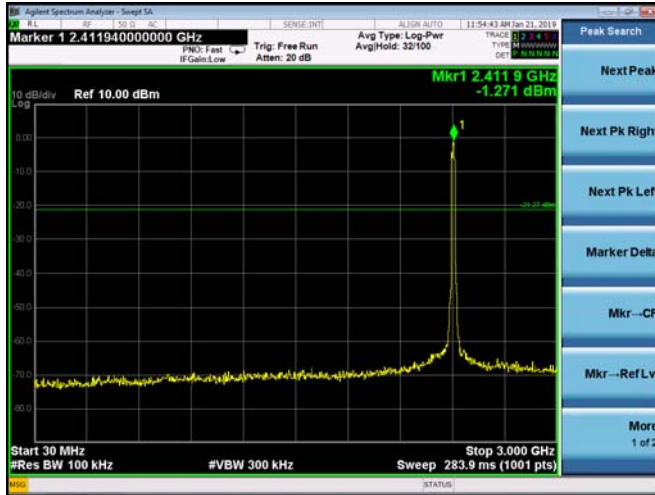

### Middle Channel 2437MHz

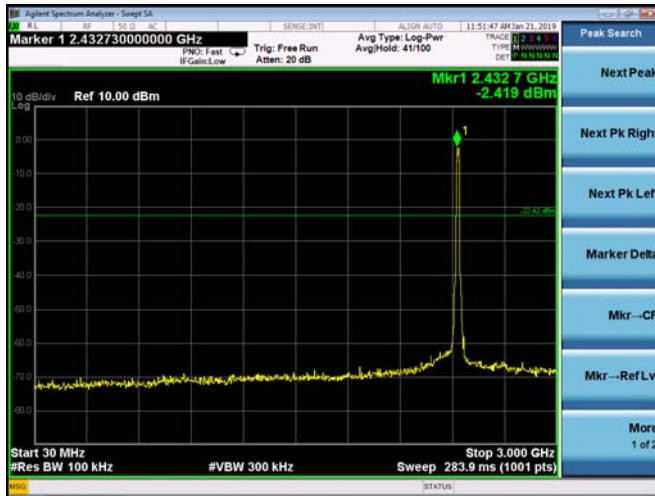

### High Channel 2462MHz

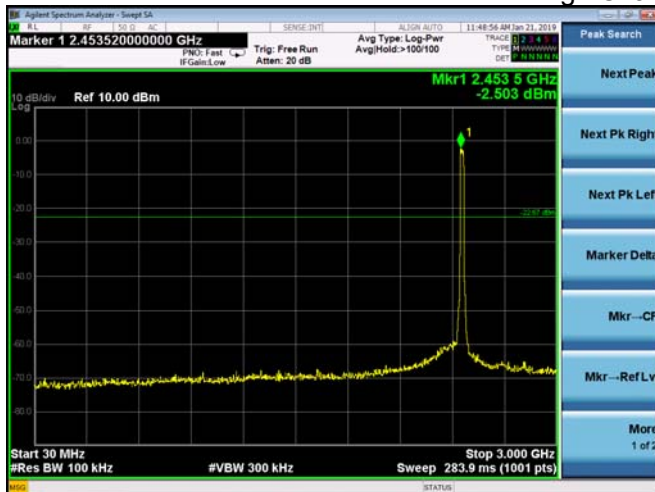







802.11n20


### Low Channel 2412MHz

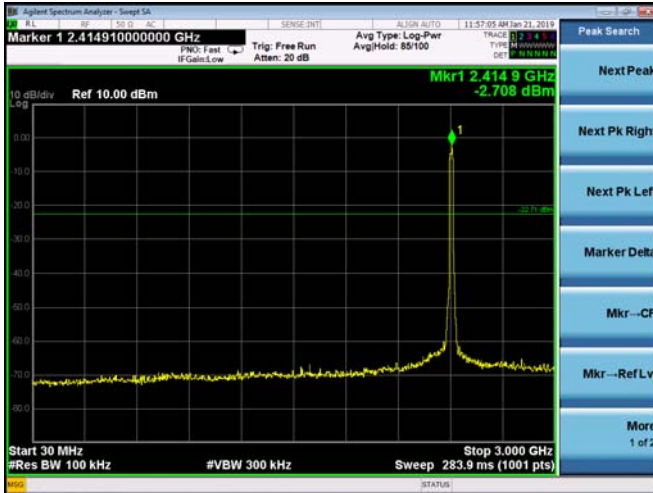

### Middle Channel 2437MHz

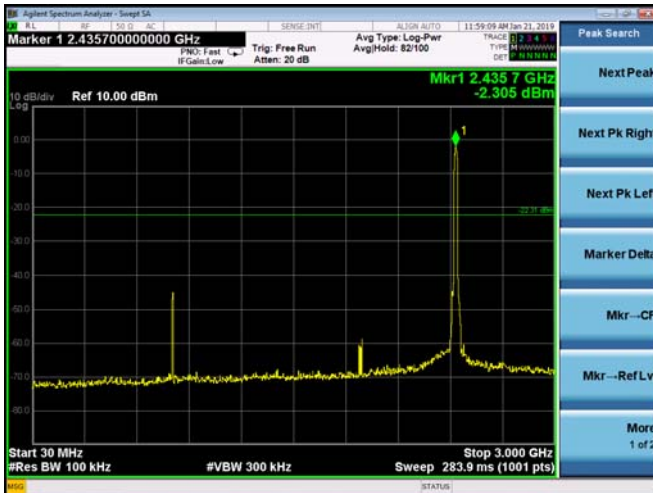


### High Channel 2462MHz

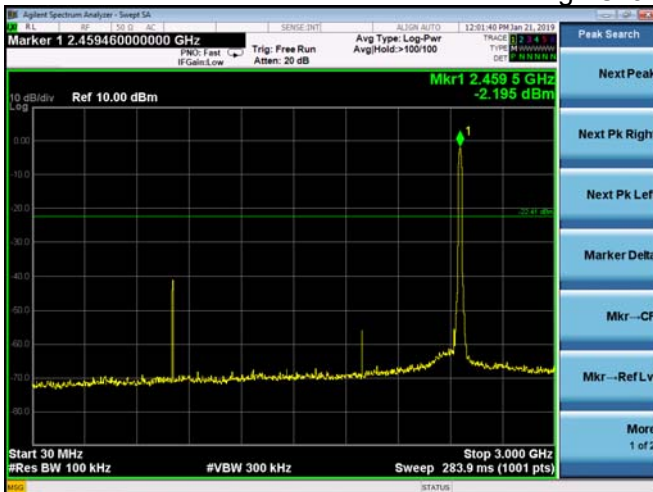




802.11n40


### Low Channel 2422MHz

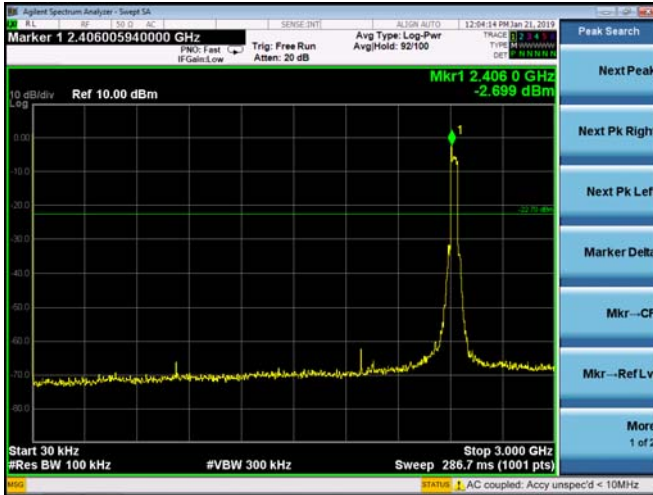

### Middle Channel 2437MHz

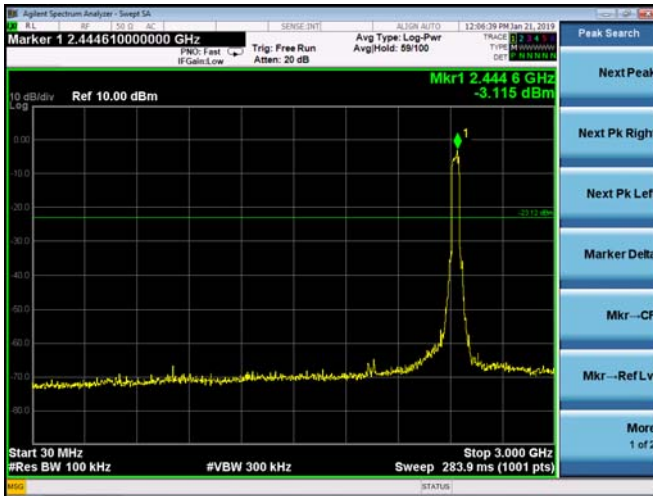

### High Channel 2452MHz

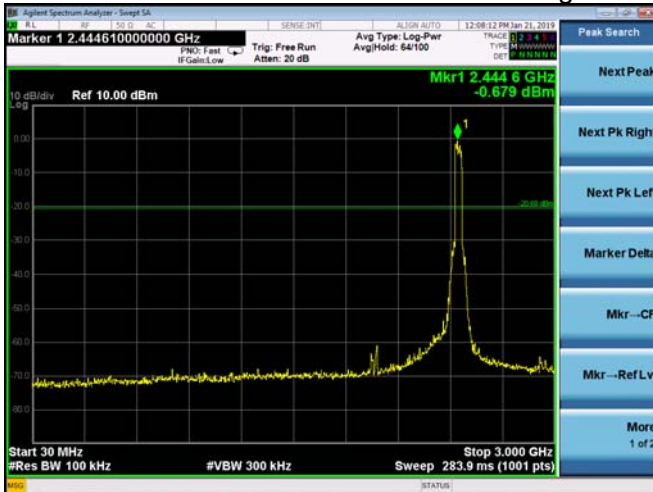

## 8. DUTY CYCLE OF TEST SIGNAL

### 8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

### 8.2 FORMULA:


Duty Cycle =  $T_{on} / (T_{on} + T_{off})$

### Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

### Duty Cycle:


	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0

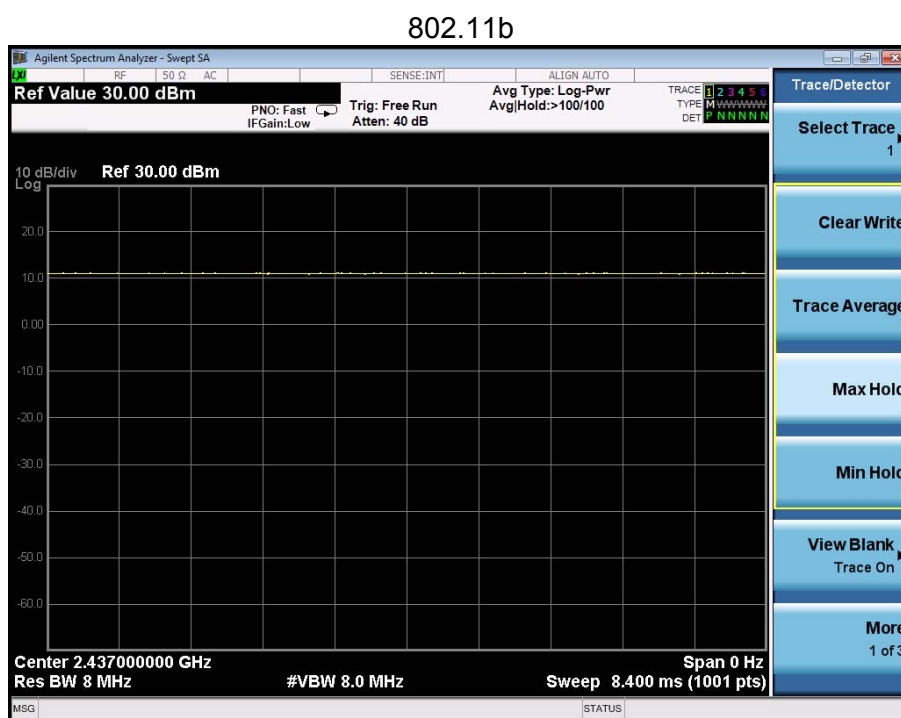




Report No.: BCTC-LH181203522E

802.11g

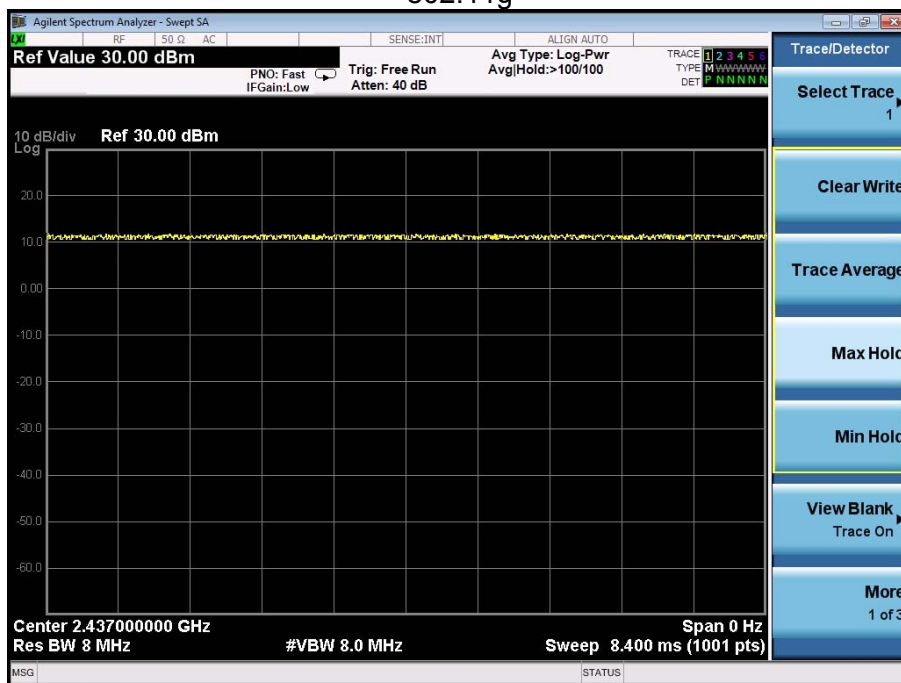


802.11n(HT20)

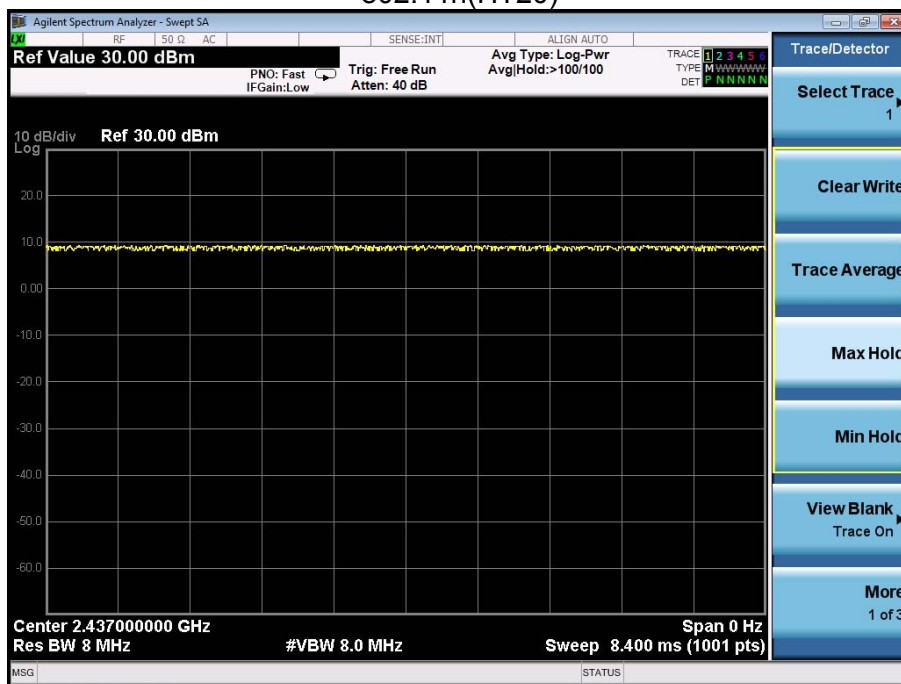





802.11n(HT40)

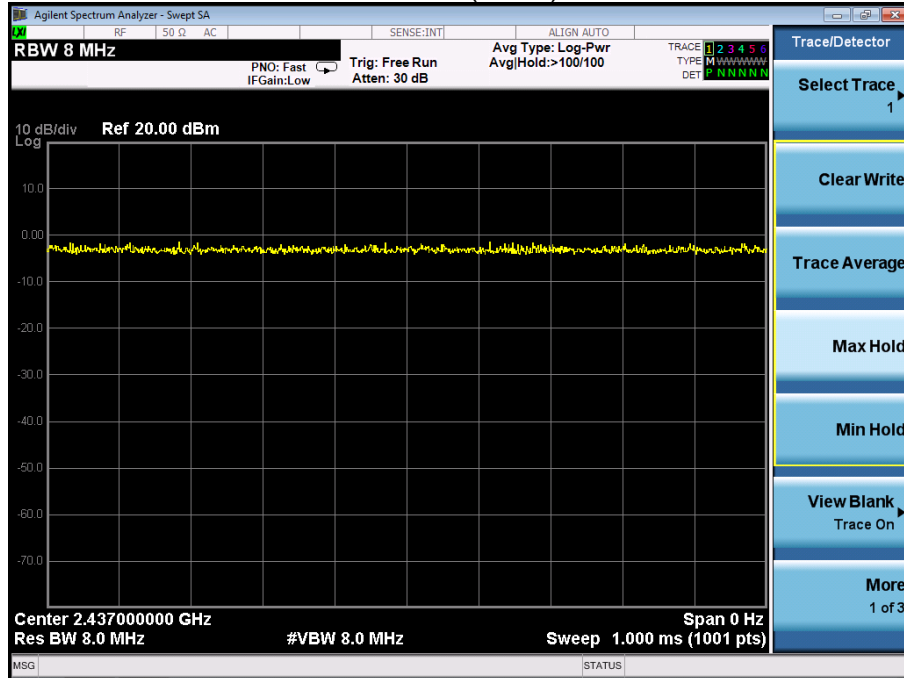

## **9. ANTENNA REQUIREMENT**

### **9.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **9.2 EUT ANTENNA**

The EUT antenna is External antenna with RP-SMA connector, the Antenna 1(long) support for 2.4G, gain is 2dBi, the Antenna 2 support(box) for 2.4G, gain is 2dBi, It comply with the standard requirement.



## 10. EUT TEST PHOTO

Conducted Measurement Photos (ANT1)



Conducted Measurement Photos (ANT2)






**Radiated Measurement Photos(ANT1)**




**Radiated Measurement Photos(ANT2)**

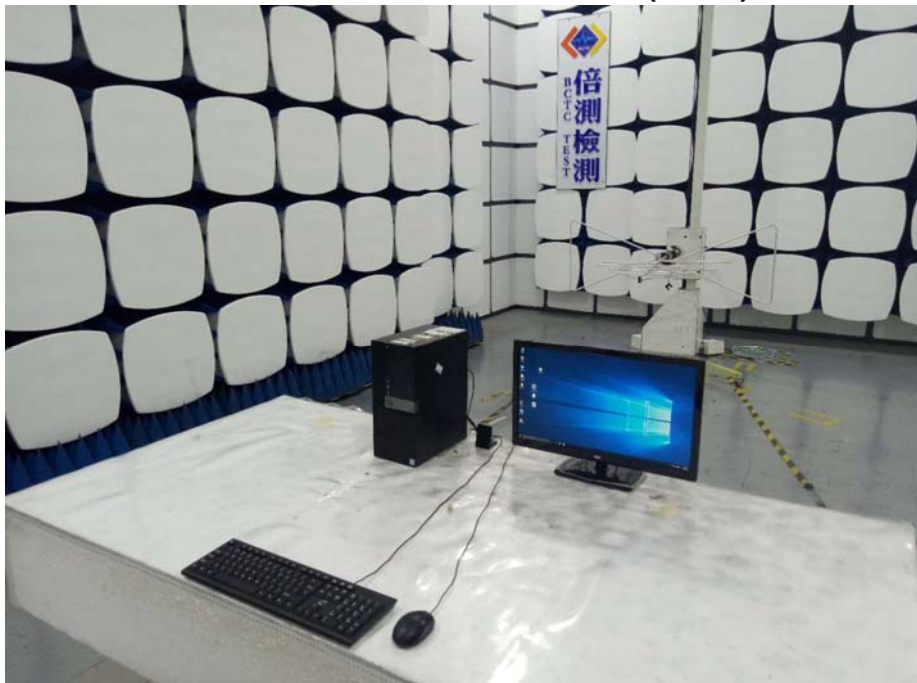



**Radiated Measurement Photos(ANT1)**

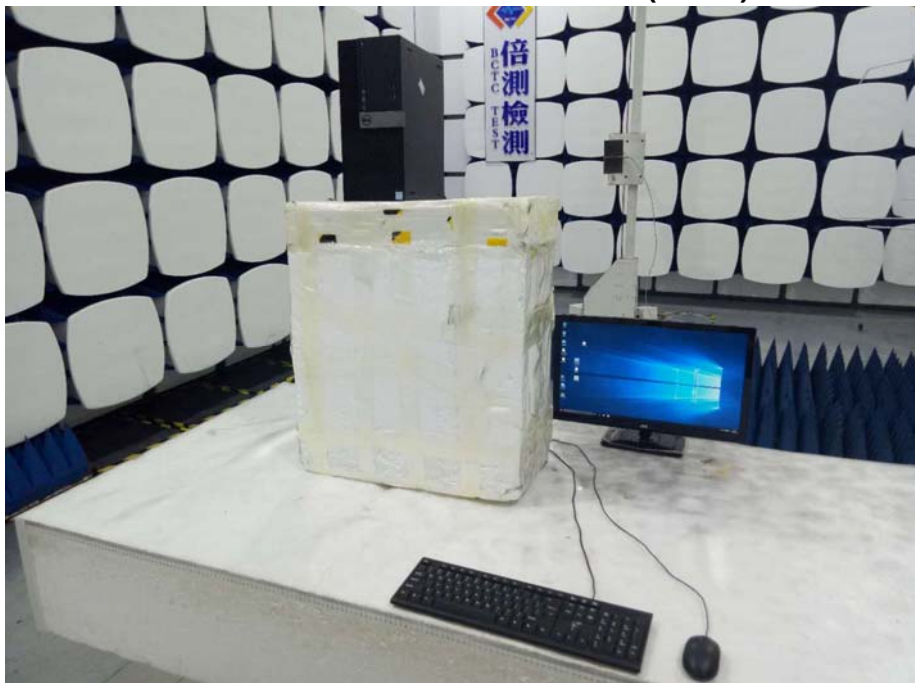


**Radiated Measurement Photos(ANT2)**







## 11. EUT PHOTO

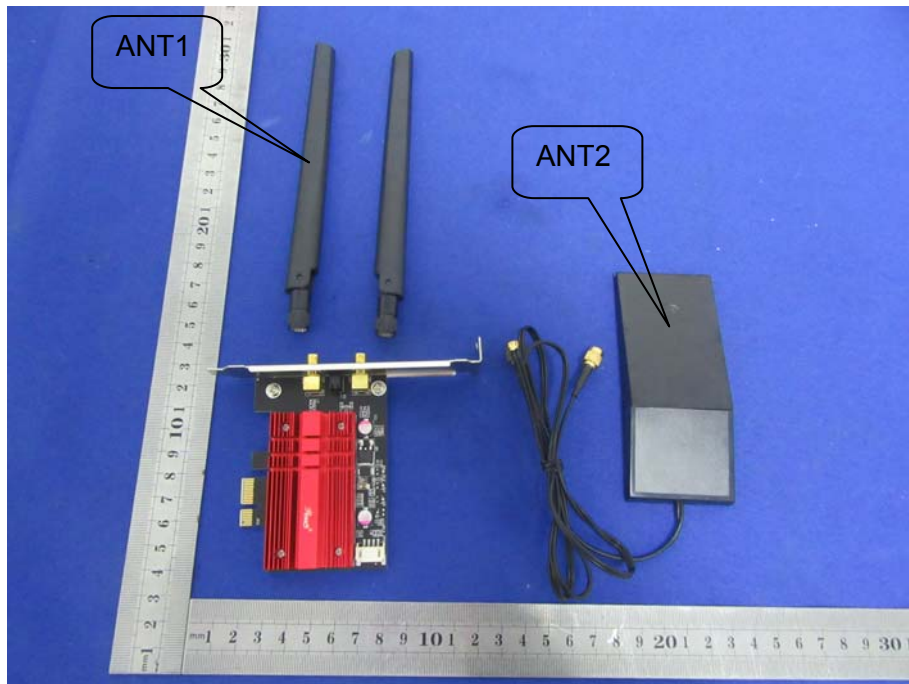

\*\*\*\*\* END OF REPORT \*\*\*\*\*