

Dates of Tests: March 10 ~ May 02, 2017
Test Report S/N: LR500111703I
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

W6YBLE100

APPLICANT

PASSTECH CO., LTD

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	BLE Module
Manufacturer	:	PASSTECH CO., LTD
Model name	:	BLE100
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C-63.4-2014
Frequency Range	:	2402 ~ 2480 MHz
Max. Output Power	:	Max -2.11 dBm – Conducted
Data of issue	:	May 02, 2017

This test report is issued under the authority of:



Yong-Cheol, Wang / Manager

The test was supervised by:



Gun, Ko, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
2. INFORMATION ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	6
3.2.1 6 dB BANDWIDTH	6
3.2.2 PEAK OUTPUT POWER	9
3.2.3 POWER SPECTRAL DENSITY	12
3.2.4 BAND EDGE	15
3.2.5 CONDUCTED SPURIOUS EMISSIONS	18
3.2.6 RADIATED SPURIOUS EMISSIONS	21
3.2.7 AC Conducted Emissions	33
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	40

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2017-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2017-04-13	FCC CAB
VCCI	JAPAN	R2133(10 m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2017-12-23	VCCI registration
VCCI	JAPAN	G-563	2018-12-13	VCCI registration
IC	CANADA	5799A-1	2019-11-07	IC filing
KOLAS	KOREA	NO.551	UPDATING	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Company name : PASSTECH CO., LTD
 Address : No. B-402, Geumgang Pentierium IT Tower, 215, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13217 Rep. of KOREA
 Tel / Fax : TEL No : +82-31-743-7277 / FAX No : +82-31-743-7276

2-2 Equipment Under Test (EUT)

Trade name : BT Module
 Model name : BLE100
 Serial number : Identical prototype
 Date of receipt : March 10, 2017
 EUT condition : Pre-production, not damaged
 Antenna type : Chip Antenna (Max Gain : 3.5 dBi)
 Frequency Range : 2402 ~ 2480 MHz
 RF output power : Max -2.11 dBm – Conducted
 Number of channels : 40
 Type of Modulation : GFSK
 Power Source : 3.3 Vdc by DC Supply

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2442	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1 Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

→ Antenna Requirement

The PASSTECH CO., LTD FCC ID: W6YBLE100 unit complies with the requirement of §15.203.

The antenna type is Chip Antenna.

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 5 MHz

VBW = 100 kHz (VBW \geq RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2402	0.854	Complies
2442	0.818	Complies
2480	0.803	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth > 500 kHz

Measurement Setup



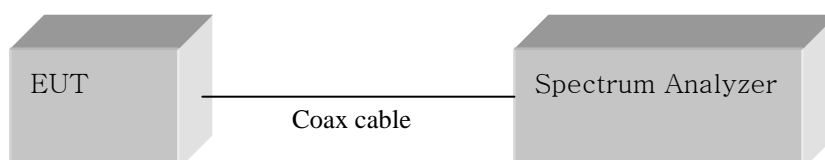


Figure 1: Measurement setup for the carrier frequency separation


Low Channel

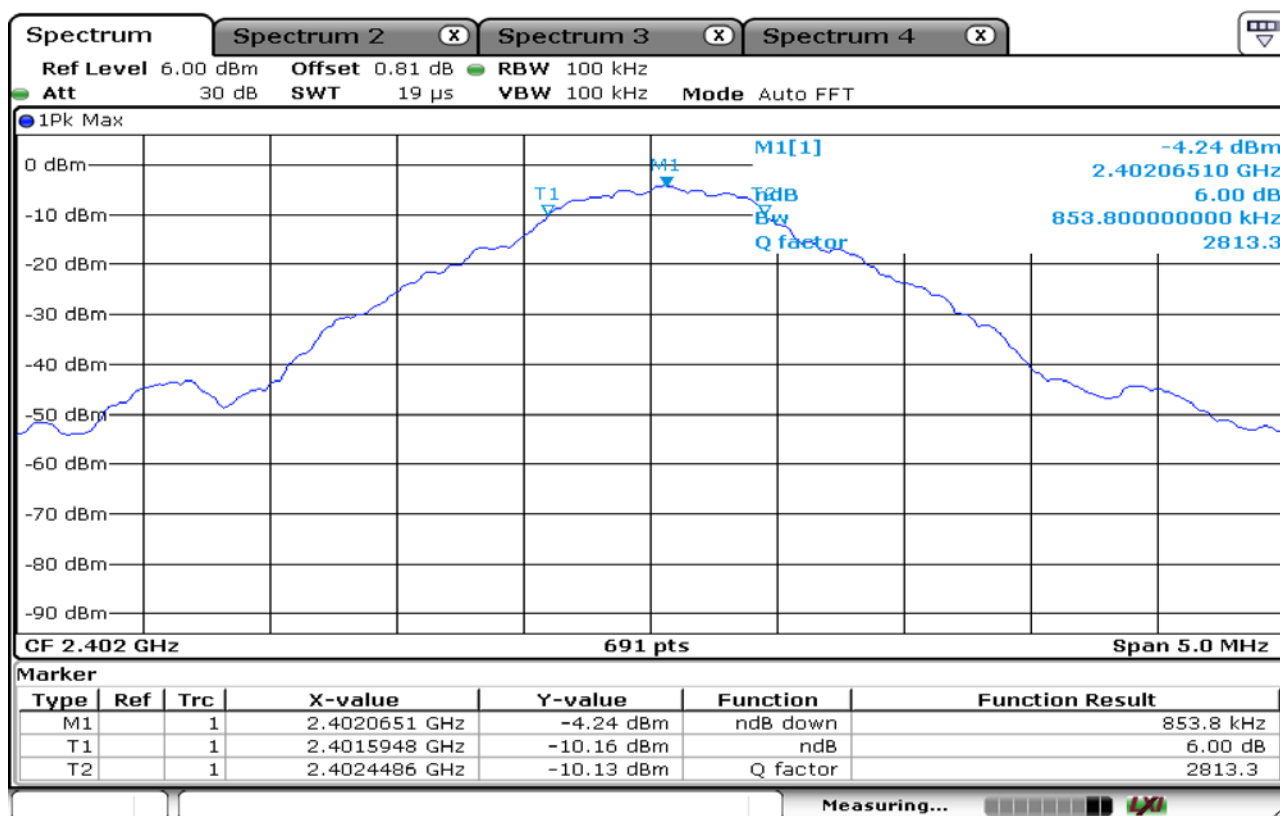

Middle Channel

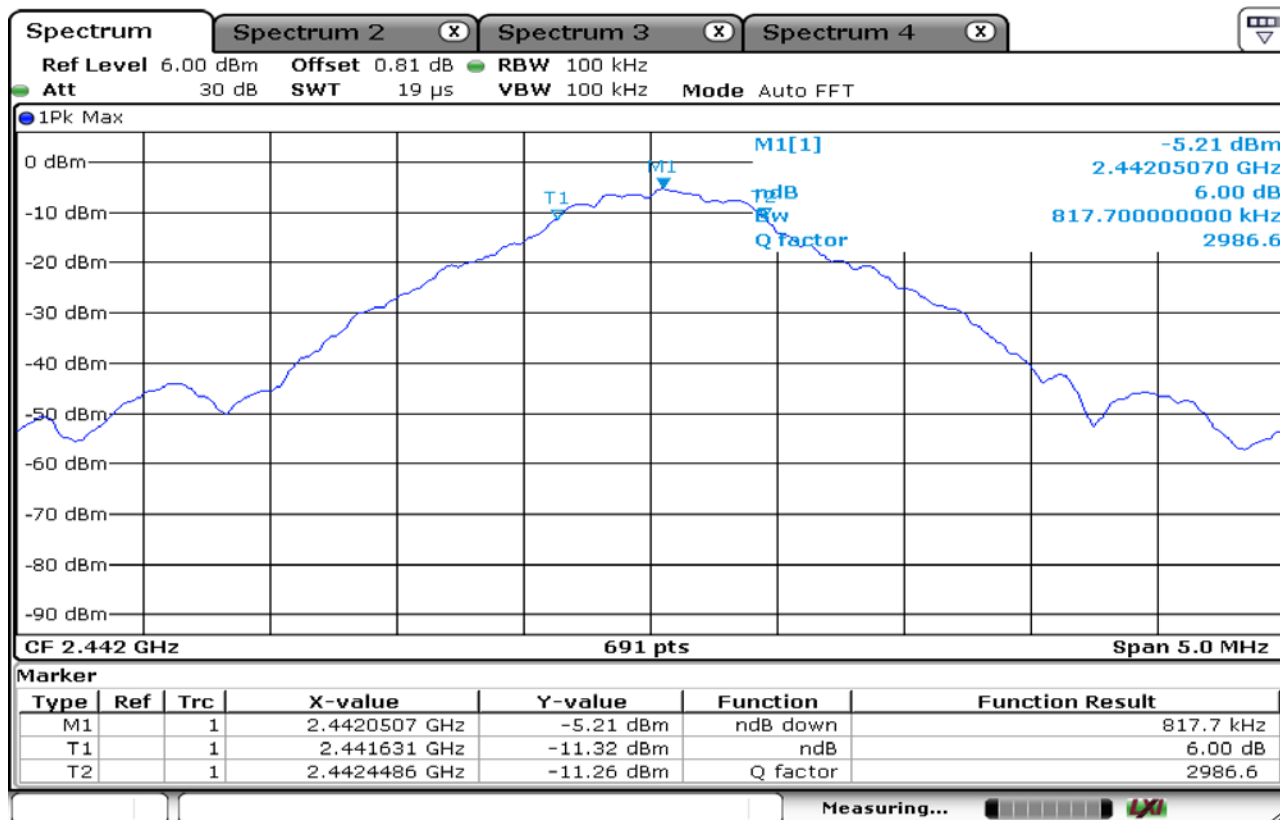

High Channel

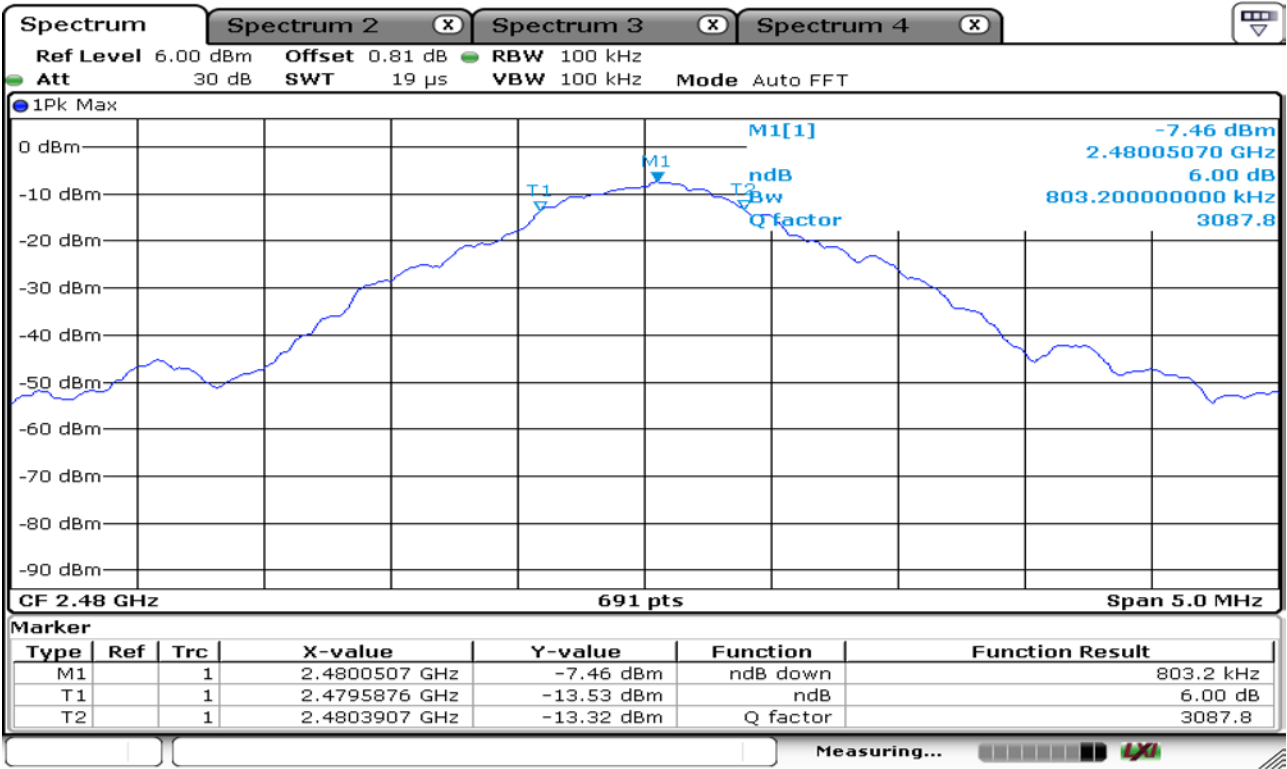

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99 % bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1 MHz

Span = auto

VBW = 1 MHz (VBW \geq RBW)

Sweep = auto

Detector function = peak

Measurement Data : **Complies**

Frequency (MHz)	Test Results		
	dBm	mW	Result
2402	-2.11	0.62	Complies
2442	-3.13	0.49	Complies
2480	-5.57	0.28	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	< 1 W
-------------------	-------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low Channel

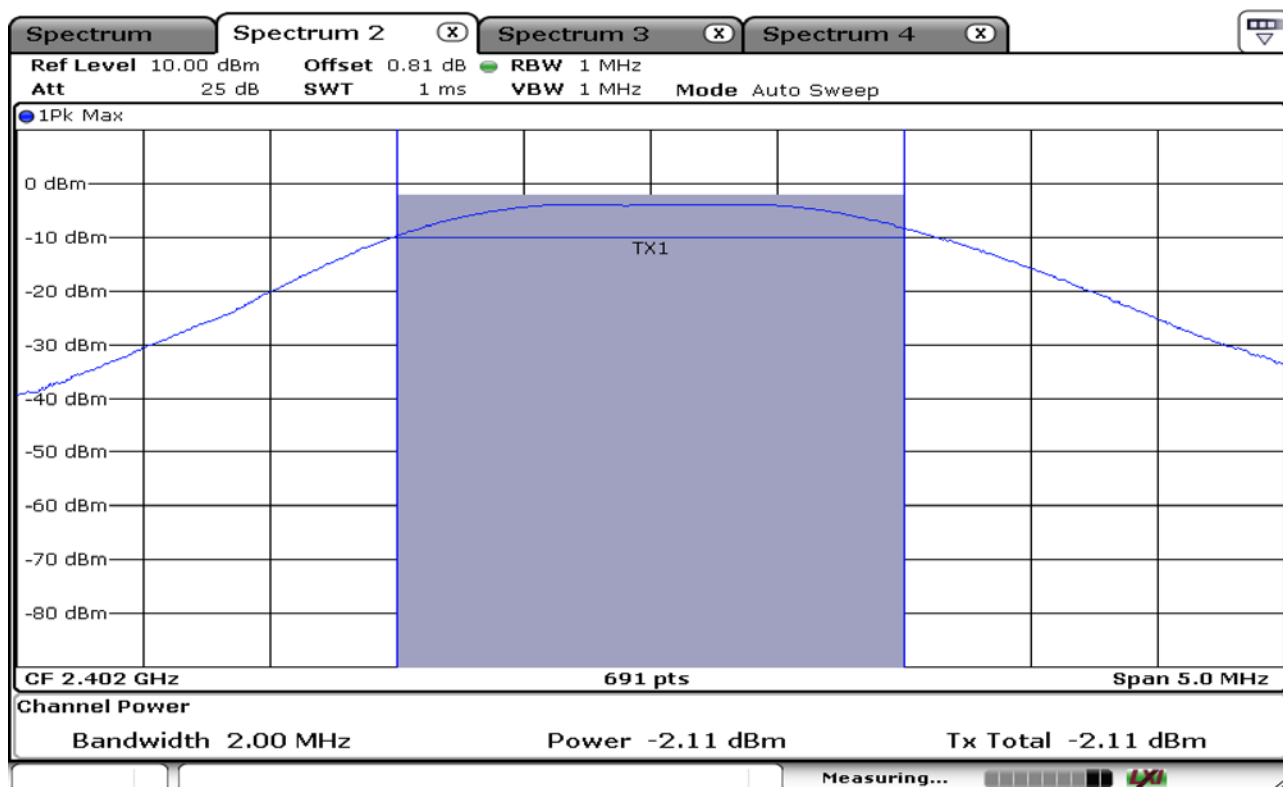

Middle Channel

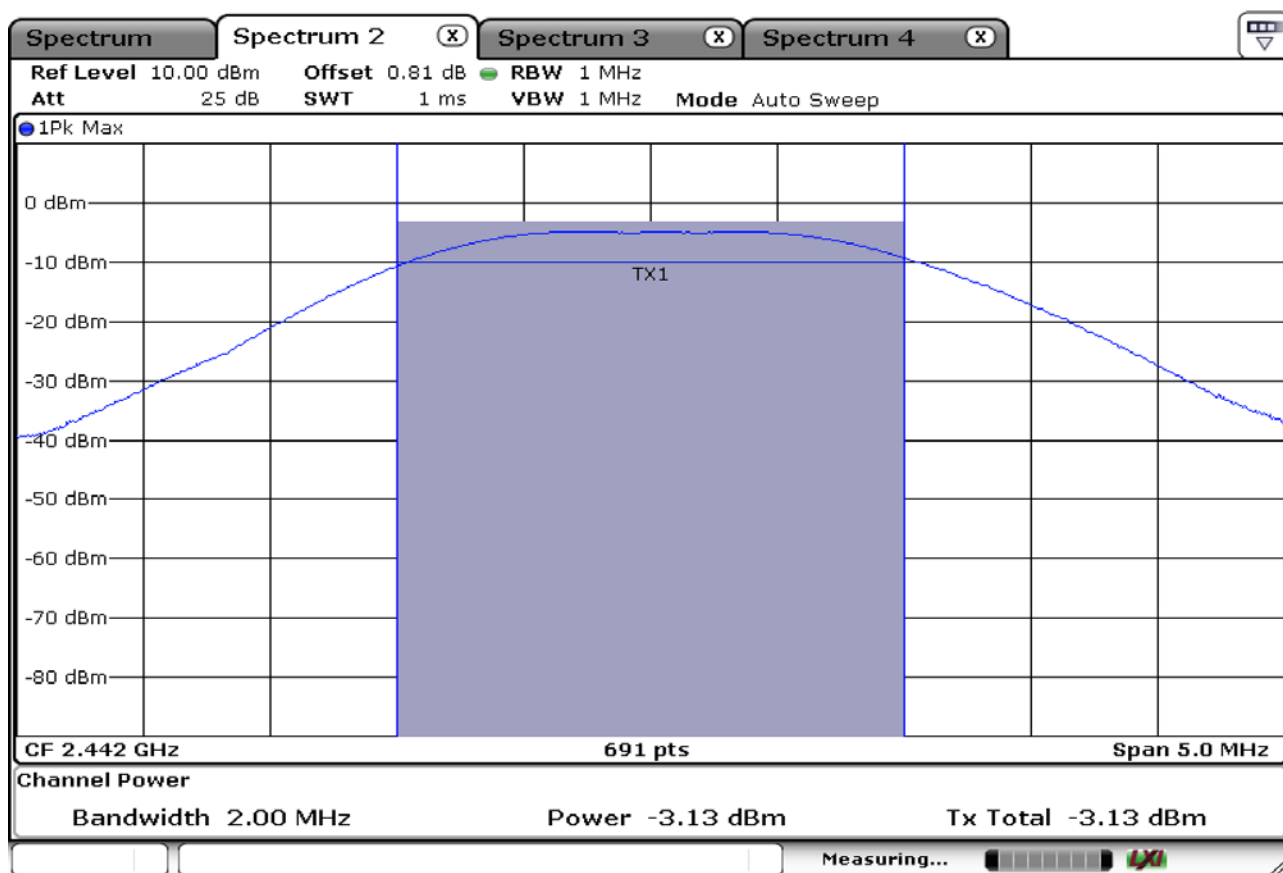

High Channel

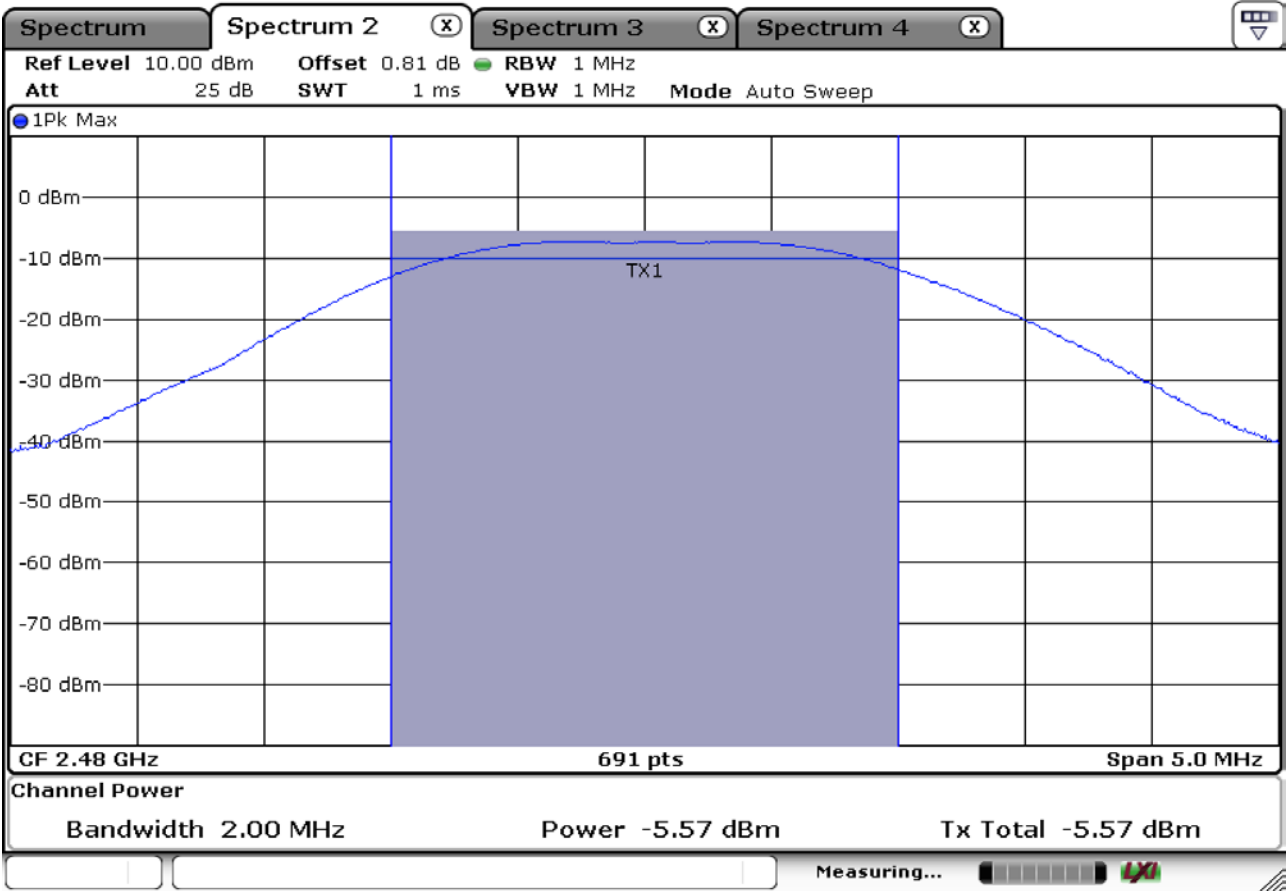

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

Span = 300 kHz

VBW = 3 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	dBm/ 3 kHz BW	Result
2402	-16.43	Complies
2442	-16.30	Complies
2480	-20.16	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	< 8 dBm @ 3 kHz BW
------------------------	--------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Low Channel

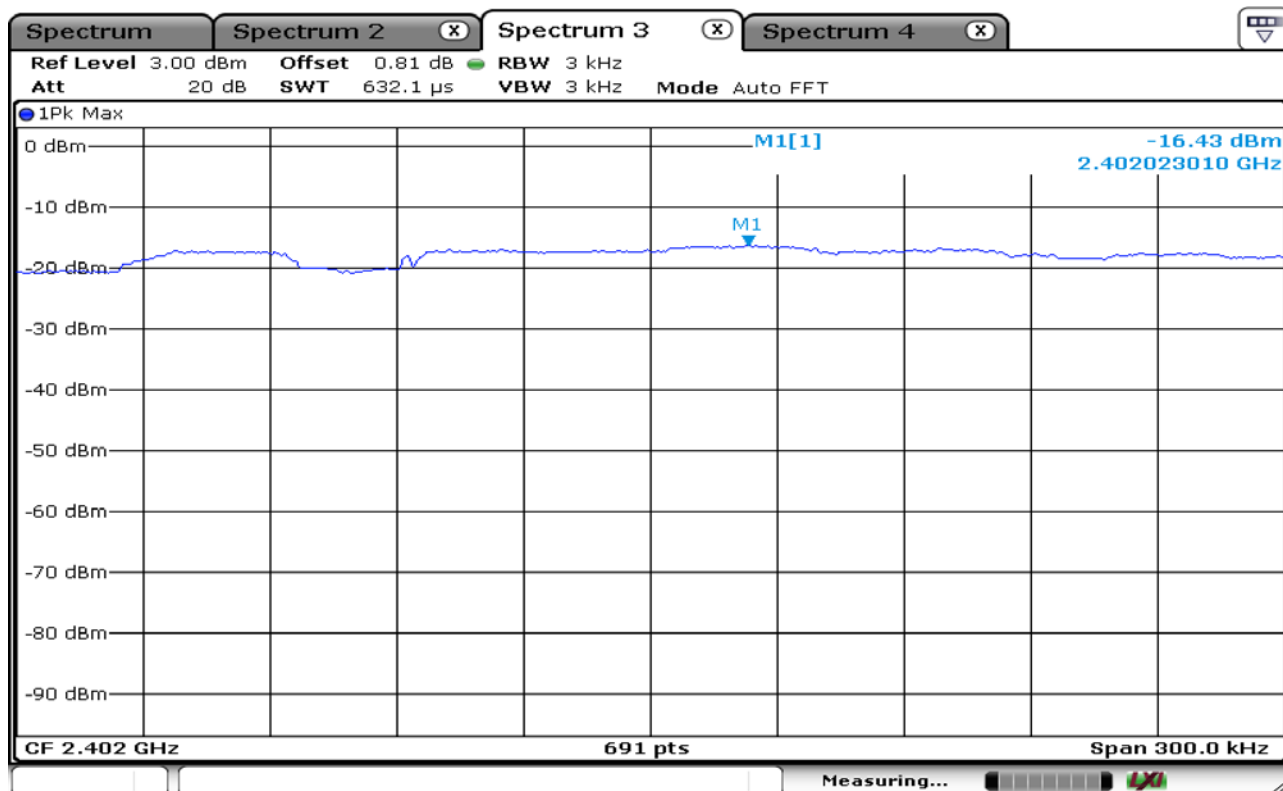

Middle Channel

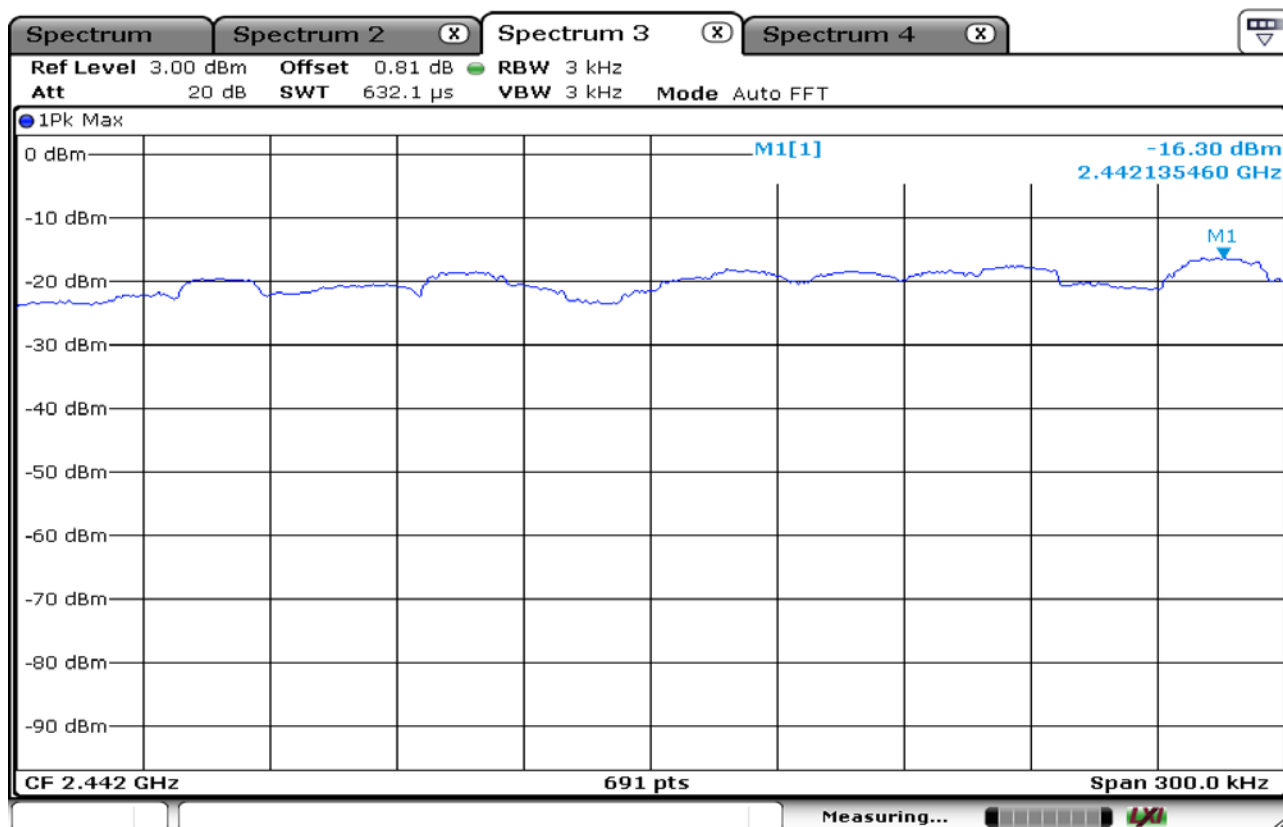

High Channel

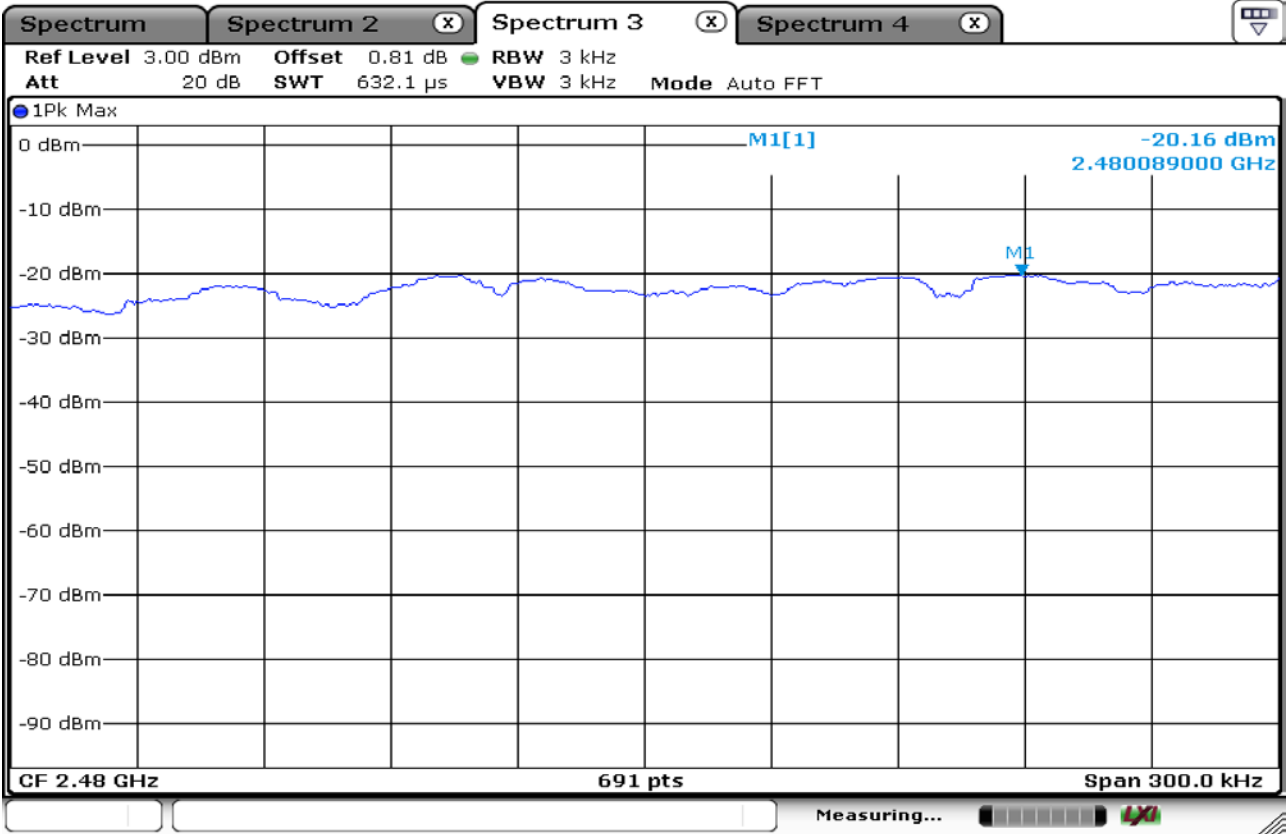

3.2.4 Band Edge

Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz, 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK:

RBW = VBW = 1 MHz, Sweep=Auto

Average:

RBW = 1 MHz, VBW=10 Hz, Sweep=Auto

Measurement Distance:

3 m

Polarization:


Horizontal / Vertical

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Lower edge

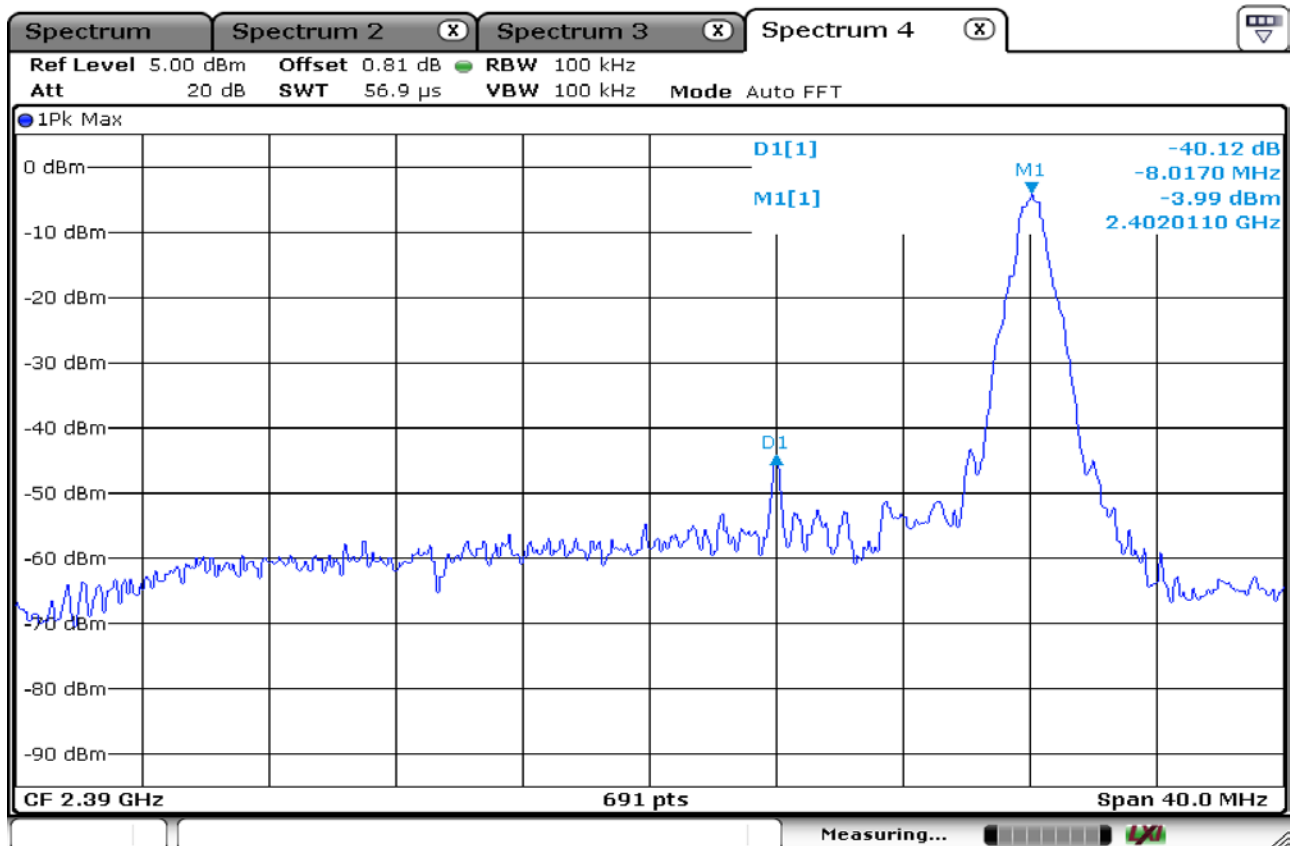

Upper edge

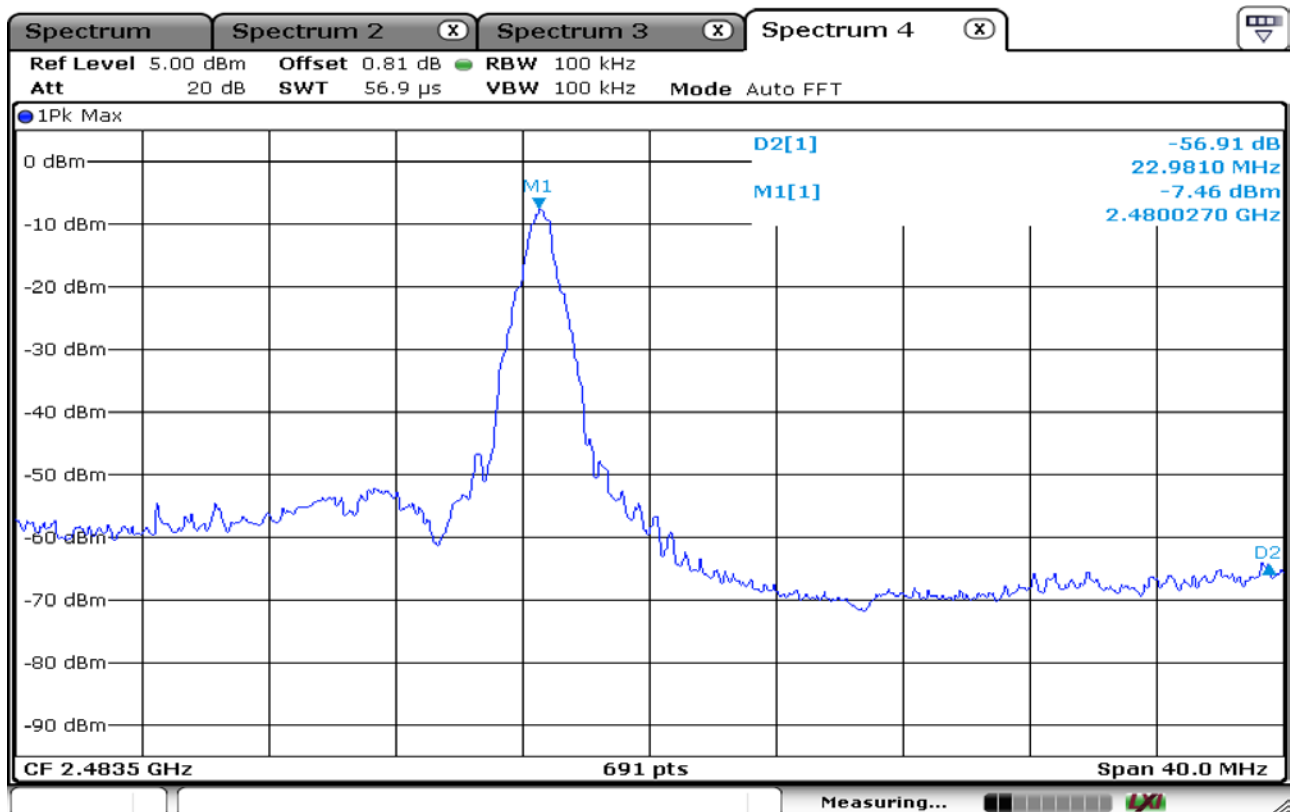

Radiated Band-edges in the restricted band 2310-2390 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak		AV / Peak		AV / Peak	
2324.8	40.95	41.66	H	28.08	47.82	54.0	74.0	21.21	21.92	32.79	52.08
2316.4	40.83	41.46	H	28.09	47.83	54.0	74.0	21.09	21.72	32.91	52.28
2322.1	42.28	42.50	H	28.08	47.82	54.0	74.0	22.54	22.76	31.46	51.24

Radiated Band-edges in the restricted band 2483.5-2500 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak		AV / Peak		AV / Peak	
2485.5	37.76	38.33	H	27.88	47.73	54.0	74.0	17.91	18.48	36.09	55.52
2485.2	35.92	36.50	H	27.88	47.73	54.0	74.0	16.07	16.65	37.93	57.35
2486.3	35.73	36.86	H	27.88	47.73	54.0	74.0	15.88	17.01	38.12	56.99

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: **Complies**


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Unwanted Emission – Low Channel
Frequency Range = 30 MHz ~ 26.5 GHz

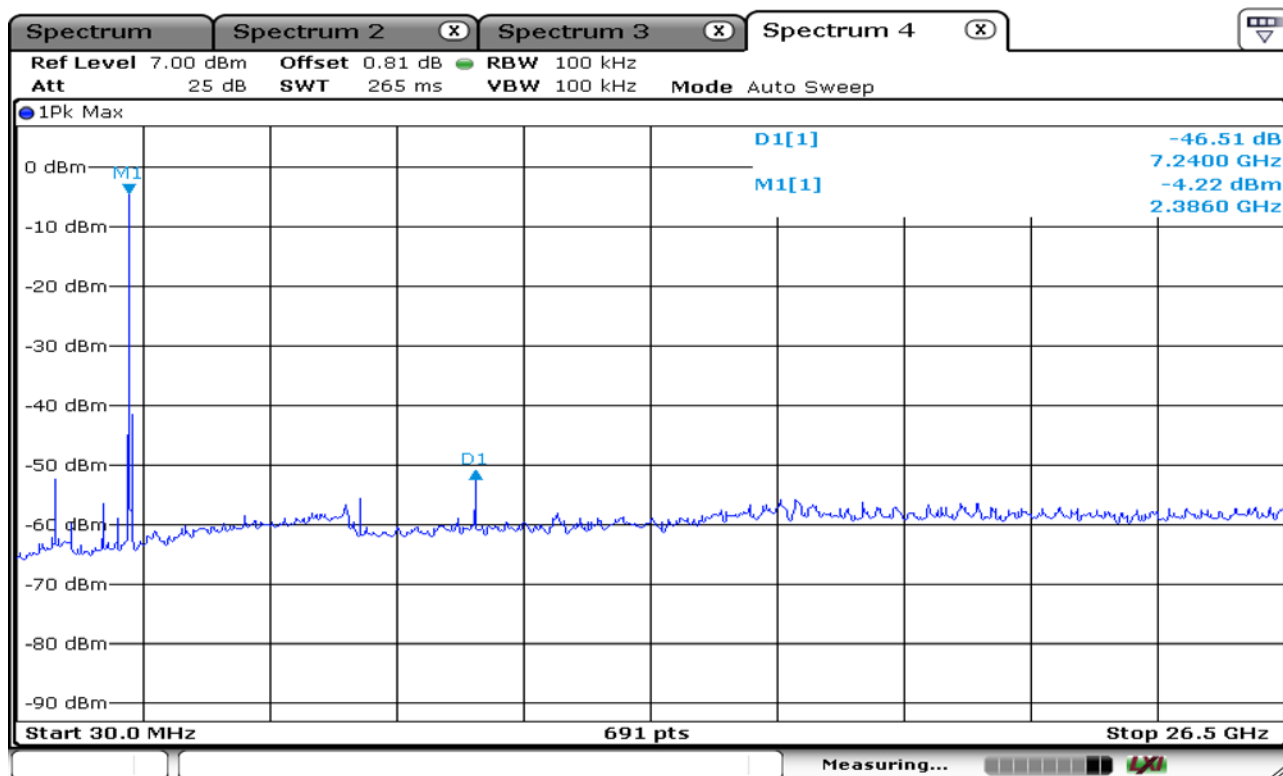

Unwanted Emission – Middle Channel
Frequency Range = 30 MHz ~ 26.5 GHz

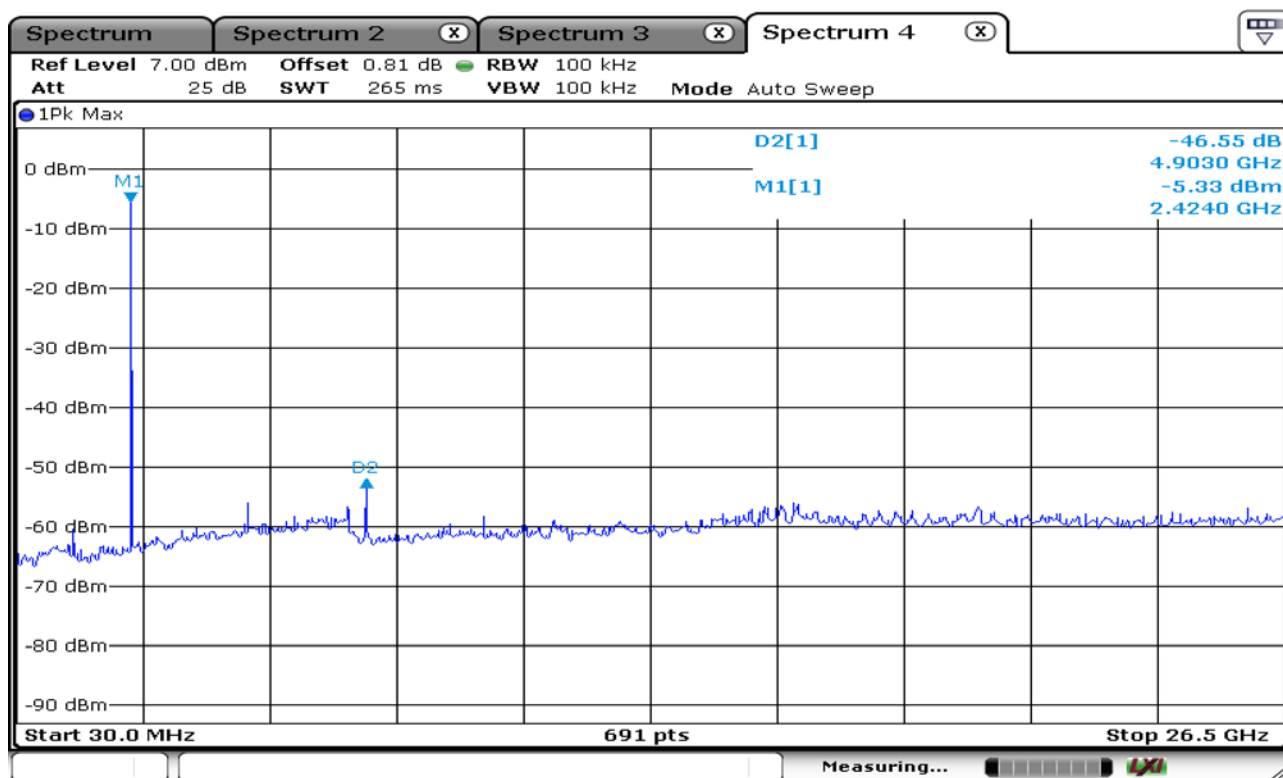

Unwanted Emission – High Channel
Frequency Range = 30 MHz ~ 26.5 GHz

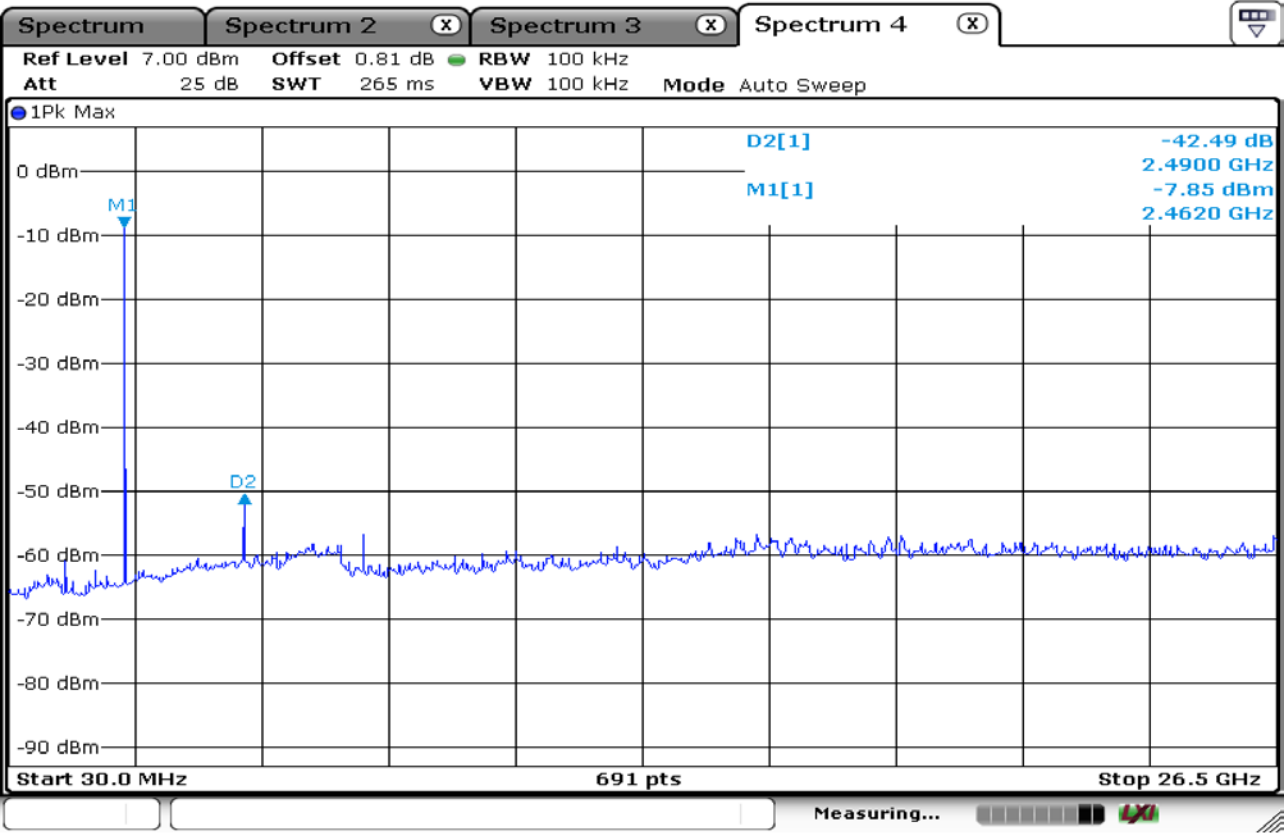

3.2.6 Radiated Spurious Emissions

Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013.

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 100 kHz (30 MHz ~ 1 GHz)

VBW \geq RBW

= 1 MHz (1 GHz ~ 10th harmonic)


Span = 100 MHz

Detector function = peak


Trace = max hold

Sweep = auto


below 30 MHz

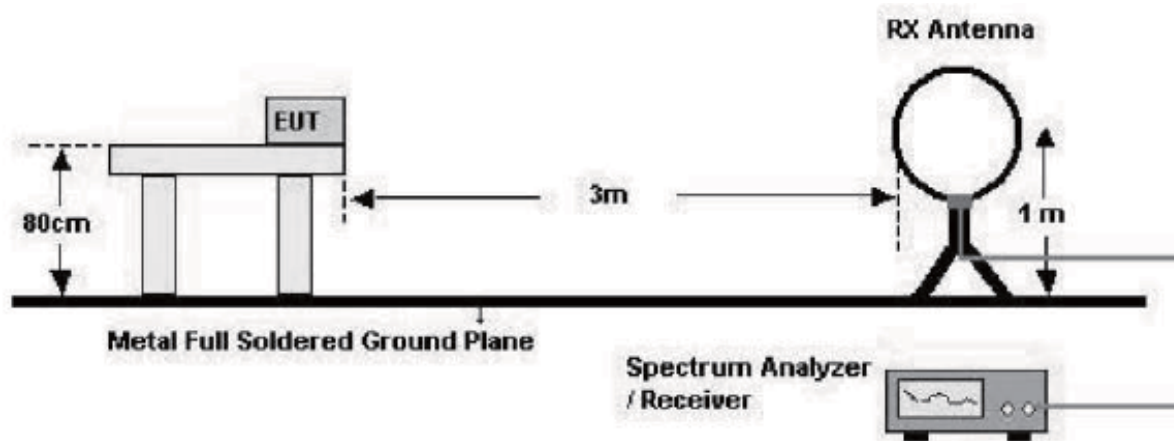

below 1 GHz (30 MHz to 1 GHz)

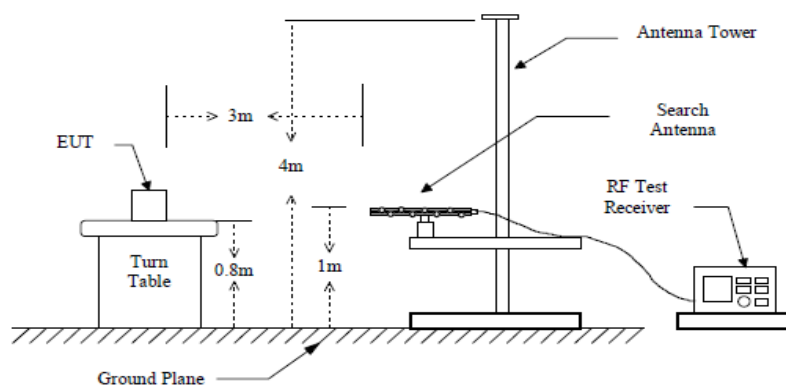

above 1 GHz

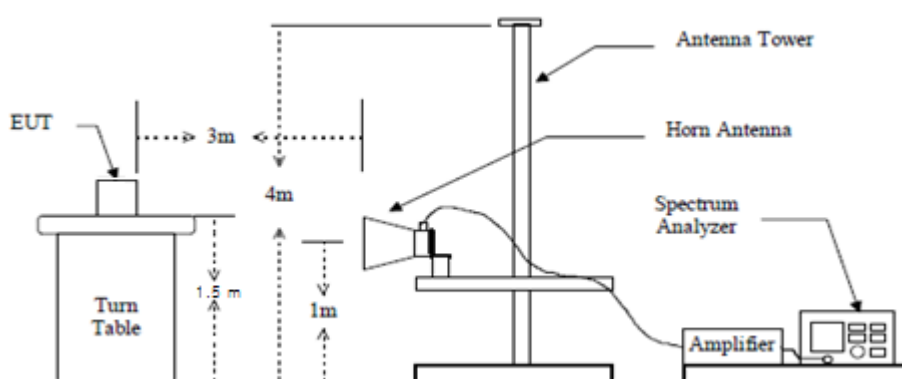

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data : (Above 1 GHz)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV/Peak		AV/Peak		AV / Peak	
9123.7	22.3	33.8	H	37.43	11.95	54.0	74.0	47.78	59.28	6.22	14.72
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

- No other emissions were detected at a level greater than 20 dB below limit.

Measurement Data : (9 kHz – 30 MHz)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
-	-	-	-	-	-	-	-	-	-	-	-
No emissions were detected at a level greater than 20 dB below limit.											
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20 dB below limit.

Radiated Emissions (Below 1 GHz) – Bluetooth(LOW) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: BLE100


TEST MODE: Bluetooth mode(low)

Temp Humi : 17 / 36

Tested by: LEE S H


Data: 164

Date: 2017-03-21

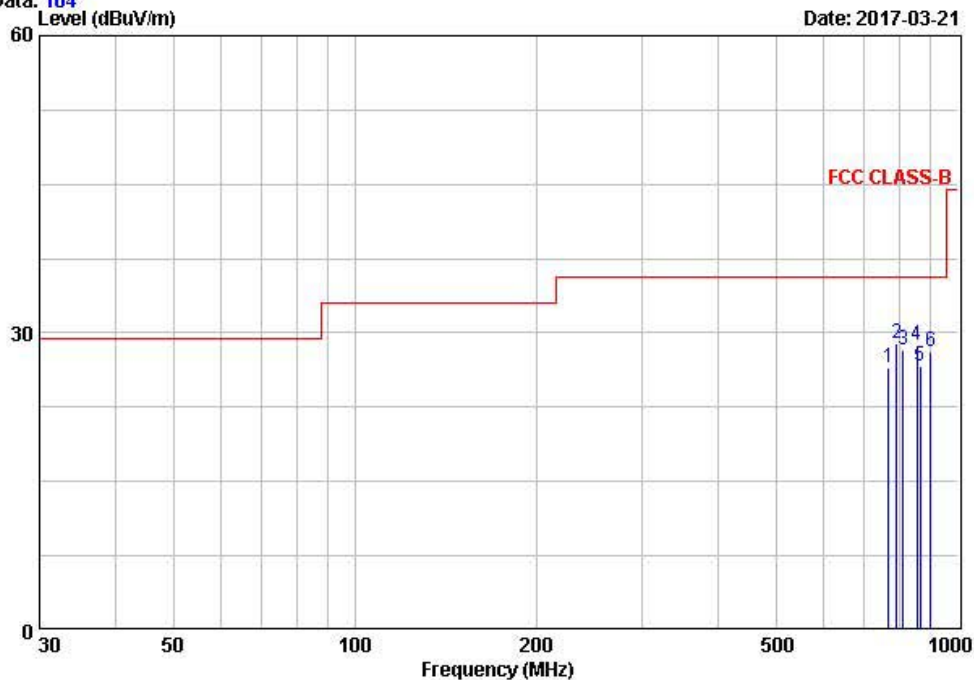

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	dBuV/m	QP dBuV/m	dB	cm	deg	
1 767.24	28.00	-1.44	26.56	35.60	9.04	100	158	VERTICAL
2 791.15	30.00	-1.04	28.96	35.60	6.64	100	133	VERTICAL
3 810.52	28.90	-0.69	28.21	35.60	7.39	120	205	HORIZONTAL
4 854.12	28.60	0.14	28.74	35.60	6.86	150	332	HORIZONTAL
5 865.24	26.20	0.37	26.57	35.60	9.03	100	101	VERTICAL
6 901.11	27.10	1.09	28.19	35.60	7.41	100	12	VERTICAL


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



TEST MODE: Bluetooth mode(mid)

Tested by: LEE S H

Date: 2017-03-21

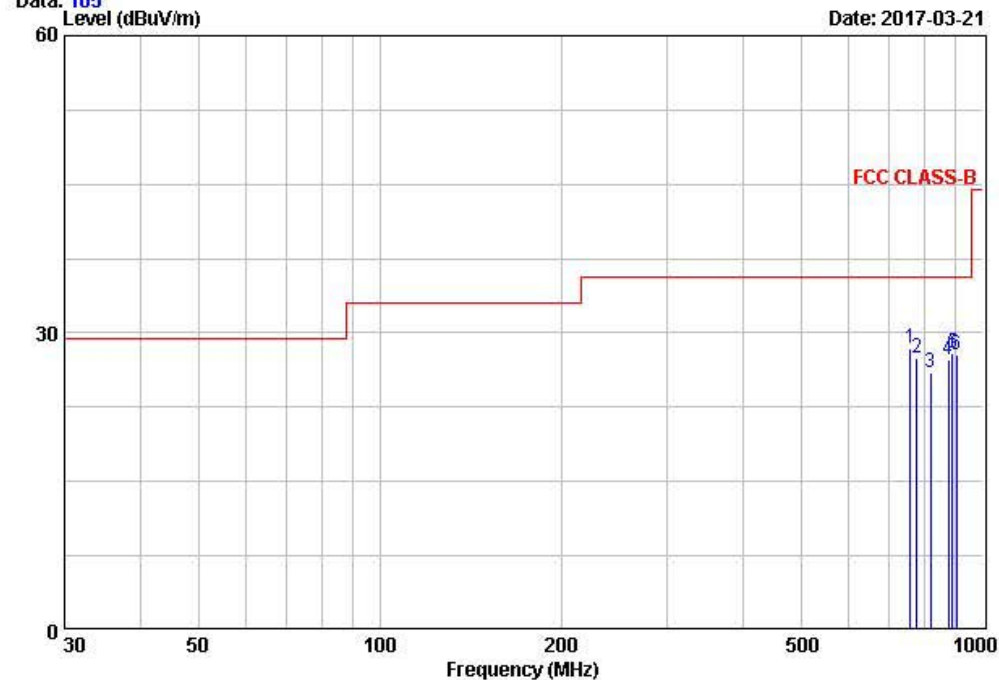

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV	dB	dBuV/m	QP dBuV/m	dB	cm	deg	
1	758.24	30.00	-1.59	28.41	35.60	7.19	100	122	VERTICAL
2	778.24	28.70	-1.25	27.45	35.60	8.15	121	111	VERTICAL
3	820.01	26.50	-0.51	25.99	35.60	9.61	100	205	VERTICAL
4	878.11	26.60	0.63	27.23	35.60	8.37	100	120	VERTICAL
5	890.12	27.10	0.87	27.97	35.60	7.63	100	112	VERTICAL
6	905.24	26.60	1.17	27.77	35.60	7.83	100	200	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Bluetooth(HIGH) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: BLE100

TEST MODE: Bluetooth mode (high)


Temp Humi : 17 / 36

Tested by: LEE S H

Data: 166

Level (dBuV/m)

Date: 2017-03-21

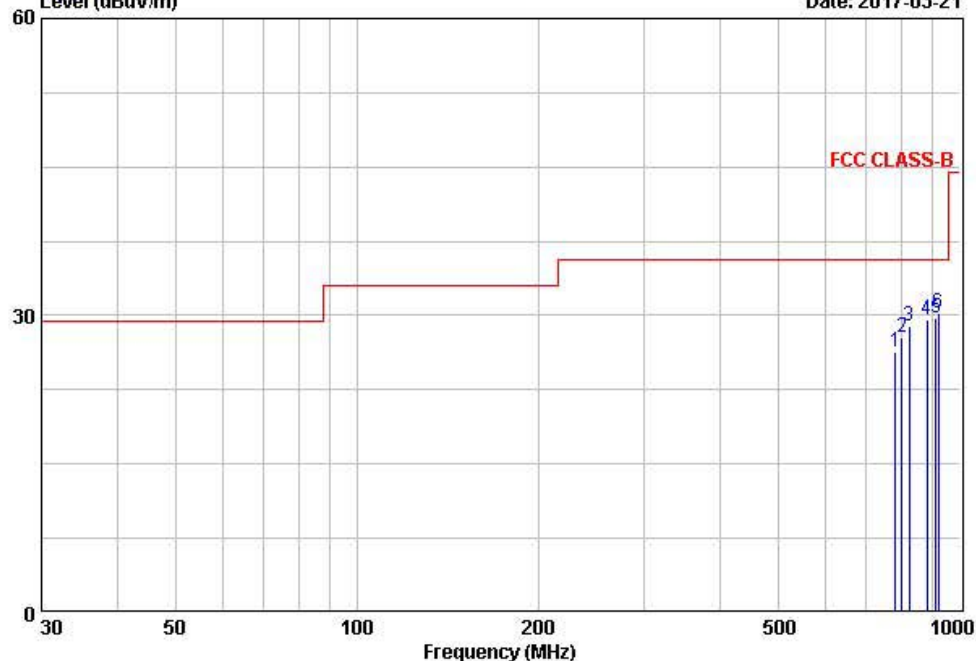

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV	dB	dBuV/m	QP	dB	cm	deg	
1	781.12	27.50	-1.20	26.30	35.60	9.30	100	100	VERTICAL
2	801.12	28.60	-0.87	27.73	35.60	7.87	100	112	VERTICAL
3	825.34	29.30	-0.40	28.90	35.60	6.70	100	135	VERTICAL
4	881.24	28.90	0.70	29.60	35.60	6.00	100	313	VERTICAL
5	912.12	28.50	1.31	29.81	35.60	5.79	150	205	HORIZONTAL
6	920.12	28.80	1.47	30.27	35.60	5.33	100	123	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Above 1 GHz) – Bluetooth(LOW) mode


EMI I Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010

EUT/Model No. : BLE100

Test Mode: Bluetooth mode (low)

Tested by : LEE S H

Temp/Humi: 21 / 37

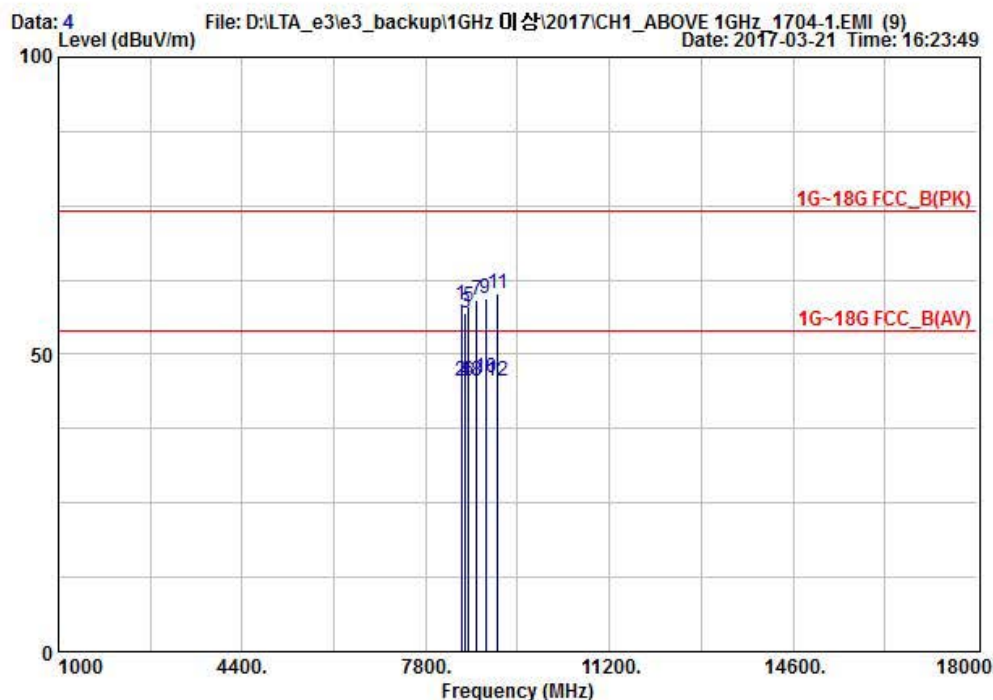

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1 8457.10	35.80	22.45	58.25	74.00	15.75	HORIZONTAL
2 8457.10	23.10	22.45	45.55	54.00	8.45	HORIZONTAL
3 8530.10	34.40	22.49	56.89	74.00	17.11	HORIZONTAL
4 8530.10	23.10	22.49	45.59	54.00	8.41	HORIZONTAL
5 8589.30	35.10	22.87	57.97	74.00	16.03	HORIZONTAL
6 8589.30	22.50	22.87	45.37	54.00	8.63	HORIZONTAL
7 8742.20	35.20	23.85	59.05	74.00	14.95	HORIZONTAL
8 8742.20	21.60	23.85	45.45	54.00	8.55	HORIZONTAL
9 8912.10	34.40	24.95	59.35	74.00	14.65	HORIZONTAL
10 8912.10	21.10	24.95	46.05	54.00	7.95	HORIZONTAL
11 9131.20	34.70	25.47	60.17	74.00	13.83	HORIZONTAL
12 9131.20	20.10	25.47	45.57	54.00	8.43	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



Test Mode: Bluetooth mode (low)

Temp/Humi: 21 / 37

The plot displays the spectral density of the signal. The y-axis represents the level in dBuV/m, ranging from 0 to 100. The x-axis represents the frequency in MHz, ranging from 18000 to 26000. Two horizontal red lines indicate the limits for 1G~40G FCC_B(PK) and 1G~40G FCC_B(AV). Four vertical blue lines, labeled 1, 2, 3, and 4, mark specific frequency points where the signal level is measured.

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118112.20	18.50	45.32	63.82	74.00	10.18	HORIZONTAL
218112.20	2.10	45.32	47.42	54.00	6.58	HORIZONTAL
318250.30	16.60	45.12	61.72	74.00	12.28	HORIZONTAL
418250.30	1.80	45.12	46.92	54.00	7.08	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

Bluetooth(MID) mode

EMI I Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No. : BLE100

Test Mode: Bluetooth mode (mid)

Tested by : LEE S H

Temp/Humi: 21 / 37

Data: 5 File: D:\LTA_e3\le3_backup\1GHz 이상\2017\CH1_ABOVE 1GHz_1704-1.EMI (9)
 Level (dBuV/m) Date: 2017-03-21 Time: 16:26:07

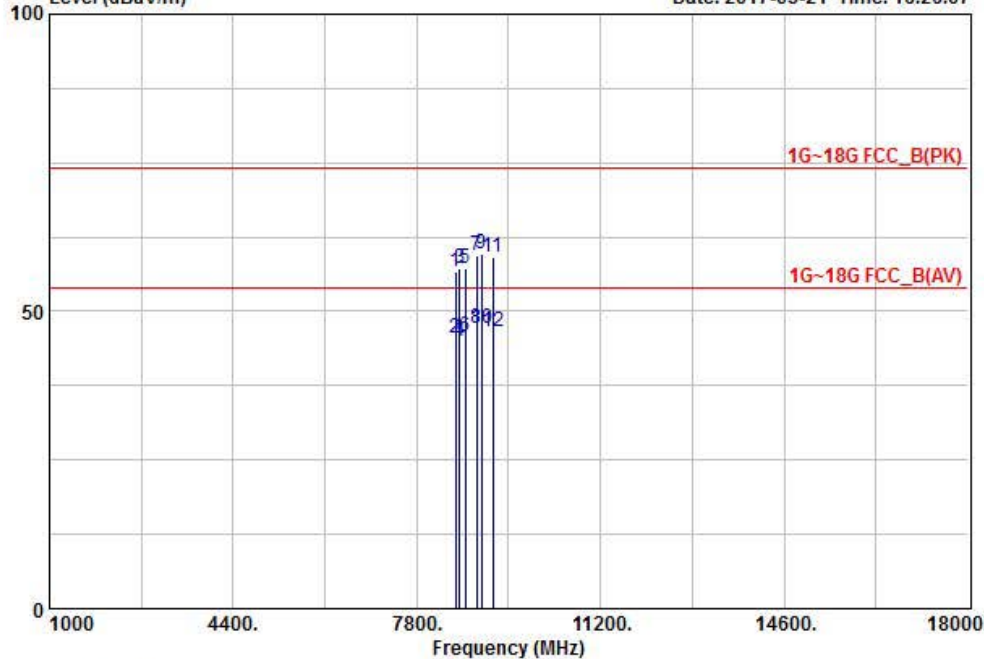

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1 8511.10	34.30	22.37	56.67	74.00	17.33	HORIZONTAL
2 8511.10	23.10	22.37	45.47	54.00	8.53	HORIZONTAL
3 8593.10	34.40	22.90	57.30	74.00	16.70	HORIZONTAL
4 8593.10	22.10	22.90	45.00	54.00	9.00	HORIZONTAL
5 8701.20	33.60	23.59	57.19	74.00	16.81	HORIZONTAL
6 8701.20	22.30	23.59	45.89	54.00	8.11	HORIZONTAL
7 8915.20	34.50	24.97	59.47	74.00	14.53	HORIZONTAL
8 8915.20	22.10	24.97	47.07	54.00	6.93	HORIZONTAL
9 9001.60	34.20	25.51	59.71	74.00	14.29	HORIZONTAL
10 9001.60	21.50	25.51	47.01	54.00	6.99	HORIZONTAL
11 9204.30	33.60	25.45	59.05	74.00	14.95	HORIZONTAL
12 9204.30	21.20	25.45	46.65	54.00	7.35	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No. : BLE100

Test Mode: Bluetooth mode (mid)

Tested by : LEE S H

Temp/Humi: 21 / 37

Data: 8 File: D:\LTA_e3\3_backup\1GHz 이상\2017\CH1_ABOVE 1GHz_1704-1.EMI (9)
Level (dBuV/m) Date: 2017-03-21 Time: 16:30:22

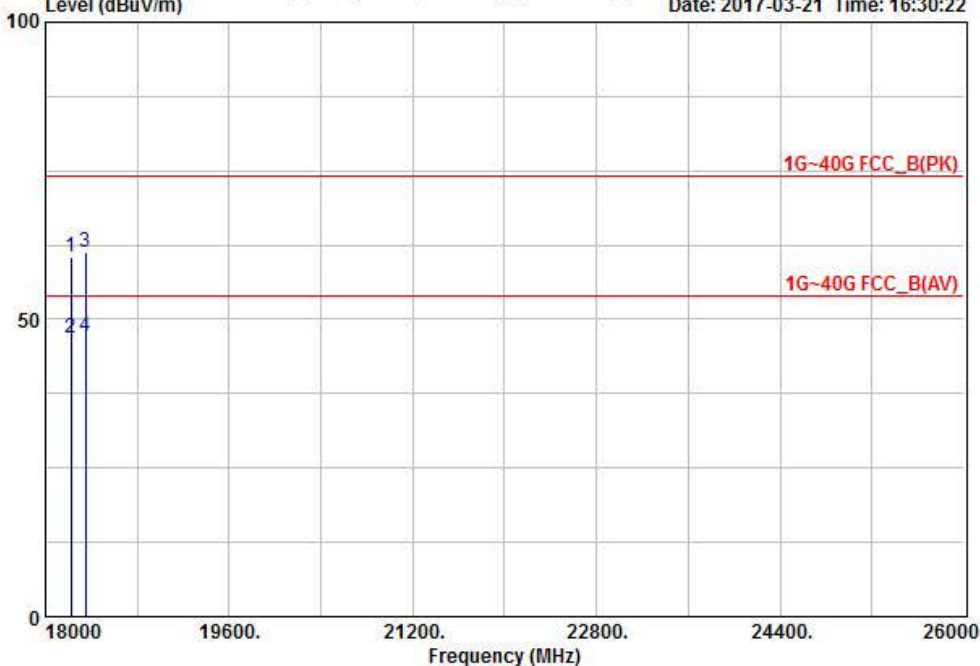

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118222.40	15.20	45.16	60.36	74.00	13.64	HORIZONTAL
218222.40	1.60	45.16	46.76	54.00	7.24	HORIZONTAL
318348.30	16.30	44.97	61.27	74.00	12.73	HORIZONTAL
418348.30	2.10	44.97	47.07	54.00	6.93	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

Bluetooth(HIGH) mode

EMI I Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No. : BLE100

Test Mode: Bluetooth mode (high)

Tested by : LEE S H

Temp/Humi: 21 / 37

Data: 6 File: D:\LTA_e3\3_backup\1GHz 이상\2017\CH1_ABOVE 1GHz_1704-1.EMI (9)
 Level (dBuV/m) Date: 2017-03-21 Time: 16:27:16

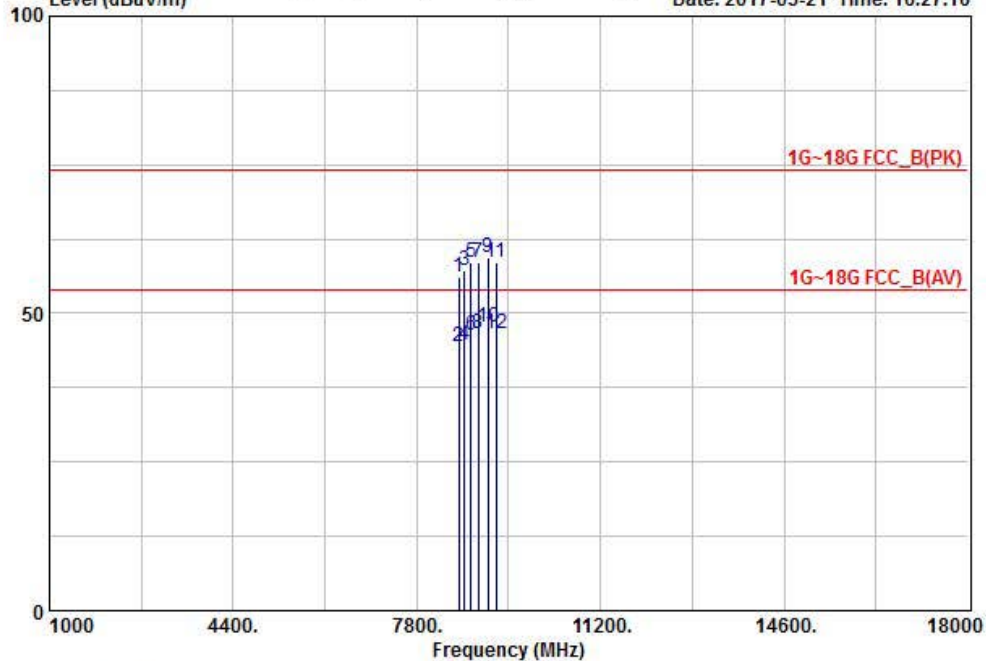

	Freq	Reading	C.F	Result	Limit	Margin	Polarity
	MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1	8584.40	33.20	22.84	56.04	74.00	17.96	HORIZONTAL
2	8584.40	21.50	22.84	44.34	54.00	9.66	HORIZONTAL
3	8687.10	33.60	23.50	57.10	74.00	16.90	HORIZONTAL
4	8687.10	21.20	23.50	44.70	54.00	9.30	HORIZONTAL
5	8804.60	34.30	24.26	58.56	74.00	15.44	HORIZONTAL
6	8804.60	22.10	24.26	46.36	54.00	7.64	HORIZONTAL
7	8941.10	33.50	25.13	58.63	74.00	15.37	HORIZONTAL
8	8941.10	21.50	25.13	46.63	54.00	7.37	HORIZONTAL
9	9123.70	33.80	25.48	59.28	74.00	14.72	HORIZONTAL
10	9123.70	22.30	25.48	47.78	54.00	6.22	HORIZONTAL
11	9271.10	33.20	25.43	58.63	74.00	15.37	HORIZONTAL
12	9271.10	21.10	25.43	46.53	54.00	7.47	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



EMI I Chamber of LTA CO.,LTD.
4, Songju-ro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Auth.by NVLAP
Tel : +82-31-3236008,9 www.ltalab.com
Fax: +82-31-3236010


EUT/Model No.: BLE100

Test Mode: Bluetooth mode (high)

Tested by : LEE S H

Temp/Humi: 21 / 37

Data: 9 File: D:\LTA_e3ie3_backup\1GHz 이상\2017\CH1_ABOVE 1GHz_1704-1.EMI (9)
Level (dBuV/m) Date: 2017-03-21 Time: 16:30:58

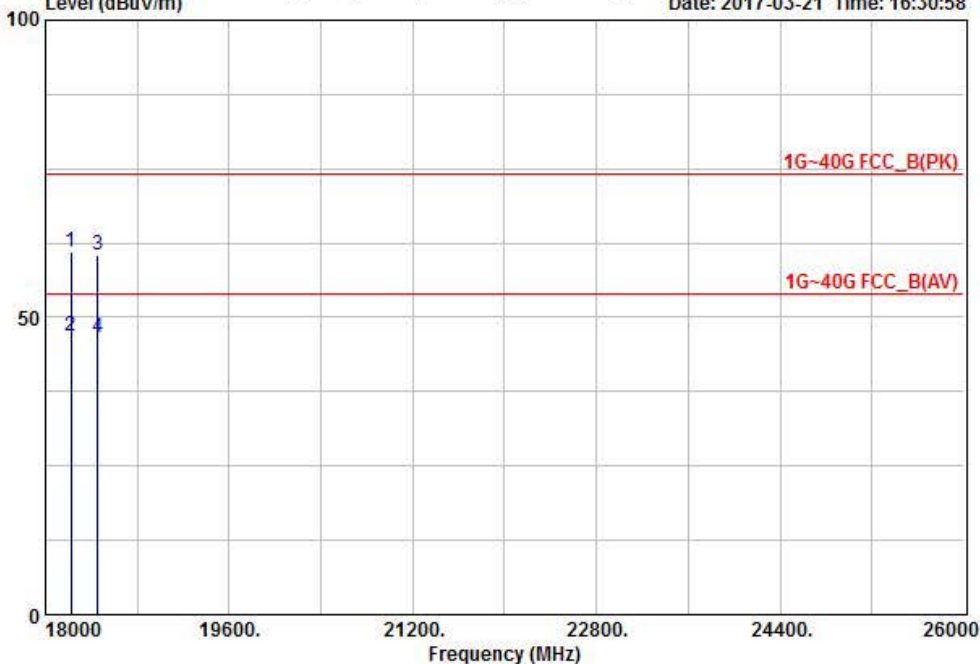

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118222.30	15.80	45.16	60.96	74.00	13.04	HORIZONTAL
218222.30	1.70	45.16	46.86	54.00	7.14	HORIZONTAL
318457.30	15.60	44.81	60.41	74.00	13.59	HORIZONTAL
418457.30	1.70	44.81	46.51	54.00	7.49	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

3.2.7 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data : **Complies**

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 20 dB below limit.

Minimum Standard: FCC Part 15.207(a) / EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Conducted Emissions – Bluetooth(LOW) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : BLE100	Phase : LINE
Test Mode : Bluetooth mode(low)	Test Power : 120 / 60
Temp. / Humi. : 21 / 44	Test Engineer : LEE S H

Data: 118

File: D:\Conducted Data\2017\LTA_Conduction_2017_05.EM6 (138)

Date: 2017-05-02

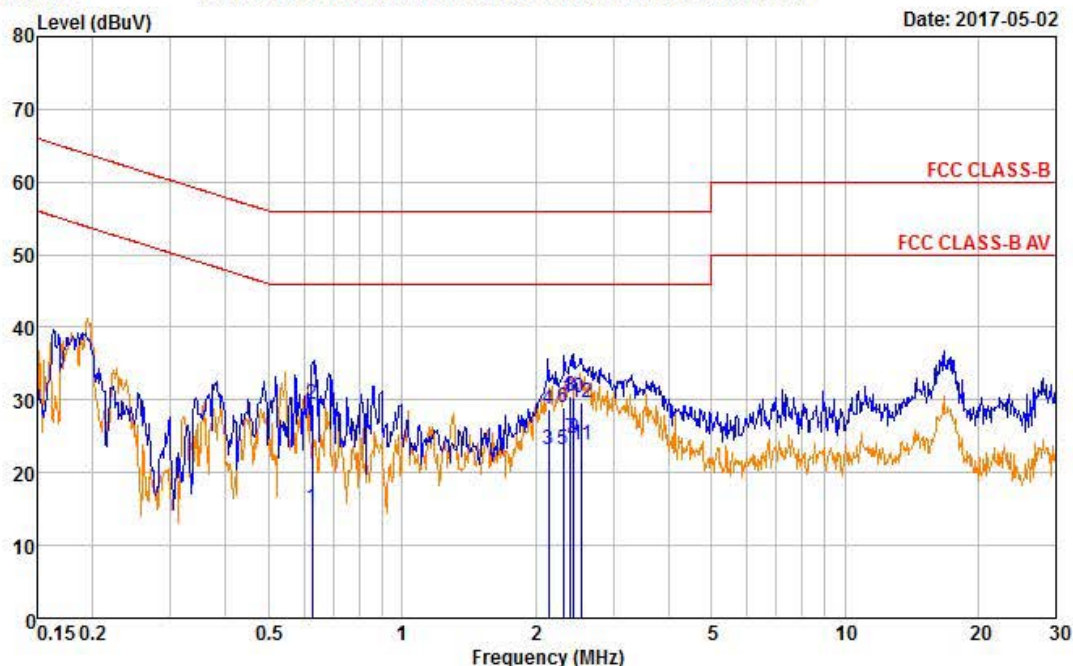

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.627	19.26	5.10	10.14	29.40	15.24	56.00	46.00	26.60	30.76
2.148	18.50	12.95	10.20	28.70	23.15	56.00	46.00	27.30	22.85
2.309	18.77	13.02	10.20	28.97	23.22	56.00	46.00	27.03	22.78
2.400	20.22	14.59	10.21	30.43	24.80	56.00	46.00	25.57	21.20
2.445	20.17	14.45	10.21	30.38	24.66	56.00	46.00	25.62	21.34
2.553	19.35	13.60	10.21	29.56	23.81	56.00	46.00	26.44	22.19

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – Bluetooth(LOW) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : BLE100	Phase : NEUTRAL
Test Mode : Bluetooth mode(low)	Test Power : 120 / 60
Temp. / Humi. : 21 / 44	Test Engineer : LEE S H

Data: 122

File: D:\Conducted Data\2017\LTA_Conduction_2017_05.EM6 (138)

Date: 2017-05-02

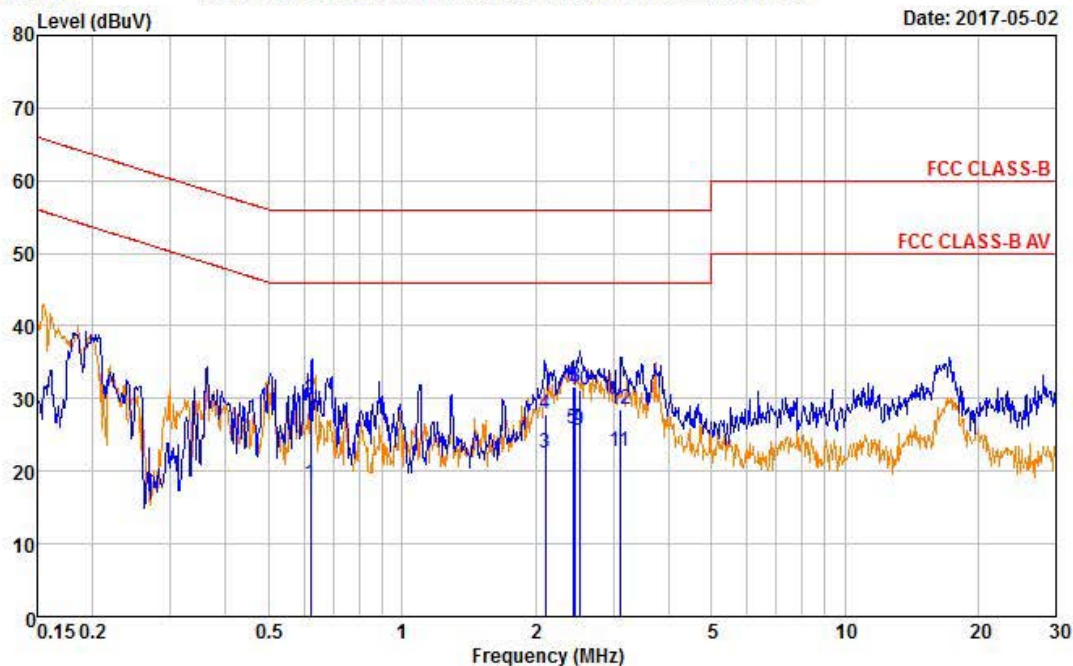

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.622	19.75	8.08	10.21	29.96	18.29	56.00	46.00	26.04	27.71
2.109	17.70	12.17	10.26	27.96	22.43	56.00	46.00	28.04	23.57
2.434	21.30	15.66	10.27	31.57	25.93	56.00	46.00	24.43	20.07
2.464	21.46	15.59	10.27	31.73	25.86	56.00	46.00	24.27	20.14
2.514	21.00	15.25	10.27	31.27	25.52	56.00	46.00	24.73	20.48
3.104	18.33	12.35	10.28	28.61	22.63	56.00	46.00	27.39	23.37

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – Bluetooth(MID) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : BLE100	Phase : LINE
Test Mode : Bluetooth mode(mid)	Test Power : 120 / 60
Temp. / Humi. : 21 / 44	Test Engineer : LEE S H

Data: 126

File: D:\Conducted Data\2017\LTA_Conduction_2017_05.EM6 (138)

Date: 2017-05-02

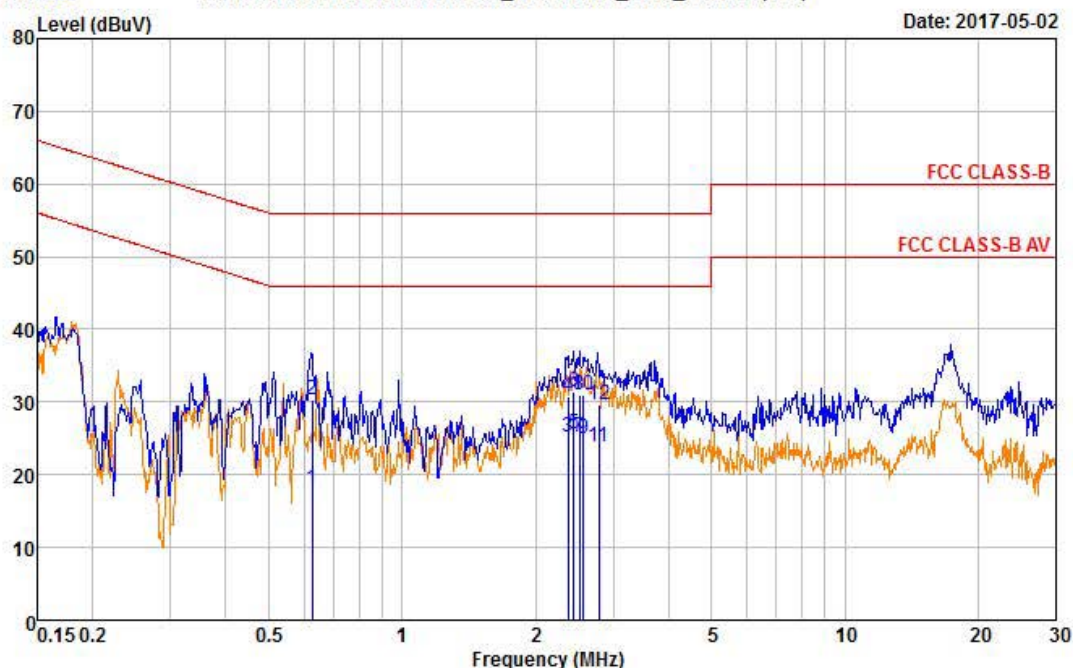

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.627	20.11	8.00	10.14	30.25	18.14	56.00	46.00	25.75	27.86
2.372	20.64	14.89	10.21	30.85	25.10	56.00	46.00	25.15	20.90
2.445	21.18	15.45	10.21	31.39	25.66	56.00	46.00	24.61	20.34
2.521	20.69	14.90	10.21	30.90	25.11	56.00	46.00	25.10	20.89
2.568	20.72	14.73	10.21	30.93	24.94	56.00	46.00	25.07	21.06
2.781	19.48	13.60	10.22	29.70	23.82	56.00	46.00	26.30	22.18

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – Bluetooth(MID) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : BLE100	Phase : NEUTRAL
Test Mode : Bluetooth mode(mid)	Test Power : 120 / 60
Temp. / Humi. : 21 / 44	Test Engineer : LEE S H

Data: 130

File: D:\Conducted Data\2017\LTA_Conduction_2017_05.EM6 (138)

Date: 2017-05-02

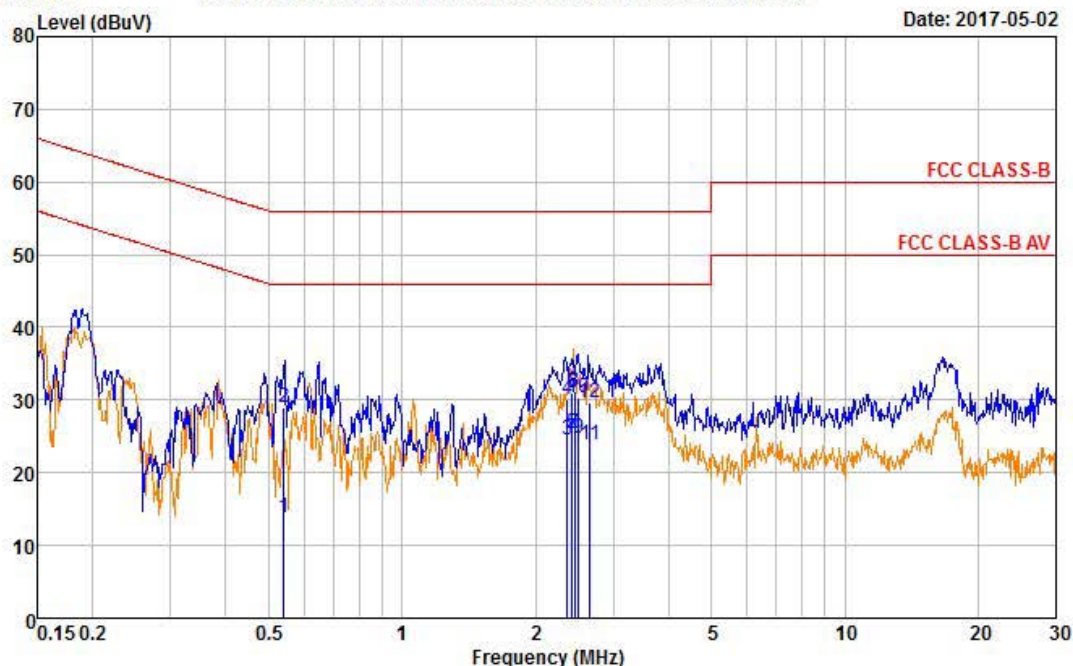

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.541	18.78	3.72	10.20	28.98	13.92	56.00	46.00	27.02	32.08
2.360	19.92	14.33	10.27	30.19	24.60	56.00	46.00	25.81	21.40
2.423	20.78	15.19	10.27	31.05	25.46	56.00	46.00	24.95	20.54
2.454	20.93	15.03	10.27	31.20	25.30	56.00	46.00	24.80	20.70
2.507	20.13	14.45	10.27	30.40	24.72	56.00	46.00	25.60	21.28
2.653	19.37	13.50	10.27	29.64	23.77	56.00	46.00	26.36	22.23

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – Bluetooth(HIGH) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : BLE100	Phase : LINE
Test Mode : Bluetooth mode(high)	Test Power : 120 / 60
Temp. / Humi. : 21 / 44	Test Engineer : LEE S H

Data: 134

File: D:\Conducted Data\2017\LTA_Conduction_2017_05.EM6 (138)

Date: 2017-05-02

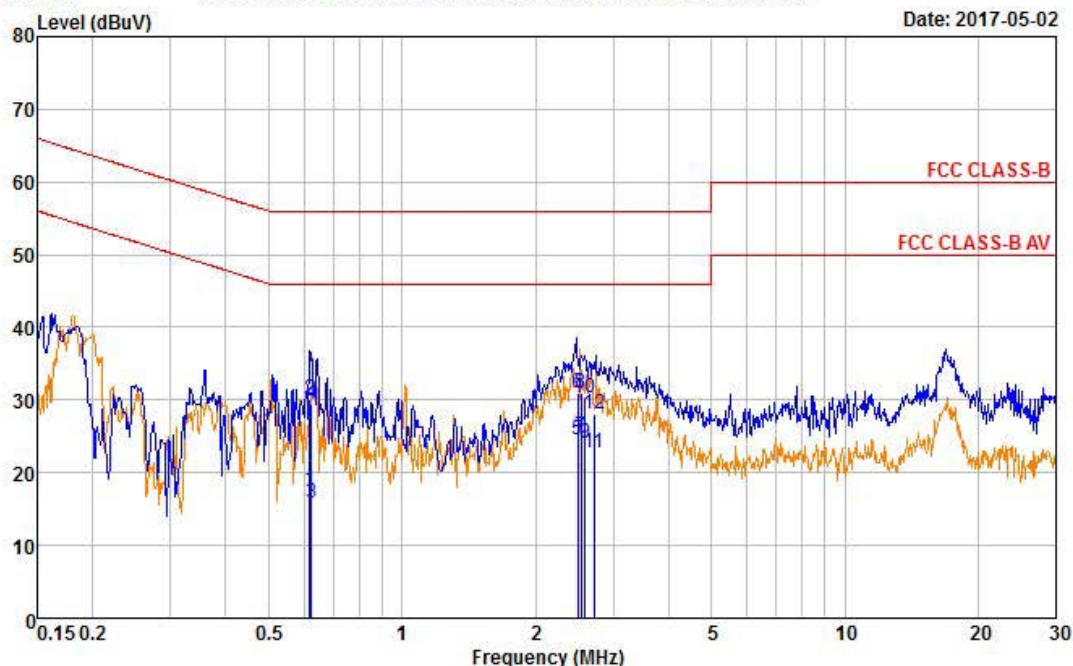

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.620	19.86	7.36	10.14	30.00	17.50	56.00	46.00	26.00	28.50
0.624	19.37	5.77	10.14	29.51	15.91	56.00	46.00	26.49	30.09
2.498	20.76	14.36	10.21	30.97	24.57	56.00	46.00	25.03	21.43
2.533	20.71	14.77	10.21	30.92	24.98	56.00	46.00	25.08	21.02
2.596	20.15	13.84	10.21	30.36	24.05	56.00	46.00	25.64	21.95
2.714	17.92	12.43	10.22	28.14	22.65	56.00	46.00	27.86	23.35

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted Emissions – Bluetooth(HIGH) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : BLE100	Phase : NEUTRAL
Test Mode : Bluetooth mode(high)	Test Power : 120 / 60
Temp. / Humi. : 21 / 44	Test Engineer : LEE S H

Data: 138

File: D:\Conducted Data\2017\LTA_Conduction_2017_05.EM6 (138)

Date: 2017-05-02

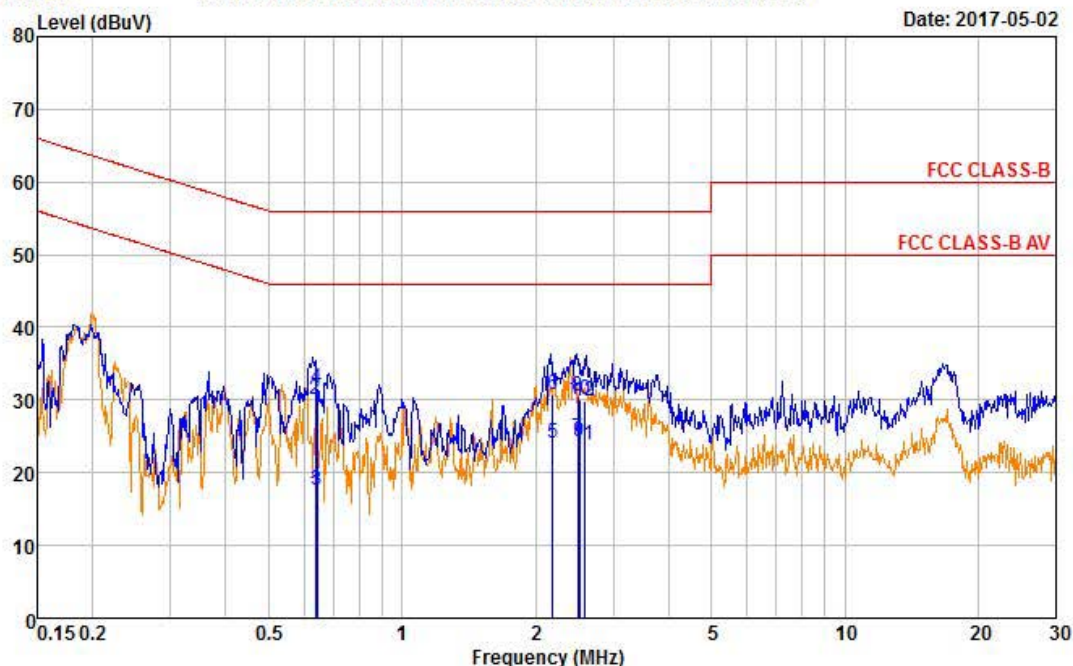

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.637	19.83	6.90	10.21	30.04	17.11	56.00	46.00	25.96	28.89
0.644	21.32	7.29	10.21	31.53	17.50	56.00	46.00	24.47	28.50
2.188	20.43	13.83	10.26	30.69	24.09	56.00	46.00	25.31	21.91
2.498	20.26	14.38	10.27	30.53	24.65	56.00	46.00	25.47	21.35
2.520	19.90	14.12	10.27	30.17	24.39	56.00	46.00	25.83	21.61
2.585	19.64	13.65	10.27	29.91	23.92	56.00	46.00	26.09	22.08

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2016-10-11
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2017-03-20
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2017-03-20
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2016-09-12
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2016-09-12
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2016-09-12
7	■	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2016-09-12
8	■	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2017-03-21
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2016-08-04
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2016-05-03
11	■	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2016-05-03
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2015-07-13
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2017-03-21
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15		Power Divider	11636A	06243	HP	1 year	2016-09-12
16	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17		Frequency Counter	5342A	2826A12411	HP	1 year	2017-03-21
18	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2017-03-20
19	■	Power Sensor	8481A	3318A94972	HP	1 year	2016-12-30
20		Audio Analyzer	8903B	3729A18901	HP	1 year	2016-09-12
21		Modulation Analyzer	8901B	3749A05878	HP	1 year	2016-09-12
22		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2016-09-12
23		Stop Watch	HS-3	812Q08R	CASIO	2 year	2017-03-21
24		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2016-09-12
25	■	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2017-03-20
26		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2017-03-20
27		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2017-03-20
28		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2017-03-20
29	■	Active Loop Antenna	FMZB1519	1519-031	SCHWARZBECK	2 year	2016-01-12
30		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2017-03-21
31		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2017-03-23
32		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2017-03-21