




Transformer

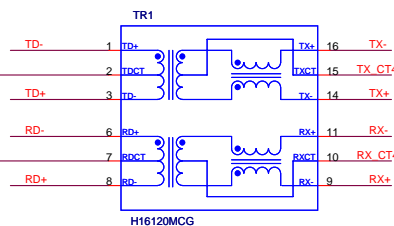

RJ45

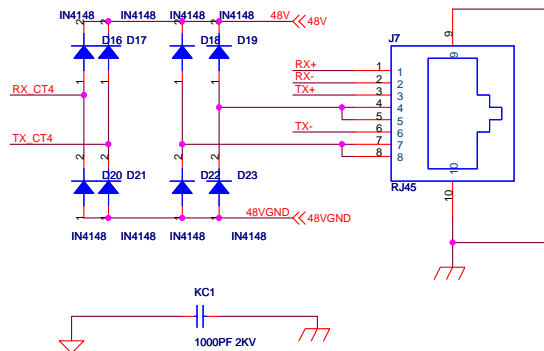


SERIAL FLASH

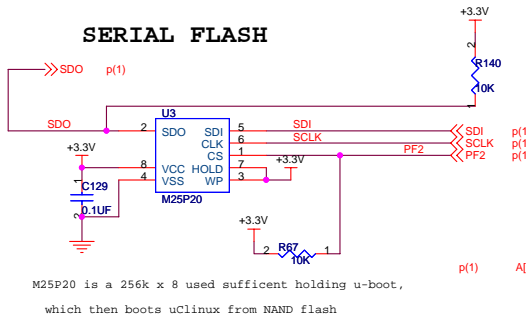


M25P20 is a 256k x 8 used sufficient holding u-boot, which then boots uClinux from NAND flash


32M or 64M X8 SDRAM

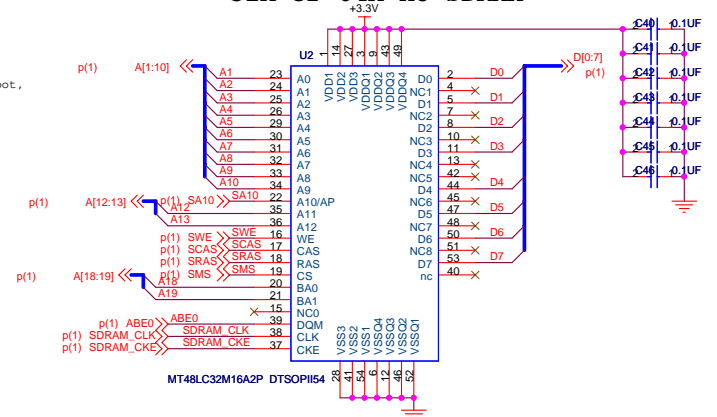


ETHERNET

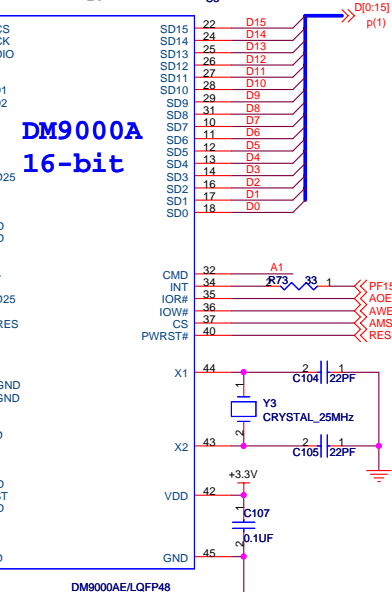



16-256MB NAND FLASH

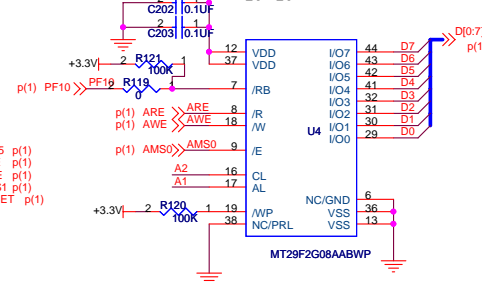

32M or 64M X8 SDRAM

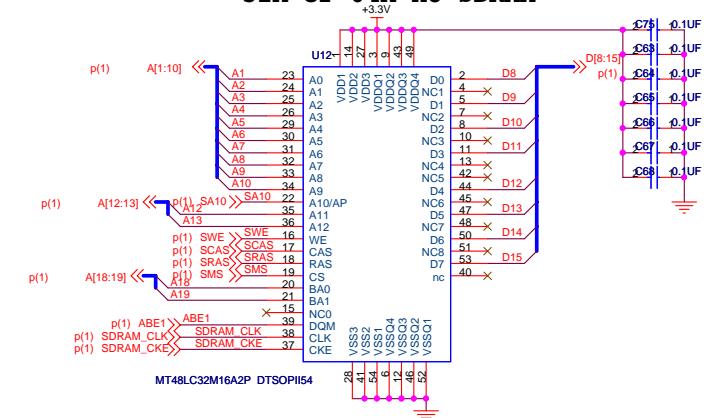

Just mount one of these, adjust to minimise EMI

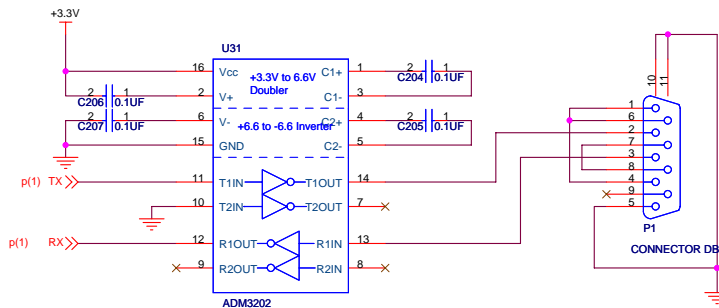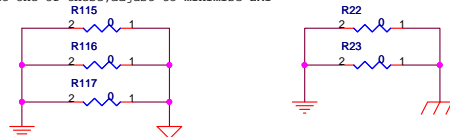


ATCOM Technology Inc.

Title		
FLASH + SDRAM + ETHERNET		
Size	Document Number	Rev
Custom	BF532 IP04 Four Port IP-PBX	1
Date:	Monday, September 08, 2008	Sheet 2 of 5


SLIC

VCC改为加个1117 3.3V输出

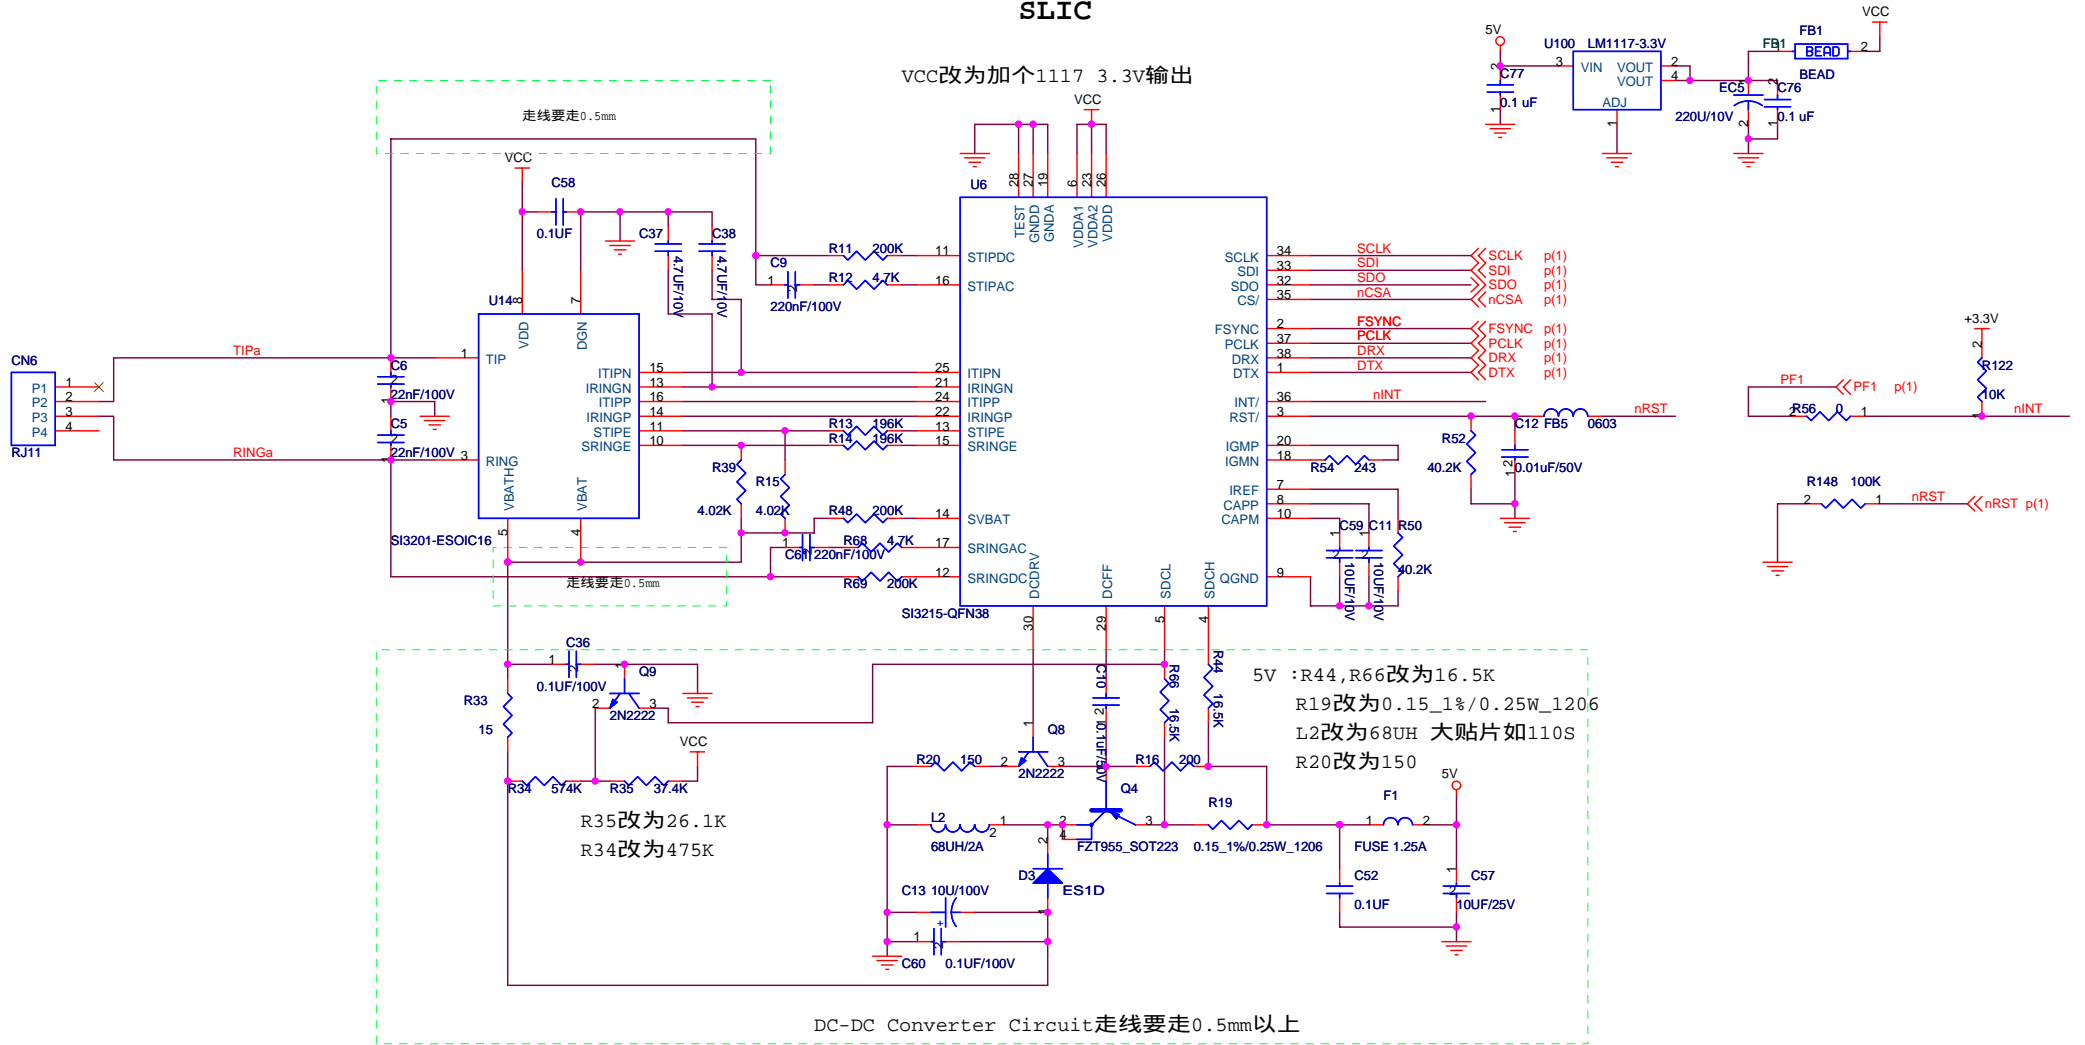

ATCOM Technology Inc.			
Title		FXS	
Size	Document Number	Rev	
B	BF532 IP04 Four Port IP-PBX	1	
Date:	Monday, September 08, 2008	Sheet	3 of 5

POE

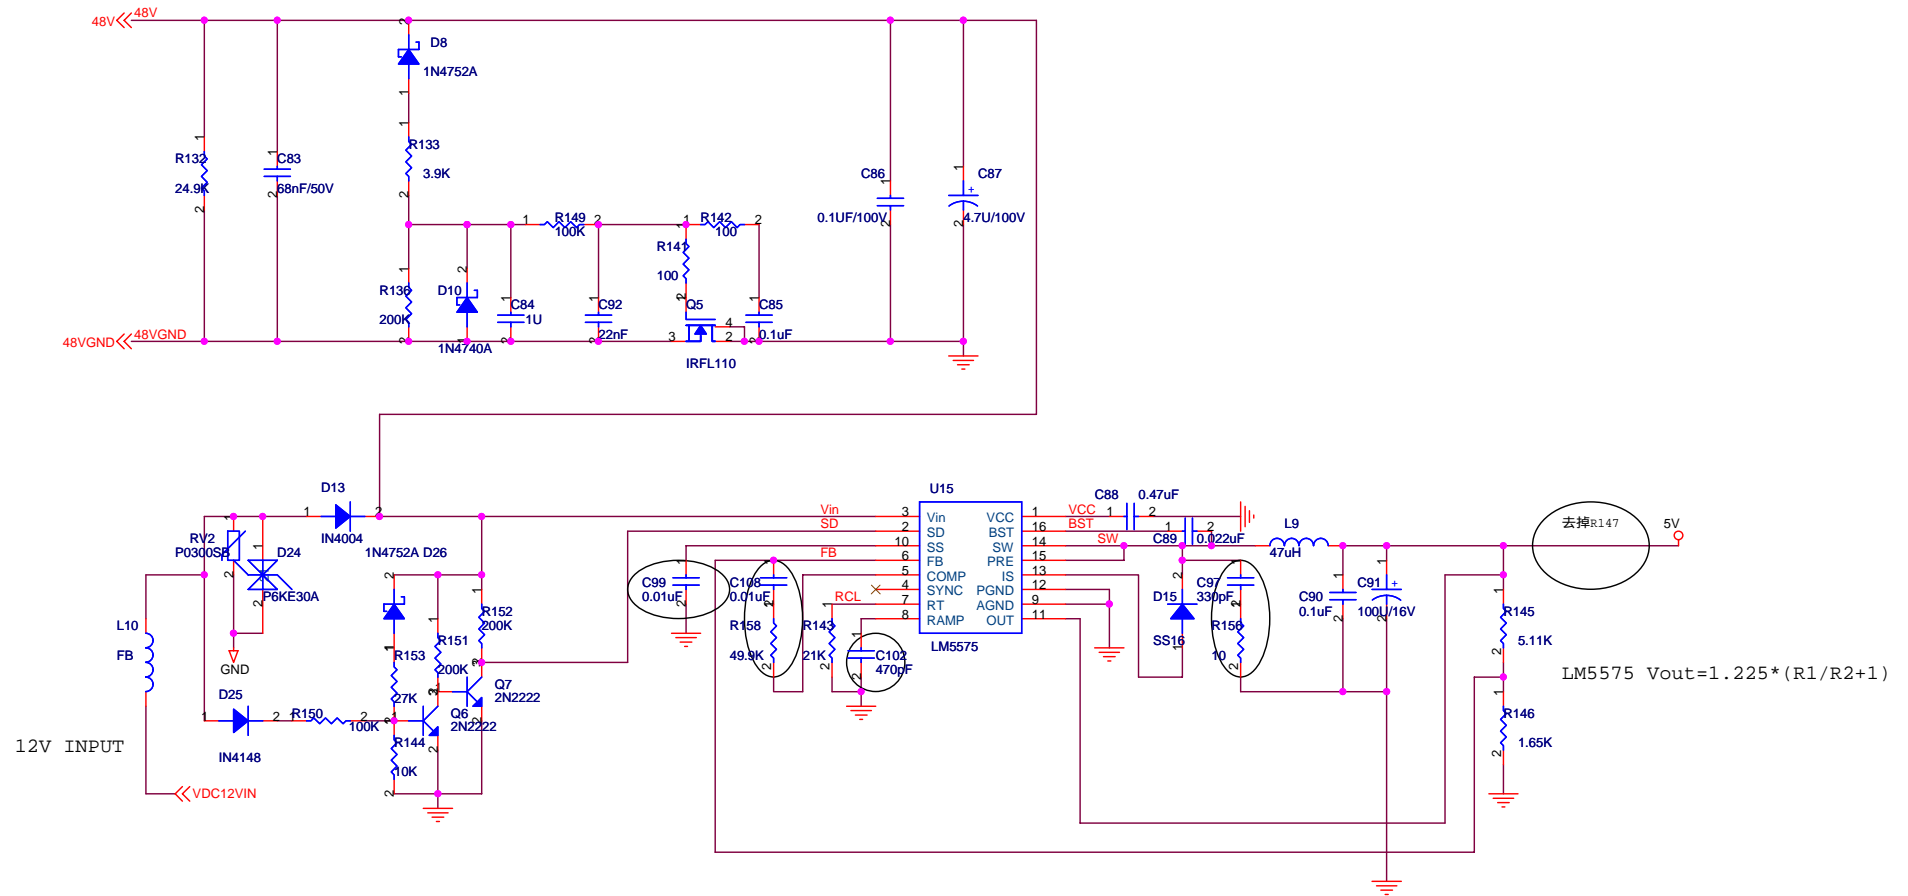

ATCOM Technology Inc.

Title

POE

Size
B

Document Number


BF532 IP04 Four Port IP-PBX

Rev	
1	


Date: Monday, September 08, 2008

Sheet 4 of 5


1





3.3V OUTPUT

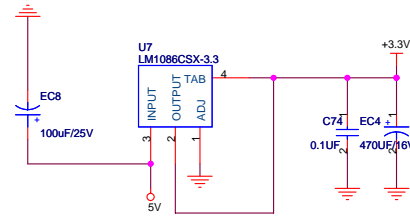

2.048 MHZ

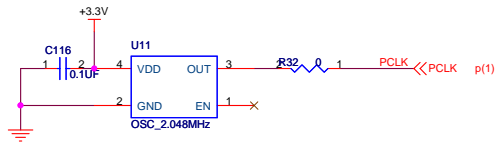

LED

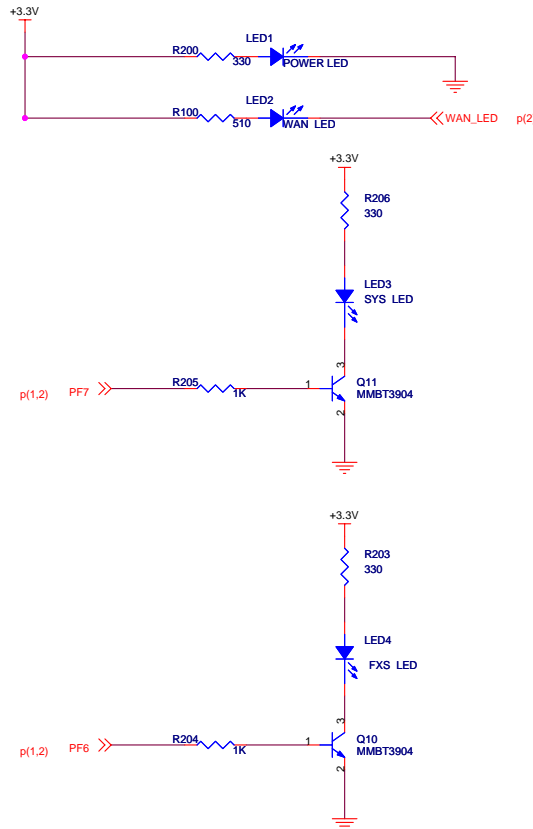

ATCOM Technology Inc.			
Title			
POWER + PCLK + LED			
Size	Document Number	Rev	
Custom	BF532 IP04 Four Port IP-PBX	1	
Date:	Monday, September 08, 2008	Sheet	5 of 5