

Application for FCC Certificate  
On Behalf of  
Hisense Electric Co., Ltd.

LCD TV

Model No.	Serial No.	Brand
LHDN32V88MH	E2010062802	Hisense

FCC ID : W9HLCDC0001

Prepared For : Hisense Electric Co., Ltd.  
No.218 Qianwangang Road, Economy & Technology  
Development Zone, Qingdao, China

Prepared By : Audix Technology (Shanghai) Co., Ltd.  
3F 34Bldg 680 Guiping Rd,  
Caohejing Hi-Tech Park,  
Shanghai 200233, China

Tel: +86-21-64955500  
Fax: +86-21-64955491

Report No. : ACI-F10016A1  
Date of Test : Jun 28 – Jul 13, 2010  
Date of Report : Jul 15, 2010

## TABLE OF CONTENTS

	Page
<b>1 SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>4</b>
1.1 Description of Standards and Results.....	4
<b>2 GENERAL INFORMATION.....</b>	<b>5</b>
2.1 Description of Equipment Under Test.....	5
2.2 Peripherals.....	7
2.3 Description of Test Facility.....	9
2.4 Measurement Uncertainty.....	9
<b>3 CONDUCTED EMISSION TEST.....</b>	<b>10</b>
3.2 Block Diagram of Test Setup.....	10
3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)].....	11
3.4 Test Configuration.....	11
3.5 Operating Condition of EUT.....	12
3.6 Test Procedures.....	12
3.7 Test Results.....	13
<b>4 RADIATED EMISSION TEST.....</b>	<b>21</b>
4.1 Test Equipment.....	21
4.2 Block Diagram of Test Setup.....	21
4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)].....	22
4.4 Test Configuration.....	22
4.5 Operating Condition of EUT.....	22
4.6 Test Procedures.....	23
4.7 Test Results.....	23
<b>5 DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>31</b>
<b>6 DEBUG DESCRIPTION.....</b>	<b>32</b>

**TEST REPORT FOR FCC CERTIFICATE**

Applicant : Hisense Electric Co., Ltd.  
Manufacturer : Hisense Electric Co., Ltd.  
EUT Description : LCD TV

Model No.	Serial No.	Brand	Power Supply
LHDN32V88MH	E2010062802	Hisense	120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 2009  
AND ANSI C63.4-2003*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B (Class B) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report shows that the EUT (M/N: Refer to Sec.2.1; S/N: Refer to Sec.2.1) which was tested in 3m anechoic chamber Jun 28 – Jul 13, 2010 is technically compliance with the FCC official limits also.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report contains data that are not covered by the NVLAP accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.


***The test results for EUT's TV functions are contained in No.F10015A1, a Verification report.***

Date of Test : Jun 28 – Jul 13, 2010 Date of Report : Jul 15, 2010

Producer :   
CANDY XI / Assistant

Review :   
DIO YANG / Deputy Assistant Manager

**AUDIX<sup>®</sup>** For and on behalf of  
Audix Technology (Shanghai) Co., Ltd.

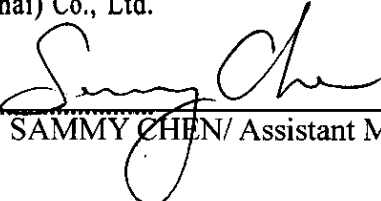Signatory :   
Authorized Signature EMC SAMMY CHEN / Assistant Manager

# 1 SUMMARY OF STANDARDS AND RESULTS

## 1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description of Test Item	Standard	Limits	Results
<b>EMISSION</b>			
Conducted Disturbance at the Mains Terminal	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2009 AND ANSI C63.4-2003	15.107(a) Class B	Pass
Radiated Disturbance	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2009 AND ANSI C63.4-2003	15.109(a) Class B	Pass

## 2 GENERAL INFORMATION

### 2.1 Description of Equipment Under Test

Description : LCD TV

Type of EUT : ☒ Production ☐ Pre-product ☐ Pro-type

Model number : LHDN32V88MH

Serial number : E2010062802

Brand : Hisense

Note : The different list for all the models are as follows:

Report No.	Model No.	Rev. Summary	Edition No.	Data of Rev.
ACI-F10016	LHDN32V88MH	Original Report.	0	Feb 04, 2010
ACI-F10016A1	LHDN32V88MH	To add LCD panel	Rev. A1	Jul 15, 2010

Applicant : Hisense Electric Co., Ltd.  
No.218 Qianwangang Road, Economy &  
Technology Development Zone, Qingdao, China

Manufacturer : Hisense Electric Co., Ltd.  
No.218 Qianwangang Road, Economy &  
Technology Development Zone, Qingdao, China

LCD Panel : Manufacturer : SAMSUNG  
M/N : LTA320AP05

Max Resolution : 1024\*768@60Hz

D-Sub Cable : Shielded, Detachable, 1.85m,  
with two cores on cable

HDMI Cable : Shielded, Detachable, 1.85m,  
without core on cable

Power Cord : Unshielded, Detachable, 1.80m

**Remark:**

The EUT is a LCD TV which input/output ports as follows:

**Side View:**

- |     |                                    |                              |
|-----|------------------------------------|------------------------------|
| (1) | One USB Port                       | Connected with U-Disk        |
| (2) | One ANT Port                       | Connected with TV SG/ATSC SG |
| (3) | One MPI Port                       | Only for optical use         |
| (4) | One component of YPbPr1 Port       | Connected with DVD #1        |
| (5) | One component of YPbPr1 Audio Port | Connected with DVD #1        |
| (6) | One VGA Port                       | Connected with PC            |
| (7) | One PC Audio Port                  | Connected with PC            |
| (8) | One HDMI4 Port                     | Connected with PC            |

**Back View:**

- |      |                                    |   |
|------|------------------------------------|---|
| (9)  | One HDMI1 Port                     | Connected with DVD #1                     |
| (10) | One HDMI2 Port                     | Connected with DVD #2                     |
| (11) | One HDMI3 Port                     | Connected with DVD #3                     |
| (12) | One component of YPbPr2 Port       | Connected with DVD #2                     |
| (13) | One component of YPbPr2 Audio Port | Connected with DVD #2                     |
| (14) | One Headphone Port                 | Connected with earphone                   |
| (15) | One component of AV Port           | Connected with DVD #3                     |
| (16) | One S-Video Port                   | Connected with DVD #3                     |
| (17) | One Digital Audio Out Port         | Connected with DVD #3                     |
| (18) | One Audio Out Port                 | Connected with Speaker                    |
| (19) | One RS232 Port                     | Only for service, do not open to customer |

## 2.2 Peripherals

### 2.2.1 PC

Manufacturer : HP  
Model Number : dx7200MT  
Serial Number : CNG8130K89  
Power Cord : Unshielded, Detachable, 1.8m  
Certificate : FCC DoC; CE/EMC; VCCI; C-Tick; UL  
BSMI (R33001) 3C (A000111)  
MIC (E-A011-04-2659(B))

### 2.2.2 Printer

Manufacturer : HP  
Model Number : C3990A  
Serial Number : JPZX020487  
Data Cable : Shielded, detachable, 1.5m  
Certificate : GS, CE/EMC, C-Tick, FCC DoC

### 2.2.3 Keyboard

Manufacturer : Microsoft  
Model Number : RT2300  
Serial Number : 7668200662248  
Data Cable : Shielded, undetachable, 1.8m  
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,  
BSMI

### 2.2.4 Mouse

Manufacturer : Microsoft  
Model Number : RT2300  
Serial Number : 6965712071551  
Data Cable : Shielded, undetachable, 1.8m.  
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,  
BSMI

### 2.2.5 Modem

Manufacturer : TP-LINK  
Model Number : TM-EC5658V  
Serial Number : 07123301053  
Data Cable : Shielded, Detachable, 1.8m  
Certificate : FCC DoC, CE/EMC, CCC

### 2.2.6 Earphone

Manufacturer : SONY  
Model Number : MDR-E808  
Serial Number : 1808030805305506

### 2.2.7 TV Signal Generator

Manufacturer : FLUKE  
Model Number : 54200m01  
Serial Number : 814008  
Data Cable : Shielded, detachable, 2.0m  
Power Cord : Unshielded, detachable, 2.0m  
Certificate : CE/EMC, FCC DoC, CCC

### 2.2.8 ATSC Signal Generator

Manufacturer : SENCORE  
Model Number : ATSC997  
Serial Number : 6790071

### 2.2.9 DVD #1

Manufacturer : PHILIPS  
Model Number : DVP3986K/93  
Serial Number : KX1A0902120108  
Certificate : FCC DoC, CE/EMC, CCC

### 2.2.10 DVD#2

Manufacturer : PHILIPS  
Model Number : DVP3986K/93  
Serial Number : KX1A0902120082  
Certificate : FCC DoC, CE/EMC, CCC

### 2.2.11 DVD#3

Manufacturer : LG  
Model Number : DF9921N  
Serial Number : 3850R-N846W  
Certificate : FCC DoC, CE/EMC, CCC

### 2.2.12 Speaker

Manufacturer : DIBA  
Model Number : FS-04  
Serial Number : 002



## 2.3 Description of Test Facility

Site Description (Semi-Anechoic Chamber) : Sept. 17, 1998 file on  
Apr 29, 2009 Renewed  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34Bldg 680 Guiping Rd,  
Caohejing Hi-Tech Park,  
Shanghai 200233, China

NVLAP Lab Code : 200371-0

## 2.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty: U = 1.26 dB  
Radiated Emission Expanded Uncertainty : U = 3.02 dB

### 3 CONDUCTED EMISSION TEST


#### 3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	100841	Oct 15, 2009	Oct 15, 2010
2.	Artificial Mains Network (AMN)	R&S	ESH2-Z5	843890/011	Apr 02, 2010	Apr 02, 2011
3.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-4	Apr 02, 2010	Apr 02, 2011
4.	50 $\Omega$ Coaxial Switch	Anritsu	MP59B	6200426389	Mar 19, 2010	Sep 19, 2010
5.	50 $\Omega$ Terminator	Anritsu	BNC	001	Apr 02, 2010	Apr 02, 2011
6.	Software	Audix	E3	SET00200 9804M592	--	--

#### 3.2 Block Diagram of Test Setup

##### 3.2.1 EUT & Peripherals

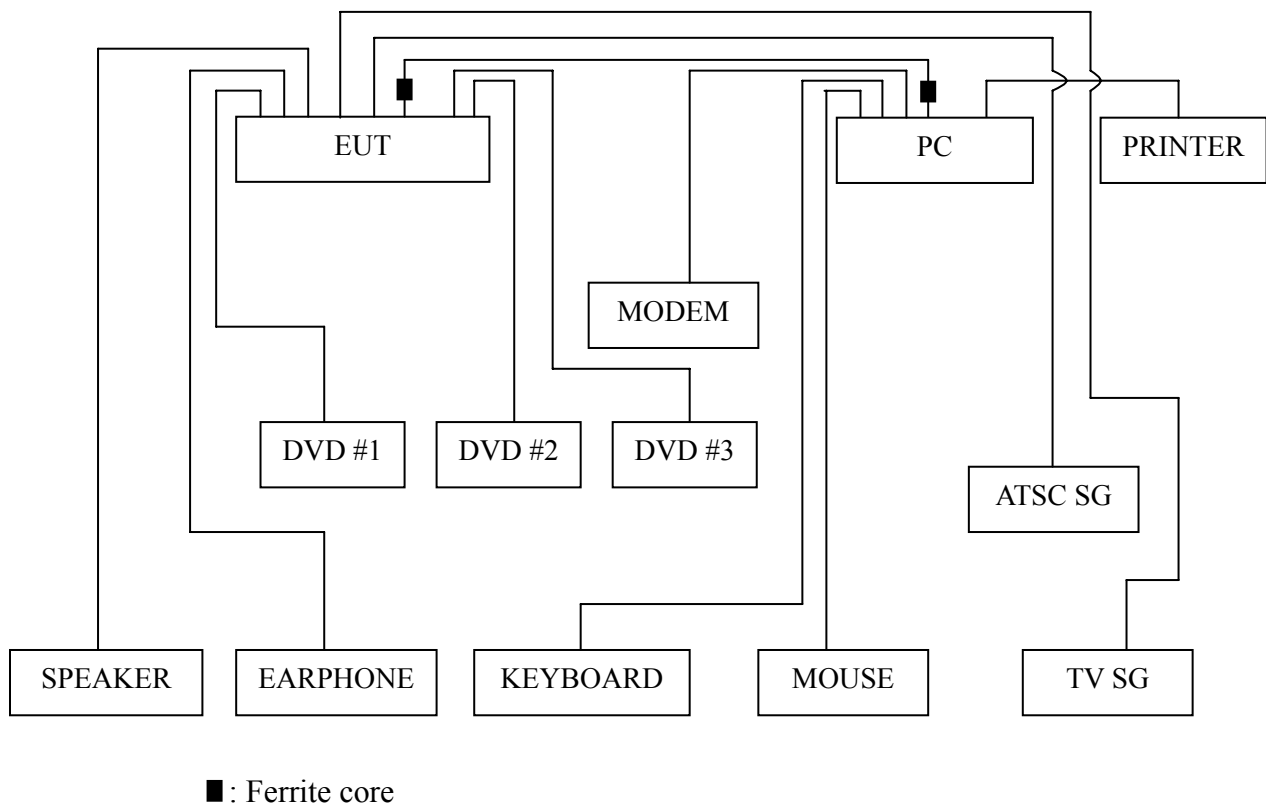

### 3.2.2 Conducted Disturbance Test Setup

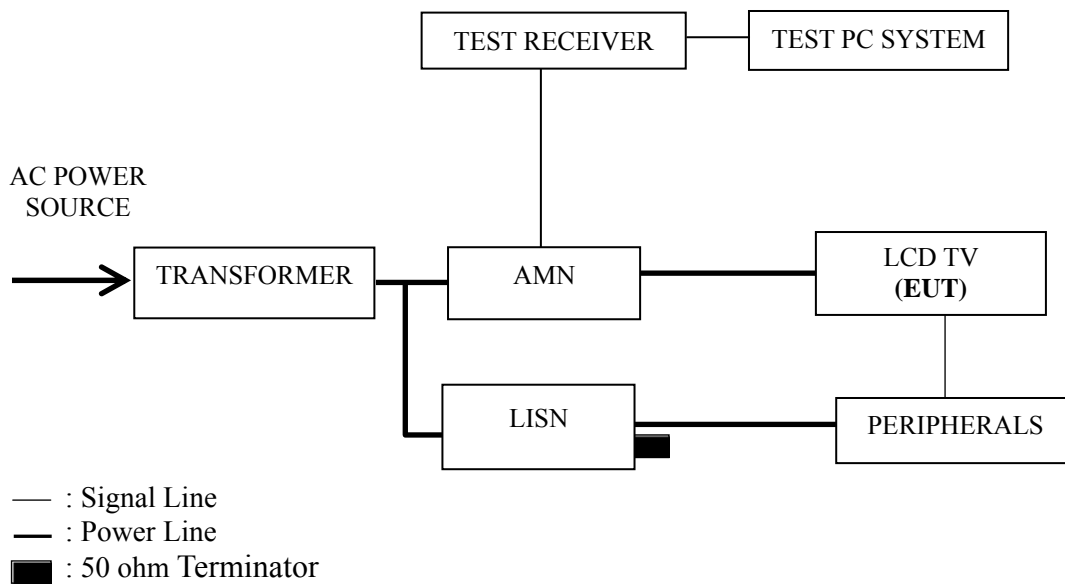

### 3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)]

Frequency Range (MHz)	Limits dB ( $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50
NOTE 1 – The lower limit shall apply at the transition frequencies. NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz		

### 3.4 Test Configuration

The EUT (listed in Sec.2.1) and the peripherals (listed in Sec 2.2) were installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner that tends to maximize its emission level in a normal application.

### 3.5 Operating Condition of EUT

3.5.1 Setup the EUT and peripherals as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipments and the EUT.

3.5.3 Set the contrast & brightness of EUT to maximum.

3.5.4 PC system ran the self-test program “EMC Test” by windows XP and sent “H” characters to EUT through graphic card, the EUT’s screen displayed and filled with “H” pattern by its resolution (Via D-Sub & HDMI Input).

3.5.5 Repeat above procedure from 3.5.3 to 3.5.4 for difference test mode.

3.5.6 The other peripherals devices were driven and operated during the test.

3.5.7 The test modes are as follows:

Test Mode
D-Sub 640*480@60Hz
D-Sub 800*600@60Hz
D-Sub 1024*768@60Hz
HDMI 640*480@60Hz
HDMI 800*600@60Hz
HDMI 1024*768@60Hz
USB Play

### 3.6 Test Procedures

The EUT and peripherals were connected to the power mains through an Artificial Mains Network (AMN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line (Line & Neutral) were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to ANSI C63.4:2003 during conducted emission test.

The bandwidth of R&S Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7.

### 3.7 Test Results

#### < PASS >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

Test Mode	Data Page
D-Sub 640*480@60Hz	P14
D-Sub 800*600@60Hz	P15
D-Sub 1024*768@60Hz	P16
HDMI 640*480@60Hz	P17
HDMI 800*600@60Hz	P18
HDMI 1024*768@60Hz	P19
USB Play	P20

NOTE 1 – Factor = Cable Loss + AMN Factor.

NOTE 2 – Emission Level = Meter Reading + Factor.

NOTE 3 – “QP” means “Quasi-Peak” values, “AV” means “Average” values.

NOTE 4 – The worst case is for HDMI 1024\*768@60Hz test mode. The worst emission is detected at 0.150 MHz (Quasi-Peak) with corrected signal level of 54.66 dB (μV) (limit is 65.99 dB (μV)), when the Neutral of the EUT is connected to AMN.

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 48%RH

Serial No. : E2010062802 Date of Test : Jul 13, 2010

Test Mode : D-Sub 640\*480@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	<b>0.150</b>	<b>53.43</b>	<b>0.37</b>	<b>53.80</b>	<b>65.99</b>	<b>12.19</b>	QP
	0.215	37.44	0.39	37.83	63.01	25.18	
	0.524	22.87	0.52	23.39	56.00	32.61	
	4.672	19.15	0.78	19.93	56.00	36.07	
	8.637	26.63	0.99	27.62	60.00	32.38	
	15.226	29.20	1.27	30.47	60.00	29.53	
	0.150	35.84	0.37	36.21	55.99	19.78	AV
	0.215	21.94	0.39	22.33	53.01	30.68	
	0.524	15.90	0.52	16.42	46.00	29.58	
	4.672	9.24	0.78	10.02	46.00	35.98	
	8.637	14.19	0.99	15.18	50.00	34.82	
	15.226	9.90	1.27	11.17	50.00	38.83	
Neutral	0.150	53.42	0.32	53.74	65.99	12.25	QP
	0.219	37.67	0.32	37.99	62.88	24.89	
	0.524	18.16	0.49	18.65	56.00	37.35	
	4.874	20.86	0.74	21.60	56.00	34.40	
	8.637	27.54	0.95	28.49	60.00	31.51	
	13.267	28.50	1.32	29.82	60.00	30.18	
	0.150	35.02	0.32	35.34	55.99	20.65	AV
	0.219	14.57	0.32	14.89	52.88	37.99	
	0.524	13.58	0.49	14.07	46.00	31.93	
	4.874	11.19	0.74	11.93	46.00	34.07	
	8.637	18.18	0.95	19.13	50.00	30.87	
	13.267	13.51	1.32	14.83	50.00	35.17	

TEST ENGINEER: TED ZHU

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 48%RH

Serial No. : E2010062802 Date of Test : Jul 13, 2010

Test Mode : D-Sub 800\*600@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.150	53.59	0.37	53.96	65.99	12.03	QP
	0.223	38.86	0.40	39.26	62.70	23.44	
	0.524	21.81	0.52	22.33	56.00	33.67	
	4.874	19.46	0.80	20.26	56.00	35.74	
	8.637	29.68	0.99	30.67	60.00	29.33	
	13.267	29.57	1.19	30.76	60.00	29.24	
	0.150	32.12	0.37	32.49	55.99	23.50	AV
	0.223	15.38	0.40	15.78	52.70	36.92	
	0.524	17.90	0.52	18.42	46.00	27.58	
	4.874	7.90	0.80	8.70	46.00	37.30	
	8.637	17.50	0.99	18.49	50.00	31.51	
	13.267	11.47	1.19	12.66	50.00	37.34	
Neutral	<b>0.150</b>	<b>53.84</b>	<b>0.32</b>	<b>54.16</b>	<b>65.99</b>	<b>11.83</b>	QP
	0.226	38.92	0.33	39.25	62.61	23.36	
	0.524	20.21	0.49	20.70	56.00	35.30	
	4.874	21.78	0.74	22.52	56.00	33.48	
	8.637	28.53	0.95	29.48	60.00	30.52	
	13.267	28.47	1.32	29.79	60.00	30.21	
	0.150	31.53	0.32	31.85	55.99	24.14	AV
	0.226	17.91	0.33	18.24	52.61	34.37	
	0.524	14.86	0.49	15.35	46.00	30.65	
	4.874	11.19	0.74	11.93	46.00	34.07	
	8.637	13.90	0.95	14.85	50.00	35.15	
	13.267	10.86	1.32	12.18	50.00	37.82	

TEST ENGINEER: TED ZHU

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 48%RH

Serial No. : E2010062802 Date of Test : Jul 13, 2010

Test Mode : D-Sub 1024\*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.150	54.05	0.37	54.42	65.99	11.57	QP
	0.226	40.01	0.40	40.41	62.61	22.20	
	0.524	22.05	0.52	22.57	56.00	33.43	
	4.874	21.80	0.80	22.60	56.00	33.40	
	8.637	29.44	0.99	30.43	60.00	29.57	
	13.267	31.30	1.19	32.49	60.00	27.51	
	0.150	37.41	0.37	37.78	55.99	18.21	AV
	0.226	18.93	0.40	19.33	52.61	33.28	
	0.524	17.89	0.52	18.41	46.00	27.59	
	4.874	8.25	0.80	9.05	46.00	36.95	
	8.637	18.37	0.99	19.36	50.00	30.64	
	13.267	10.45	1.19	11.64	50.00	38.36	
Neutral	<b>0.150</b>	<b>54.12</b>	<b>0.32</b>	<b>54.44</b>	<b>65.99</b>	<b>11.55</b>	QP
	0.215	38.05	0.31	38.36	63.01	24.65	
	0.524	19.14	0.49	19.63	56.00	36.37	
	4.874	21.00	0.74	21.74	56.00	34.26	
	8.637	28.58	0.95	29.53	60.00	30.47	
	13.267	29.24	1.32	30.56	60.00	29.44	
	0.150	32.35	0.32	32.67	55.99	23.32	AV
	0.215	20.49	0.31	20.80	53.01	32.21	
	0.524	12.53	0.49	13.02	46.00	32.98	
	4.874	12.07	0.74	12.81	46.00	33.19	
	8.637	14.39	0.95	15.34	50.00	34.66	
	13.267	12.30	1.32	13.62	50.00	36.38	

TEST ENGINEER: TED ZHU



EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 48%RH

Serial No. : E2010062802 Date of Test : Jul 13, 2010

Test Mode : HDMI 640\*480@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	<b>0.150</b>	<b>53.59</b>	<b>0.37</b>	<b>53.96</b>	<b>65.99</b>	<b>12.03</b>	QP
	0.226	34.44	0.40	34.84	62.61	27.77	
	0.516	24.57	0.52	25.09	56.00	30.91	
	4.874	17.23	0.80	18.03	56.00	37.97	
	8.637	27.39	0.99	28.38	60.00	31.62	
	15.226	30.00	1.27	31.27	60.00	28.73	
	0.150	32.69	0.37	33.06	55.99	22.93	AV
	0.226	16.95	0.40	17.35	52.61	35.26	
	0.516	17.26	0.52	17.78	46.00	28.22	
	4.874	9.37	0.80	10.17	46.00	35.83	
	8.637	14.69	0.99	15.68	50.00	34.32	
	15.226	15.16	1.27	16.43	50.00	33.57	
Neutral	0.150	53.46	0.32	53.78	65.99	12.21	QP
	0.213	39.50	0.31	39.81	63.10	23.29	
	0.521	18.45	0.49	18.94	56.00	37.06	
	4.874	21.73	0.74	22.47	56.00	33.53	
	8.916	28.10	0.97	29.07	60.00	30.93	
	13.267	30.28	1.32	31.60	60.00	28.40	
	0.150	32.10	0.32	32.42	55.99	23.57	AV
	0.213	25.04	0.31	25.35	53.10	27.75	
	0.521	13.47	0.49	13.96	46.00	32.04	
	4.874	11.08	0.74	11.82	46.00	34.18	
	8.916	15.12	0.97	16.09	50.00	33.91	
	13.267	11.64	1.32	12.96	50.00	37.04	

TEST ENGINEER: TED ZHU

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 48%RH

Serial No. : E2010062802 Date of Test : Jul 13, 2010

Test Mode : HDMI 800\*600@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.150	53.96	0.37	54.33	65.99	11.66	QP
	0.221	38.64	0.40	39.04	62.79	23.75	
	0.516	24.02	0.52	24.54	56.00	31.46	
	4.454	19.68	0.77	20.45	56.00	35.55	
	8.637	28.40	0.99	29.39	60.00	30.61	
	15.226	28.89	1.27	30.16	60.00	29.84	
	0.150	34.42	0.37	34.79	55.99	21.20	AV
	0.221	16.09	0.40	16.49	52.79	36.30	
	0.516	13.70	0.52	14.22	46.00	31.78	
	4.454	9.28	0.77	10.05	46.00	35.95	
	8.637	17.37	0.99	18.36	50.00	31.64	
	15.226	10.82	1.27	12.09	50.00	37.91	
Neutral	<b>0.150</b>	<b>54.28</b>	<b>0.32</b>	<b>54.60</b>	<b>65.99</b>	<b>11.39</b>	QP
	0.216	38.77	0.31	39.08	62.96	23.88	
	0.524	18.20	0.49	18.69	56.00	37.31	
	4.874	19.59	0.74	20.33	56.00	35.67	
	8.916	28.10	0.97	29.07	60.00	30.93	
	15.226	29.02	1.47	30.49	60.00	29.51	
	0.150	33.62	0.32	33.94	55.99	22.05	AV
	0.216	17.43	0.31	17.74	52.96	35.22	
	0.524	12.99	0.49	13.48	46.00	32.52	
	4.874	12.91	0.74	13.65	46.00	32.35	
	8.916	15.57	0.97	16.54	50.00	33.46	
	15.226	9.92	1.47	11.39	50.00	38.61	

TEST ENGINEER: TED ZHU

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 48%RH

Serial No. : E2010062802 Date of Test : Jul 13, 2010

Test Mode : HDMI 1024\*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.150	54.23	0.37	54.60	65.99	11.39	QP
	0.226	38.47	0.40	38.87	62.61	23.74	
	0.524	24.06	0.52	24.58	56.00	31.42	
	1.552	20.83	0.58	21.41	56.00	34.59	
	8.637	27.65	0.99	28.64	60.00	31.36	
	15.226	29.46	1.27	30.73	60.00	29.27	
	0.150	32.47	0.37	32.84	55.99	23.15	AV
	0.226	18.83	0.40	19.23	52.61	33.38	
	0.524	18.00	0.52	18.52	46.00	27.48	
	1.552	7.91	0.58	8.49	46.00	37.51	
	8.637	14.41	0.99	15.40	50.00	34.60	
	15.226	9.90	1.27	11.17	50.00	38.83	
Neutral	<b>0.150</b>	<b>54.34</b>	<b>0.32</b>	<b>54.66</b>	<b>65.99</b>	<b>11.33</b>	QP
	0.226	39.59	0.33	39.92	62.61	22.69	
	0.521	18.63	0.49	19.12	56.00	36.88	
	4.874	19.53	0.74	20.27	56.00	35.73	
	8.637	28.51	0.95	29.46	60.00	30.54	
	13.267	28.13	1.32	29.45	60.00	30.55	
	0.150	35.43	0.32	35.75	55.99	20.24	AV
	0.226	15.87	0.33	16.20	52.61	36.41	
	0.521	13.37	0.49	13.86	46.00	32.14	
	4.874	11.66	0.74	12.40	46.00	33.60	
	8.637	14.42	0.95	15.37	50.00	34.63	
	13.267	11.11	1.32	12.43	50.00	37.57	

TEST ENGINEER: TED ZHU

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 48%RH

Serial No. : E2010062802 Date of Test : Jul 13, 2010

Test Mode : USB Play

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	<b>0.150</b>	<b>53.59</b>	<b>0.37</b>	<b>53.96</b>	<b>65.99</b>	<b>12.03</b>	QP
	0.226	34.44	0.40	34.84	62.61	27.77	
	0.516	24.57	0.52	25.09	56.00	30.91	
	4.874	17.23	0.80	18.03	56.00	37.97	
	8.637	27.39	0.99	28.38	60.00	31.62	
	15.226	30.00	1.27	31.27	60.00	28.73	
	0.150	32.69	0.37	33.06	55.99	22.93	AV
	0.226	16.95	0.40	17.35	52.61	35.26	
	0.516	17.26	0.52	17.78	46.00	28.22	
	4.874	9.37	0.80	10.17	46.00	35.83	
	8.637	14.69	0.99	15.68	50.00	34.32	
	15.226	15.16	1.27	16.43	50.00	33.57	
Neutral	0.150	53.46	0.32	53.78	65.99	12.21	QP
	0.213	39.50	0.31	39.81	63.10	23.29	
	0.521	18.45	0.49	18.94	56.00	37.06	
	4.874	21.73	0.74	22.47	56.00	33.53	
	8.916	28.10	0.97	29.07	60.00	30.93	
	13.267	30.28	1.32	31.60	60.00	28.40	
	0.150	32.10	0.32	32.42	55.99	23.57	AV
	0.213	25.04	0.31	25.35	53.10	27.75	
	0.521	13.47	0.49	13.96	46.00	32.04	
	4.874	11.08	0.74	11.82	46.00	34.18	
	8.916	15.12	0.97	16.09	50.00	33.91	
	13.267	11.64	1.32	12.96	50.00	37.04	

TEST ENGINEER: TED ZHU

## 4 RADIATED EMISSION TEST


### 4.1 Test Equipment

The following test equipments are used during the radiated emission test in a semi-anechoic chamber:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESVS10	844594/001	Mar 07, 2010	Mar 07, 2011
2.	Preamplifier	Agilent	8447D	2944A10548	Mar 19, 2010	Sep 19, 2010
3.	Bi-log Antenna	TESEQ	CBL6112D	23192	Dec 01, 2009	Dec 01, 2010
4.	Spectrum Analyzer	Agilent	E7405A	MY45106600	May 19, 2010	May 19, 2011
5.	Software	Audix	E3	SET00200 9912M295-2	--	--


### 4.2 Block Diagram of Test Setup

#### 4.2.1 EUT and Peripherals

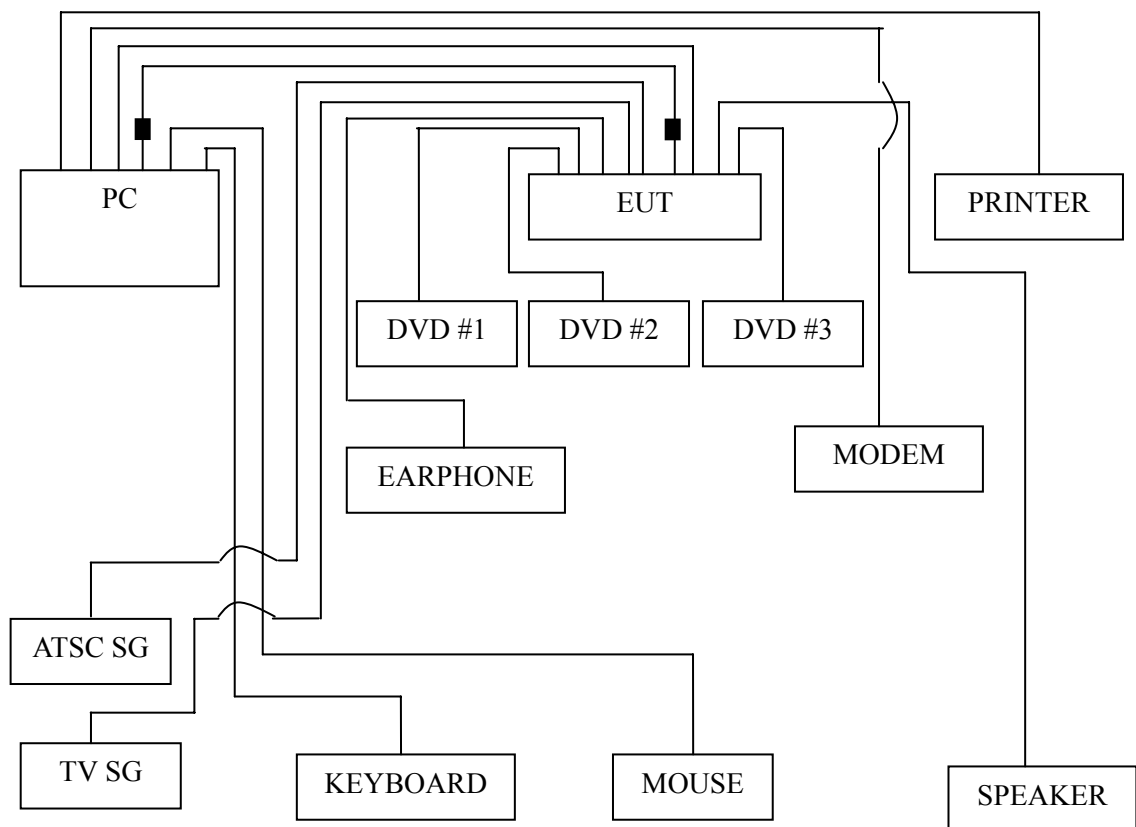

■: Ferrite core

#### 4.2.2 Radiated emission test setup

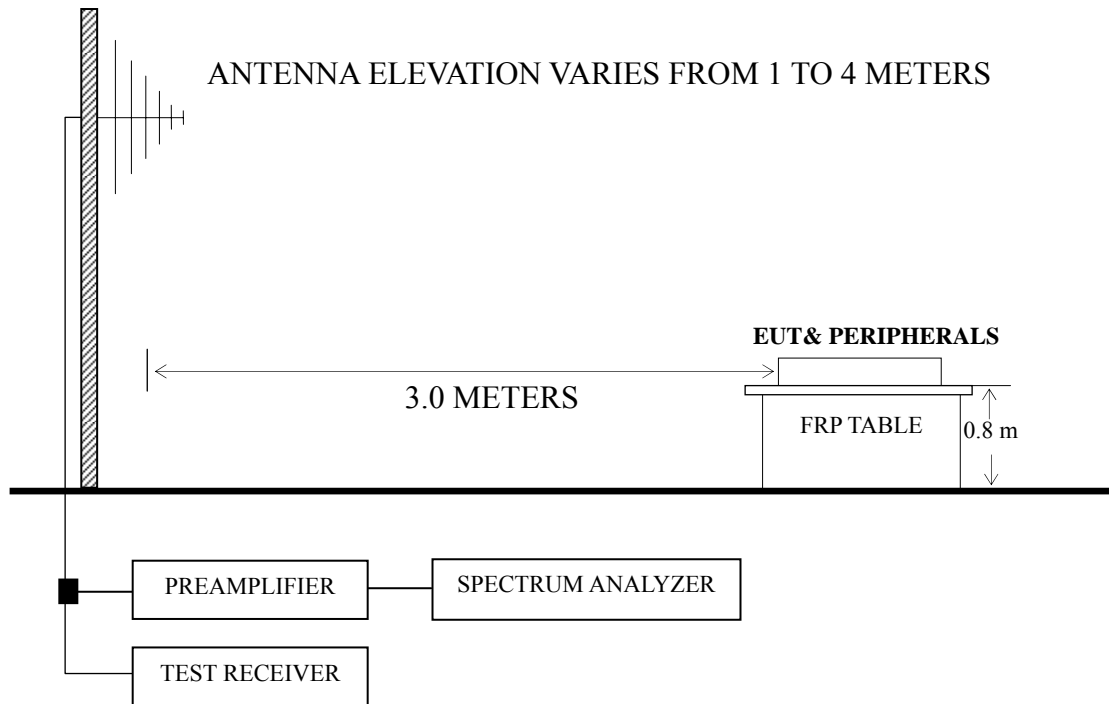

■ : 50 ohm Coaxial Switch

#### 4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)]

Frequency (MHz)	Distance (m)	Field strength limits	
		( $\mu\text{V/m}$ )	dB ( $\mu\text{V/m}$ )
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB ( $\mu\text{V/m}$ ) = 20 log Emission Level ( $\mu\text{V/m}$ )

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - The limits shown are based on Quasi-peak value detector.

#### 4.4 Test Configuration

The configuration of the EUT and peripherals are same as those used in conducted emission test.

Please refer to Sec.3.4.

#### 4.5 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.3.5, except for the test setup replaced by Sec.4.2.

## 4.6 Test Procedures

The EUT and peripherals were placed on a FRP turntable that is 0.8 meter above ground. The FRP turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4:2003 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz.

The frequency range from 30 MHz to 1000MHz was checked for all test modes.

The test modes were done on radiated disturbance test and all the test results are listed in Sec.4.7.

## 4.7 Test Results

**<PASS>**

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Test Mode	Data Page
D-Sub 640*480@60Hz	P24
D-Sub 800*600@60Hz	P25
D-Sub 1024*768@60Hz	P26
HDMI 640*480@60Hz	P27
HDMI 800*600@60Hz	P28
HDMI 1024*768@60Hz	P29
USB Play	P30

NOTE 1 – Emission Level = Antenna Factor + Cable Loss + Meter Reading.

NOTE 2 – The emission levels that are 20dB below the official limit are not reported.

NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 4 – The worst case is for D-Sub 1024\*768@60Hz test mode. The worst emission at horizontal polarization was detected at 87.230 MHz with corrected signal level of 34.18dB (μV/m) (limit is 40.00dB (μV/m)), when the antenna was 1.00 m height and the turntable was at 130°. The worst emission at vertical polarization was detected at 87.230 MHz with corrected signal level of 36.55 dB (μV/m) (limit is 40.00 dB (μV/m)), when the antenna was 1.00 m height and the turntable was at 340°.

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 60%RH

Serial No. : E2010062802 Date of Test : Jun 28, 2010

Test Mode : D-Sub 640\*480@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	43.580	12.75	11.88	0.74	25.37	40.00	14.63
	80.440	26.33	7.85	0.95	35.13	40.00	4.87
	109.540	26.14	12.25	1.08	39.47	43.50	4.03
	174.530	25.55	10.07	1.35	36.97	43.50	6.53
	305.480	21.56	14.07	1.78	37.41	46.00	8.59
	<b>638.190</b>	<b>20.37</b>	<b>19.39</b>	<b>2.54</b>	<b>42.30</b>	<b>46.00</b>	<b>3.70</b>
Vertical	36.790	14.47	15.80	0.69	30.96	40.00	9.04
	87.230	25.11	8.96	0.98	35.05	40.00	4.95
	<b>174.530</b>	<b>28.19</b>	<b>10.07</b>	<b>1.35</b>	<b>39.61</b>	<b>43.50</b>	<b>3.89</b>
	284.140	18.15	13.62	1.72	33.49	46.00	12.51
	412.180	15.51	16.67	2.09	34.27	46.00	11.73
	601.330	19.20	19.21	2.46	40.87	46.00	5.13

TEST ENGINEER: RAVEN JIN



EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 60%RH

Serial No. : E2010062802 Date of Test : Jun 28, 2010

Test Mode : D-Sub 800\*600@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	33.880	10.41	17.44	0.67	28.52	40.00	11.48
	87.230	23.68	8.96	0.98	33.62	40.00	6.38
	<b>153.190</b>	<b>25.50</b>	<b>11.04</b>	<b>1.25</b>	<b>37.79</b>	<b>43.50</b>	<b>5.71</b>
	305.480	14.49	14.07	1.78	30.34	46.00	15.66
	601.330	9.42	19.21	2.46	31.09	46.00	14.91
	911.730	10.00	21.78	3.04	34.82	46.00	11.18
Vertical	87.230	25.25	8.96	0.98	35.19	40.00	4.81
	<b>145.430</b>	<b>25.89</b>	<b>11.66</b>	<b>1.23</b>	<b>38.78</b>	<b>43.50</b>	<b>4.72</b>
	303.540	15.91	14.00	1.78	31.69	46.00	14.31
	368.530	14.45	15.81	1.98	32.24	46.00	13.76
	601.330	14.82	19.21	2.46	36.49	46.00	9.51
	870.990	9.39	21.42	2.98	33.79	46.00	12.21

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 60%RH

Serial No. : E2010062802 Date of Test : Jun 28, 2010

Test Mode : D-Sub 1024\*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	58.130	19.56	6.96	0.83	27.35	40.00	12.65
	<b>87.230</b>	<b>24.24</b>	<b>8.96</b>	<b>0.98</b>	<b>34.18</b>	<b>40.00</b>	<b>5.82</b>
	174.530	22.14	10.07	1.35	33.56	43.50	9.94
	305.480	20.70	14.07	1.78	36.55	46.00	9.45
	412.180	17.68	16.67	2.09	36.44	46.00	9.56
	647.890	14.78	19.45	2.57	36.80	46.00	9.20
Vertical	30.970	15.62	19.03	0.64	35.29	40.00	4.71
	<b>87.230</b>	<b>26.61</b>	<b>8.96</b>	<b>0.98</b>	<b>36.55</b>	<b>40.00</b>	<b>3.45</b>
	155.130	23.73	10.89	1.26	35.88	43.50	7.62
	305.480	21.21	14.07	1.78	37.06	46.00	8.94
	601.330	16.10	19.21	2.46	37.77	46.00	8.23
	875.840	10.67	21.46	3.00	35.13	46.00	10.87

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 60%RH

Serial No. : E2010062802 Date of Test : Jun 28, 2010

Test Mode : HDMI 640\*480@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	<b>30.970</b>	<b>15.47</b>	<b>19.03</b>	<b>0.64</b>	<b>35.14</b>	<b>40.00</b>	<b>4.86</b>
	85.290	22.12	8.66	0.97	31.75	40.00	8.25
	150.280	17.98	11.25	1.24	30.47	43.50	13.03
	303.540	13.63	14.00	1.78	29.41	46.00	16.59
	601.330	11.81	19.21	2.46	33.48	46.00	12.52
	863.230	10.94	21.35	2.98	35.27	46.00	10.73
Vertical	36.790	5.82	15.80	0.69	22.31	40.00	17.69
	85.290	19.90	8.66	0.97	29.53	40.00	10.47
	167.740	23.41	10.27	1.32	35.00	43.50	8.50
	298.690	19.46	13.88	1.76	35.10	46.00	10.90
	405.390	14.62	16.57	2.08	33.27	46.00	12.73
	<b>647.890</b>	<b>15.93</b>	<b>19.45</b>	<b>2.57</b>	<b>37.95</b>	<b>46.00</b>	<b>8.05</b>

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 60%RH

Serial No. : E2010062802 Date of Test : Jun 28, 2010

Test Mode : HDMI 800\*600@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	<b>31.940</b>	<b>16.19</b>	<b>18.49</b>	<b>0.65</b>	<b>35.33</b>	<b>40.00</b>	<b>4.67</b>
	94.990	22.33	10.45	1.02	33.80	43.50	9.70
	189.080	18.77	10.24	1.41	30.42	43.50	13.08
	334.580	15.24	14.86	1.87	31.97	46.00	14.03
	681.840	16.13	19.62	2.63	38.38	46.00	7.62
	863.230	10.48	21.35	2.98	34.81	46.00	11.19
Vertical	67.830	18.75	6.52	0.88	26.15	40.00	13.85
	153.190	21.26	11.04	1.25	33.55	43.50	9.95
	298.690	17.46	13.88	1.76	33.10	46.00	12.90
	405.390	14.62	16.57	2.08	33.27	46.00	12.73
	647.890	13.93	19.45	2.57	35.95	46.00	10.05
	<b>863.230</b>	<b>12.13</b>	<b>21.35</b>	<b>2.98</b>	<b>36.46</b>	<b>46.00</b>	<b>9.54</b>

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 60%RH

Serial No. : E2010062802 Date of Test : Jun 28, 2010

Test Mode : HDMI 1024\*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	<b>31.940</b>	<b>16.56</b>	<b>18.49</b>	<b>0.65</b>	<b>35.70</b>	<b>40.00</b>	<b>4.30</b>
	94.990	22.77	10.45	1.02	34.24	43.50	9.26
	223.030	18.56	11.80	1.52	31.88	46.00	14.12
	308.390	16.93	14.14	1.80	32.87	46.00	13.13
	601.330	16.22	19.21	2.46	37.89	46.00	8.11
	809.880	11.37	20.80	2.90	35.07	46.00	10.93
Vertical	67.830	22.61	6.52	0.88	30.01	40.00	9.99
	94.990	22.23	10.45	1.02	33.70	43.50	9.80
	148.340	20.70	11.41	1.23	33.34	43.50	10.16
	293.840	19.05	13.79	1.74	34.58	46.00	11.42
	<b>601.330</b>	<b>16.79</b>	<b>19.21</b>	<b>2.46</b>	<b>38.46</b>	<b>46.00</b>	<b>7.54</b>
	972.840	10.90	22.22	4.01	37.13	54.00	16.87

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LHDN32V88MH Humidity : 60%RH

Serial No. : E2010062802 Date of Test : Jun 28, 2010

Test Mode : USB Play

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	87.230	25.34	8.96	0.99	35.29	40.00	4.71
	152.220	23.80	11.09	1.24	36.13	43.50	7.37
	217.210	21.50	11.48	1.50	34.48	46.00	11.52
	<b>550.890</b>	<b>20.53</b>	<b>18.58</b>	<b>2.37</b>	<b>41.48</b>	<b>46.00</b>	<b>4.52</b>
	701.240	18.88	19.70	2.68	41.26	46.00	4.74
	979.630	13.38	22.27	3.15	38.80	54.00	15.20
Vertical	34.850	14.98	16.97	0.66	32.61	40.00	7.39
	104.690	23.43	11.88	1.07	36.38	43.50	7.12
	210.420	22.25	11.18	1.46	34.89	43.50	8.61
	<b>582.900</b>	<b>20.98</b>	<b>19.00</b>	<b>2.44</b>	<b>42.42</b>	<b>46.00</b>	<b>3.58</b>
	689.600	19.54	19.65	2.66	41.85	46.00	4.15
	787.570	17.94	20.58	2.86	41.38	46.00	4.62

TEST ENGINEER: RAVEN JIN

## **5 DEVIATION TO TEST SPECIFICATIONS**

None.


## 6 DEBUG DESCRIPTION

The following components are used during the countermeasure procedures:

Name	M/N	Manufacturer	Location
Ferrite core	ZCAT3035-1330\ROH	FEELUX	See Internal photo Figure 20
		Rui Feng Electronic Co., Ltd.	
		Hai An Magnetic Material No.2 Factory	
Ferrite core	ZCAT2132-1130\ROH	FEELUX	See Internal photo Figure 19
		Rui Feng Electronic Co., Ltd.	
		Hai An Magnetic Material No.2 Factory	
Gasket	35X0.7X41mm\VGA\ROH	Qingdao Joinset S&T Co., Ltd.	See Internal photo Figure 18

Note: We had required the applicant and manufacturer that all electrical and mechanical devices employed for spurious radiation suppression, including any modifications made during certification testing, must be incorporated in each unit marked

TEST ENGINEER:



(RAVEN JIN)