

Application for FCC Certificate
On Behalf of
Hisense Electric Co., Ltd.

LCD TV

Model No.	Serial No.	Brand
LTDN42V77US	E1105388-01/01	Hisense
F42V77C	--	

FCC ID : W9HLCDD0007

Prepared For : Hisense Electric Co., Ltd.
No.218 Qianwangang Road, Economy & Technology
Development Zone, Qingdao, China

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500
Fax: +86-21-64955491

Report No. : ACI-F11082
Date of Test : May 19 – 27, 2011
Date of Report : Jun 15, 2011

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS.....	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION.....	5
2.1 Description of Equipment Under Test.....	5
2.2 Peripherals.....	7
2.3 Description of Test Facility.....	8
2.4 Measurement Uncertainty.....	8
3 CONDUCTED EMISSION TEST.....	9
3.1 Test Equipment.....	9
3.2 Block Diagram of Test Setup.....	9
3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)].....	10
3.4 Test Configuration.....	10
3.5 Operating Condition of EUT.....	11
3.6 Test Procedures.....	11
3.7 Test Results.....	12
4 RADIATED EMISSION TEST.....	19
4.1 Test Equipment.....	19
4.2 Block Diagram of Test Setup.....	19
4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)].....	20
4.4 Test Configuration.....	20
4.5 Operating Condition of EUT.....	20
4.6 Test Procedures.....	21
4.7 Test Results.....	22
5 DEVIATION TO TEST SPECIFICATIONS.....	29
6 DEBUG DESCRIPTION.....	30

TEST REPORT FOR FCC CERTIFICATE

Applicant : Hisense Electric Co., Ltd.

Manufacturer : Hisense Electric Co., Ltd.

EUT Description : LCD TV

Model No.	Serial No.	Brand	Power Supply
LTDN42V77US	E1105388-01/01	Hisense	120V/60Hz
F42V77C	--		

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 2010
AND ANSI C63.4-2003*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B (Class B) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report shows that the EUT (M/N: Refer to Sec.2.1; S/N: Refer to Sec.2.1) which was tested in 3m anechoic chamber May 19 – 27, 2011 is technically compliance with the FCC official limits also.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report contains data that are not covered by the NVLAP accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

The test results for EUT's TV functions are contained in No.F11081, a Verification report.

Date of Test : May 19 – 27, 2011 Date of Report : Jun 15, 2011

Producer : Yenny Yu.
YENNY YU/AssistantReview : Dio Yang.
DIO YANG/ Deputy Assistant Manager

AUDIX® For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory : Samy Chen
Authorized Signature EMC SAMMY CHEN / Deputy Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description of Test Item	Standard	Limits	Results
EMISSION			
Conducted Disturbance at the Mains Terminal	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2010 AND ANSI C63.4-2003	15.107(a) Class B	Pass
Radiated Disturbance	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2010 AND ANSI C63.4-2003	15.109(a) Class B	Pass

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description	:	LCD TV	
Type of EUT	:	<input checked="" type="checkbox"/> Production <input type="checkbox"/> Pre-product <input type="checkbox"/> Pro-type	
Model No.	:	LTDN42V77US	F42V77C
Serial No.	:	E1105388-01/01	--
Brand	:	Hisense	
Note	:	The above models are all the same except for the model name. The LTDN42V77US was tested and recorded in the report.	
Applicant	:	Hisense Electric Co., Ltd. No.218 Qianwangang Road, Economy & Technology Development Zone, Qingdao, China	
Manufacturer	:	Hisense Electric Co., Ltd. No.218 Qianwangang Road, Economy & Technology Development Zone, Qingdao, China	
LCD Panel	:	Manufacturer	: LG Display M/N : LC420WUE (SC) (V1)
Tuner	:	Manufacturer	: XuGuang Tech. Co., Ltd. M/N : DVT-8C/W41F2\ROH
Max Resolution	:	1024*768@60Hz	
D-Sub Cable	:	Shielded, Detachable, 1.85m, with two cores on cable	
HDMI Cable	:	Shielded, Detachable, 1.00m,	
Power Cord	:	Unshielded, Detachable, 1.80m	

Remark:

The EUT is a LCD TV which input/output ports as follows:

Back Port:

- (1) One HDMI2 Port : Connected with DVD #1
- (2) One HDMI3 Port : Connected with DVD #2
- (3) One DIGITAL AUDIO OUT Port : Connected with DVD #1
- (4) One VGA Port : Connected with PC
- (5) One PC AUDIO Port : Connected with PC

Side Port

- (1) One component of YPbPr Port : Connected with DVD #1
- (2) One component of YPbPr Audio Port : Connected with DVD #1
- (3) One component of AV Port : Connected with DVD #1
- (4) One ANT Port : Connected with TV SG
- (5) One Earphone Port : Connected with Earphone
- (6) One USB port : Do not open to customer
- (7) One HDMI1 Port : Connected with PC

2.2 Peripherals

2.2.1 PC

Manufacturer : HP
Model Number : dx7200MT
Serial Number : CNG8130K89
Power Cord : Unshielded, Detachable, 1.8m
Certificate : FCC DoC; CE/EMC; VCCI; C-Tick; UL
BSMI (R33001) 3C (A000111)
MIC (E-A011-04-2659(B))

2.2.2 Printer

Manufacturer : HP
Model Number : C3990A
Serial Number : JPZX020487
Data Cable : Shielded, detachable, 1.5m
Certificate : GS, CE/EMC, C-Tick, FCC DoC

2.2.3 Keyboard

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 7668200662248
Data Cable : Shielded, undetachable, 1.8m
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,
BSMI

2.2.4 Mouse

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 6965712071551
Data Cable : Shielded, undetachable, 1.8m.
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,
BSMI

2.2.5 Modem

Manufacturer : TP Link
Model Number : TM-EC5658V
Serial Number : 07123301053
Data Cable : Shielded, undetachable, 1.8m.
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,
BSMI

2.2.6 Earphone

Manufacturer : SONY
Model Number : MDR-E808
Serial Number : 1808030805305506

2.2.7 TV Signal Generator

Manufacturer : FLUKE
Model Number : 54200m01
Serial Number : 814008
Data Cable : Shielded, detachable, 2.0m
Power Cord : Unshielded, detachable, 2.0m
Certificate : CE/EMC, FCC DoC, CCC

2.2.8 ATSC Signal Generator

Manufacturer : SENCORE
Model Number : ATSC997
Serial Number : 6790071

2.2.9 DVD #1

Manufacturer : PHILIPS
Model Number : DVP3986K/93
Serial Number : KX1A0902120108
Certificate : FCC DoC, CE/EMC, CCC

2.2.10 DVD #2

Manufacturer : LG
Model Number : DF9921N
Serial Number : 3850R-M846W
Certificate : FCC DoC, CE/EMC, CCC

2.3 Description of Test Facility

Site Description : Sept. 17, 1998 file on
(No.3 3m Chamber) Apr 29, 2009 Renewed
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

NVLAP Lab Code : 200371-0

2.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty: U = 3.38dB
Radiated Emission Expanded Uncertainty (30-200MHz):
U = 4.58 dB (horizontal)
U = 4.70 dB (vertical)
Radiated Emission Expanded Uncertainty (200M-1GHz):
U = 4.84 dB (horizontal)
U = 4.70 dB (vertical)

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	100841	Mar 22, 2011	Mar 22, 2012
2.	Artificial Mains Network (AMN #1)	R&S	ESH2-Z5	843890/011	Mar 22, 2011	Mar 22, 2012
3.	Artificial Mains Network (AMN #2)	R&S	ENV4200	100125	Mar 22, 2011	Mar 22, 2012
4.	50 Ω Coaxial Switch	Anritsu	MP59B	6200426389	Mar 18, 2011	Sep 18, 2011
5.	50 Ω Terminator	Anritsu	BNC	001	Mar 22, 2011	Mar 22, 2012
6.	Software	Audix	E3	SET00200 9804M592	--	--

3.2 Block Diagram of Test Setup

3.2.1 EUT & Peripherals

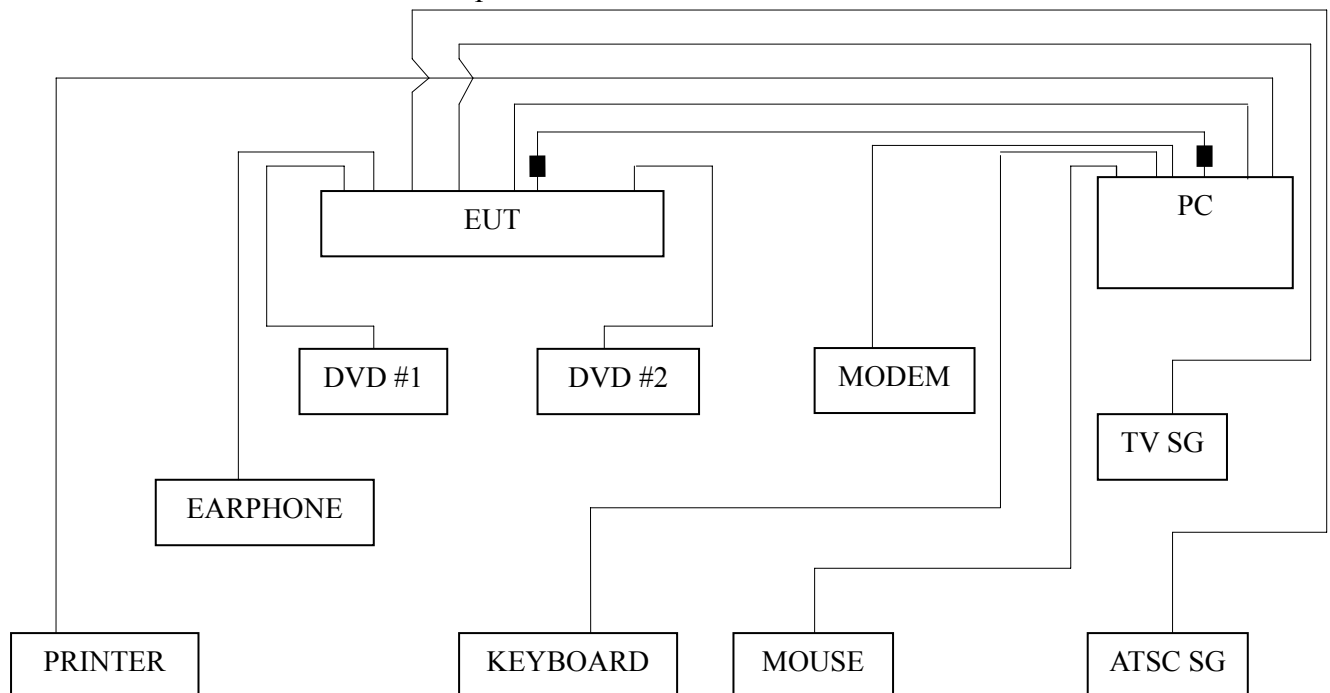

3.2.2 Conducted Disturbance Test Setup

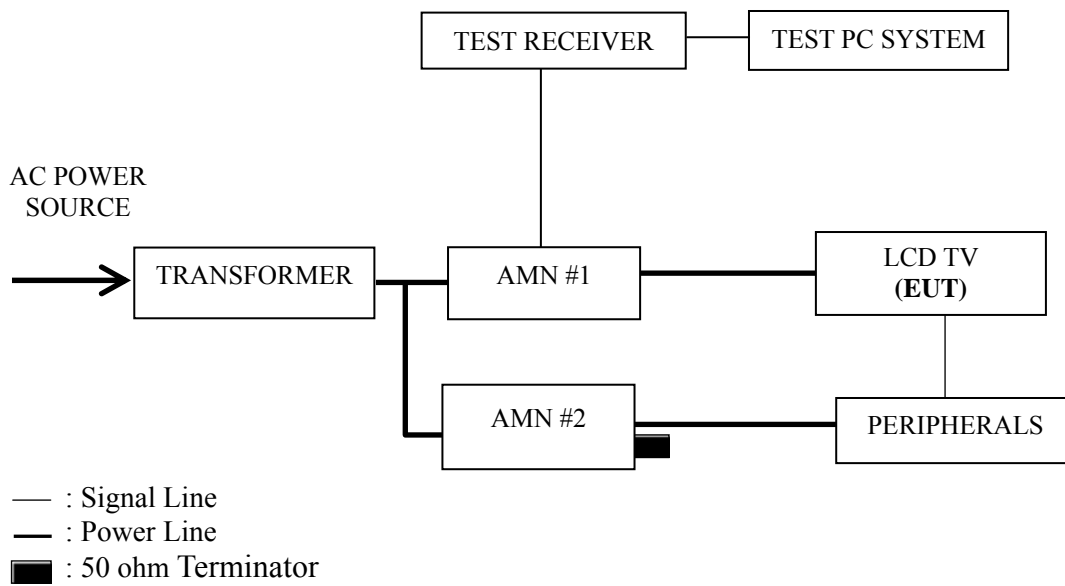

3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)]

Frequency Range (MHz)	Limits dB (μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50
NOTE 1 – The lower limit shall apply at the transition frequencies. NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz		

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the peripherals (listed in Sec 2.2) were installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT and peripherals as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipments and the EUT.

3.5.3 Set the contrast & brightness of EUT to maximum.

3.5.4 PC system ran the self-test program “EMC Test” by windows XP and sent “H” characters to EUT through graphic card, the EUT’s screen displayed and filled with “H” pattern by its resolution (Via D-Sub & HDMI Input).

3.5.5 Repeat above procedure 3.5.4 for difference test mode.

3.5.6 The other peripherals devices were driven and operated during the test.

3.5.7 The test modes are as follows:

Test Mode
D-Sub 640*480@60Hz
D-Sub 800*600@60Hz
D-Sub 1024*768@60Hz
HDMI 640*480@60Hz
HDMI 800*600@60Hz
HDMI 1024*768@60Hz

3.6 Test Procedures

The EUT and peripherals were connected to the power mains through an Artificial Mains Network (AMN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line (Line & Neutral) were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to ANSI C63.4:2003 during conducted emission test.

The bandwidth of R&S Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7.

3.7 Test Results

< PASS >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

Test Mode	Data Page
D-Sub 640*480@60Hz	P13
D-Sub 800*600@60Hz	P14
D-Sub 1024*768@60Hz	P15
HDMI 640*480@60Hz	P16
HDMI 800*600@60Hz	P17
HDMI 1024*768@60Hz	P18

NOTE 1 – Factor = Cable Loss + AMN Factor.

NOTE 2 – Emission Level = Meter Reading + Factor.

NOTE 3 – “QP” means “Quasi-Peak” values, “AV” means “Average” values.

NOTE 4 – The worst case is for D-Sub 640*480@60Hz test mode. The worst emission is detected at 22.535 MHz (Quasi-Peak value) with corrected signal level of 47.56 dB (μV) (limit is 60.00 dB (μV)), when the Line of the EUT is connected to AMN.

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 48%RH

Serial No. : E1105388-01/01 Date of Test : May 19, 2011

Test Mode : D-Sub 640*480@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.182	42.83	0.38	43.21	64.42	21.21	QP
	0.393	38.22	0.48	38.70	57.99	19.29	
	0.546	40.40	0.52	40.92	56.00	15.08	
	1.433	40.61	0.57	41.18	56.00	14.82	
	15.388	38.37	1.28	39.65	60.00	20.35	
	22.535	45.84	1.72	47.56	60.00	12.44	
	0.182	32.50	0.38	32.88	54.42	21.54	AV
	0.393	28.10	0.48	28.58	47.99	19.41	
	0.546	30.20	0.52	30.72	46.00	15.28	
	1.433	30.20	0.57	30.77	46.00	15.23	
	15.388	28.10	1.28	29.38	50.00	20.62	
	22.535	35.49	1.72	37.21	50.00	12.79	
Neutral	0.180	43.55	0.31	43.86	64.50	20.64	QP
	0.356	40.07	0.42	40.49	58.83	18.34	
	0.541	40.91	0.49	41.40	56.00	14.60	
	1.433	42.17	0.54	42.71	56.00	13.29	
	15.388	38.64	1.48	40.12	60.00	19.88	
	22.298	44.71	1.81	46.52	60.00	13.48	
	0.180	33.20	0.31	33.51	54.50	20.99	AV
	0.356	30.00	0.42	30.42	48.83	18.41	
	0.541	30.60	0.49	31.09	46.00	14.91	
	1.433	31.80	0.54	32.34	46.00	13.66	
	15.388	28.51	1.48	29.99	50.00	20.01	
	22.298	34.31	1.81	36.12	50.00	13.88	

TEST ENGINEER: WENCY YANG

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 48%RH

Serial No. : E1105388-01/01 Date of Test : May 19, 2011

Test Mode : D-Sub 800*600@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.183	43.00	0.38	43.38	64.33	20.95	QP
	0.356	38.02	0.46	38.48	58.83	20.35	
	0.546	40.79	0.52	41.31	56.00	14.69	
	1.433	40.77	0.57	41.34	56.00	14.66	
	15.388	39.07	1.28	40.35	60.00	19.65	
	22.063	45.12	1.70	46.82	60.00	13.18	
	0.183	32.50	0.38	32.88	54.33	21.45	AV
	0.356	27.81	0.46	28.27	48.83	20.56	
	0.546	30.20	0.52	30.72	46.00	15.28	
	1.433	30.30	0.57	30.87	46.00	15.13	
	15.388	28.20	1.28	29.48	50.00	20.52	
	22.063	34.80	1.70	36.50	50.00	13.50	
Neutral	0.182	43.86	0.31	44.17	64.42	20.25	QP
	0.363	39.70	0.43	40.13	58.65	18.52	
	0.541	40.90	0.49	41.39	56.00	14.61	
	1.433	41.21	0.54	41.75	56.00	14.25	
	15.388	38.35	1.48	39.83	60.00	20.17	
	22.655	44.40	1.83	46.23	60.00	13.77	
	0.182	32.80	0.31	33.11	54.42	21.31	AV
	0.363	29.59	0.43	30.02	48.65	18.63	
	0.541	30.60	0.49	31.09	46.00	14.91	
	1.433	31.20	0.54	31.74	46.00	14.26	
	15.388	28.11	1.48	29.59	50.00	20.41	
	22.655	34.29	1.83	36.12	50.00	13.88	

TEST ENGINEER: WENCY YANG

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 48%RH

Serial No. : E1105388-01/01 Date of Test : May 19, 2011

Test Mode : D-Sub 1024*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.184	42.86	0.38	43.24	64.28	21.04	QP
	0.352	37.75	0.46	38.21	58.91	20.70	
	0.546	39.88	0.52	40.40	56.00	15.60	
	1.433	40.48	0.57	41.05	56.00	14.95	
	15.146	38.36	1.26	39.62	60.00	20.38	
	22.535	44.77	1.72	46.49	60.00	13.51	
	0.184	32.10	0.38	32.48	54.28	21.80	AV
	0.352	27.40	0.46	27.86	48.91	21.05	
	0.546	29.60	0.52	30.12	46.00	15.88	
	1.433	30.10	0.57	30.67	46.00	15.33	
	15.146	28.20	1.26	29.46	50.00	20.54	
	22.535	34.29	1.72	36.01	50.00	13.99	
Neutral	0.180	43.76	0.31	44.07	64.50	20.43	QP
	0.352	40.66	0.41	41.07	58.91	17.84	
	0.546	40.08	0.49	40.57	56.00	15.43	
	1.236	42.08	0.52	42.60	56.00	13.40	
	14.986	38.81	1.46	40.27	60.00	19.73	
	23.387	43.74	1.84	45.58	60.00	14.42	
	0.180	33.20	0.31	33.51	54.50	20.99	AV
	0.352	30.11	0.41	30.52	48.91	18.39	
	0.546	29.80	0.49	30.29	46.00	15.71	
	1.236	32.11	0.52	32.63	46.00	13.37	
	14.986	28.60	1.46	30.06	50.00	19.94	
	23.387	33.30	1.84	35.14	50.00	14.86	

TEST ENGINEER: WENCY YANG

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 48%RH

Serial No. : E1105388-01/01 Date of Test : May 19, 2011

Test Mode : HDMI 640*480@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.180	42.99	0.38	43.37	64.50	21.13	QP
	0.348	38.32	0.46	38.78	59.00	20.22	
	0.546	41.05	0.52	41.57	56.00	14.43	
	1.236	39.70	0.55	40.25	56.00	15.75	
	14.986	39.27	1.25	40.52	60.00	19.48	
	21.830	43.79	1.69	45.48	60.00	14.52	
	0.180	32.60	0.38	32.98	54.50	21.52	AV
	0.348	28.20	0.46	28.66	49.00	20.34	
	0.546	31.00	0.52	31.52	46.00	14.48	
	1.236	29.51	0.55	30.06	46.00	15.94	
	14.986	29.10	1.25	30.35	50.00	19.65	
	21.830	33.30	1.69	34.99	50.00	15.01	
Neutral	0.182	43.31	0.31	43.62	64.42	20.80	QP
	0.346	40.89	0.41	41.30	59.05	17.75	
	0.546	40.44	0.49	40.93	56.00	15.07	
	1.535	41.32	0.54	41.86	56.00	14.14	
	14.986	40.88	1.46	42.34	60.00	17.66	
	22.063	43.06	1.81	44.87	60.00	15.13	
	0.182	33.30	0.31	33.61	54.42	20.81	AV
	0.346	30.60	0.41	31.01	49.05	18.04	
	0.546	30.20	0.49	30.69	46.00	15.31	
	1.535	31.11	0.54	31.65	46.00	14.35	
	14.986	30.10	1.46	31.56	50.00	18.44	
	22.063	32.90	1.81	34.71	50.00	15.29	

TEST ENGINEER: WENCY YANG

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 48%RH

Serial No. : E1105388-01/01 Date of Test : May 19, 2011

Test Mode : HDMI 800*600@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.180	43.22	0.38	43.60	64.50	20.90	QP
	0.348	39.40	0.46	39.86	59.00	19.14	
	0.546	40.46	0.52	40.98	56.00	15.02	
	3.025	40.03	0.70	40.73	56.00	15.27	
	14.986	39.41	1.25	40.66	60.00	19.34	
	22.655	43.52	1.72	45.24	60.00	14.76	
	0.180	33.30	0.38	33.68	54.50	20.82	AV
	0.348	29.80	0.46	30.26	49.00	18.74	
	0.546	30.00	0.52	30.52	46.00	15.48	
	3.025	30.00	0.70	30.70	46.00	15.30	
	14.986	29.20	1.25	30.45	50.00	19.55	
	22.655	32.00	1.72	33.72	50.00	16.28	
Neutral	0.186	43.49	0.30	43.79	64.20	20.41	QP
	0.356	39.48	0.42	39.90	58.83	18.93	
	0.546	40.68	0.49	41.17	56.00	14.83	
	1.236	42.37	0.52	42.89	56.00	13.11	
	14.986	39.27	1.46	40.73	60.00	19.27	
	22.896	43.51	1.83	45.34	60.00	14.66	
	0.186	33.21	0.30	33.51	54.20	20.69	AV
	0.356	29.60	0.42	30.02	48.83	18.81	
	0.546	30.50	0.49	30.99	46.00	15.01	
	1.236	32.11	0.52	32.63	46.00	13.37	
	14.986	29.00	1.46	30.46	50.00	19.54	
	22.896	33.00	1.83	34.83	50.00	15.17	

TEST ENGINEER: WENCY YANG

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 48%RH

Serial No. : E1105388-01/01 Date of Test : May 19, 2011

Test Mode : HDMI 1024*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.180	42.73	0.38	43.11	64.50	21.39	QP
	0.348	37.39	0.46	37.85	59.00	21.15	
	0.546	40.37	0.52	40.89	56.00	15.11	
	1.433	40.12	0.57	40.69	56.00	15.31	
	15.388	38.22	1.28	39.50	60.00	20.50	
	21.830	44.64	1.69	46.33	60.00	13.67	
	0.180	32.00	0.38	32.38	54.50	22.12	AV
	0.348	27.20	0.46	27.66	49.00	21.34	
	0.546	30.10	0.52	30.62	46.00	15.38	
	1.433	30.00	0.57	30.57	46.00	15.43	
	15.388	28.10	1.28	29.38	50.00	20.62	
	21.830	34.20	1.69	35.89	50.00	14.11	
Neutral	0.176	44.01	0.31	44.32	64.68	20.36	QP
	0.352	39.69	0.41	40.10	58.91	18.81	
	0.546	40.62	0.49	41.11	56.00	14.89	
	1.236	41.86	0.52	42.38	56.00	13.62	
	14.828	39.21	1.45	40.66	60.00	19.34	
	22.063	43.81	1.81	45.62	60.00	14.38	
	0.176	34.00	0.31	34.31	54.68	20.37	AV
	0.352	29.51	0.41	29.92	48.91	18.99	
	0.546	30.30	0.49	30.79	46.00	15.21	
	1.236	31.71	0.52	32.23	46.00	13.77	
	14.828	29.10	1.45	30.55	50.00	19.45	
	22.063	33.50	1.81	35.31	50.00	14.69	

TEST ENGINEER: WENCY YANG

4 RADIATED EMISSION TEST


4.1 Test Equipment

The following test equipments are used during the radiated emission test in a semi-anechoic chamber:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESVS10	844594/001	Mar 22, 2011	Mar 22, 2012
2.	Preamplifier	Agilent	8447D	2944A10548	Mar 18, 2011	Sep 18, 2011
3.	Bi-log Antenna	TESEQ	CBL6112D	23192	Dec 01, 2010	Dec 01, 2011
4.	Spectrum Analyzer	Agilent	E7405A	MY45106600	Mar 22, 2011	Mar 22, 2012
5.	50 Ω Coaxial Switch	Anritsu	MP59B	6200426390	Mar 18, 2011	Sep 18, 2011
6.	Software	Audix	E3	SET00200 9912M295-2	--	--


4.2 Block Diagram of Test Setup

4.2.1 EUT and Peripherals

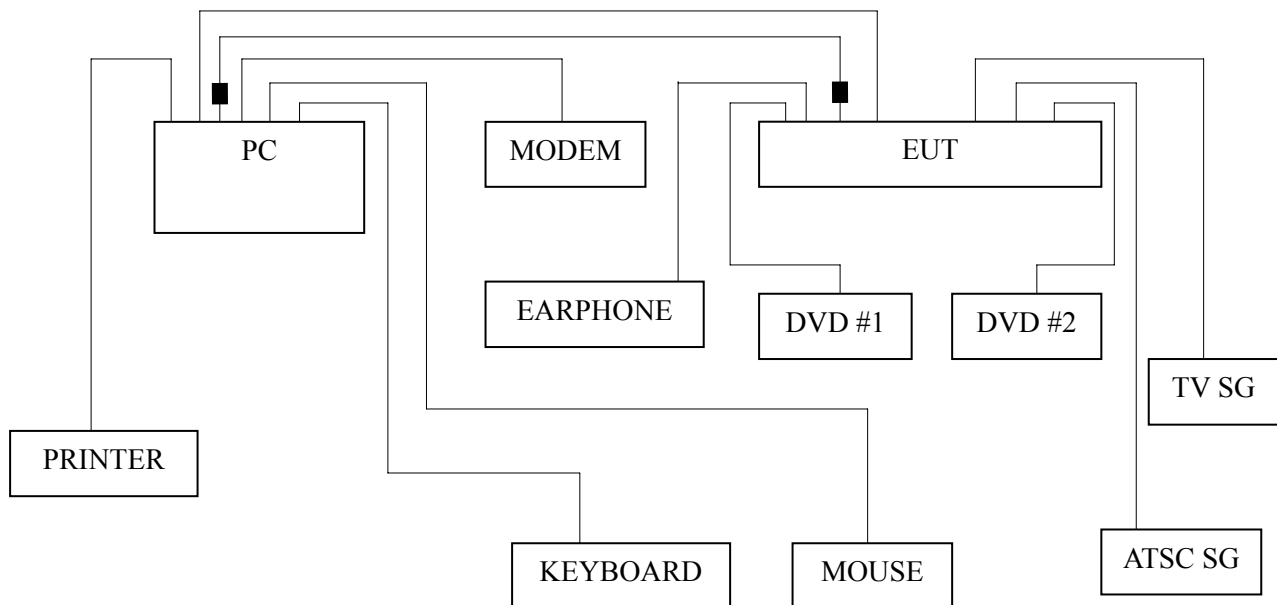

■ : Ferrite core

4.2.2 Radiated emission test setup

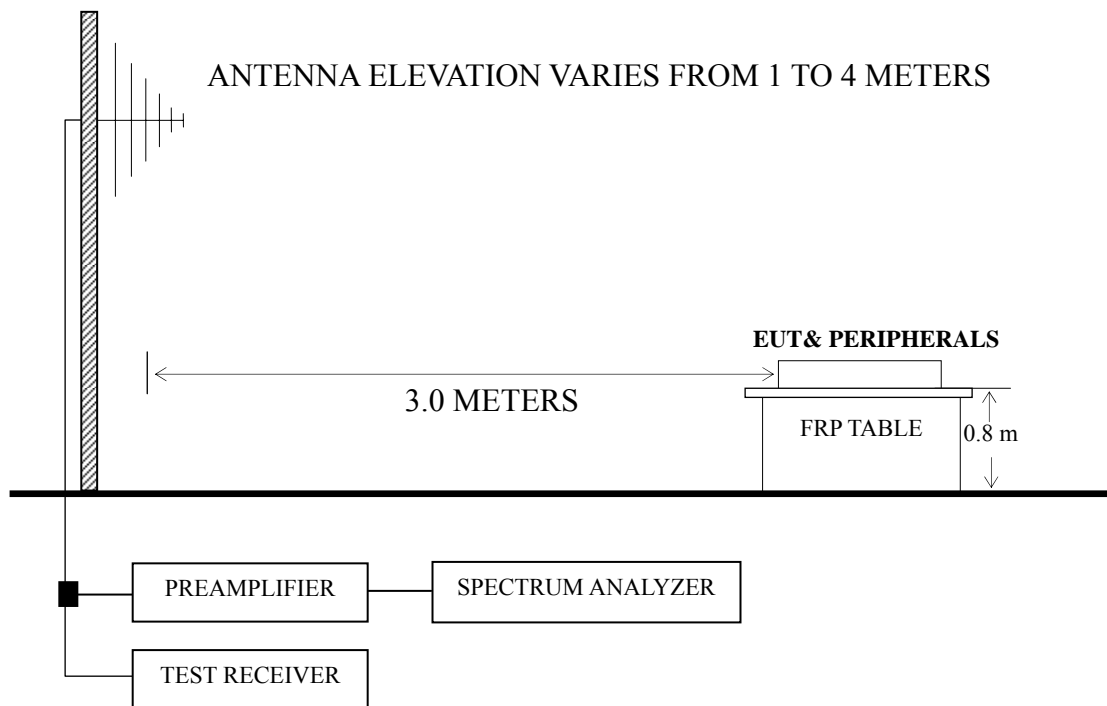

■ : 50 ohm Coaxial Switch

4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)]

Frequency (MHz)	Distance (m)	Field strength limits	
		($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB ($\mu\text{V/m}$) = 20 log Emission Level ($\mu\text{V/m}$)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - The limits shown are based on Quasi-peak value detector.

4.4 Test Configuration

The configuration of the EUT and peripherals are same as those used in conducted emission test.

Please refer to Sec.3.4.

4.5 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.3.5, except for the test setup replaced by Sec.4.2.

4.6 Test Procedures

The EUT and peripherals were placed on a FRP turntable that is 0.8 meter above ground. The FRP turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4:2003 requirements during radiated emission test.

The I.F. bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz.

The frequency range from 30 MHz to 1000MHz was checked for all test modes.

The test modes were done on radiated disturbance test and all the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Test Mode	Data Page
D-Sub 640*480@60Hz	P23
D-Sub 800*600@60Hz	P24
D-Sub 1024*768@60Hz	P25
HDMI 640*480@60Hz	P26
HDMI 800*600@60Hz	P27
HDMI 1024*768@60Hz	P28

NOTE 1 – Emission Level = Antenna Factor + Cable Loss + Meter Reading.

NOTE 2 – All readings are Quasi-Peak values.

NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 4 – The worst case is for D-Sub 640*480@60Hz test mode. The worst emission at horizontal polarization was detected at 32.000MHz with corrected signal level of 37.14 dB (μV/m) (limit is 40.00 dB (μV/m)), when the antenna was 1.80 m height and the turntable was at 45°. The worst emission at vertical polarization was detected at 293.840 MHz with corrected signal level of 38.43 dB (μV/m) (limit is 46.00 dB (μV/m)), when the antenna was 1.70 m height and the turntable was at 250°.

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 60%RH

Serial No. : E1105388-01/01 Date of Test : May 23, 2011

Test Mode : D-Sub 640*480@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	32.000	18.00	18.49	0.65	37.14	40.00	2.86
	36.800	17.00	15.80	0.69	33.49	40.00	6.51
	87.230	23.98	8.96	0.98	33.92	40.00	6.08
	164.830	22.33	10.35	1.31	33.99	43.50	9.51
	218.180	20.96	11.52	1.51	33.99	46.00	12.01
	293.840	22.16	13.79	1.74	37.69	46.00	8.31
Vertical	87.230	22.33	8.96	0.98	32.27	40.00	7.73
	109.540	19.74	12.25	1.08	33.07	43.50	10.43
	162.890	21.23	10.42	1.30	32.95	43.50	10.55
	218.180	21.92	11.52	1.51	34.95	46.00	11.05
	293.840	22.90	13.79	1.74	38.43	46.00	7.57
	412.180	15.69	16.67	2.09	34.45	46.00	11.55

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 60%RH

Serial No. : E1105388-01/01 Date of Test : May 23, 2011

Test Mode : D-Sub 800*600@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.940	6.52	18.49	0.65	25.66	40.00	14.34
	62.980	17.06	6.57	0.86	24.49	40.00	15.51
	109.540	18.99	12.25	1.08	32.32	43.50	11.18
	133.790	19.18	12.35	1.18	32.71	43.50	10.79
	293.840	23.50	13.79	1.74	39.03	46.00	6.97
	877.780	10.88	21.49	3.00	35.37	46.00	10.63
Vertical	58.130	20.48	6.96	0.83	28.27	40.00	11.73
	94.990	17.91	10.45	1.02	29.38	43.50	14.12
	159.980	19.70	10.50	1.28	31.48	43.50	12.02
	295.780	18.04	13.84	1.76	33.64	46.00	12.36
	487.840	11.51	17.75	2.24	31.50	46.00	14.50
	885.540	11.33	21.56	3.00	35.89	46.00	10.11

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 60%RH

Serial No. : E1105388-01/01 Date of Test : May 23, 2011

Test Mode : D-Sub 1024*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	56.190	19.36	7.46	0.82	27.64	40.00	12.36
	94.990	19.40	10.45	1.02	30.87	43.50	12.63
	164.830	20.99	10.35	1.31	32.65	43.50	10.85
	213.330	14.83	11.30	1.49	27.62	43.50	15.88
	295.780	19.50	13.84	1.76	35.10	46.00	10.90
	489.780	12.86	17.78	2.25	32.89	46.00	13.11
Vertical	30.970	4.12	19.03	0.64	23.79	40.00	16.21
	61.040	13.31	6.59	0.85	20.75	40.00	19.25
	109.540	16.67	12.25	1.08	30.00	43.50	13.50
	162.890	19.17	10.42	1.30	30.89	43.50	12.61
	255.040	17.56	13.01	1.62	32.19	46.00	13.81
	295.780	23.36	13.84	1.76	38.96	46.00	7.04

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 60%RH

Serial No. : E1105388-01/01 Date of Test : May 23, 2011

Test Mode : HDMI 640*480@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.940	12.94	18.49	0.65	32.08	40.00	7.92
	87.230	18.98	8.96	0.98	28.92	40.00	11.08
	109.540	13.40	12.25	1.08	26.73	43.50	16.77
	164.830	17.14	10.35	1.31	28.80	43.50	14.70
	293.840	17.16	13.79	1.74	32.69	46.00	13.31
	562.530	6.60	18.75	2.38	27.73	46.00	18.27
Vertical	32.910	6.83	17.95	0.66	25.44	40.00	14.56
	109.540	19.74	12.25	1.08	33.07	43.50	10.43
	126.030	18.70	12.71	1.16	32.57	43.50	10.93
	162.890	18.23	10.42	1.30	29.95	43.50	13.55
	293.840	18.90	13.79	1.74	34.43	46.00	11.57
	412.180	10.69	16.67	2.09	29.45	46.00	16.55

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 60%RH

Serial No. : E1105388-01/01 Date of Test : May 23, 2011

Test Mode : HDMI 800*600@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.940	9.52	18.49	0.65	28.66	40.00	11.34
	55.220	17.05	7.69	0.81	25.55	40.00	14.45
	64.920	22.10	6.55	0.87	29.52	40.00	10.48
	133.790	21.18	12.35	1.18	34.71	43.50	8.79
	293.840	19.50	13.79	1.74	35.03	46.00	10.97
	688.630	6.53	19.65	2.65	28.83	46.00	17.17
Vertical	58.130	15.48	6.96	0.83	23.27	40.00	16.73
	94.990	12.91	10.45	1.02	24.38	43.50	19.12
	159.980	14.70	10.50	1.28	26.48	43.50	17.02
	187.140	14.14	10.17	1.40	25.71	43.50	17.79
	295.780	13.04	13.84	1.76	28.64	46.00	17.36
	686.690	10.37	19.63	2.65	32.65	46.00	13.35

TEST ENGINEER: RAVEN JIN

EUT : LCD TV Temperature : 22°C

Model No. : LTDN42V77US Humidity : 60%RH

Serial No. : E1105388-01/01 Date of Test : May 23, 2011

Test Mode : HDMI 1024*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	32.910	9.71	17.95	0.66	28.32	40.00	11.68
	56.190	14.36	7.46	0.82	22.64	40.00	17.36
	94.990	13.40	10.45	1.02	24.87	43.50	18.63
	164.830	14.99	10.35	1.31	26.65	43.50	16.85
	295.780	13.50	13.84	1.76	29.10	46.00	16.90
	489.780	9.86	17.78	2.25	29.89	46.00	16.11
Vertical	109.540	15.67	12.25	1.08	29.00	43.50	14.50
	162.890	17.17	10.42	1.30	28.89	43.50	14.61
	295.780	20.36	13.84	1.76	35.96	46.00	10.04
	342.340	13.31	15.11	1.90	30.32	46.00	15.68
	681.840	10.86	19.62	2.63	33.11	46.00	12.89
	880.690	8.67	21.53	3.00	33.20	46.00	12.80

TEST ENGINEER: RAVEN JIN

5 DEVIATION TO TEST SPECIFICATIONS

None.

6 DEBUG DESCRIPTION

The following components are used during the countermeasure procedures:

Name	M/N	Manufacturer	Location
Ferrite core	ZCAT3035-1330\ROH	FEELUX	See Internal Photos Figure 15
		Rui Feng Electronic Co., Ltd.	
		Hai An Magnetic Material No.2 Factory	
		JIANGSU LETTALL ELECTRONICS CO., LTD.	
Ferrite core	BNF-12\ZCAT1519-0830\ROH	FEELUX	See Internal Photos Figure 16, 17
		Rui Feng Electronic Co., Ltd.	
		Hai An Magnetic Material No.2 Factory	
		JIANGSU LETTALL ELECTRONICS CO., LTD.	

Note: We had required the applicant and manufacturer that all electrical and mechanical devices employed for spurious radiation suppression, including any modifications made during certification testing, must be incorporated in each unit marked

TEST ENGINEER:



(RAVEN JIN)