




**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.538102
SAR 1g (W/Kg)	0.381724

#### Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -2)

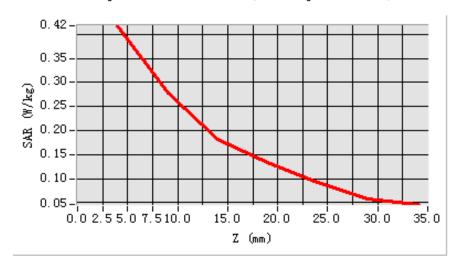



**MEASUREMENT 11** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


### A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Left head	
<b>Device Position</b>	Tilt	
Band	GSM1900	
Channels	Middle	
Signal	GSM	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1880.000000
Relative permitivity (real part)	40.193029
Relative permitivity (imaginary part)	13.813720
Conductivity (S/m)	1.4125923
Variation (%)	-1.100000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8

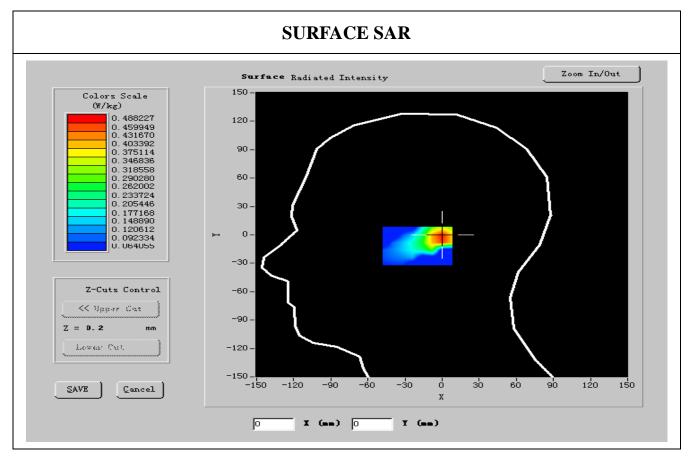

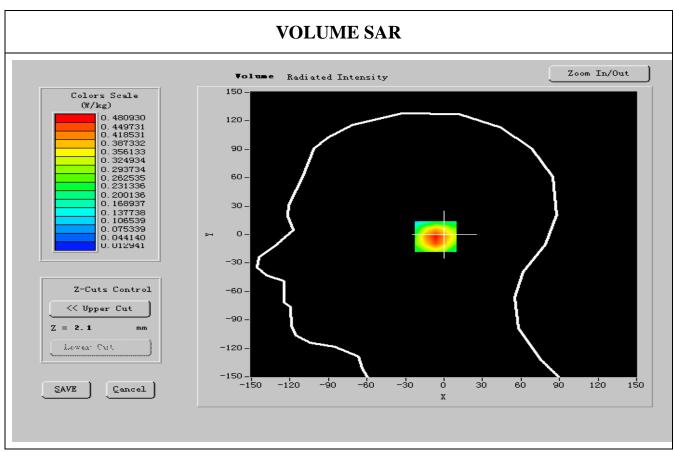




**Maximum location: X=-13.00, Y=-3.00** 

Report No: KS110117B02-SF

SAR 10g (W/Kg)	0.642704
SAR 1g (W/Kg)	0.410710

#### Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -2)

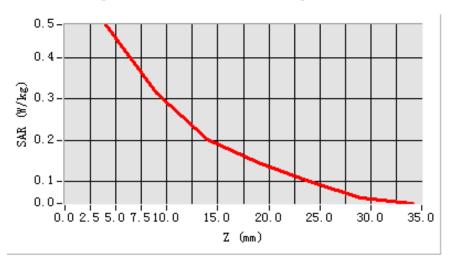



**MEASUREMENT 12** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Left head	
Device Position	Tilt	
Band	GSM1900	
Channels	High	
Signal	GSM	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1909.800000
Relative permitivity (real part)	40.281799
Relative permitivity (imaginary part)	13.669600
Conductivity (S/m)	1.420175
Variation (%)	-1.120000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8

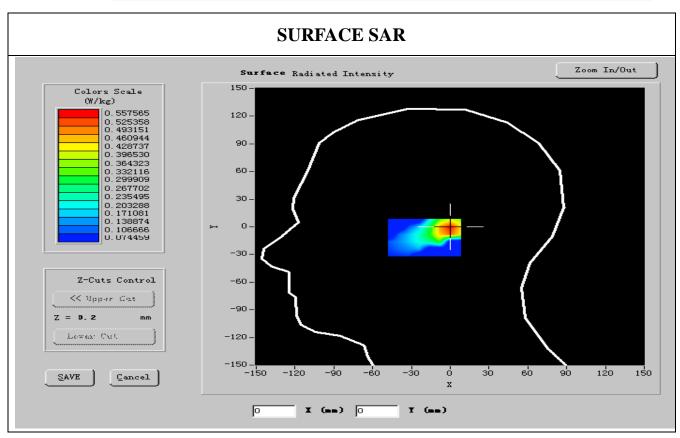

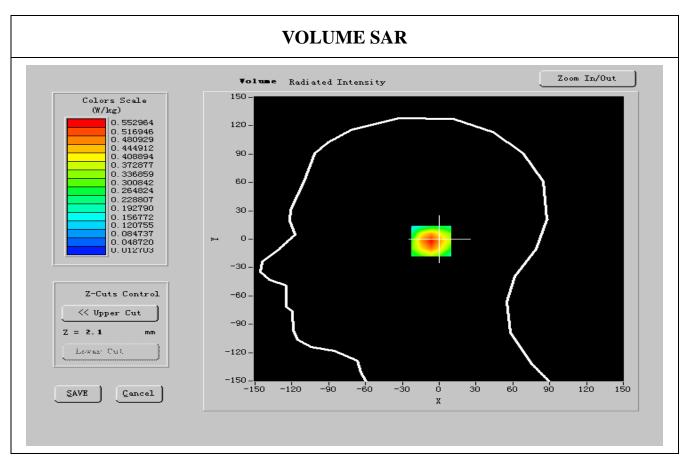


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.641029
SAR 1g (W/Kg)	0.432187

#### **Z** Axis Scan

#### SAR, Z Axis Scan (X = 0, Y = -2)

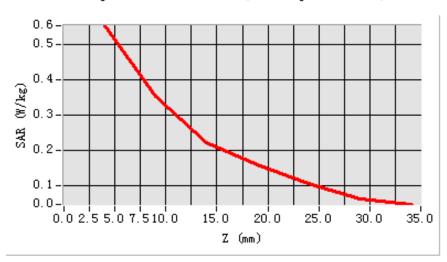



**MEASUREMENT 13** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


### A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Body	
<b>Device Position</b>	BackSide toward phantom	
Band	GSM1900	
Channels	Low	
Signal	GSM	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1850.200000
Relative permitivity (real part)	52.311900
Relative permitivity (imaginary part)	13.532100
Conductivity (S/m)	1.416172
Variation (%)	-0.130000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8

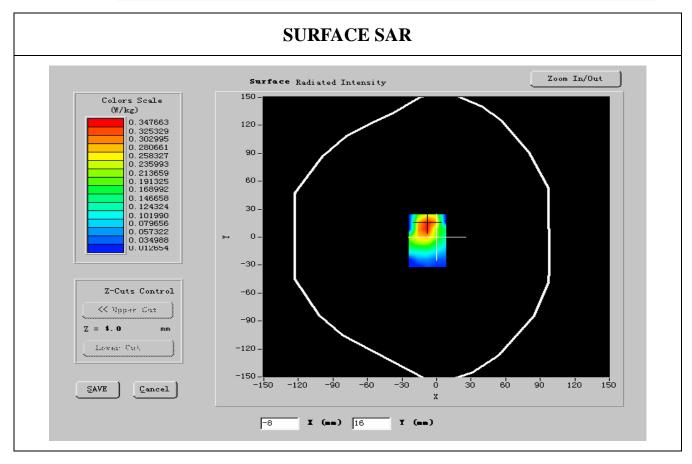

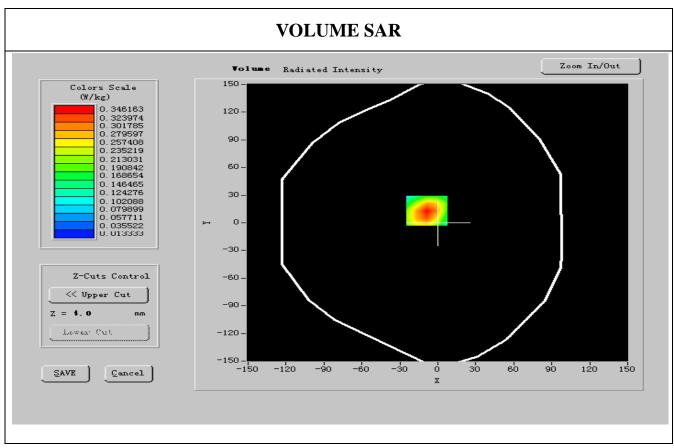




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.638017
SAR 1g (W/Kg)	0.340181

### Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

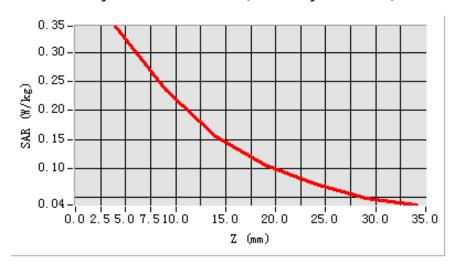



**MEASUREMENT 14** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Body
<b>Device Position</b>	BackSide toward phantom
Band	GSM1900
Channels	Middle
Signal	GSM

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1880.000000
Relative permitivity (real part)	52.891907
Relative permitivity (imaginary part)	13.812690
Conductivity (S/m)	1.534615
Variation (%)	-0.700000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8

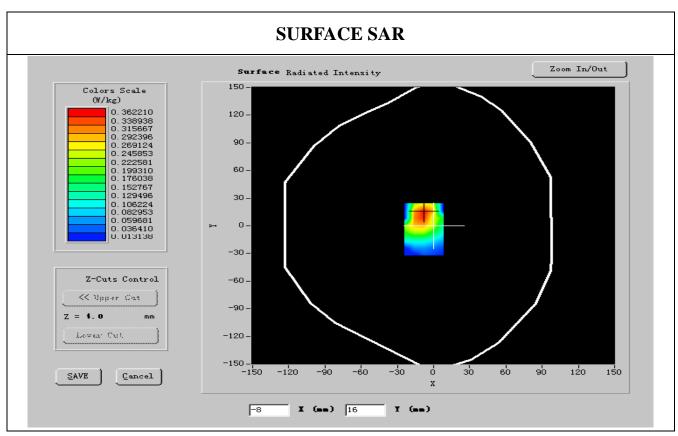

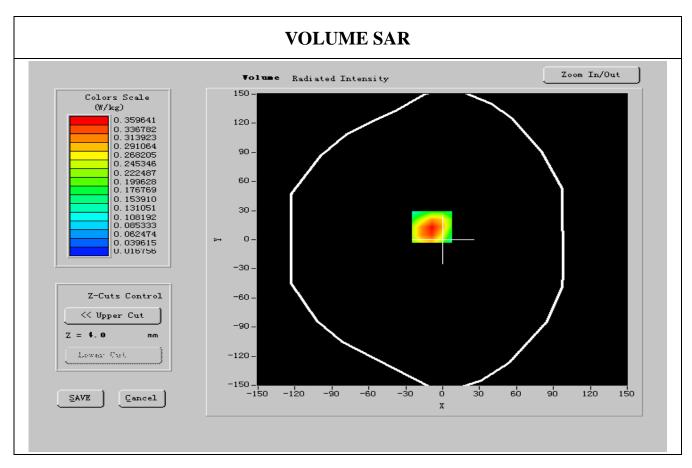


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.601732
SAR 1g (W/Kg)	0.301709

#### Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

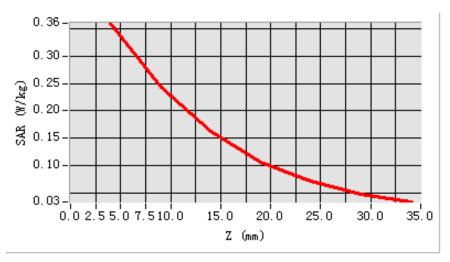



### **MEASUREMENT 15**

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


### A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Body	
<b>Device Position</b>	BackSide toward phantom	
Band	GSM1900	
Channels	High	
Signal	GSM	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1909.800000
Relative permitivity (real part)	52.886999
Relative permitivity (imaginary part)	13.669900
Conductivity (S/m)	1.516835
Variation (%)	-0.590000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8

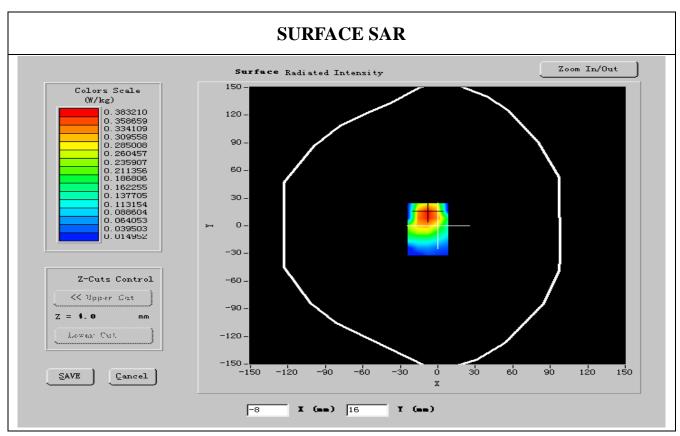

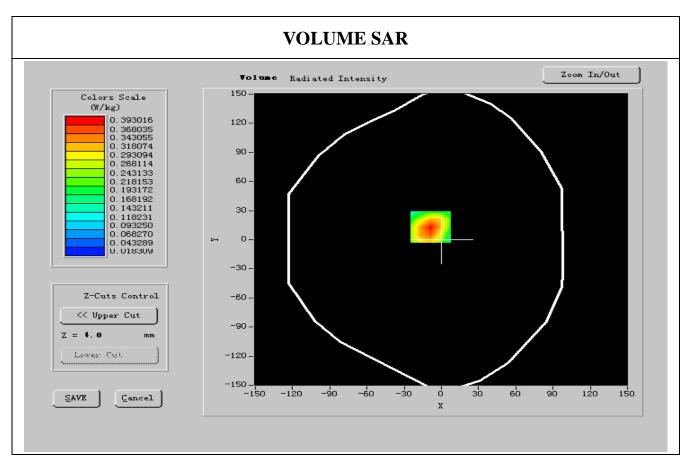


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.412135
SAR 1g (W/Kg)	0.360759

#### Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

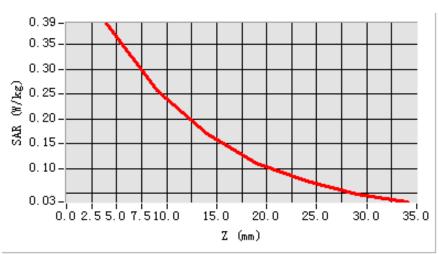



**MEASUREMENT 16** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Body	
<b>Device Position</b>	BackSide toward phantom	
Band	GPRS1900	
Channels	Low	
Signal	GPRS	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1850.200000
Relative permitivity (real part)	52.341710
Relative permitivity (imaginary part)	14.450329
Conductivity (S/m)	1.532878
Variation (%)	-0.400000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2

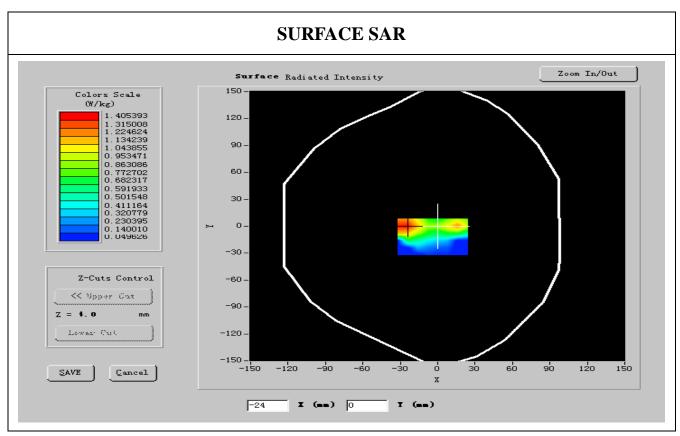

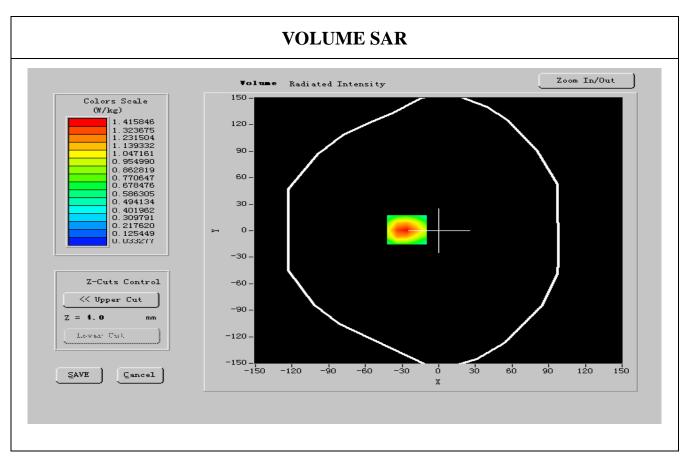


### **Maximum location: X=-13.00, Y=-3.00**

SAR 10g (W/Kg)	0.603206
SAR 1g (W/Kg)	0.372505

### Z Axis Scan

### SAR, Z Axis Scan (X = -10, Y = 12)

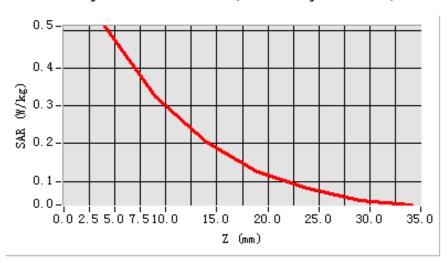



**MEASUREMENT 17** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


### A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Body	
<b>Device Position</b>	BackSide toward phantom	
Band	GPRS1900	
Channels	Middle	
Signal	GPRS	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1880.000000
Relative permitivity (real part)	51.417168
Relative permitivity (imaginary part)	14.291756
Conductivity (S/m)	1.527146
Variation (%)	-1.010000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2

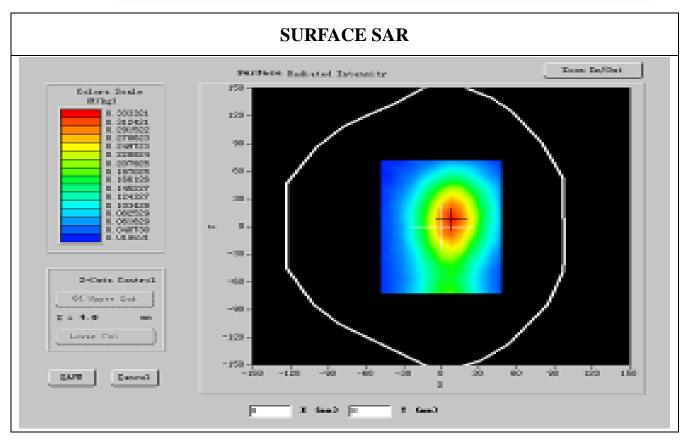

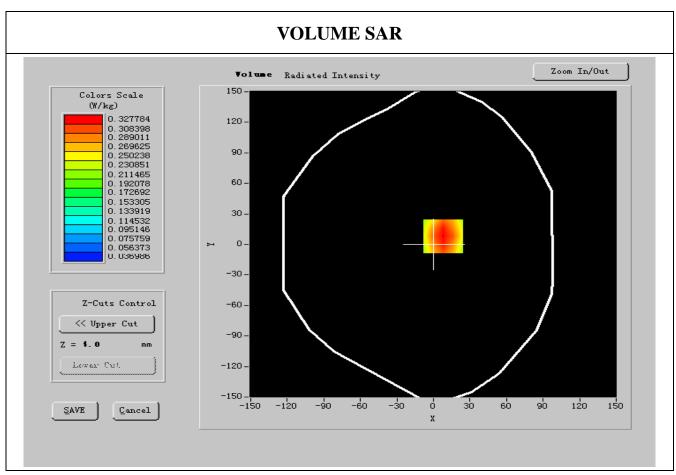


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.520431
SAR 1g (W/Kg)	0.323170

#### Z Axis Scan

### SAR, Z Axis Scan (X = -10, Y = 12)

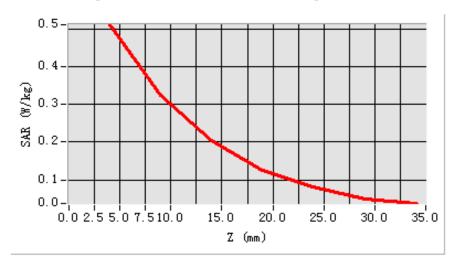



**MEASUREMENT 18** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Body	
<b>Device Position</b>	BackSide toward phantom	
Band	GPRS1900	
Channels	High	
Signal	GPRS	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1909.800000
Relative permitivity (real part)	51.813362
Relative permitivity (imaginary part)	14.319028
Conductivity (S/m)	1.513217
Variation (%)	-0.110000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2

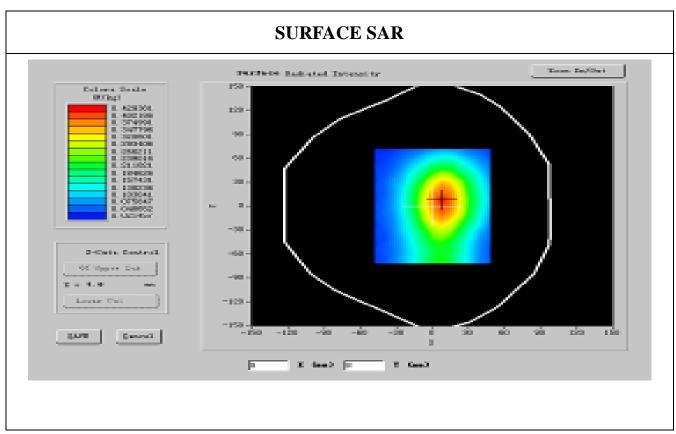

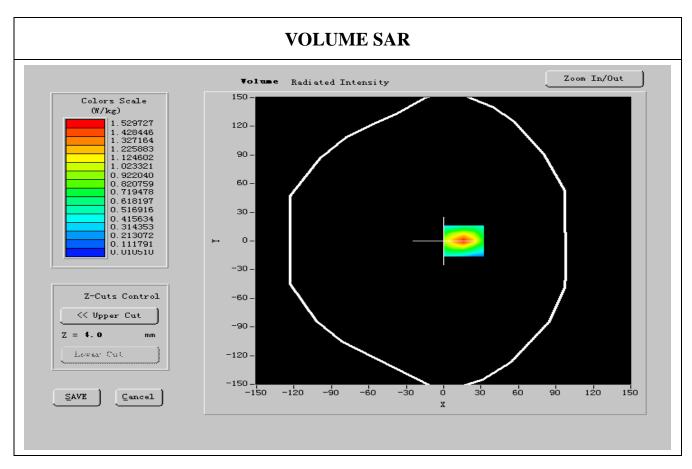


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.601927
SAR 1g (W/Kg)	0.301274

#### **Z** Axis Scan

#### SAR, Z Axis Scan (X = -10, Y = 12)

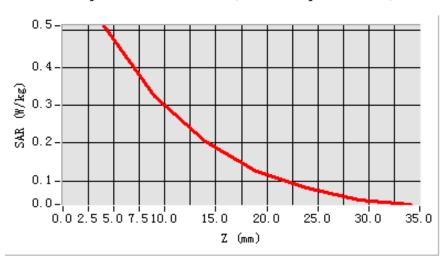



**MEASUREMENT 19** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Body
<b>Device Position</b>	FrontSide toward phantom
Band	GSM1900
Channels	Low
Signal	GSM

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1850.200000
Relative permitivity (real part)	52.312080
Relative permitivity (imaginary part)	13.581690
Conductivity (S/m)	1.411952
Variation (%)	-0.130000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8

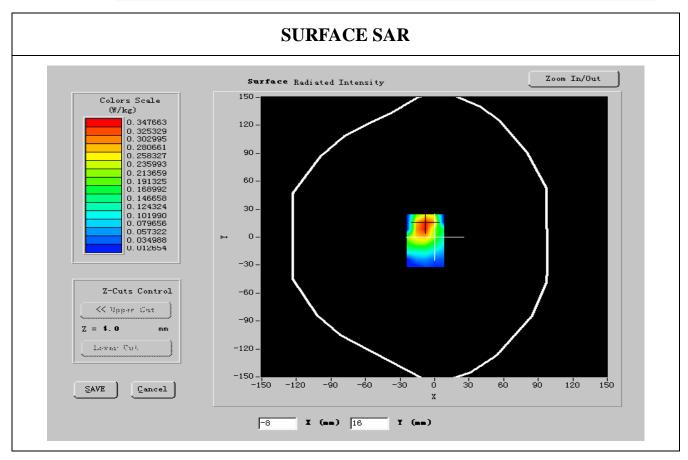

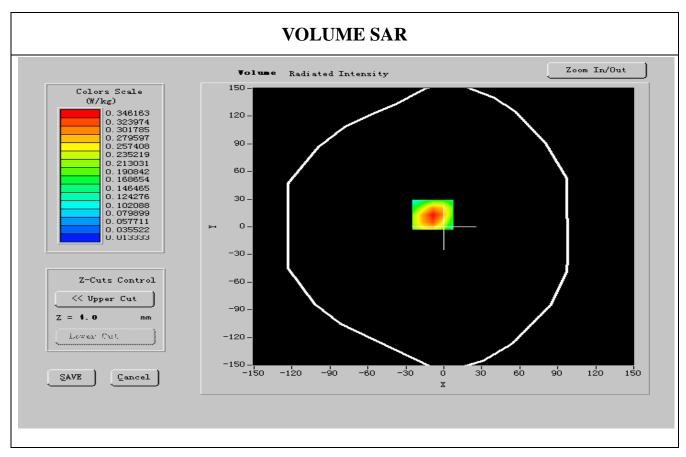




**Maximum location: X=-13.00, Y=-3.00** 

Report No: KS110117B02-SF

SAR 10g (W/Kg)	0.516703
SAR 1g (W/Kg)	0.320691

#### Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

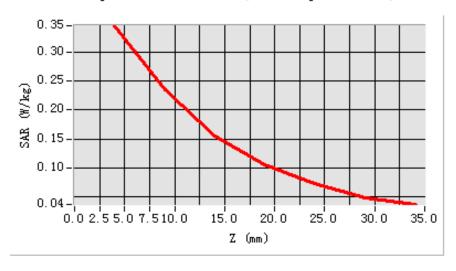



**MEASUREMENT 20** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Body	
<b>Device Position</b>	FrontSide toward phantom	
Band	GSM1900	
Channels	Middle	
Signal	GSM	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1880.000000
Relative permitivity (real part)	52.812701
Relative permitivity (imaginary part)	13.816400
Conductivity (S/m)	1.516227
Variation (%)	-0.700000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8

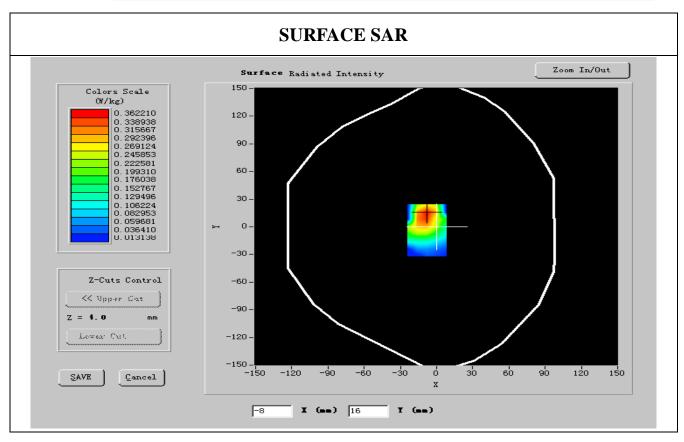

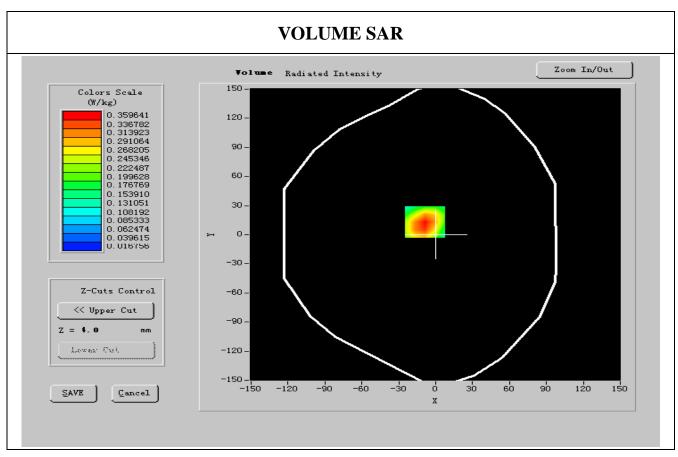


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.582104
SAR 1g (W/Kg)	0.302156

#### Z Axis Scan

### SAR, Z Axis Scan (X = -9, Y = 13)

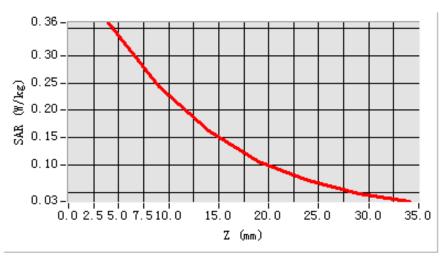



**MEASUREMENT 21** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


### A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM1900
Channels	High
Signal	GSM

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1909.800000
Relative permitivity (real part)	52.885999
Relative permitivity (imaginary part)	13.669900
Conductivity (S/m)	1.520175
Variation (%)	-0.600000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8

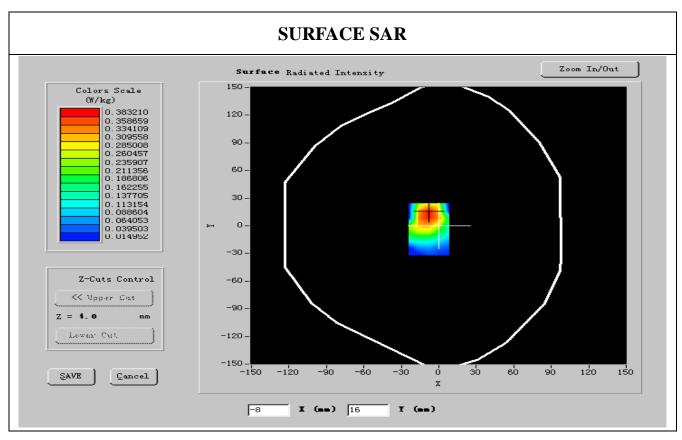

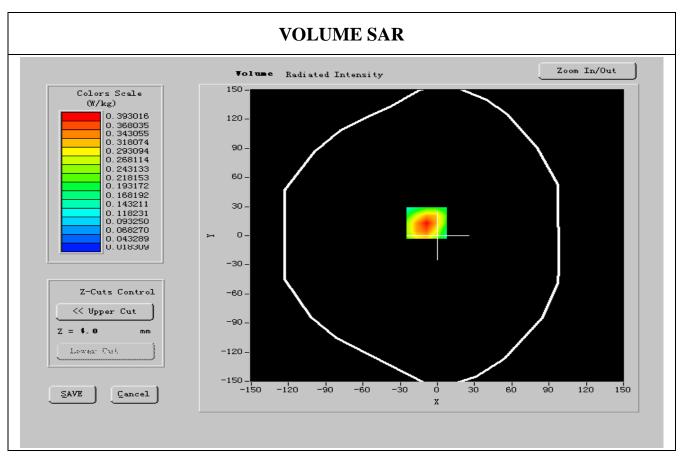


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.290843
SAR 1g (W/Kg)	0.341277

#### Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

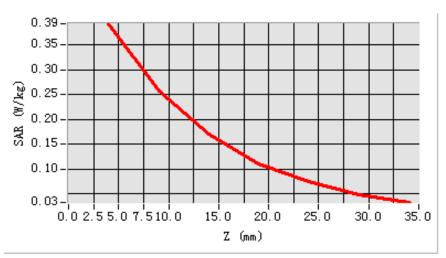



**MEASUREMENT 22** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max	
Phantom	Body	
<b>Device Position</b>	FrontSide toward phantom	
Band	GPRS1900	
Channels	Low	
Signal	GPRS	

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1850.200000
Relative permitivity (real part)	52.349660
Relative permitivity (imaginary part)	14.420193
Conductivity (S/m)	1.526098
Variation (%)	-0.400000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2

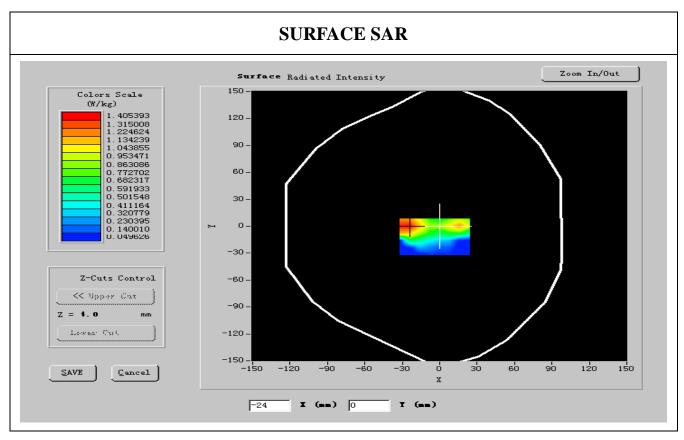

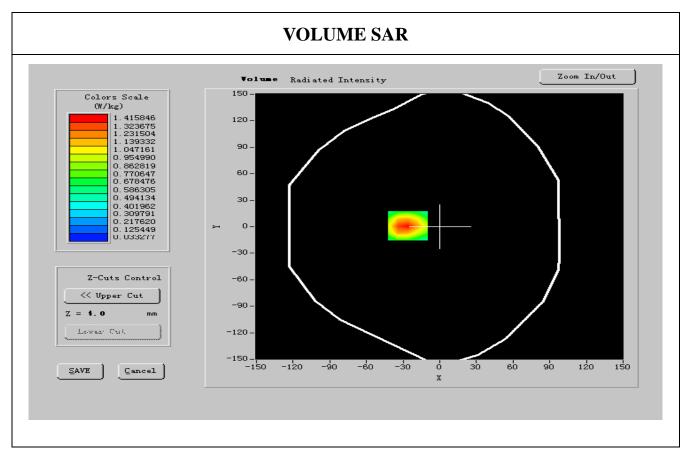


**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.482014
SAR 1g (W/Kg)	0.280717

#### **Z** Axis Scan

#### SAR, Z Axis Scan (X = -10, Y = 12)

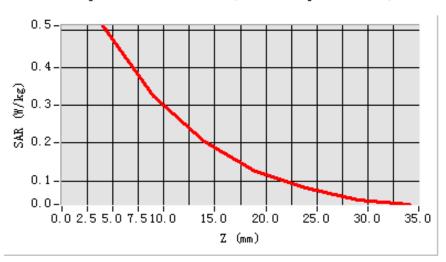



**MEASUREMENT 23** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


## A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS1900
Channels	Middle
Signal	GPRS

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1880.000000
Relative permitivity (real part)	51.418401
Relative permitivity (imaginary part)	14.291706
Conductivity (S/m)	1.517404
Variation (%)	-1.010000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2

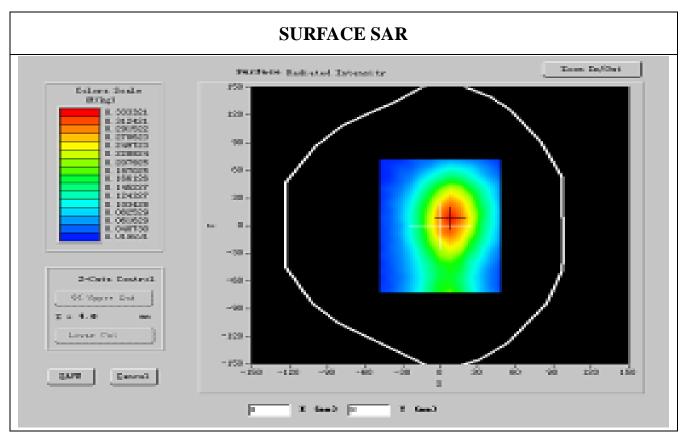

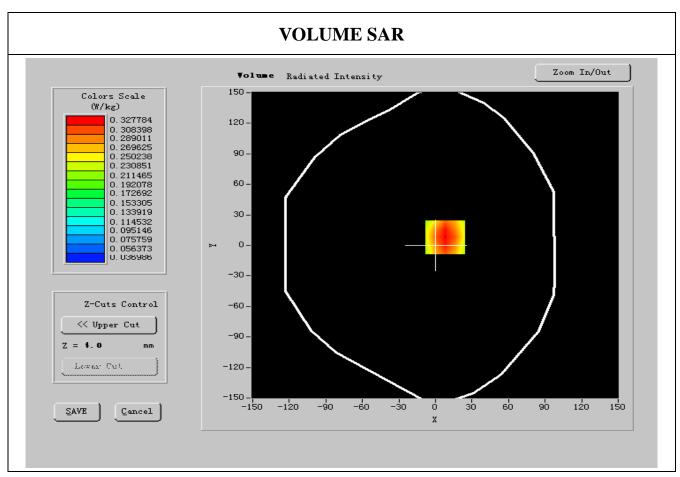




**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.584527
SAR 1g (W/Kg)	0.331673

#### Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

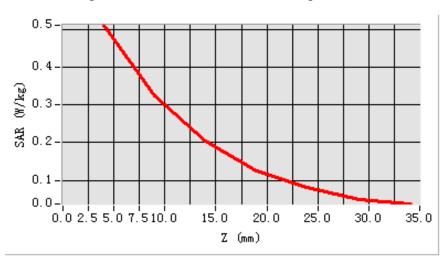



**MEASUREMENT 24** 

Report No: KS110117B02-SF

Date of measurement: 01/19/2011

Area Scan: 7 x 7 x 1 dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7 dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21 dx=20mm dy=20mm dz=5mm


### A. Experimental conditions.


Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Body
<b>Device Position</b>	FrontSide toward phantom
Band	GPRS1900
Channels	High
Signal	GPRS

### **B.** Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Test Set		
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

Frequency (MHz)	1909.800000
Relative permitivity (real part)	51.813609
Relative permitivity (imaginary part)	14.316303
Conductivity (S/m)	1.517234
Variation (%)	-0.130000
Ambient Temperature:	21.3 °C
Liquid Temperature:	20.5 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2

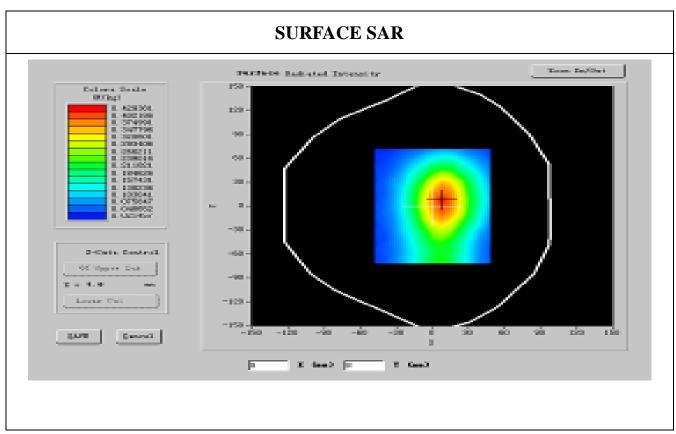

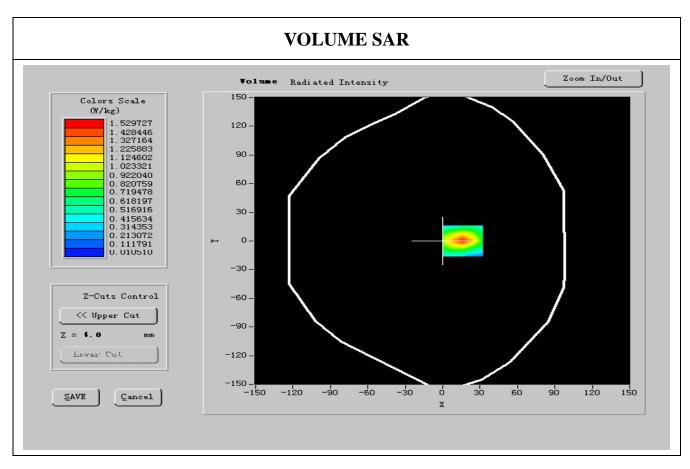

**Maximum location: X=-13.00, Y=-3.00** 

SAR 10g (W/Kg)	0.472017
SAR 1g (W/Kg)	0.341057

#### Z Axis Scan

#### SAR, Z Axis Scan (X = -10, Y = 12)

