

# FCC Part 22H & 24E & 27 Measurement and Test Report

For

Verykool USA Inc

3636 Nobel Drive, Suite 325 San Diego, CA 92122

**FCC ID: WA6S758**

<b>FCC Rules:</b>	<u>FCC Part 22H, FCC Part 24E, FCC Part 27</u>
<b>Product Description:</b>	<u>Android phone</u>
<b>Tested Model:</b>	<u>S758</u>
<b>Report No.:</b>	<u>STR12118097I-1</u>
<b>Tested Date:</b>	<u>2012-11-08 to 2012-11-28</u>
<b>Issued Date:</b>	<u>2012-11-28</u>
<b>Tested By:</b>	<u>Seven Song / Engineer</u> <i>Seven Song</i>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	

**SEM.Test Compliance Service Co., Ltd**

3/F, Jinbao Commerce Building, Xin'an Fanshen Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	5
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>3. RF EXPOSURE .....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. RF OUTPUT POWER.....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 TEST EQUIPMENT LIST AND DETAILS .....	9
4.3 TEST PROCEDURE.....	9
4.4 ENVIRONMENTAL CONDITIONS .....	10
4.5 SUMMARY OF TEST RESULTS/PLOTS .....	10
<b>5. EMISSION BANDWIDTH.....</b>	<b>20</b>
5.1 STANDARD APPLICABLE.....	20
5.2 TEST EQUIPMENT LIST AND DETAILS .....	20
5.3 TEST PROCEDURE.....	20
5.4 ENVIRONMENTAL CONDITIONS .....	20
5.5 SUMMARY OF TEST RESULTS/PLOTS .....	21
<b>6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....</b>	<b>37</b>
6.1 STANDARD APPLICABLE.....	37
6.2 TEST EQUIPMENT LIST AND DETAILS .....	37
6.3 TEST PROCEDURE.....	37
6.4 ENVIRONMENTAL CONDITIONS .....	37
6.5 SUMMARY OF TEST RESULTS/PLOTS .....	38
<b>7. SPURIOUS RADIATED EMISSIONS.....</b>	<b>98</b>
7.1 MEASUREMENT UNCERTAINTY .....	98
7.2 STANDARD APPLICABLE.....	98
7.3 TEST EQUIPMENT LIST AND DETAILS .....	98
7.4 TEST PROCEDURE.....	98
7.5 ENVIRONMENTAL CONDITIONS .....	99
7.6 SUMMARY OF TEST RESULTS/PLOTS .....	99
<b>8. FREQUENCY STABILITY .....</b>	<b>137</b>
8.1 STANDARD APPLICABLE.....	137
8.2 TEST EQUIPMENT LIST AND DETAILS .....	137
8.3 TEST PROCEDURE.....	137
8.4 ENVIRONMENTAL CONDITIONS .....	138
8.5 SUMMARY OF TEST RESULTS/PLOTS .....	138

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

**Client Information**

Applicant: Verykool USA Inc  
Address of applicant: 3636 Nobel Drive, Suite 325 San Diego, CA 92122

Manufacturer: FUKDA TECHNOLOGY CO., LTD  
Address of manufacturer: East Unit, 4th Floor, No.2 Building, Zhenhua Laobing Industrial Park, No.44 Tiezai Road, Xixiang Town, Bao'an District, Shenzhen, China

General Description of EUT	
Product Name:	Android phone
Trade Name:	Verykool
Model No.:	S758
Rated Voltage:	DC 3.7V Li-ion Battery (Model:GS3)
Power Adapter Model:	TNC-L108C-CH (Input: AC 100-240V, Output: DC 5V 800mA)
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT</b>	
Support Band:	GSM850/PCS1900, WCDMA Band II, Band V, Band IV
GPRS Class:	Class 12
Frequency range:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz WCDMA/UPA/DPA Band V: 824~849MHz WCDMA/UPA/DPA Band II: 1850~1910MHz WCDMA/UPA/DPA Band IV: 1710-1755MHz
Max. RF Power(Conducted):	GSM850: 32.90dBm GSM1900: 29.16dBm WCDMA Band II: 22.70dBm WCDMA Band V: 23.49dBm WCDMA Band IV: 22.54dBm
Max. RF Power(ERP/EIRP):	GSM850: 30.53dBm GSM1900: 27.02dBm WCDMA Band II: 21.02dBm WCDMA Band V: 21.71dBm WCDMA Band IV: 21.68dBm
Network Protocol:	GSM/GPRS/EDGE/UMTS/HSUPA/HSDPA
Modulation:	GMSK for GSM/GPRS; 8PSK for EDGE; QPSK for WCDMA
Type of Emission:	GMSK: 257KGXW 8PSK: 266KG7W QPSK: 4M54F9W
Antenna Gain:	GSM850: 1.9dBi GSM1900: 1.4dBi WCDMA Band II: 1.4dBi WCDMA Band V: 1.9dBi WCDMA Band IV: 1.1 dBi
Device Category:	Portable Device

## 1.2 Test Standards

The following report is prepared on behalf of the Verykool USA Inc in accordance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E and FCC Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E and FCC Part 27 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603-C: 2004 and ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

### 1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band II	Low, Middle, High Channels
TM8	WCDMA Band V	Low, Middle, High Channels

TM9	WCDMA Band IV	Low, Middle, High Channels
TM10	HSUPA Band II	Low, Middle, High Channels
TM11	HSUPA Band V	Low, Middle, High Channels
TM12	HSUPA Band IV	Low, Middle, High Channels
TM13	HSDPA Band II	Low, Middle, High Channels
TM14	HSDPA Band V	Low, Middle, High Channels
TM15	HSDPA Band V	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band II	WCDMA/HSUPA/HSDPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
WCDMA Band V	WCDMA/HSUPA/HSDPA	826.4 MHz	4132
		836.4 MHz	4182
		846.6 MHz	4233
WCDMA Band IV	WCDMA/HSUPA/HSDPA	1712.4 MHz	1312
		1732.6 MHz	1413
		1752.6 MHz	1513
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSUPA, HSDPA compliance test and record the worst case.			

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c) § 27.50 (d)	RF Output Power	Compliant
§ 22.917 (b), § 24.238 (b) § 27.53	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a), § 27.53	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a), § 27.53	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a), § 27.53	Out of Band Emissions	Compliant
§ 22.355, § 24.235, § 27.54	Frequency Stability	Compliant

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR report.



## 4. RF Output Power

### 4.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), no any case may the peak output power of mobile or portable station transmitter exceed 2 Watt EIRP.


According to §27.50(d) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP

### 4.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	112012	2012-03-28	2013-03-27
Signal Generator	R&S	SMR20	100047	2012-03-28	2013-03-27

### 4.3 Test Procedure

Conducted output power test method:



Radiated power test method:

- 1.The setup of EUT is according with per TIA/EIA Standard 603C and ANSI C63.4-2003 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.

4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

#### 4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### 4.5 Summary of Test Results/Plots

Radiated Power

ERP For GSM Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	28.07	1.5	0	H	1.5	0	26.57	38.45
824.2	31.62	1.5	0	V	1.5	0	30.12	38.45
Middle Channel								
28.03	28.03	1.5	0	H	1.5	0	26.53	38.45
31.37	31.37	1.5	0	V	1.5	0	29.87	38.45
High Channel								
848.8	28.75	1.5	0	H	1.5	0	27.25	38.45
848.8	32.03	1.5	0	V	1.5	0	30.53	38.45

EIRP For GSM Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	32.16	1.5	0	H	1.9	7.7	22.56	33
1850.2	36.62	1.5	0	V	1.9	7.7	27.02	33
Middle Channel								
1880.0	33.12	1.5	0	H	1.9	7.7	23.52	33
1880.0	36.40	1.5	0	V	1.9	7.7	26.80	33
High Channel								
1909.8	31.70	1.5	0	H	1.9	7.7	22.10	33
1909.8	36.39	1.5	0	V	1.9	7.7	26.79	33

## ERP For GPRS Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	28.07	1.5	0	H	1.5	0	26.57	38.45
824.2	31.53	1.5	0	V	1.5	0	30.03	38.45
Middle Channel								
836.6	28.20	1.5	0	H	1.5	0	26.70	38.45
836.6	31.28	1.5	0	V	1.5	0	29.78	38.45
High Channel								
848.8	27.37	1.5	0	H	1.5	0	25.87	38.45
848.8	31.07	1.5	0	V	1.5	0	29.57	38.45

## EIRP For GPRS Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	33.14	1.5	0	H	1.9	7.7	23.54	33
1850.2	36.14	1.5	0	V	1.9	7.7	26.54	33
Middle Channel								
1880.0	32.38	1.5	0	H	1.9	7.7	22.78	33
1880.0	36.30	1.5	0	V	1.9	7.7	26.70	33
High Channel								
1909.8	32.70	1.5	0	H	1.9	7.7	23.10	33
1909.8	36.14	1.5	0	V	1.9	7.7	26.54	33

## ERP For EDGE Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	21.63	1.5	0	H	1.5	0	20.13	38.45
824.2	25.60	1.5	0	V	1.5	0	24.10	38.45
Middle Channel								
836.6	21.81	1.5	0	H	1.5	0	20.31	38.45
836.6	25.55	1.5	0	V	1.5	0	24.05	38.45
High Channel								
848.8	21.68	1.5	0	H	1.5	0	20.18	38.45
848.8	21.62	1.5	0	V	1.5	0	20.12	38.45

## EIRP For EDGE Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	29.12	1.5	0	H	1.9	7.7	19.52	33
1850.2	33.00	1.5	0	V	1.9	7.7	23.40	33
Middle Channel								
1880.0	29.03	1.5	0	H	1.9	7.7	19.43	33
1880.0	32.97	1.5	0	V	1.9	7.7	23.37	33
High Channel								
1909.8	28.84	1.5	0	H	1.9	7.7	19.24	33
1909.8	33.10	1.5	0	V	1.9	7.7	23.50	33

## ERP For WCDMA Mode Band V

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	19.74	1.5	0	H	1.5	0	18.24	38.45
826.4	21.92	1.5	0	V	1.5	0	20.42	38.45
Middle Channel								
836.4	19.37	1.5	0	H	1.5	0	17.87	38.45
836.4	22.56	1.5	0	V	1.5	0	21.06	38.45
High Channel								
846.6	19.74	1.5	0	H	1.5	0	18.24	38.45
846.6	22.25	1.5	0	V	1.5	0	20.75	38.45

## EIRP For WCDMA Mode Band II

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
1852.4	27.18	1.5	0	H	1.9	7.7	17.58	33
1852.4	30.62	1.5	0	V	1.9	7.7	21.02	33
Middle Channel								
1880.0	27.6	1.5	0	H	1.9	7.7	18.00	33
1880.0	29.93	1.5	0	V	1.9	7.7	20.33	33
High Channel								
1907.6	27.46	1.5	0	H	1.9	7.7	17.86	33
1907.6	29.75	1.5	0	V	1.9	7.7	20.15	33

## EIRP For WCDMA Mode Band IV

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dBi	dBm	dBm
Low Channel								
1712.4	27.17	1.5	0	H	1.9	7.7	17.57	33
1712.4	30.54	1.5	0	V	1.9	7.7	20.94	33
Middle Channel								
1732.0	27.84	1.5	0	H	1.9	7.7	18.24	33
1732.0	30.67	1.5	0	V	1.9	7.7	21.07	33
High Channel								
1752.6	27.76	1.5	0	H	1.9	7.7	18.16	33
1752.6	30.71	1.5	0	V	1.9	7.7	21.11	33

## ERP For HSUPA Mode Band V

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	19.04	1.5	0	H	1.5	0	17.54	38.45
826.4	22.08	1.5	0	V	1.5	0	20.58	38.45
Middle Channel								
836.4	19.70	1.5	0	H	1.5	0	18.20	38.45
836.4	22.03	1.5	0	V	1.5	0	20.53	38.45
High Channel								
846.6	18.70	1.5	0	H	1.5	0	17.20	38.45
846.6	22.81	1.5	0	V	1.5	0	21.31	38.45

## EIRP For HSUPA Mode Band II

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dBi	dBm	dBm
Low Channel								
1852.4	27.16	1.5	0	H	1.9	7.7	17.56	33
1852.4	30.07	1.5	0	V	1.9	7.7	20.47	33
Middle Channel								
1880.0	27.47	1.5	0	H	1.9	7.7	17.87	33
1880.0	30.41	1.5	0	V	1.9	7.7	20.81	33
High Channel								
1907.6	27.62	1.5	0	H	1.9	7.7	18.02	33
1907.6	29.88	1.5	0	V	1.9	7.7	20.28	33

## EIRP For HSUPA Mode Band IV

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dBi	dBm	dBm
Low Channel								
1712.4	28.40	1.5	0	H	1.9	7.7	18.80	33
1712.4	31.28	1.5	0	V	1.9	7.7	21.68	33
Middle Channel								
1732.0	28.65	1.5	0	H	1.9	7.7	19.05	33
1732.0	31.01	1.5	0	V	1.9	7.7	21.41	33
High Channel								
1752.6	28.53	1.5	0	H	1.9	7.7	18.93	33
1752.6	30.67	1.5	0	V	1.9	7.7	21.07	33

## ERP For HSDPA Mode Band V

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	20.75	1.5	0	H	1.5	0	19.25	38.45
826.4	22.67	1.5	0	V	1.5	0	21.17	38.45
Middle Channel								
836.4	20.75	1.5	0	H	1.5	0	19.25	38.45
836.4	22.69	1.5	0	V	1.5	0	21.19	38.45
High Channel								
846.6	21.00	1.5	0	H	1.5	0	19.50	38.45
846.6	23.21	1.5	0	V	1.5	0	21.71	38.45

## EIRP For HSDPA Mode Band II

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
1852.4	26.84	1.5	0	H	1.9	7.7	17.24	33
1852.4	30.06	1.5	0	V	1.9	7.7	20.46	33
Middle Channel								
1880.0	27.08	1.5	0	H	1.9	7.7	17.48	33
1880.0	29.79	1.5	0	V	1.9	7.7	20.19	33
High Channel								
1907.6	27.25	1.5	0	H	1.9	7.7	17.65	33
1907.6	30.18	1.5	0	V	1.9	7.7	20.58	33



## EIRP For HSUPA Mode Band IV

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dBi	dBm	dBm
Low Channel								
1712.4	28.27	1.5	0	H	1.9	7.7	18.67	33
1712.4	30.97	1.5	0	V	1.9	7.7	21.37	33
Middle Channel								
1732.0	28.35	1.5	0	H	1.9	7.7	18.75	33
1732.0	31.18	1.5	0	V	1.9	7.7	21.58	33
High Channel								
1752.6	28.24	1.5	0	H	1.9	7.7	18.64	33
1752.6	30.44	1.5	0	V	1.9	7.7	20.84	33

Max. Conducted Output Power

For Cellular Band

Test Mode	Channel	Frequency (MHz)	Output Power (dBm)	FCC Part 22.913 Limit (dBm)
GSM850	Low Channel	824.2	32.22	38.45
	Middle Channel	836.6	32.17	38.45
	High Channel	848.8	32.14	38.45
PCS1900	Low Channel	1850.2	29.01	33
	Middle Channel	1880.0	29.06	33
	High Channel	1909.8	29.16	33

For GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	32.85	31.77	30.67	29.15
	190	836.6	32.90	31.87	30.80	28.78
	251	848.8	32.60	31.57	30.25	28.70
PCS 1900	512	1850.2	29.02	27.45	25.93	24.55
	661	1880.0	29.01	27.50	25.65	24.62
	810	1909.8	28.87	27.84	25.70	24.42

For EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	26.55	25.49	24.35	24.07
	190	836.6	25.16	24.38	24.40	24.10
	251	848.8	26.05	25.32	24.33	24.06
PCS 1900	512	1850.2	25.97	24.87	24.23	24.01
	661	1880.0	25.13	24.55	24.25	24.05
	810	1909.8	25.17	24.57	24.26	24.07

*For 3G Mode*

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4182	4232	9263	9400	9537
	subtest	dBm			dBm		
5.2(WCDMA)	non	23.15	23.49	23.29	22.67	22.72	22.59
HSDPA	1	23.11	23.43	23.21	22.62	22.71	22.56
	2	23.09	23.42	23.23	22.64	22.67	22.55
	3	22.68	22.98	22.84	22.21	22.23	22.11
	4	22.62	23.04	22.86	22.24	22.26	22.09
HSUPA	1	22.93	23.37	23.15	22.66	22.68	22.54
	2	21.19	21.61	21.34	20.79	20.81	20.61
	3	22.18	22.63	22.31	21.71	21.75	21.59
	4	21.17	21.53	21.34	20.65	20.74	20.62
	5	23.15	23.44	23.24	22.62	22.69	22.57

Item	band	WCDMA 1700			/		
	ARFCN	1312	1413	1513	/	/	/
	subtest	dBm					
5.2(WCDMA)	non	22.54	22.54	22.54	/	/	/
HSDPA	1	22.51	22.51	22.51	/	/	/
	2	22.49	22.49	22.49	/	/	/
	3	22.05	22.05	22.05	/	/	/
	4	22.11	22.11	22.11	/	/	/
HSUPA	1	22.52	22.52	22.52	/	/	/
	2	20.56	20.56	20.56	/	/	/
	3	21.54	21.54	21.54	/	/	/
	4	20.59	20.59	20.59	/	/	/
	5	22.52	22.52	22.52	/	/	/

## 5. Emission Bandwidth

### 5.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### 5.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Aglient	Spectrum Analyzer	E4402B	US41192821	2012-03-28	2013-03-27
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	112012	2012-03-28	2013-03-27

### 5.3 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

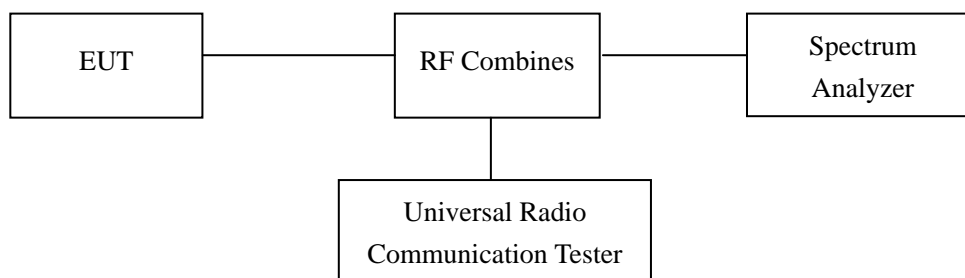

### 5.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 5.5 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	128	824.2	254.1382	340.856
	190	836.6	250.3227	336.693
	251	848.8	249.0922	335.494
GPRS	128	824.2	252.6220	335.244
	190	836.6	255.7320	338.238
	251	848.8	253.7362	333.297
EDGE	128	824.2	264.5944	332.392
	190	836.6	262.9310	330.287
	251	848.8	265.6439	339.570

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	512	1850.2	257.3912	337.490
	661	1880.0	254.5394	331.698
	810	1909.8	256.8128	338.836
GPRS	512	1850.2	253.6274	339.650
	661	1880.0	257.0134	340.886
	810	1909.8	254.8679	341.604
EDGE	512	1850.2	254.3009	335.744
	661	1880.0	262.0201	343.375
	810	1909.8	260.9917	330.788

## For Band II

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	9400	1880.0	4.1331	4.633
HSUPA	9400	1880.0	4.1477	4.647
HSDPA	9400	1880.0	4.1484	4.642

## For Band V


Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	4175	835	4.1452	4.634
HSUPA	4175	835	4.1614	4.639
HSDPA	4175	835	4.1513	4.646

## For Band IV


Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	1412	1732	4.4820	8.000
HSUPA	1412	1732	4.5394	8.000
HSDPA	1412	1732	4.5402	8.000

*Please refer to the following test plots:*


For Cellular Band  
GSM Low Channel

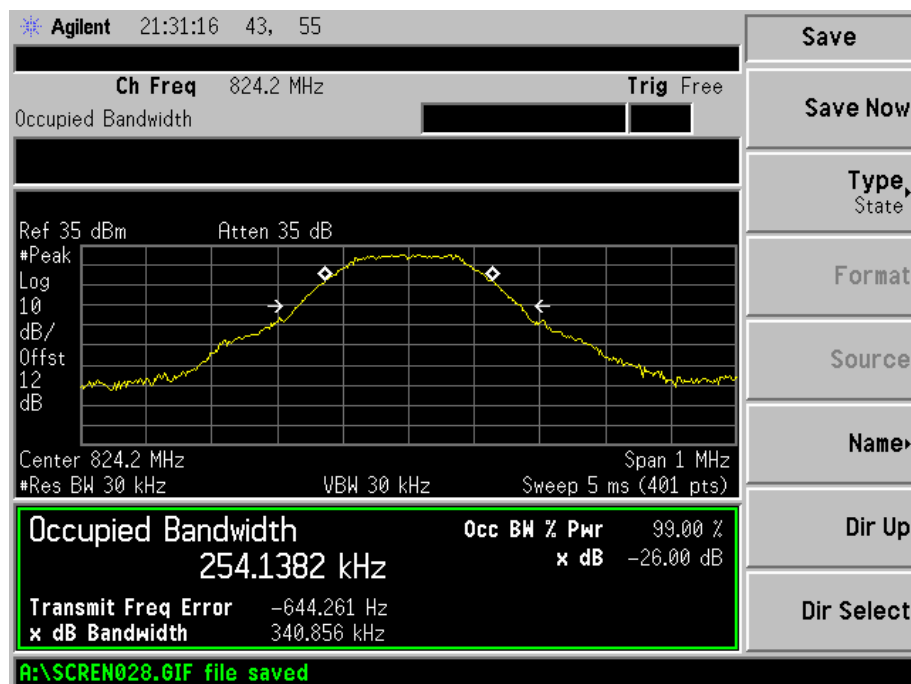


GSM Middle Channel

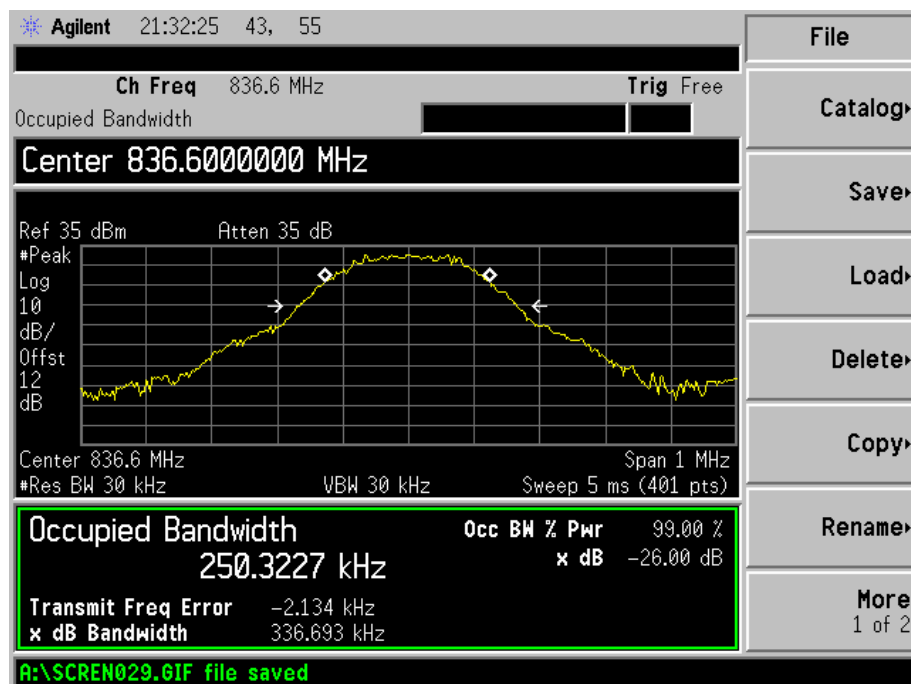

# GSM High channel

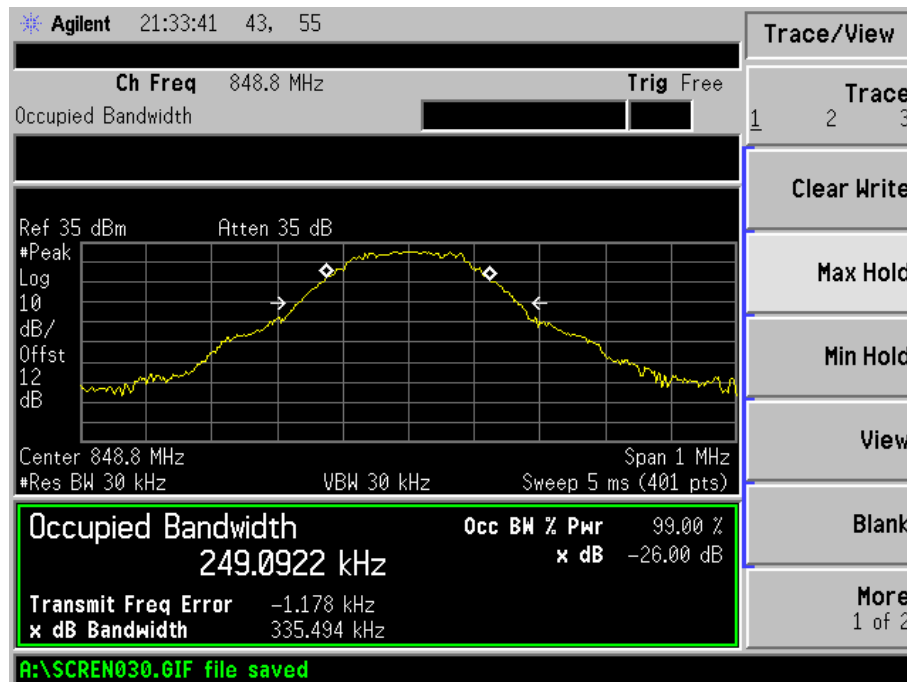


# GPRS Low Channel

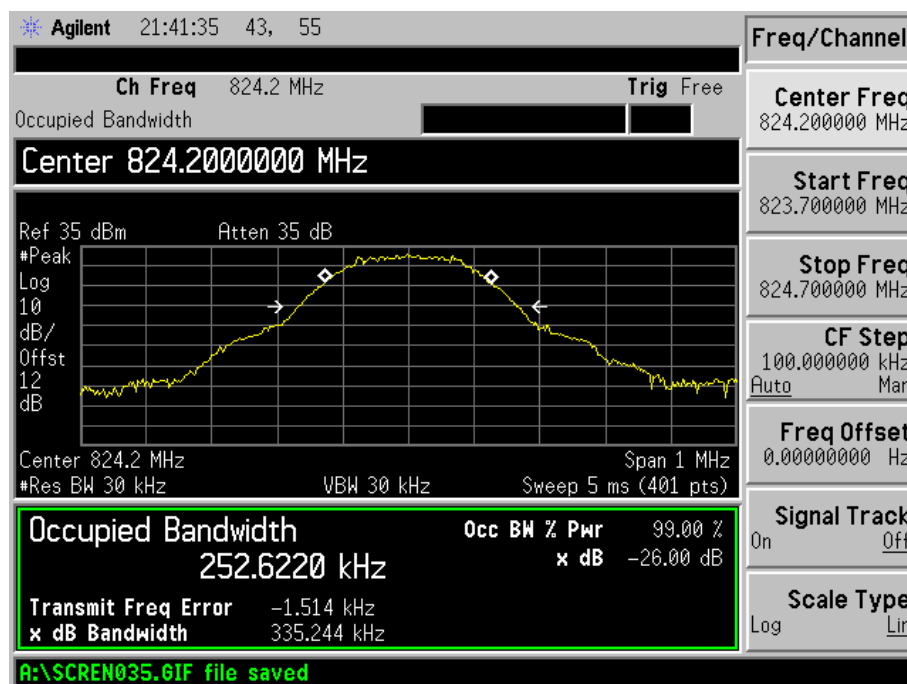





# GPRS Middle Channel

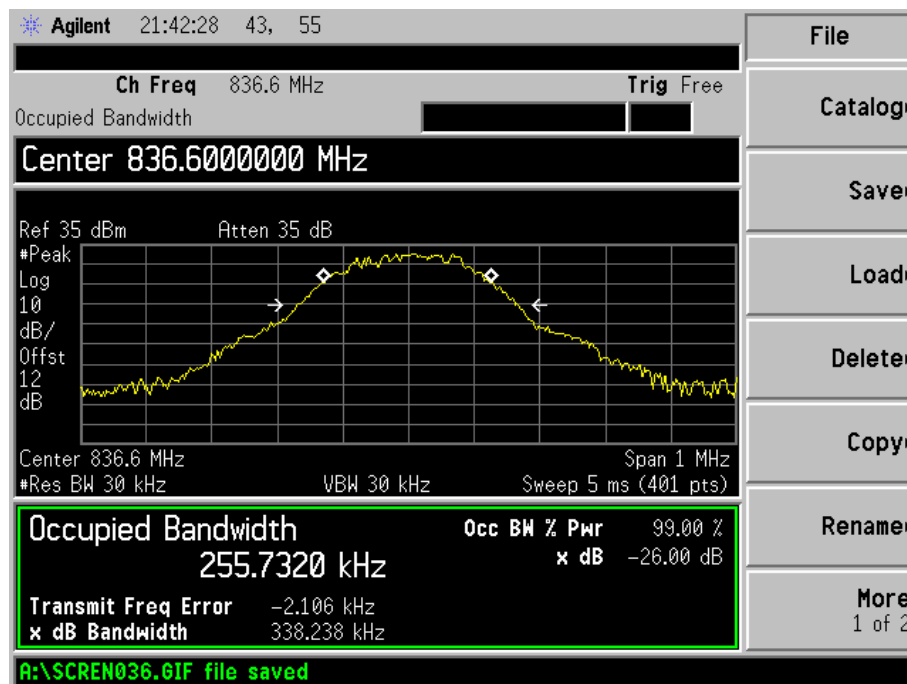


# GPRS High Channel

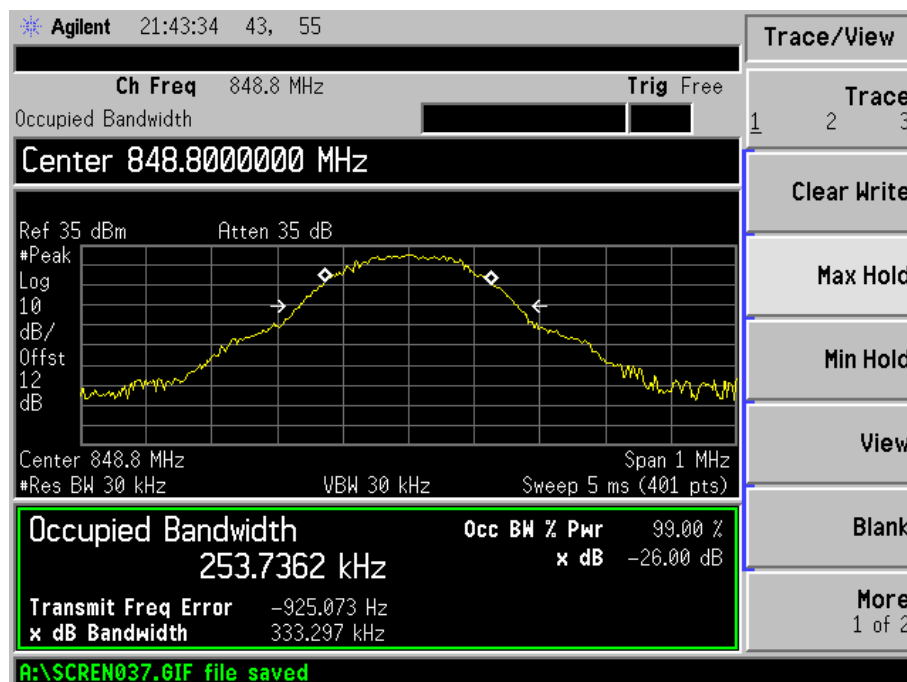



## EDGE Low Channel

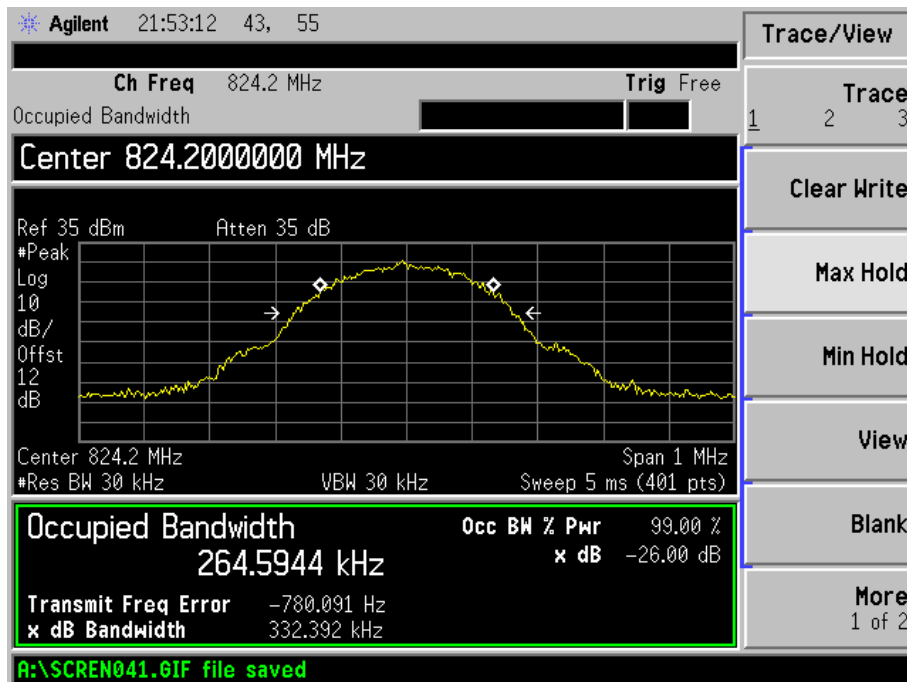


## EDGE Middle Channel

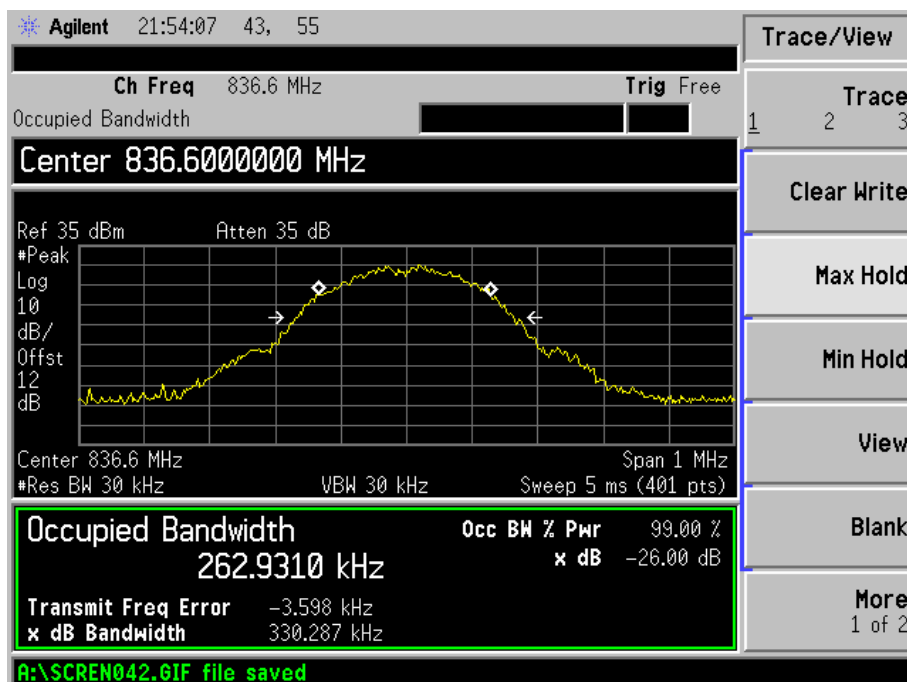


## EDGE High channel

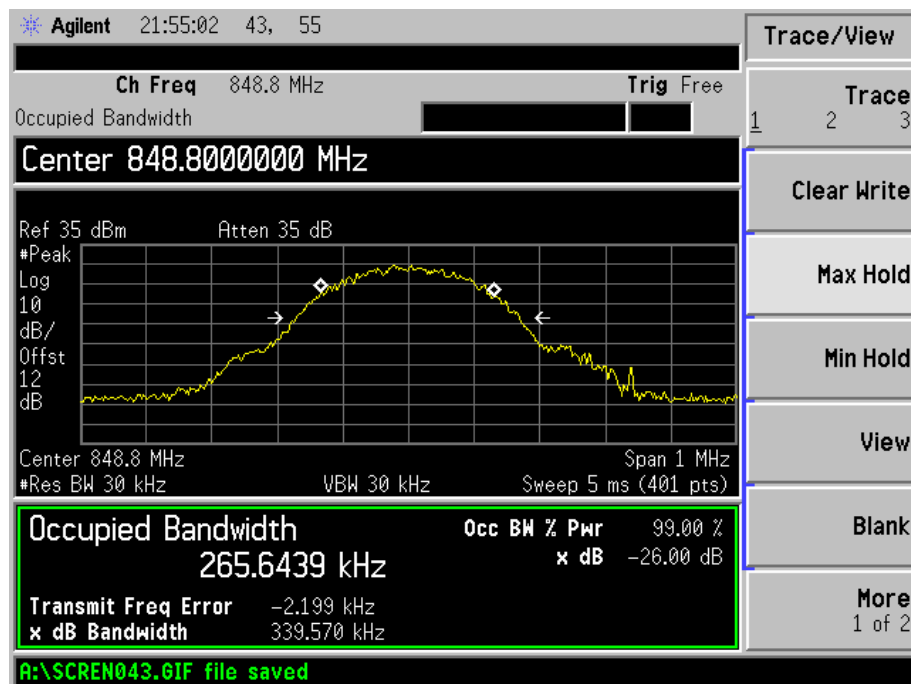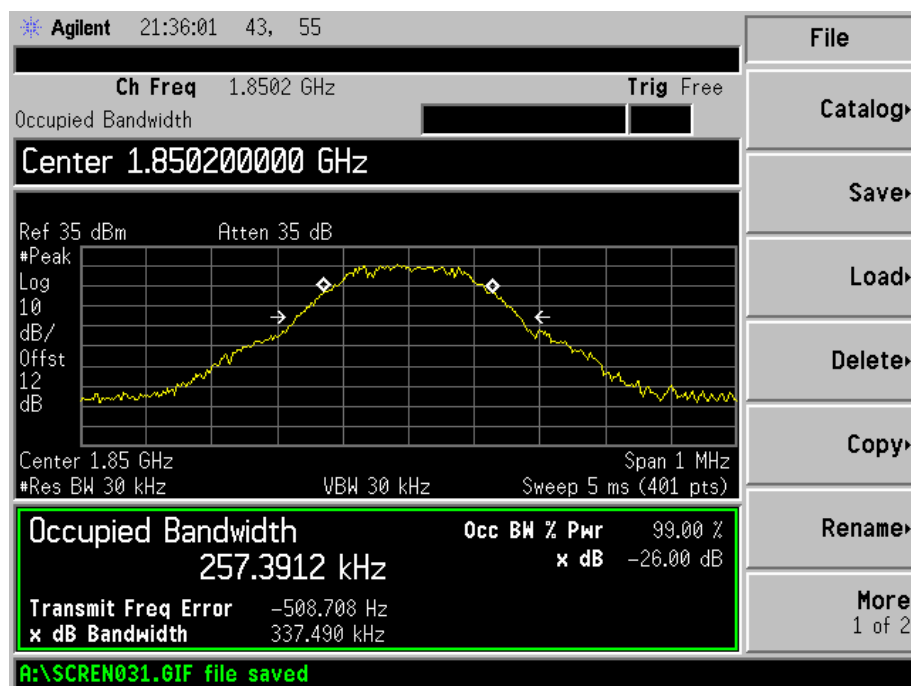For PCS Band  
GSM Low Channel


## GSM Middle Channel

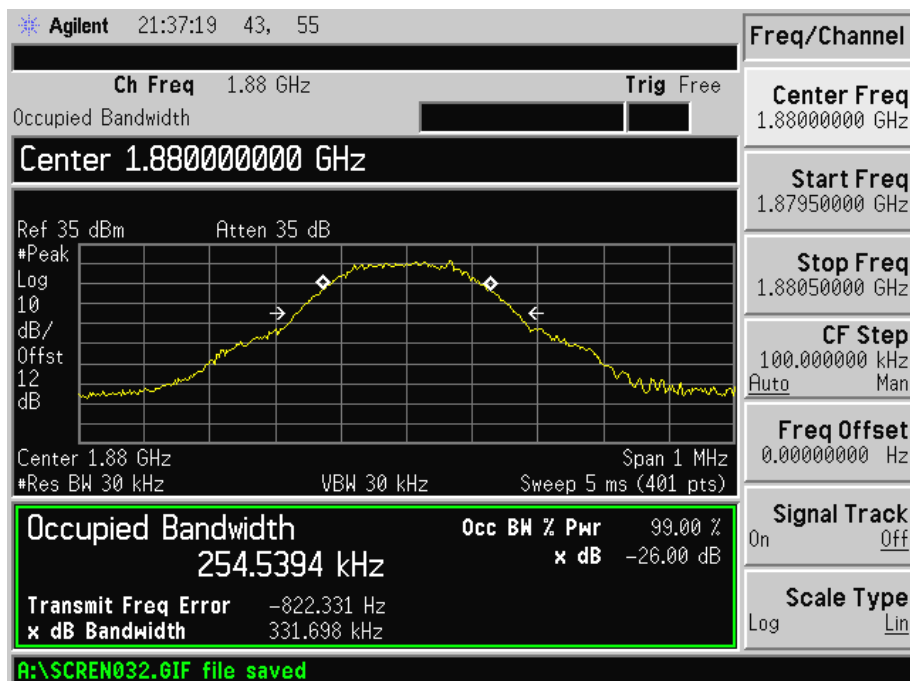


## GSM High channel

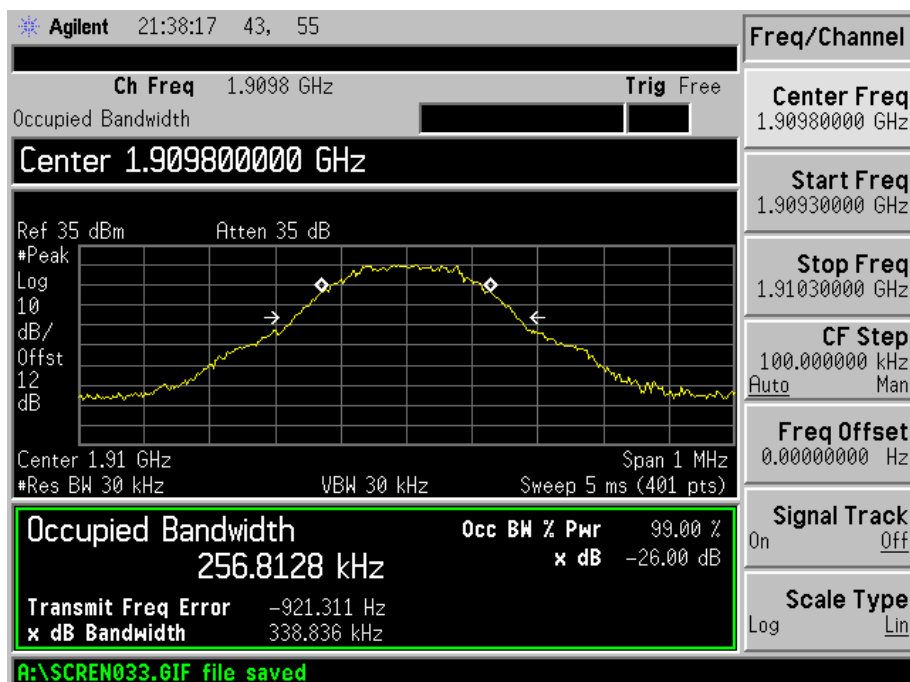


## GPRS Low Channel

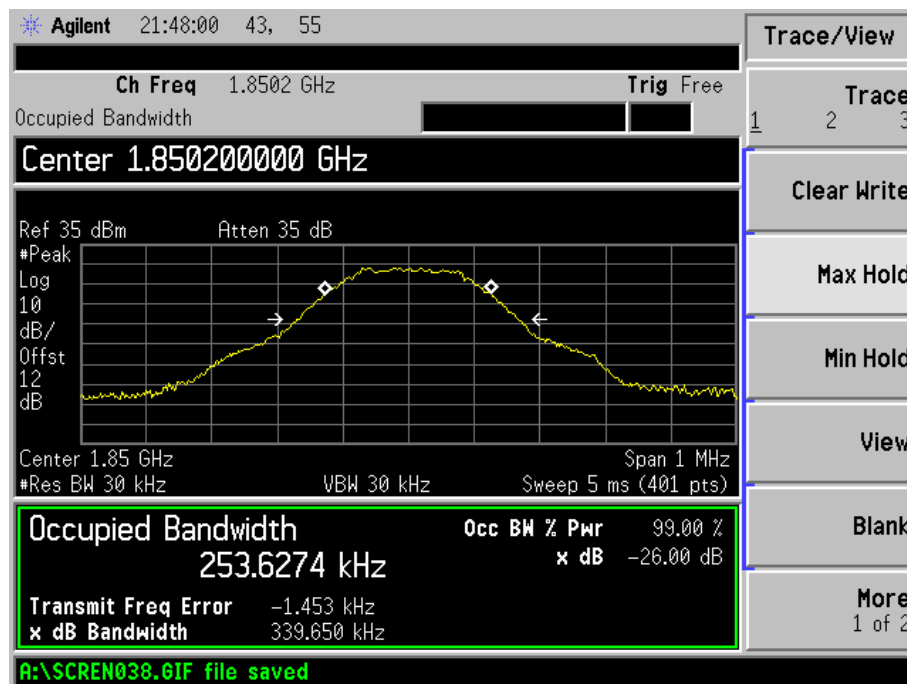


## GPRS Middle Channel

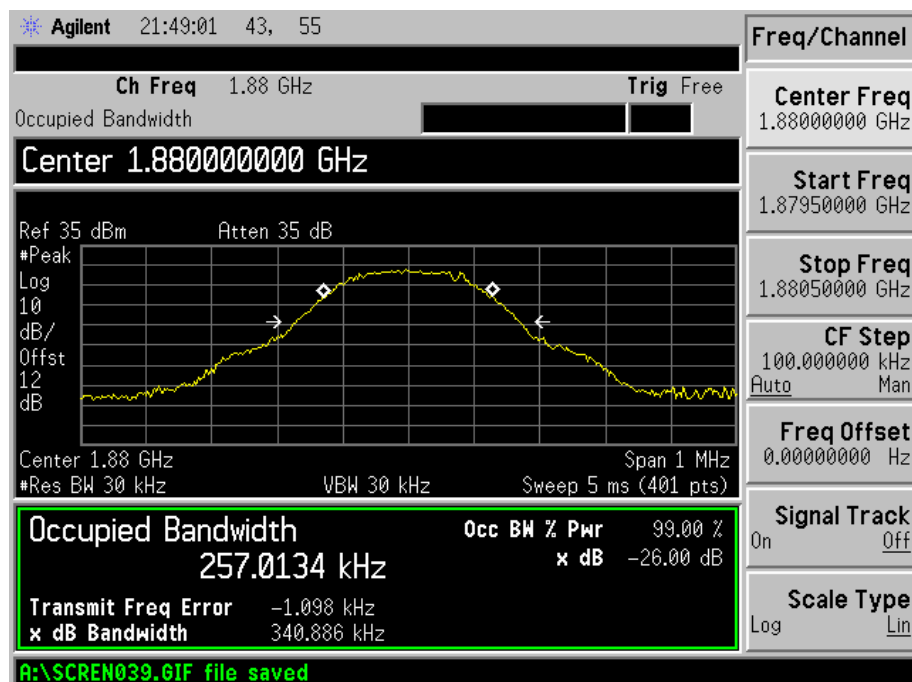


## GPRS High Channel

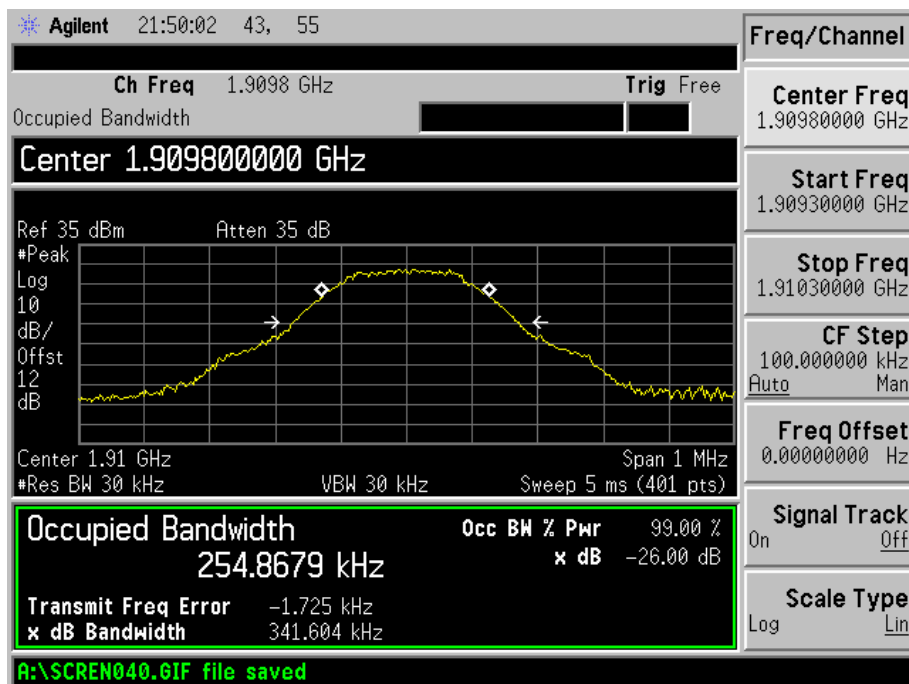


## EDGE Low Channel

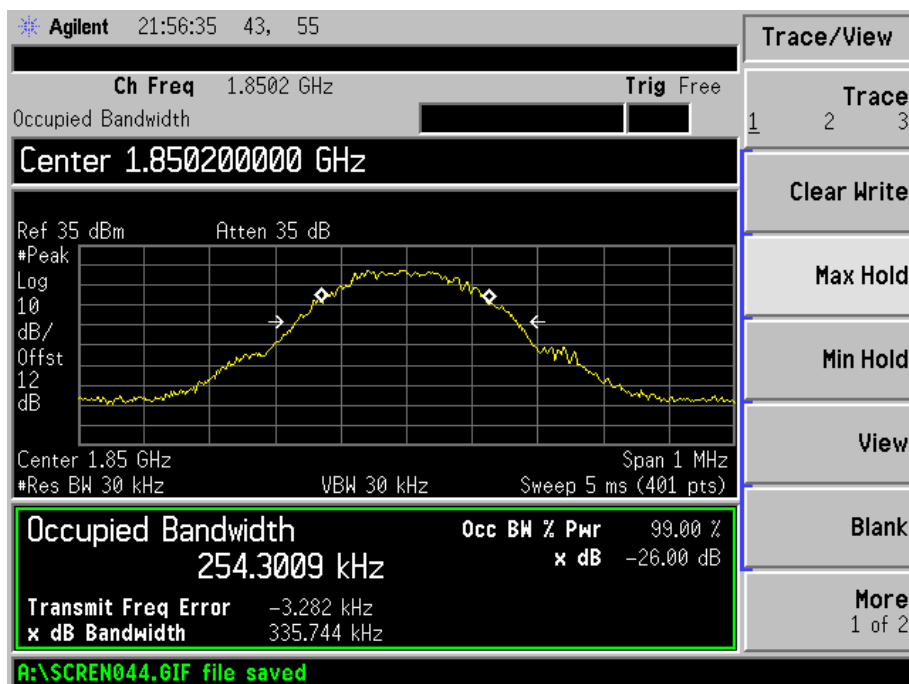

## EDGE Middle Channel

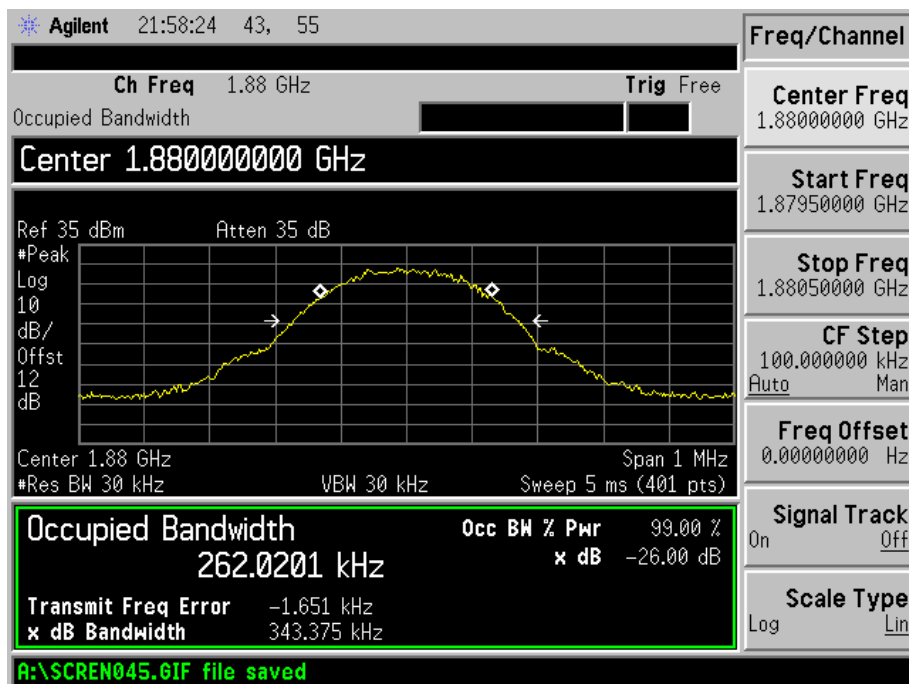


## EDGE High channel

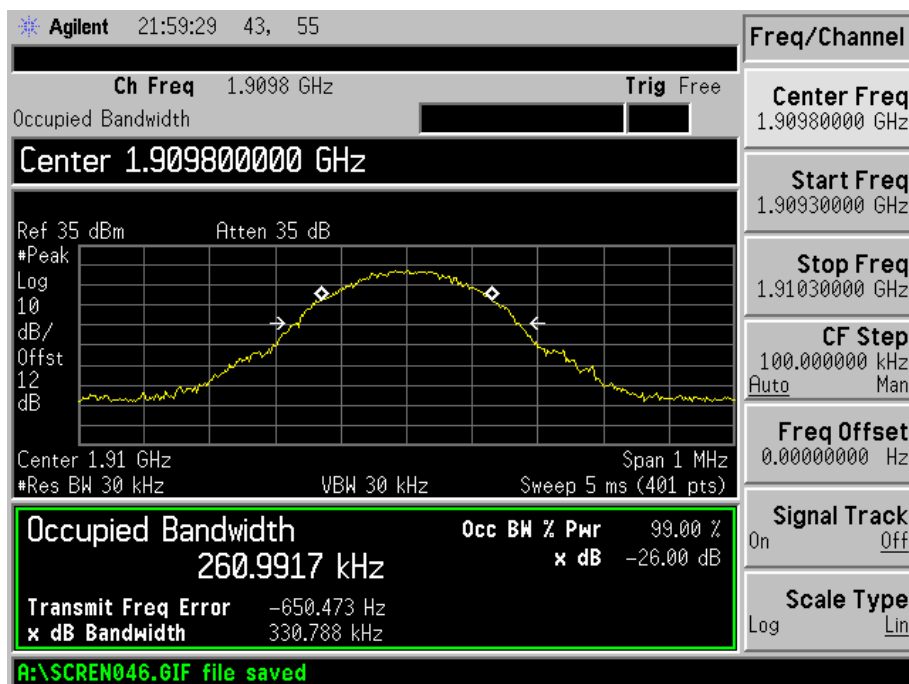


For Band II

WCDMA Middle Channel

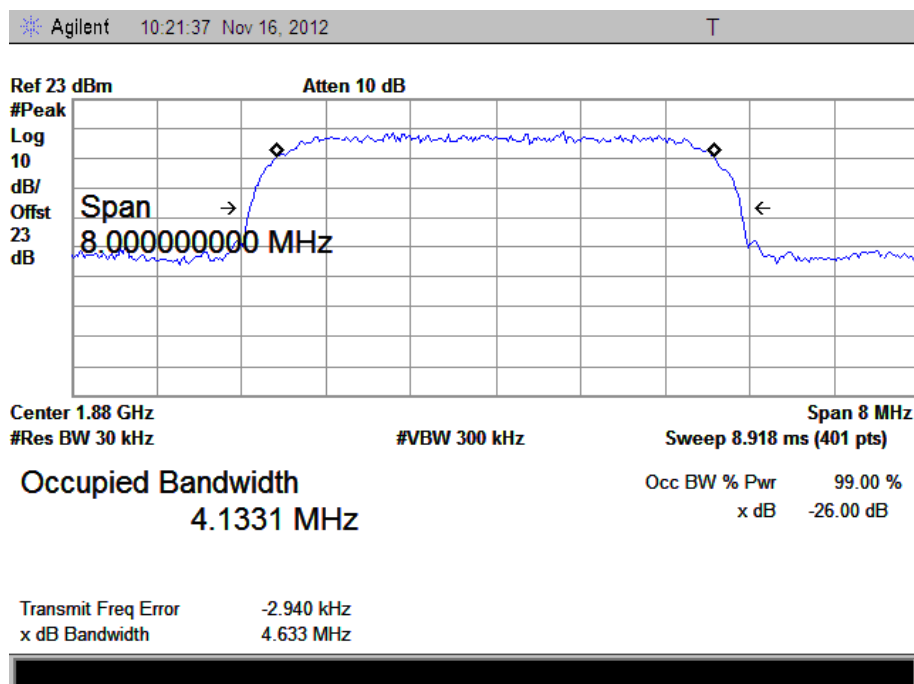


HSUPA Middle Channel

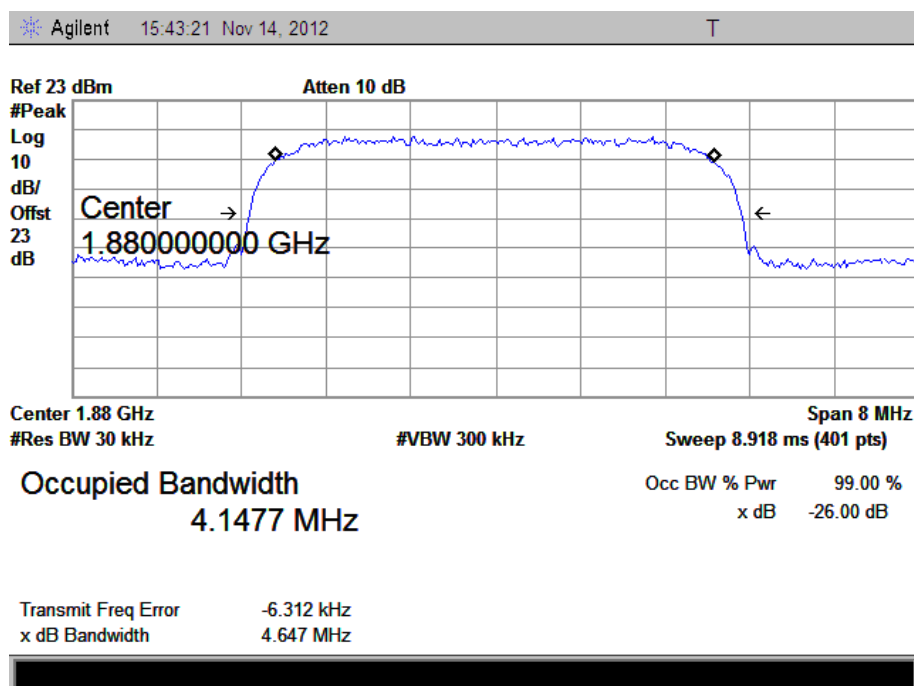




## HSDPA Middle Channel

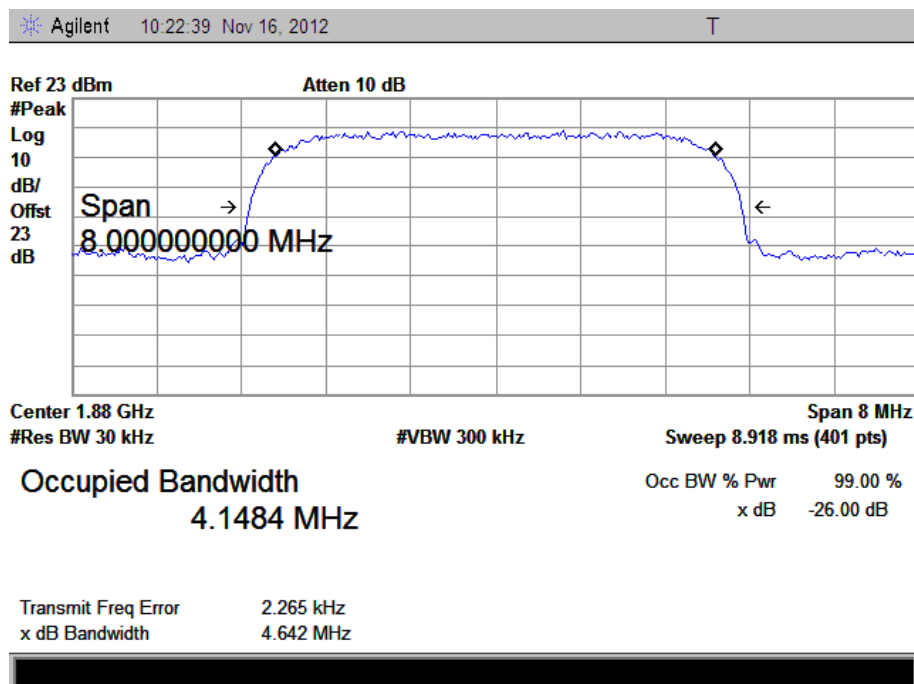


For Band V


## WCDMA Middle Channel

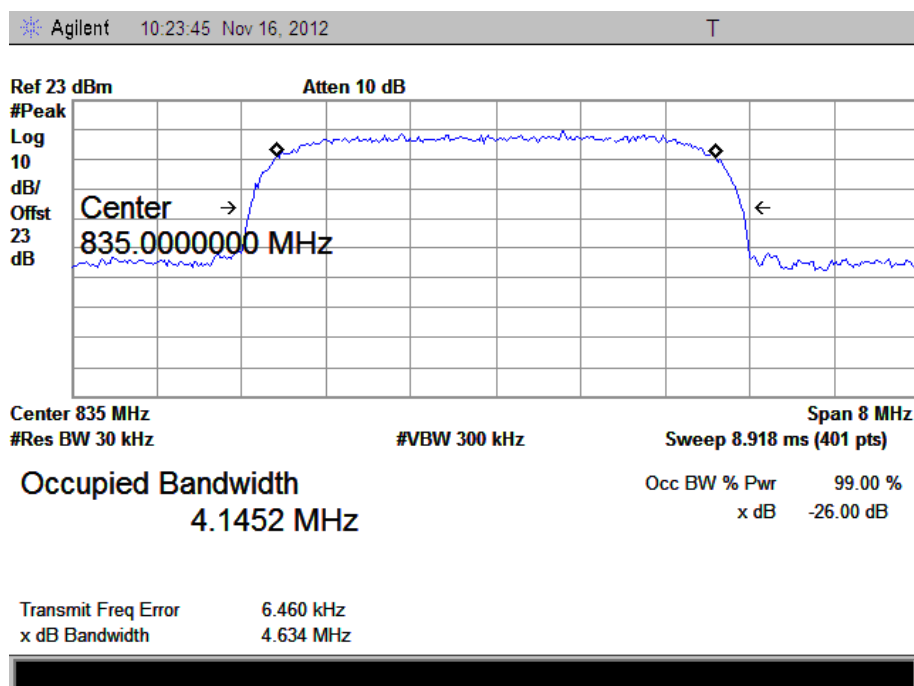

## HSUPA Middle Channel

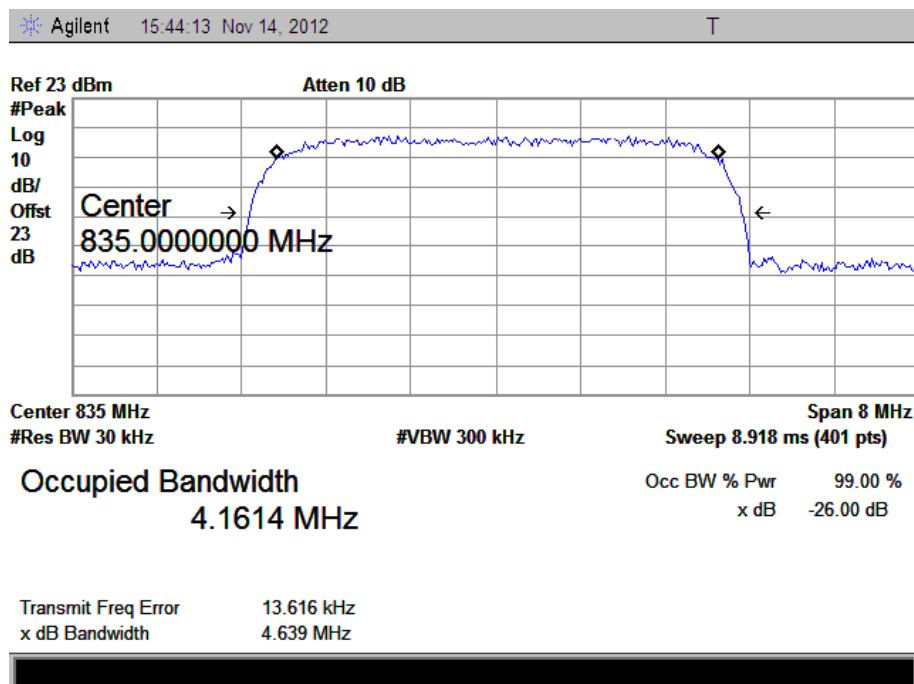


## HSDPA Middle Channel

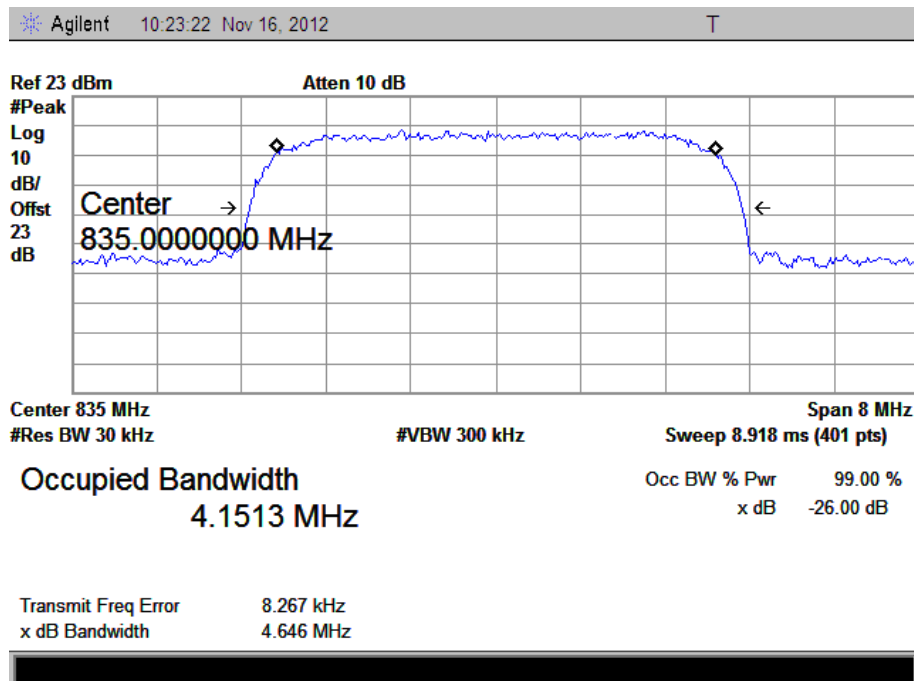


For Band IV


WCDMA Middle Channel

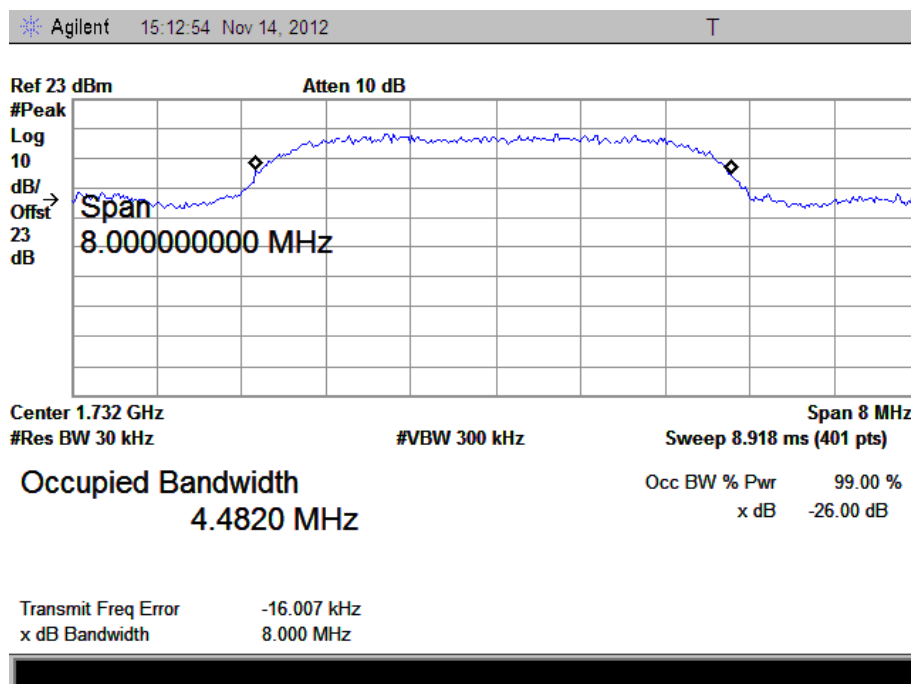

HSUPA Middle Channel

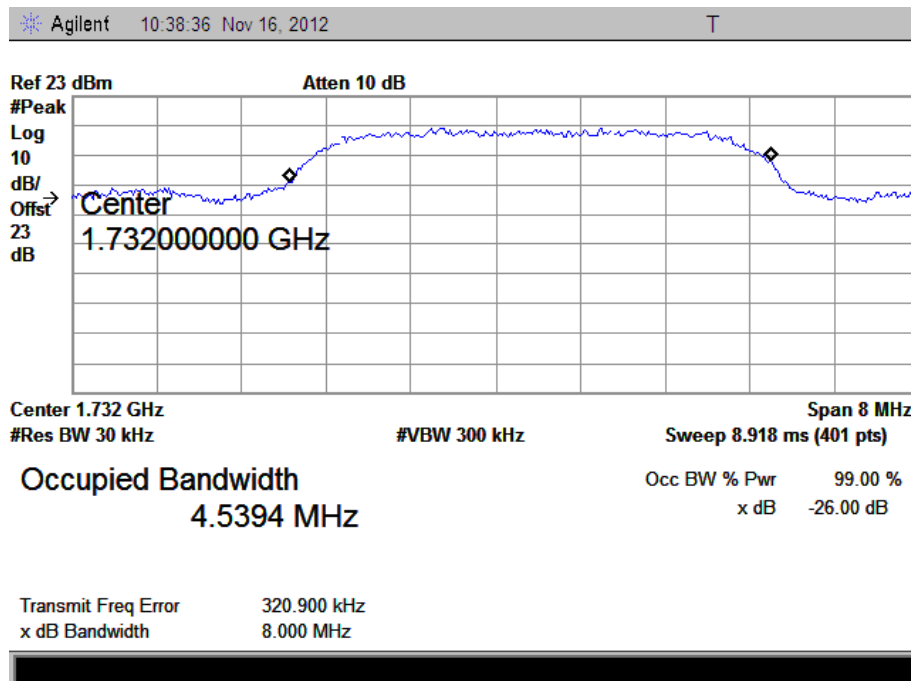

HSDPA Middle Channel

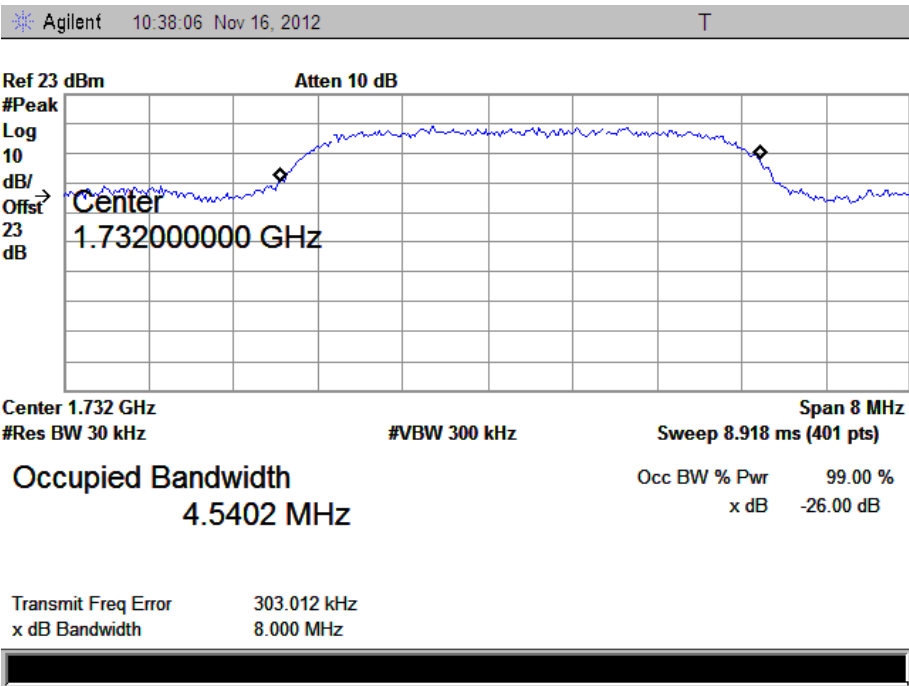

## 6. Out of Band Emissions at Antenna Terminal

### 6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h) For operations in the 1710-1755 MHz and 2110-2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB


### 6.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Aglient	Spectrum Analyzer	E4402B	US41192821	2012-03-28	2013-03-27
Rohde & Schwarz	Spectrum Analyzer	FSP	836079/035	2012-03-28	2013-03-27
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	112012	2012-03-28	2013-03-27

### 6.3 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

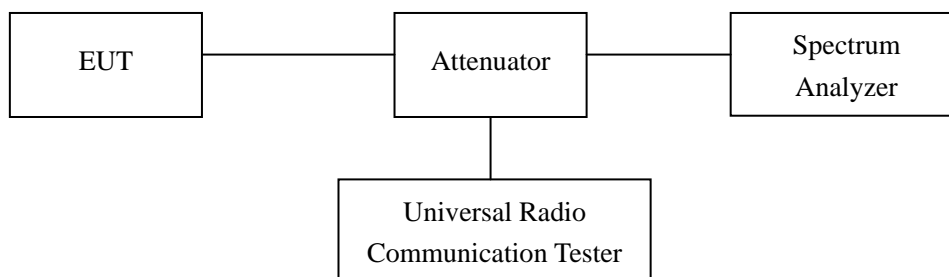


### 6.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar


## 6.5 Summary of Test Results/Plots

Please refer to the following test plots For Cellular Band

GSM Low Channel 30MHz to 1GHz

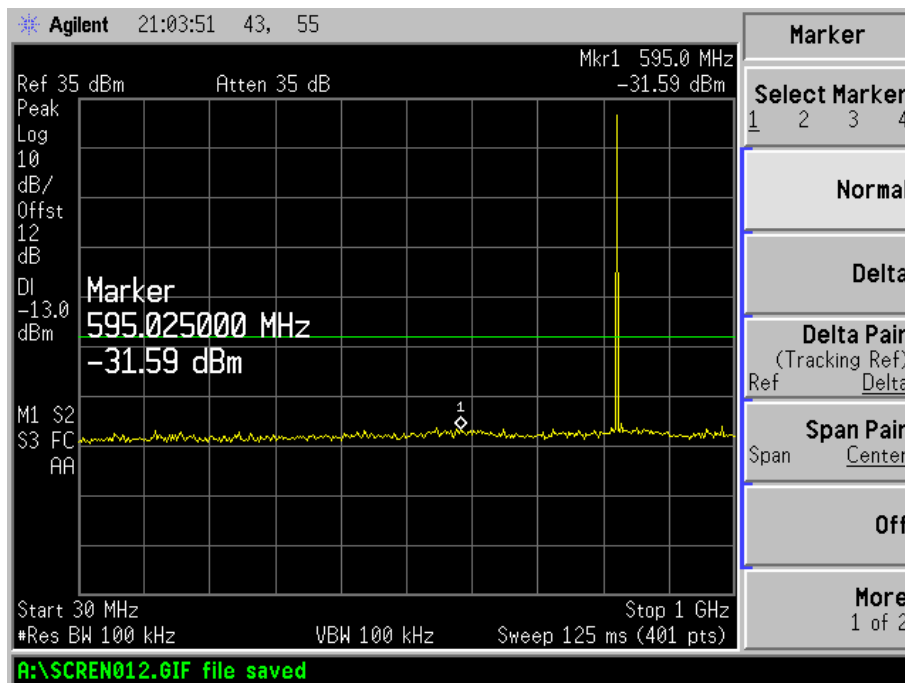


Above 1GHz

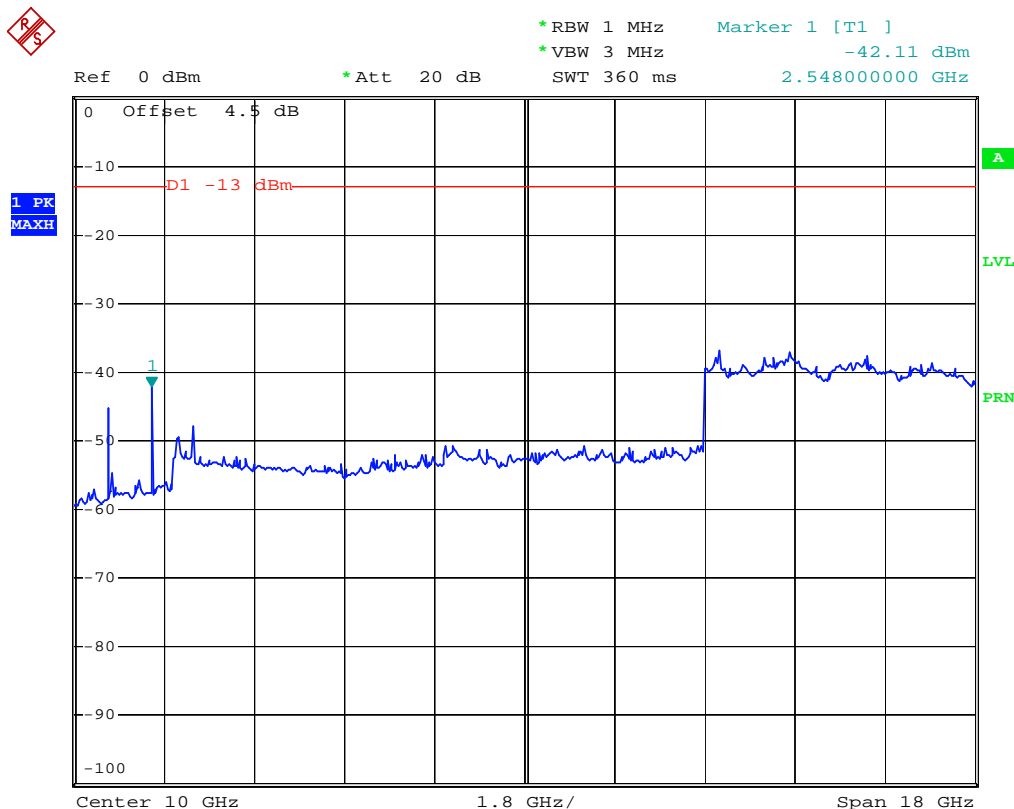


## GSM Middle Channel

30MHz to 1GHz

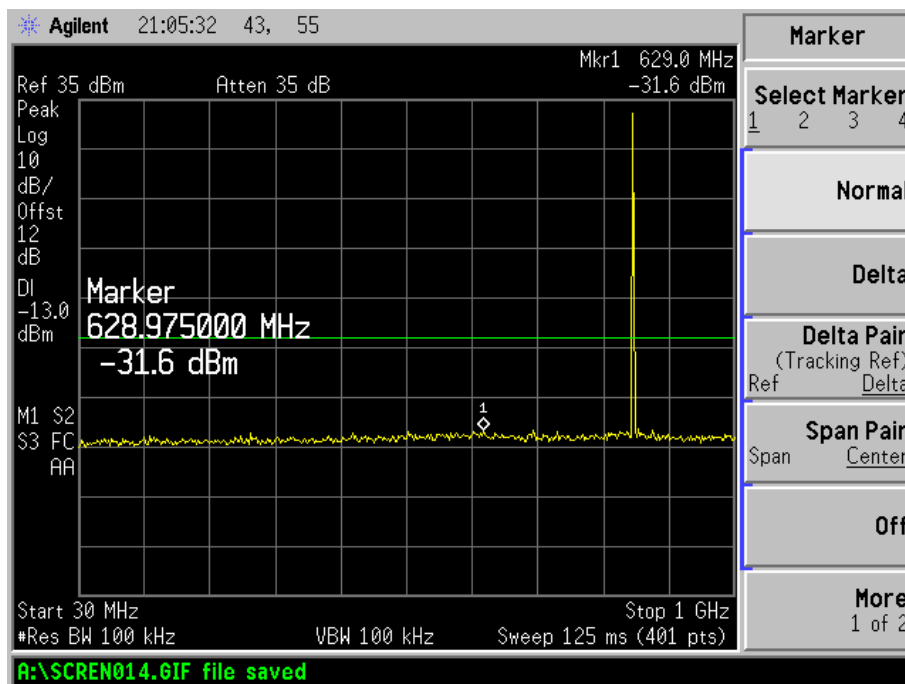


## Above 1GHz

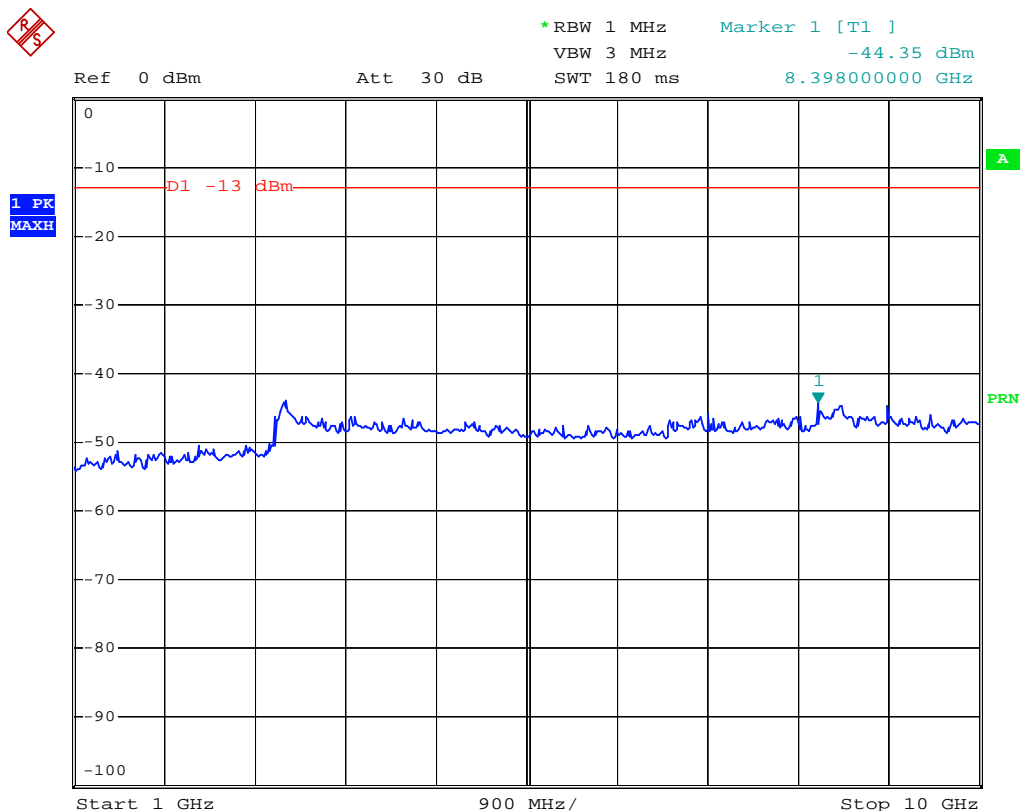


## GSM High Channel

30MHz to 1GHz

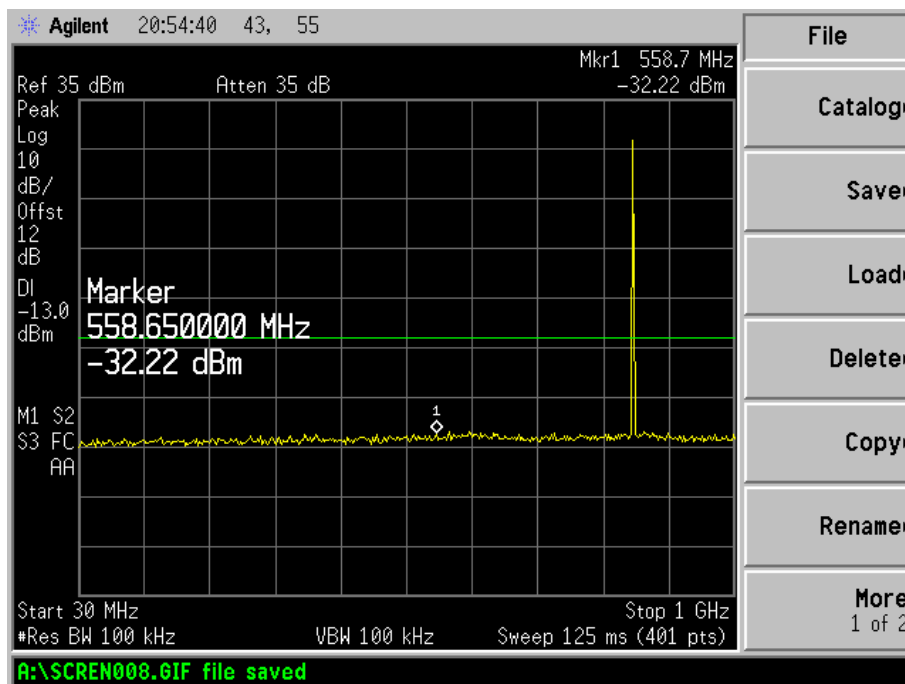


## Above 1GHz

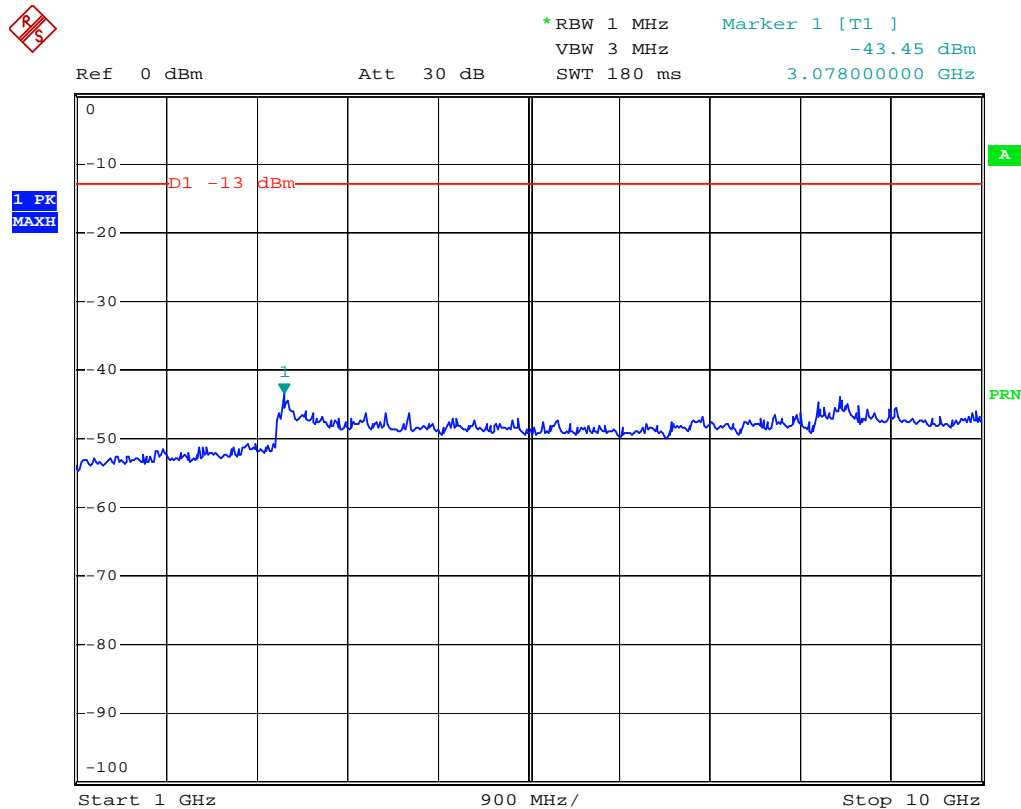




## GSM Low Band Emission

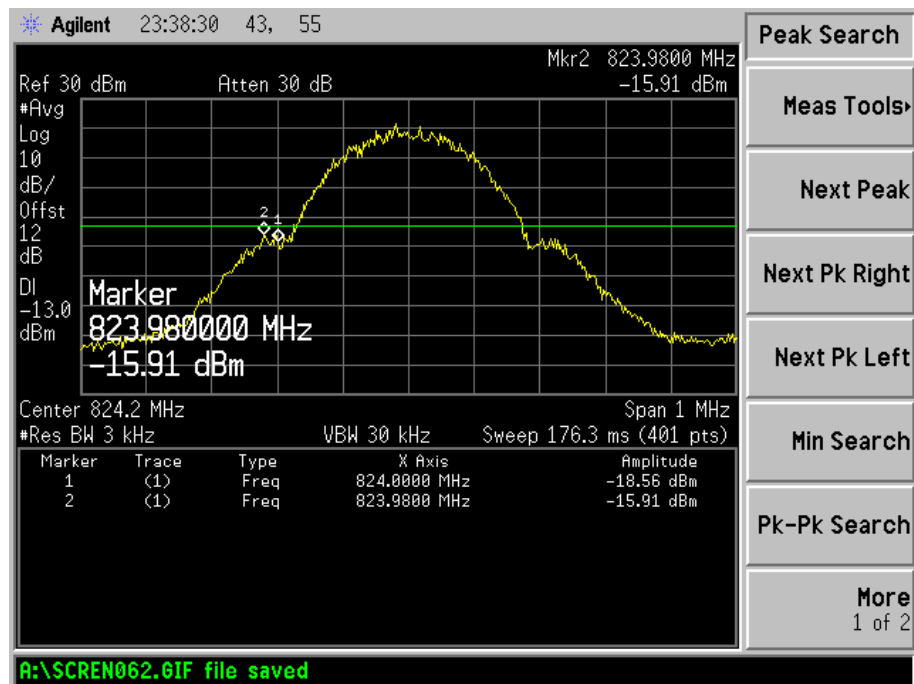


## GSM High Band Emission

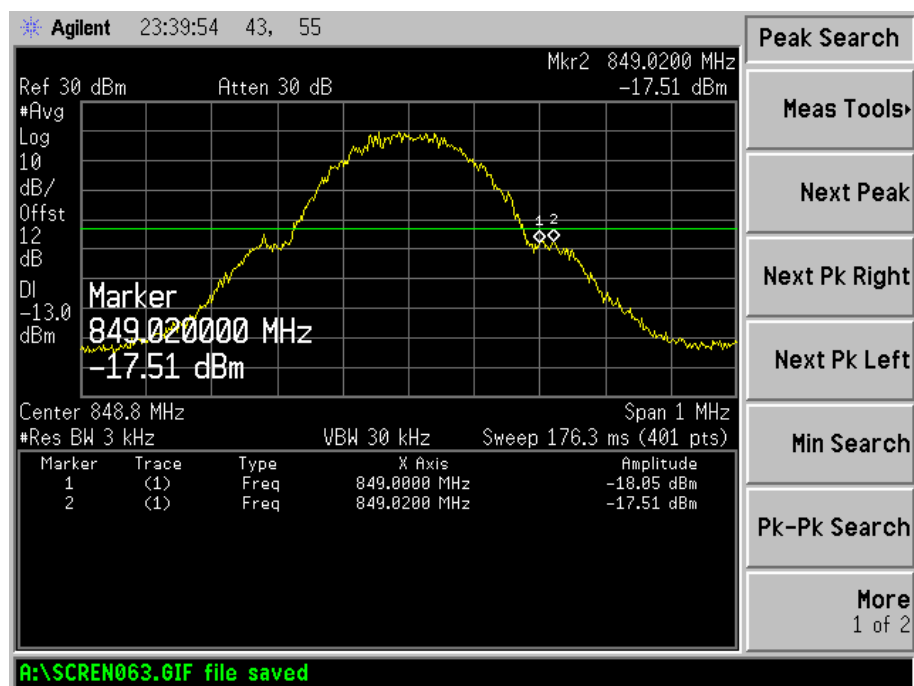


## GPRS Low Channel

30MHz to 1GHz

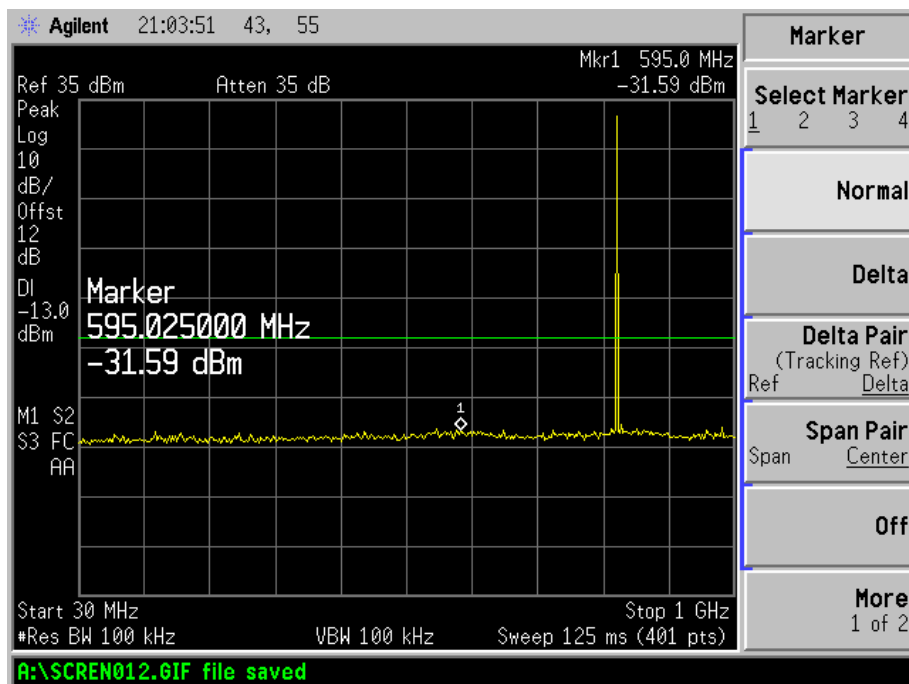


## Above 1GHz

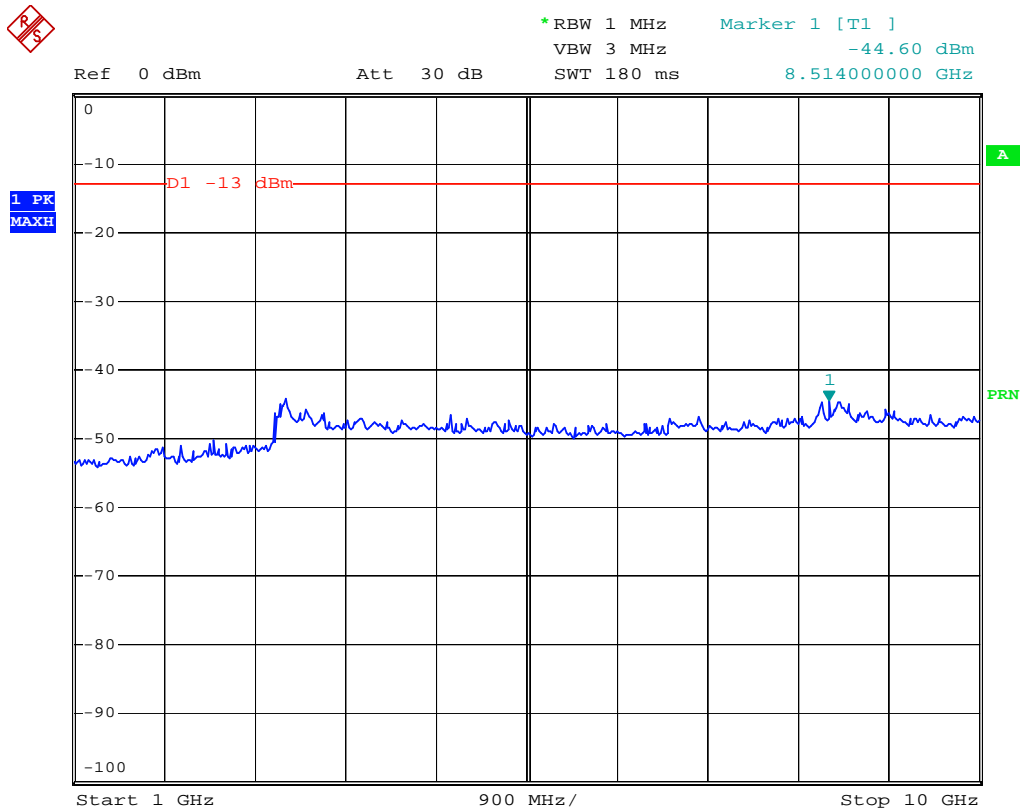


## GPRS Middle Channel

30MHz to 1GHz

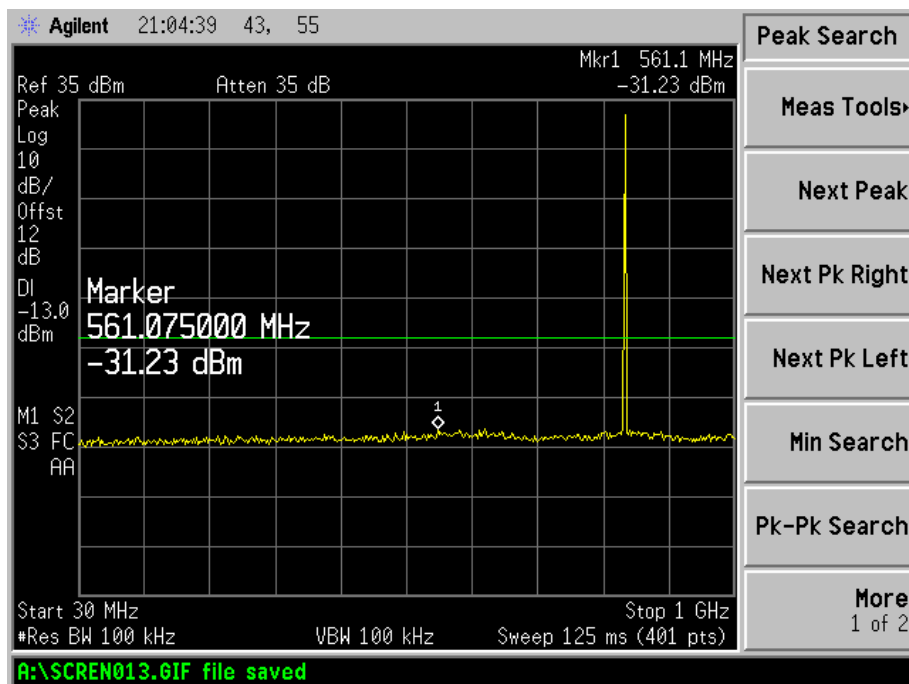


## Above 1GHz

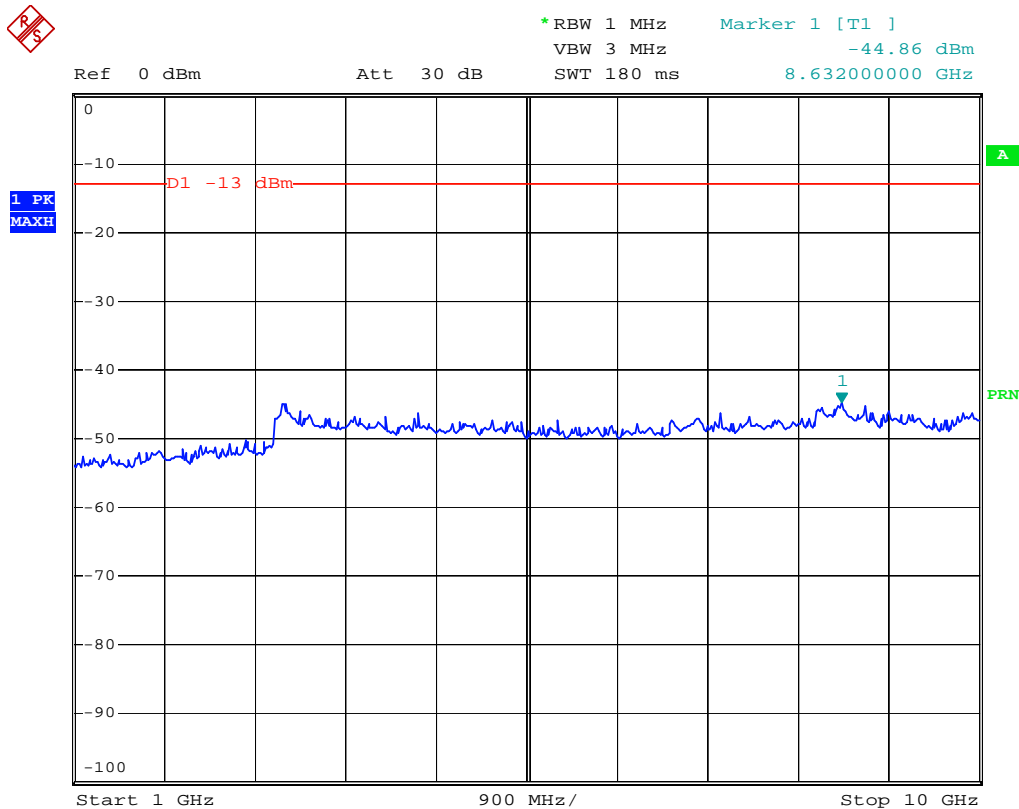


## GPRS High Channel


30MHz to 1GHz

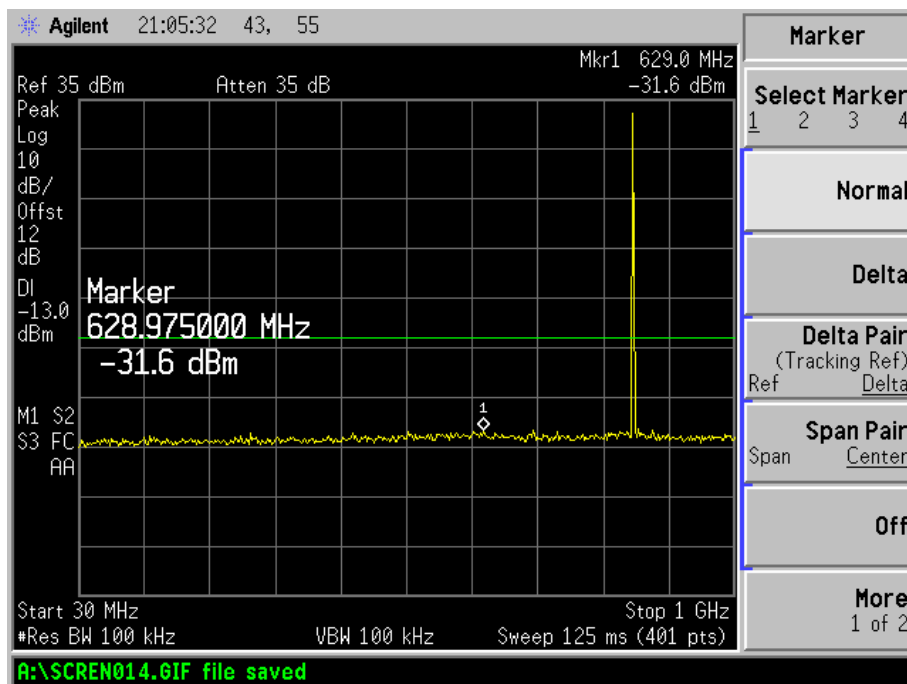


## Above 1GHz

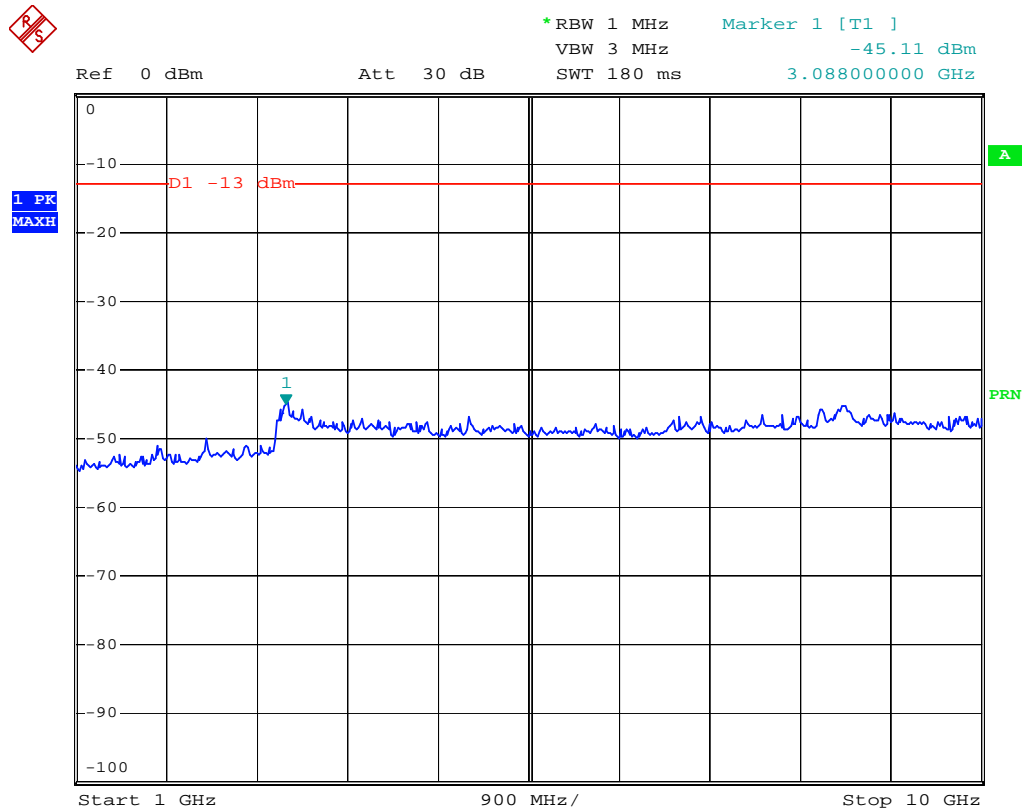

## GPRS Low Band Emission

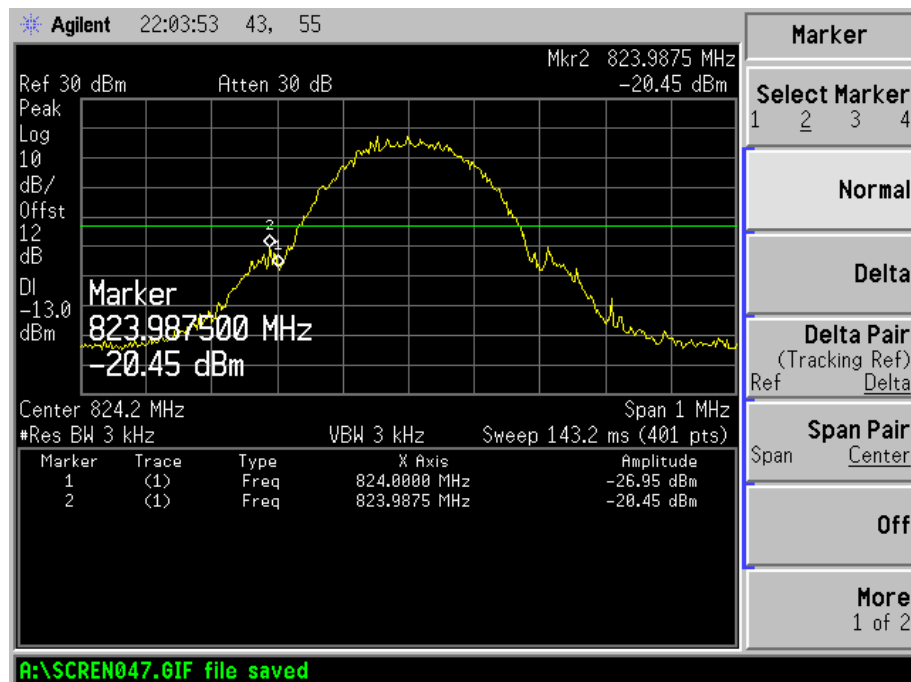


## GPRS High Band Emission

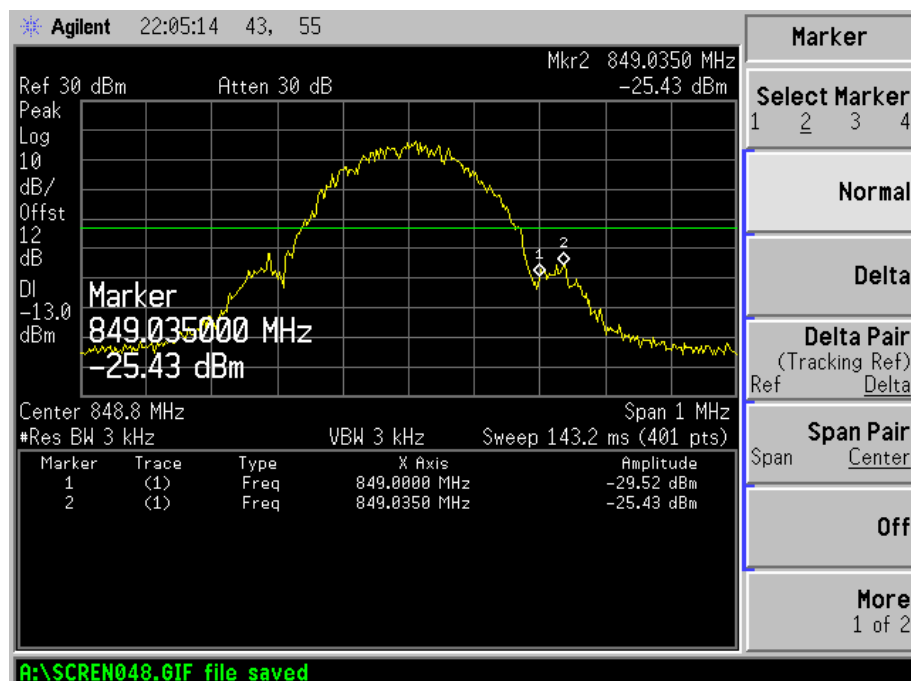


EDGE Low Channel

30MHz to 1GHz

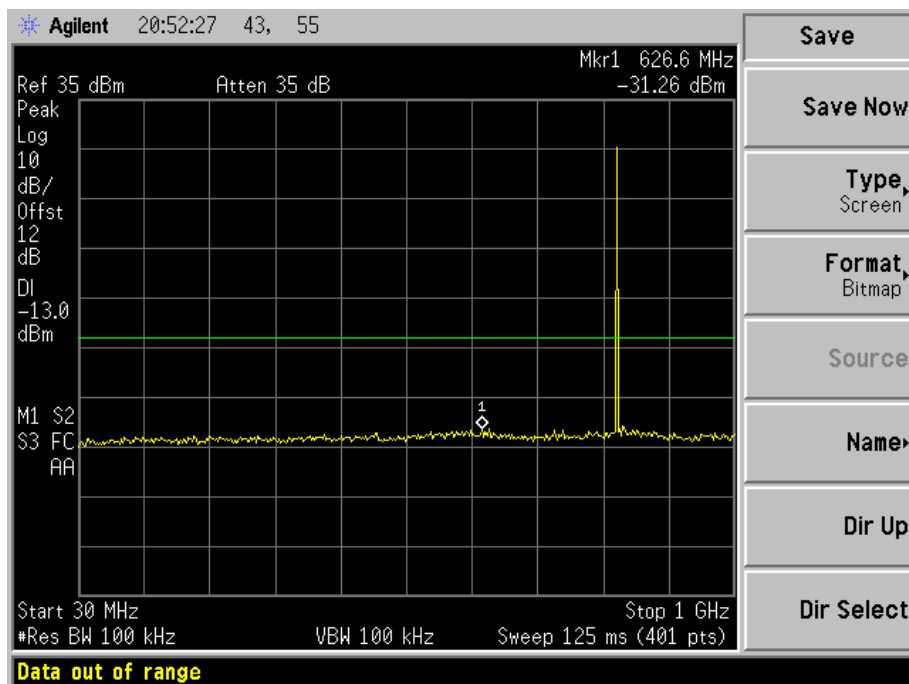


Above 1GHz

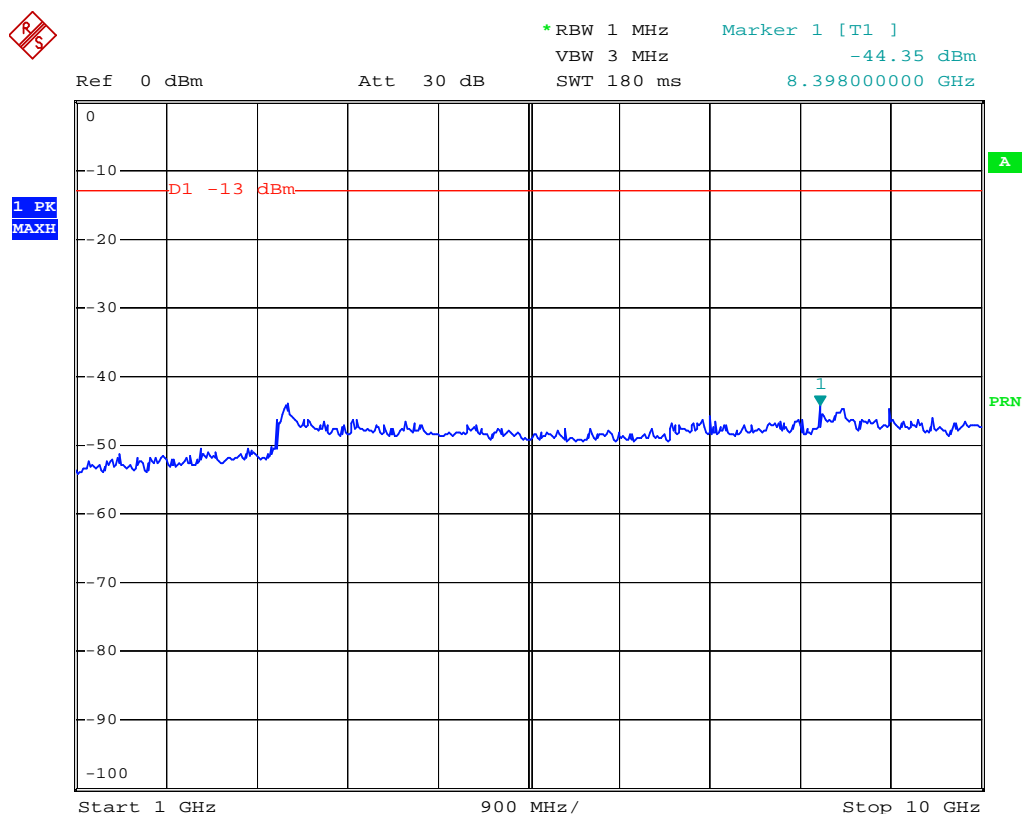


## EDGE Middle Channel

30MHz to 1GHz

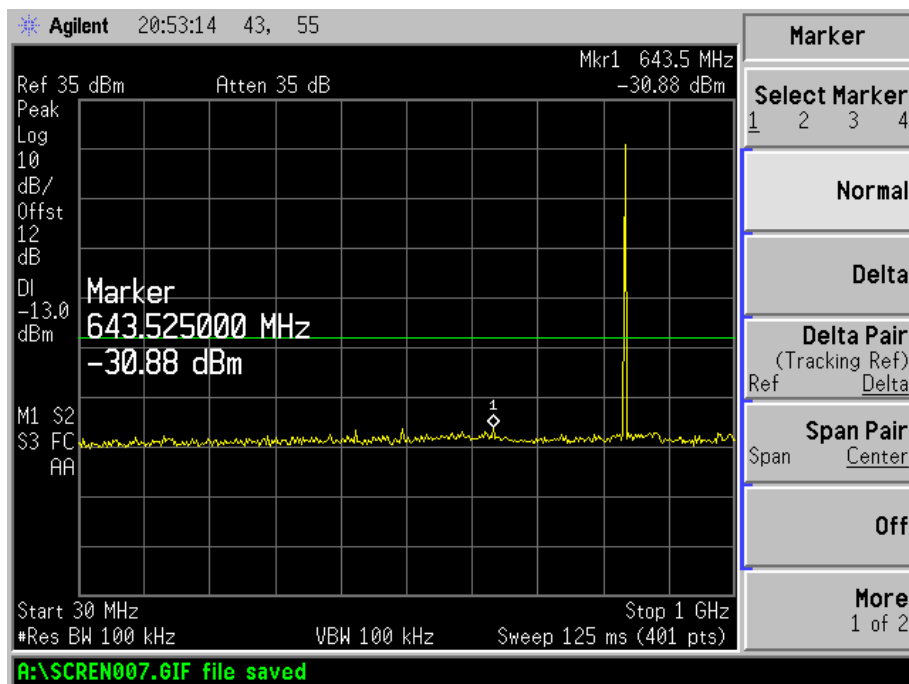


## Above 1GHz

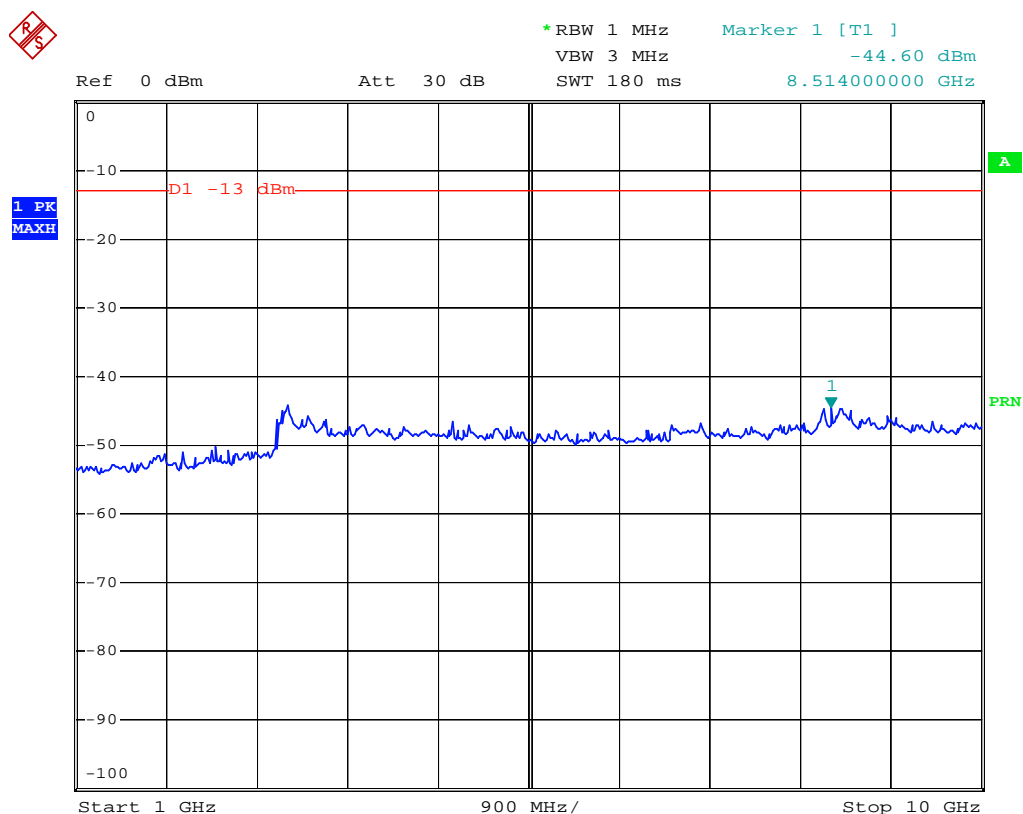


EDGE High Channel

30MHz to 1GHz

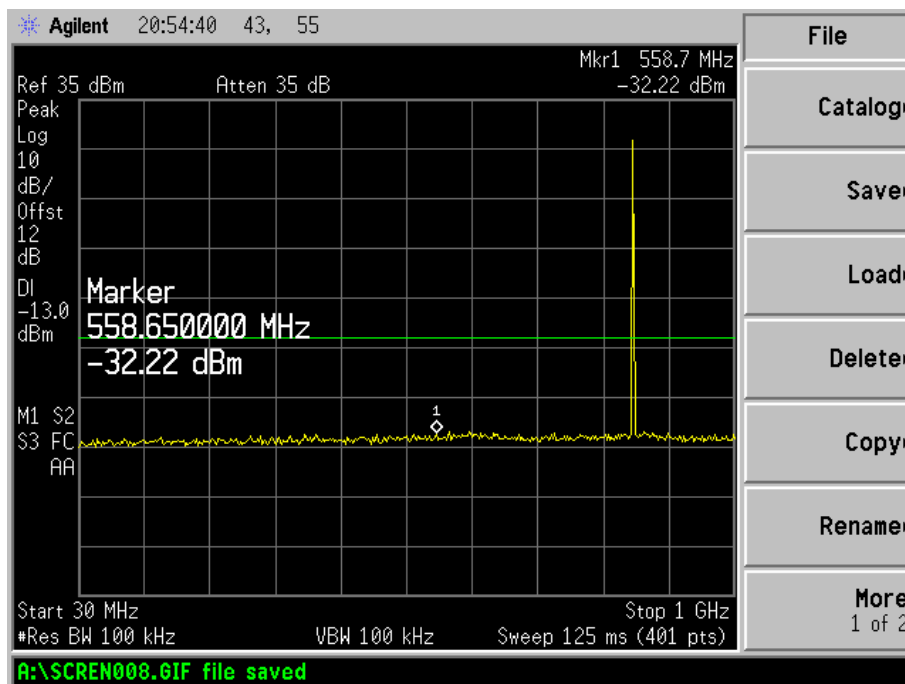

Above 1GHz

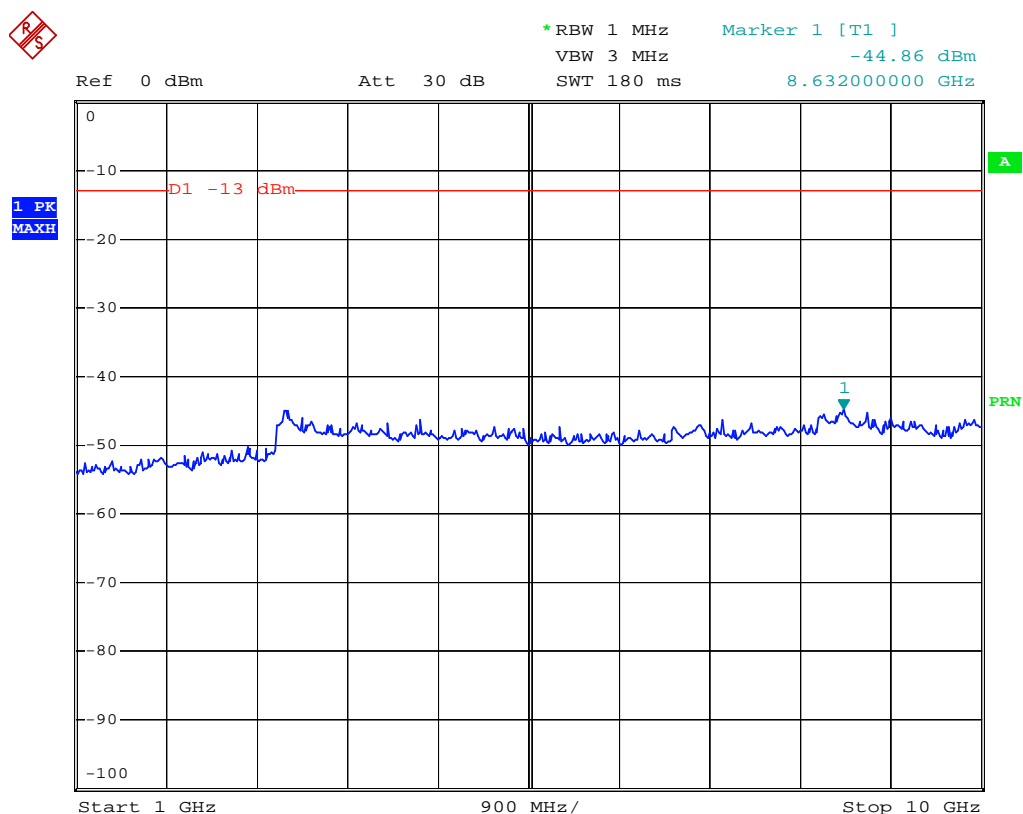





## EDGE Low Band Emission




## EDGE High Band Emission

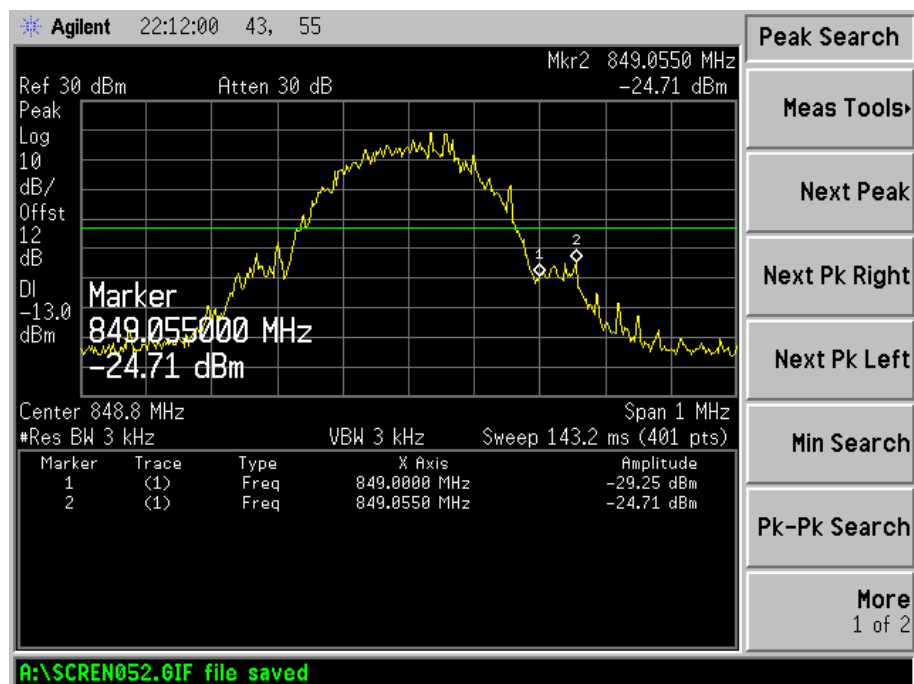

For PCS Band  
GSM Low Channel  
30MHz to 1GHz

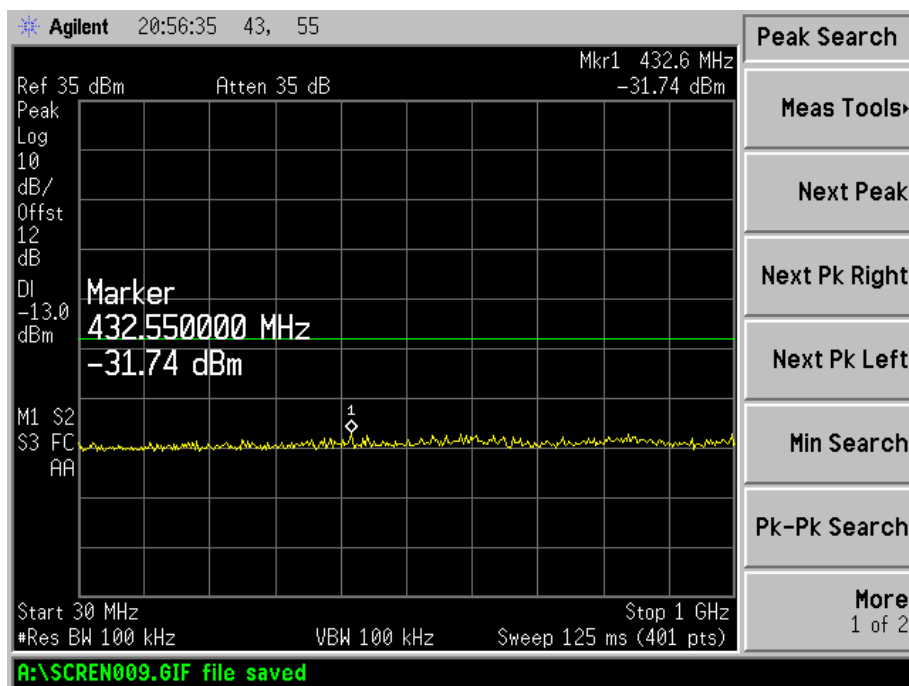


Above 1GHz

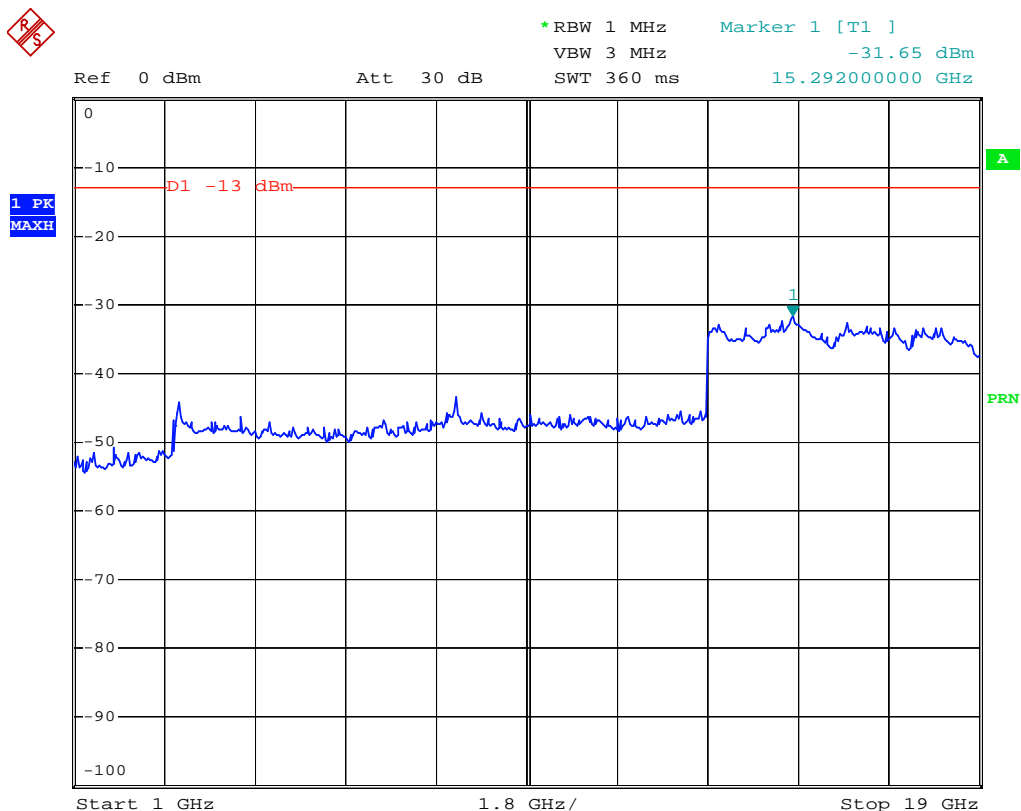


## GSM Middle Channel

30MHz to 1GHz

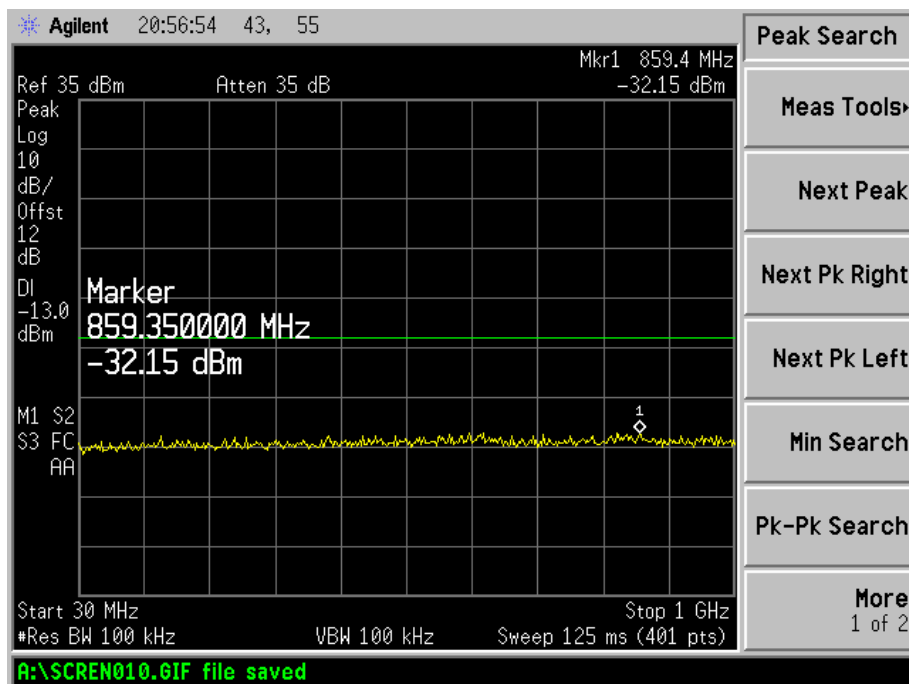


## Above 1GHz

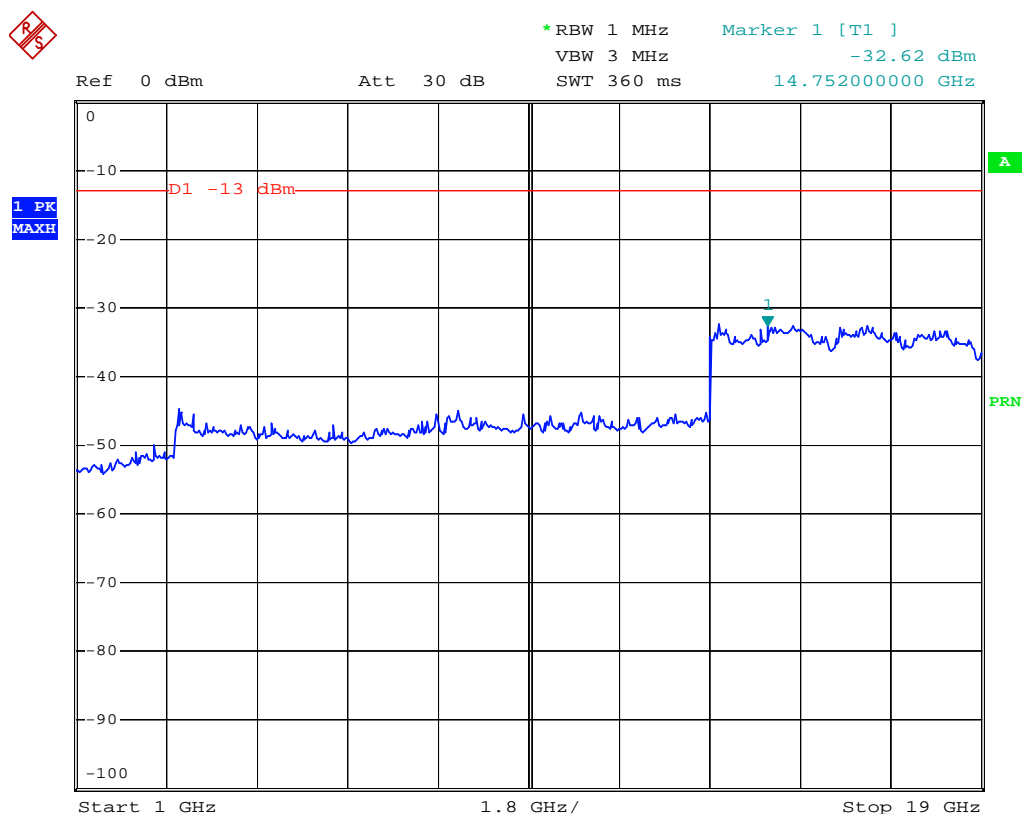


## GSM High Channel

30MHz to 1GHz

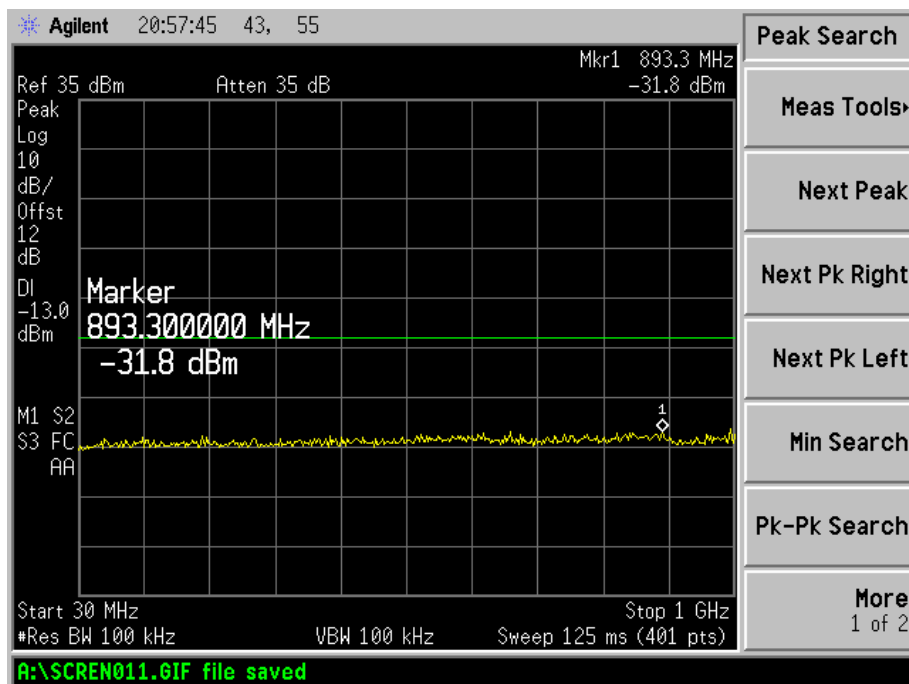


Above 1GHz

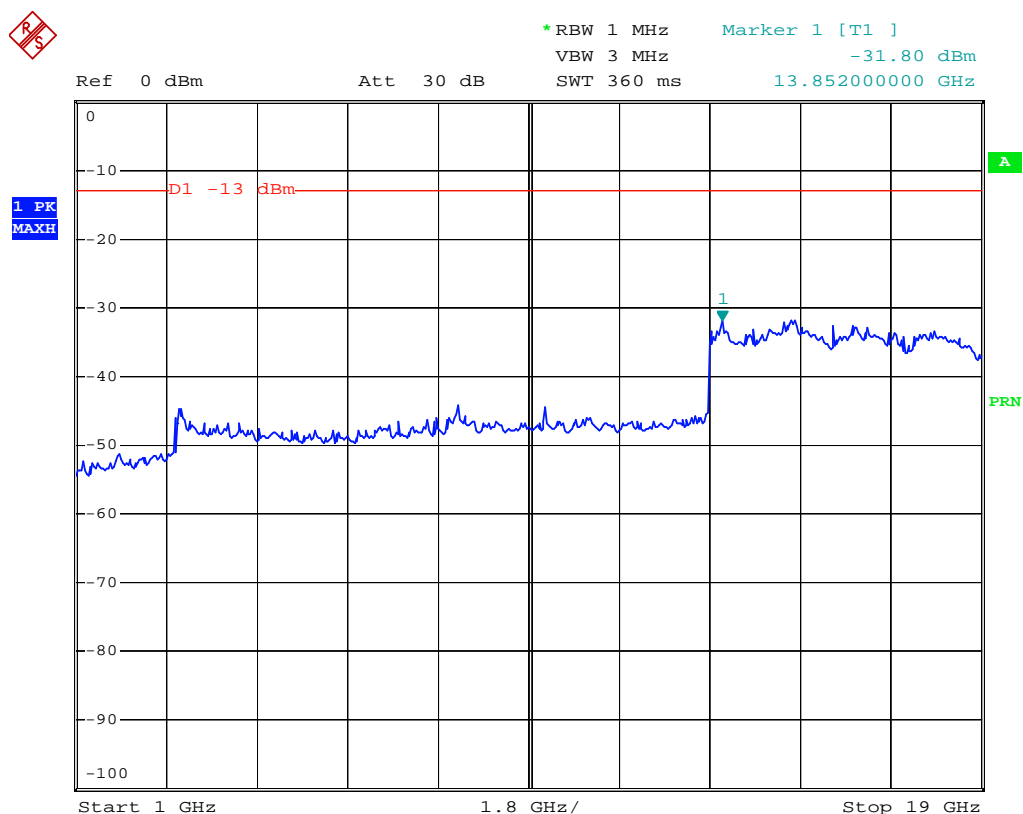

## GSM Low Band Emission




## GSM High Band Emission

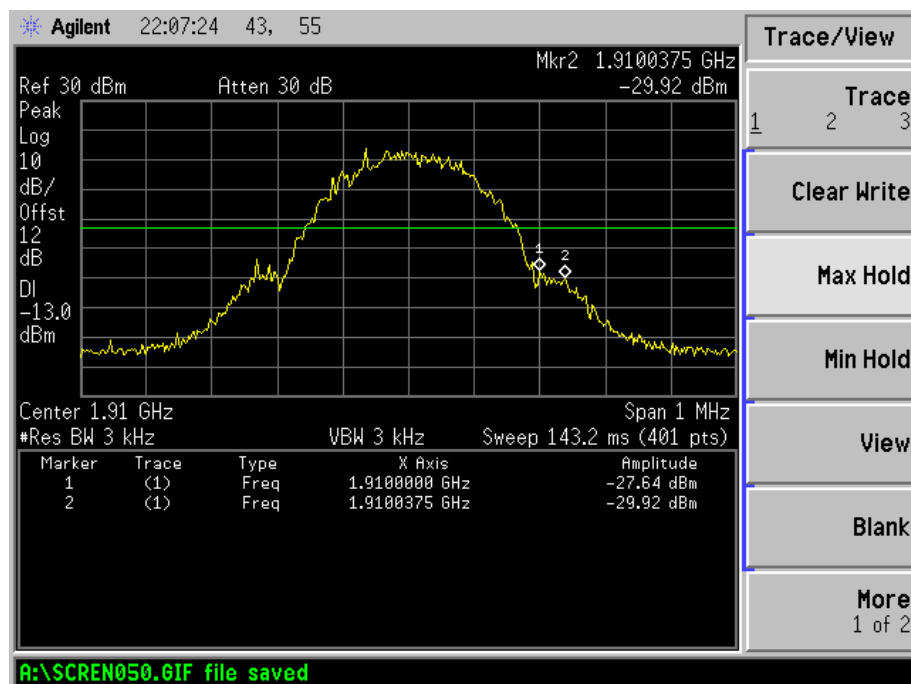


## GPRS Low Channel

30MHz to 1GHz

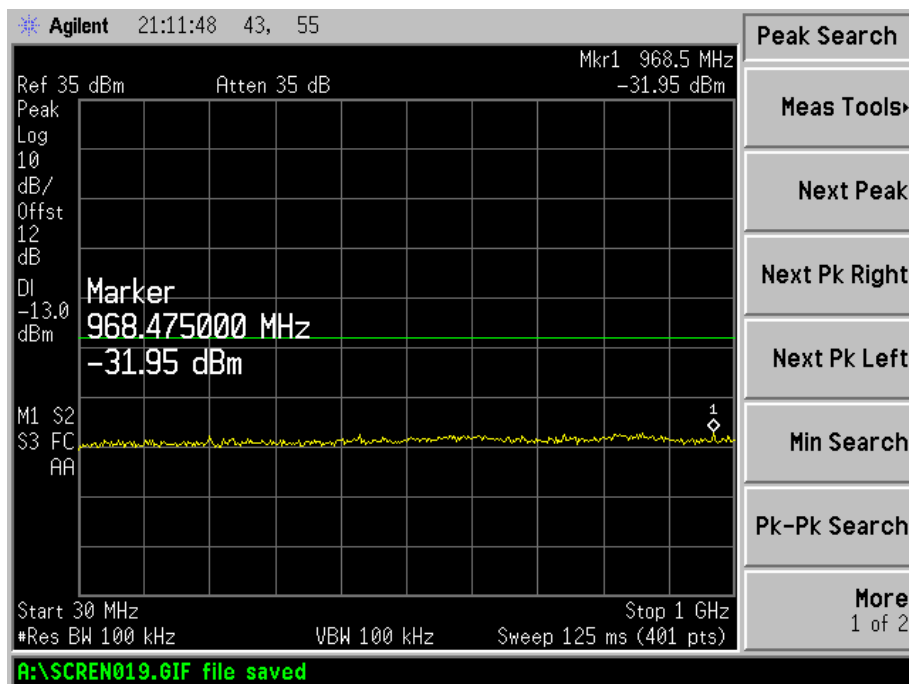


## Above 1GHz

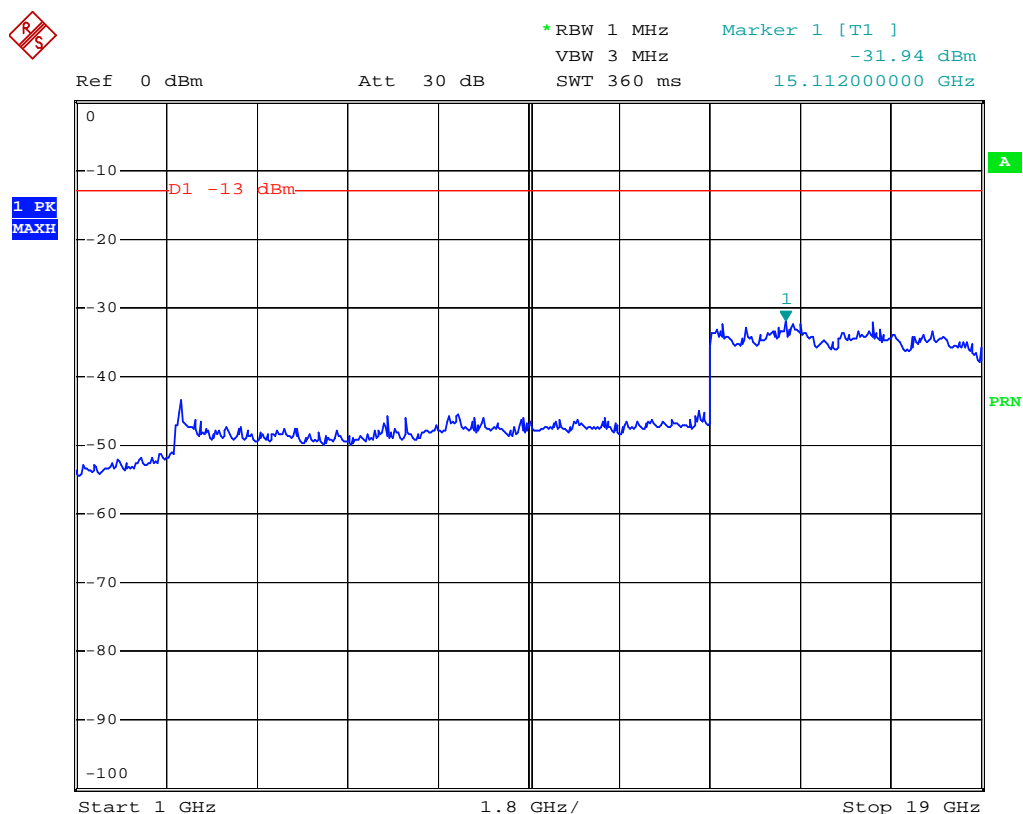


## GPRS Middle Channel

30MHz to 1GHz

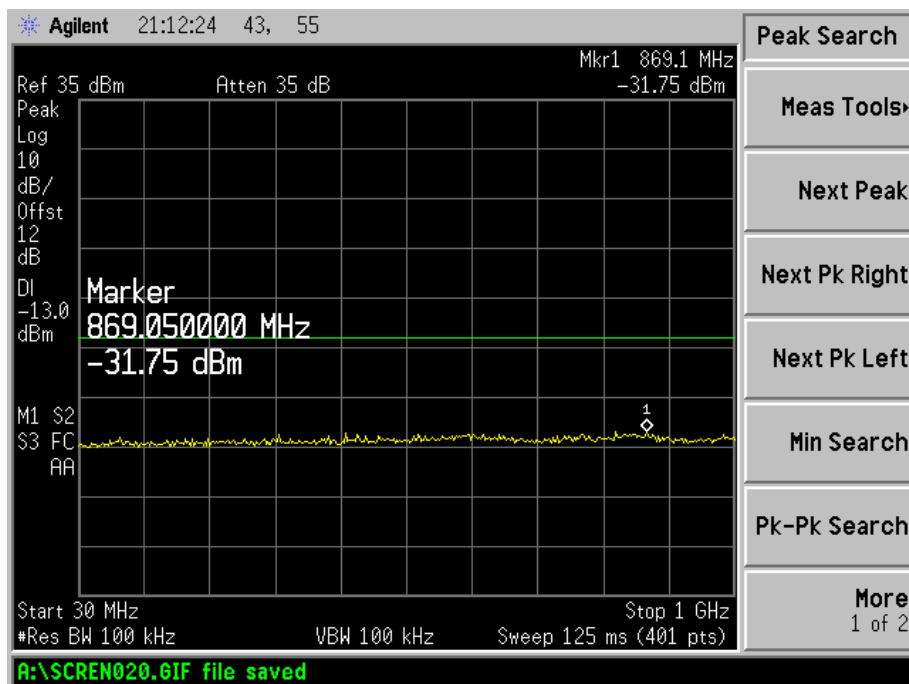


## Above 1GHz

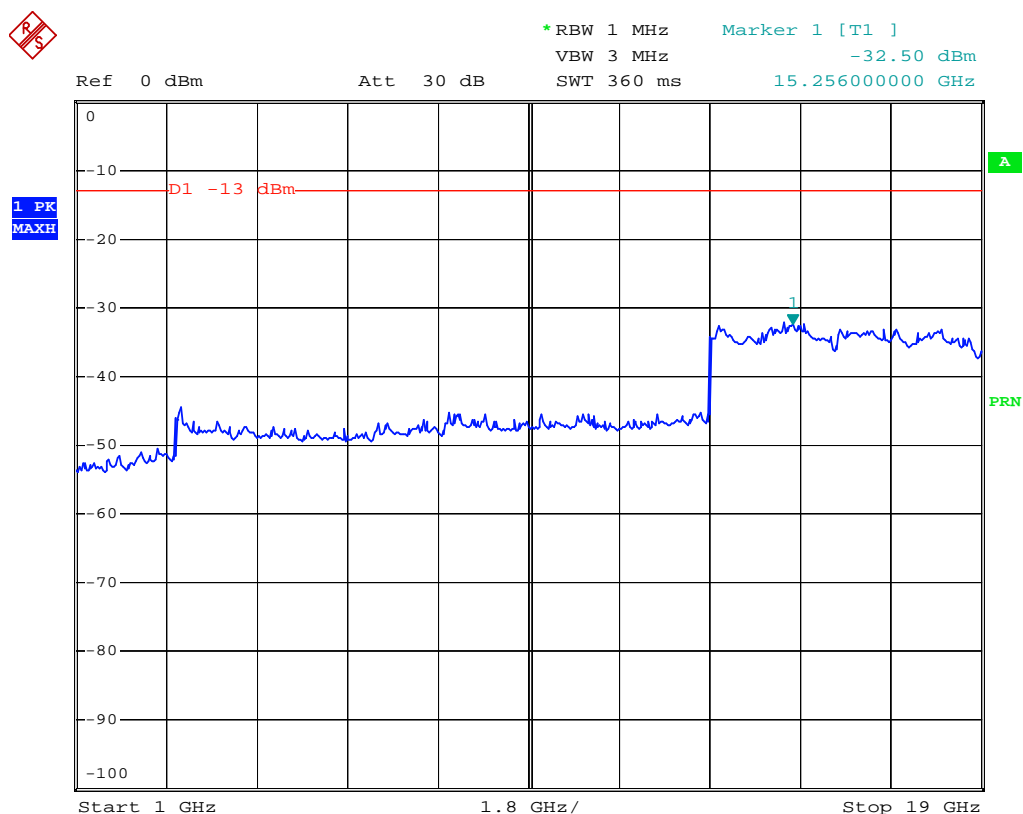


## GPRS High Channel

30MHz to 1GHz

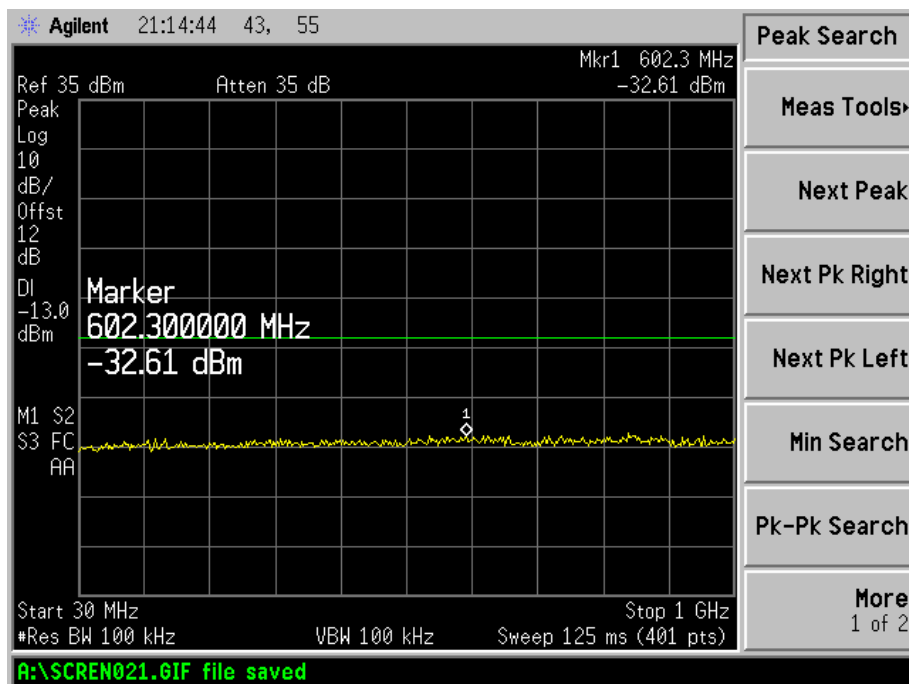


## Above 1GHz

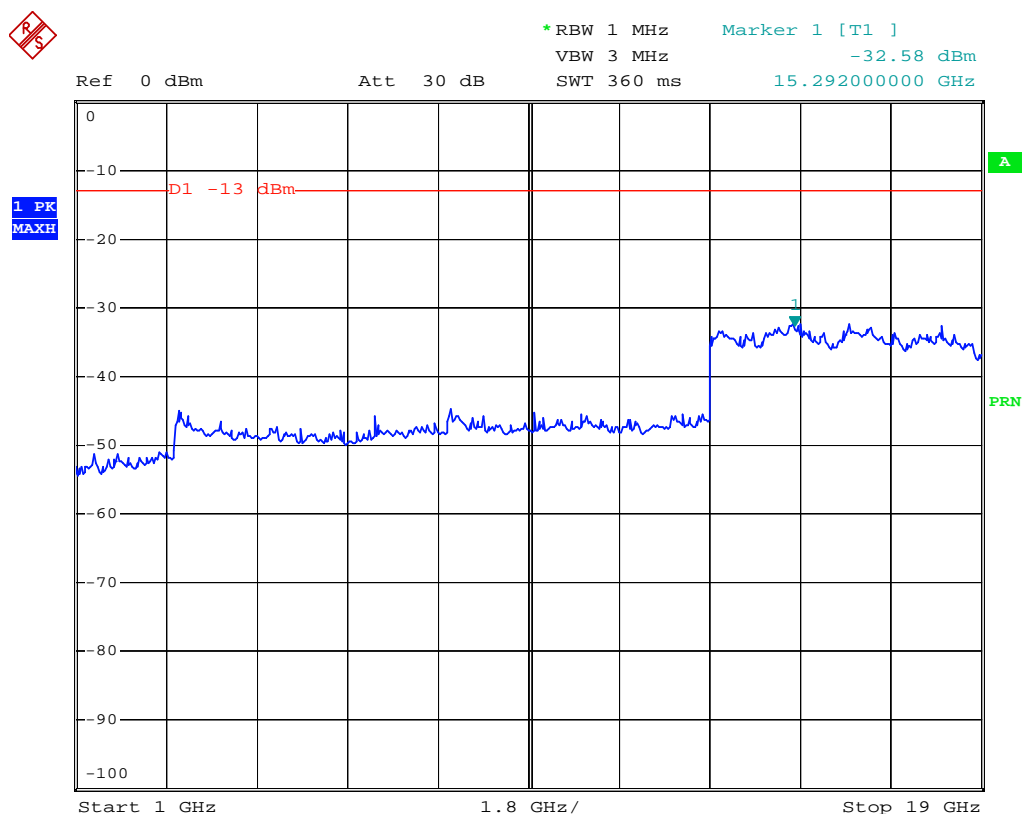




## GPRS Low Band Emission

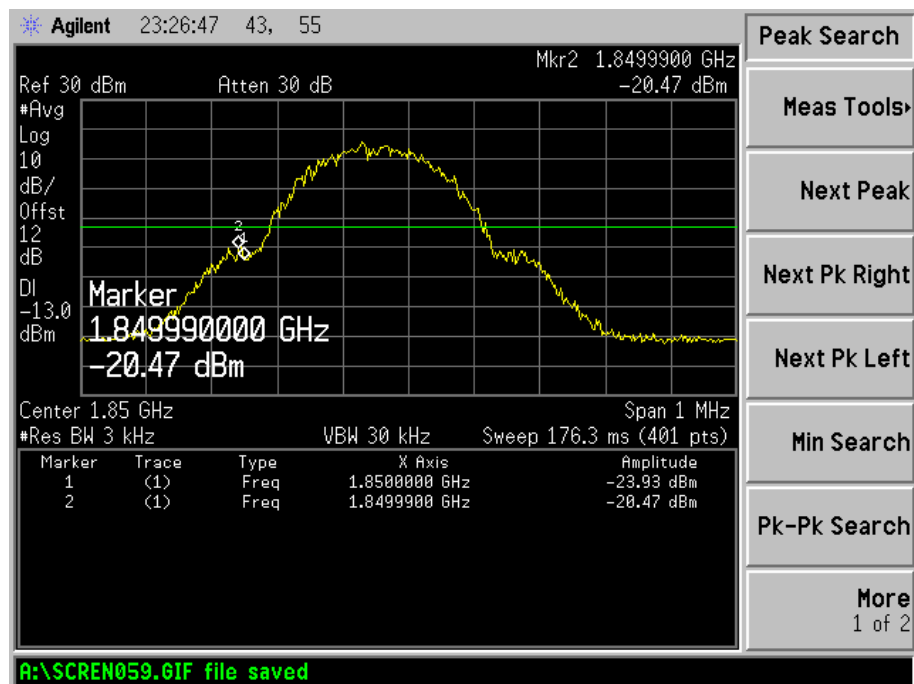


## GPRS High Band Emission

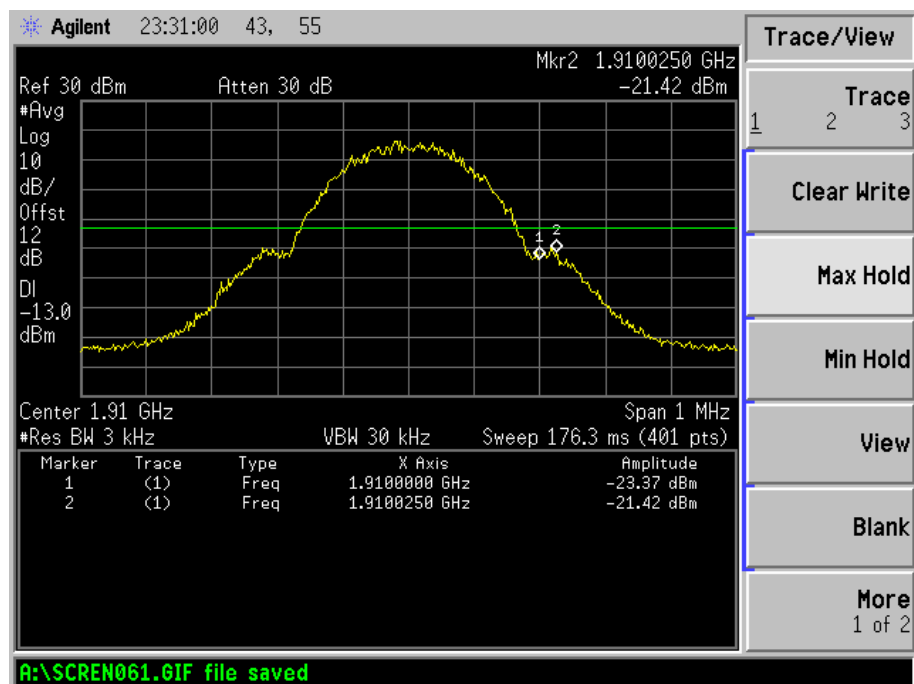


EDGE Low Channel

30MHz to 1GHz

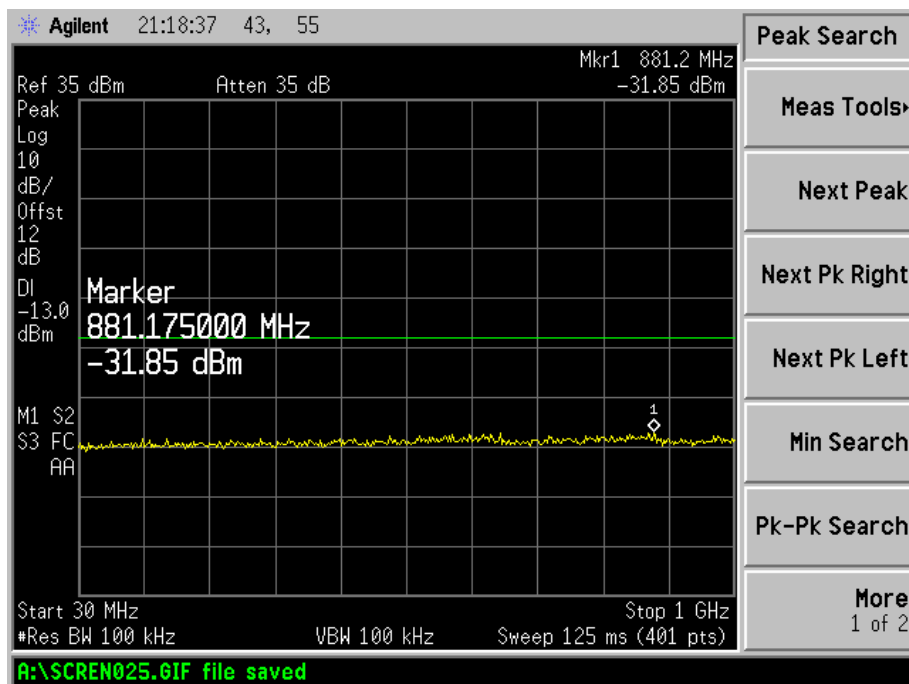


Above 1GHz

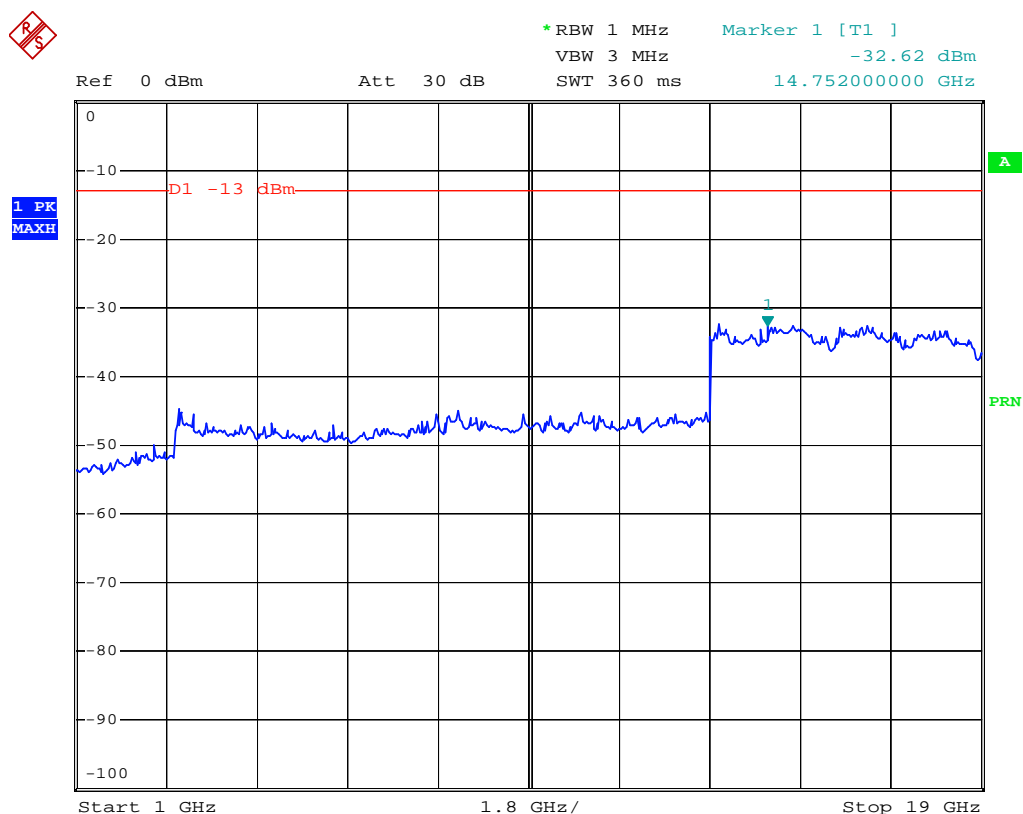


EDGE Middle Channel

30MHz to 1GHz

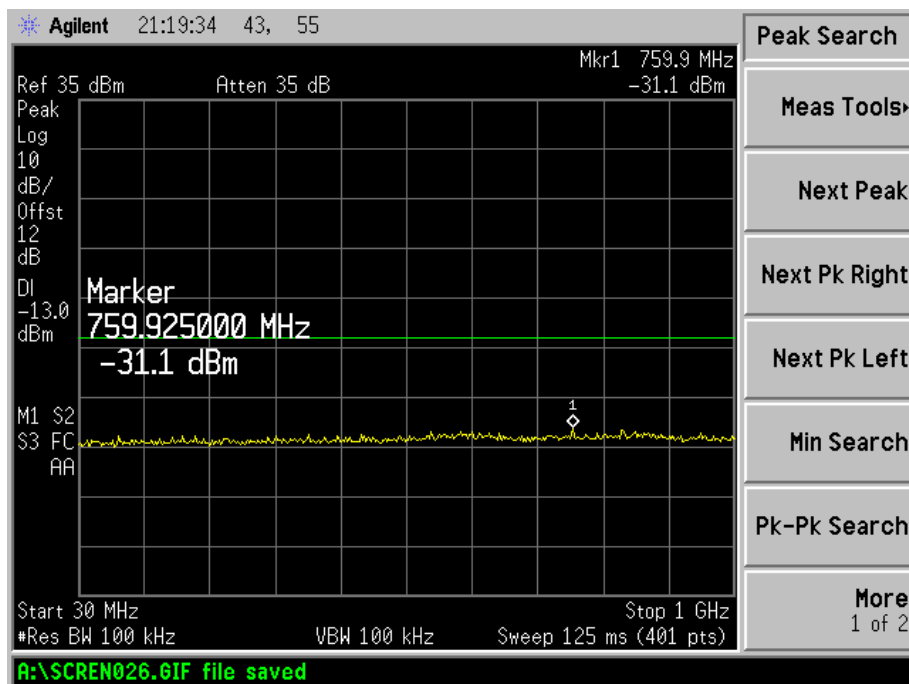


Above 1GHz

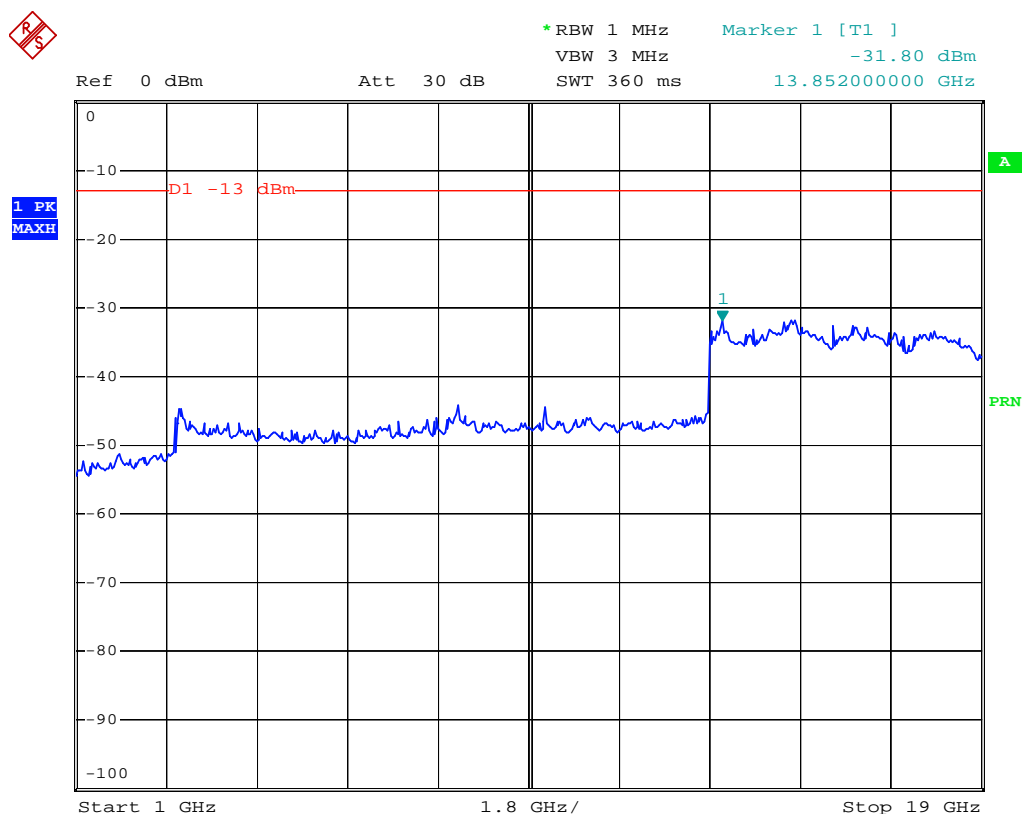


EDGE High Channel


30MHz to 1GHz

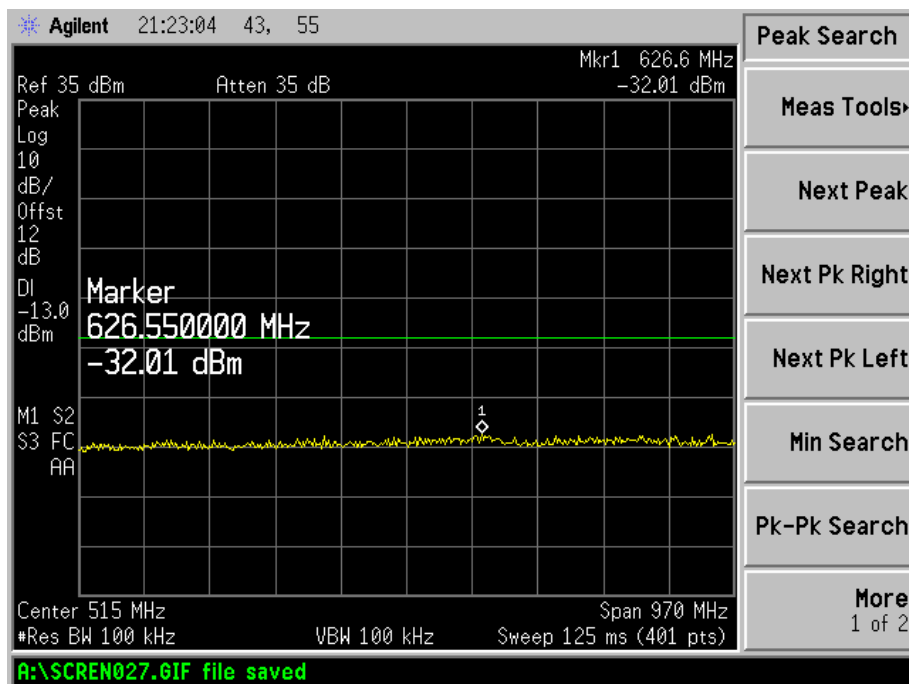


Above 1GHz

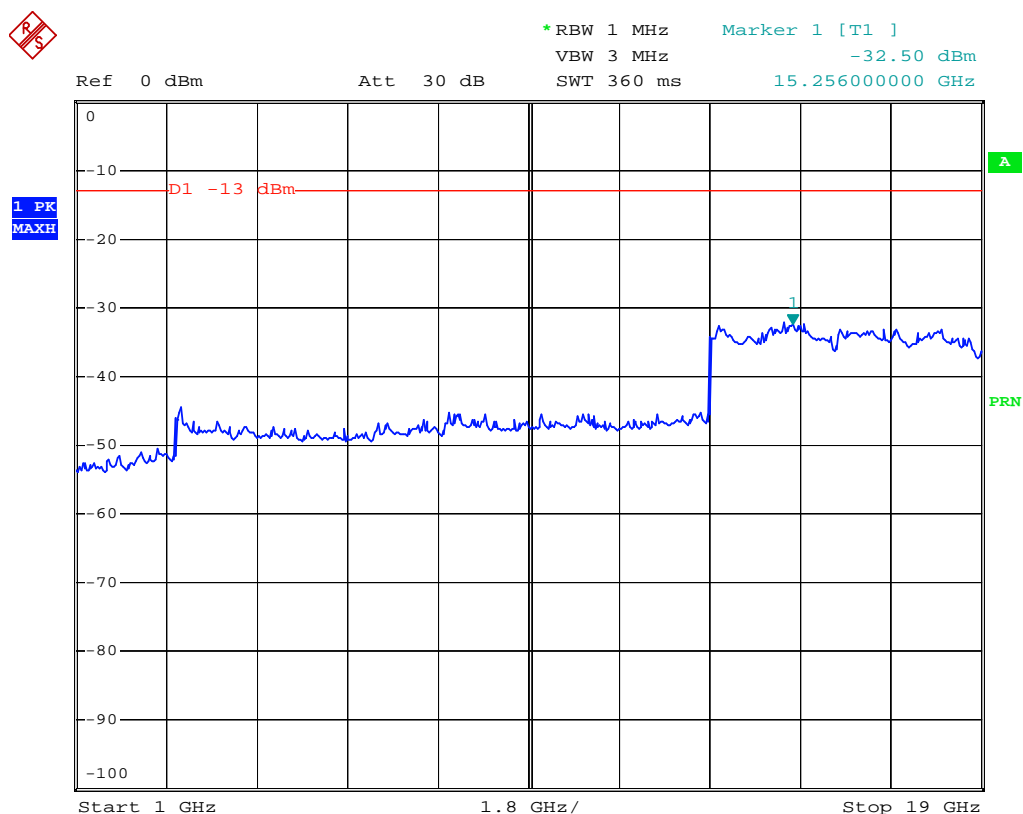

## EDGE Low Band Emission

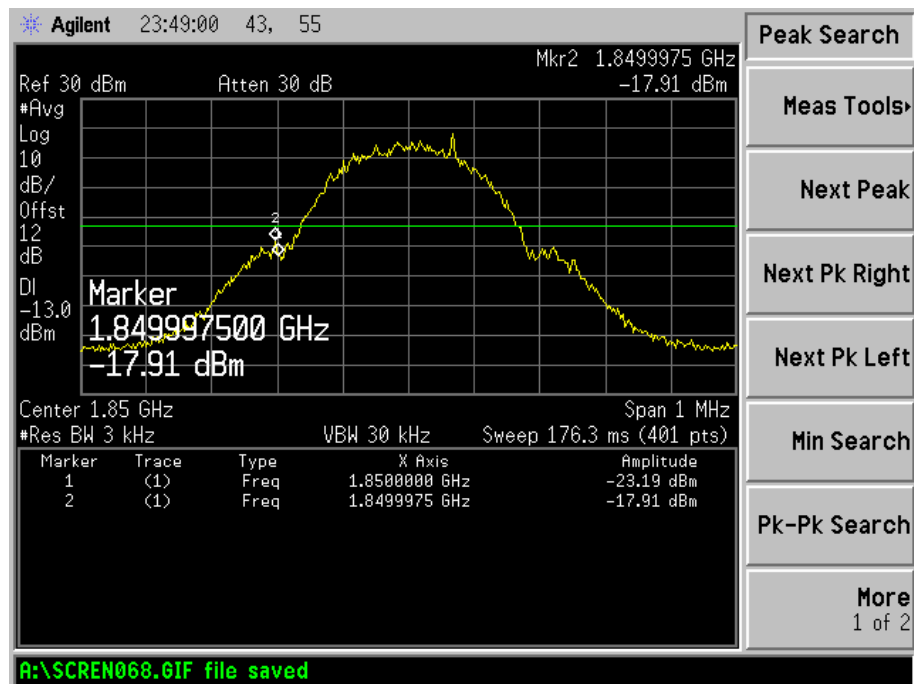


## EDGE High Band Emission

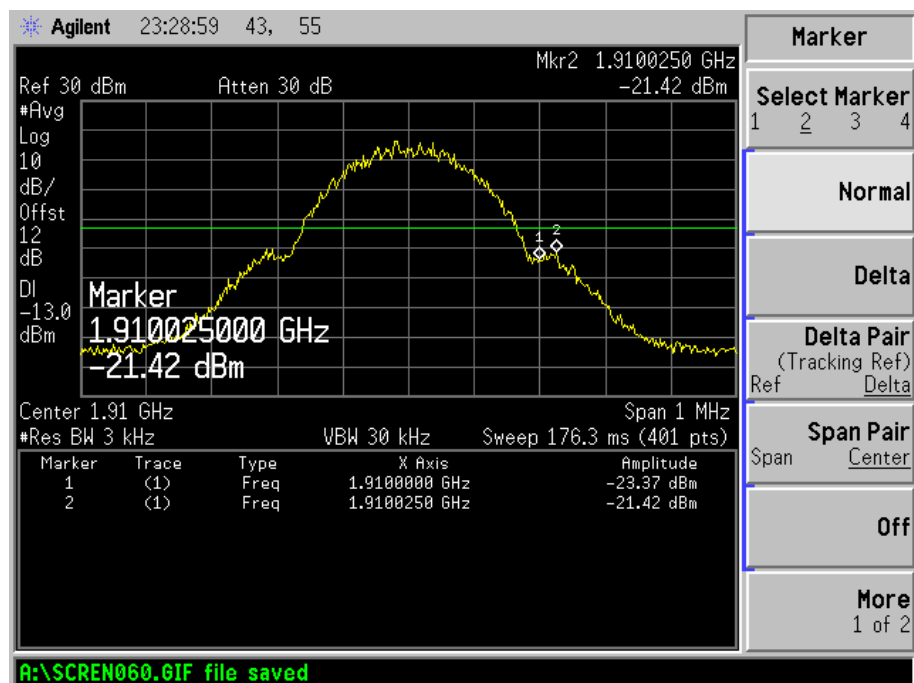


# For Band II

WCDMA Low Channel

30MHz to 1GHz

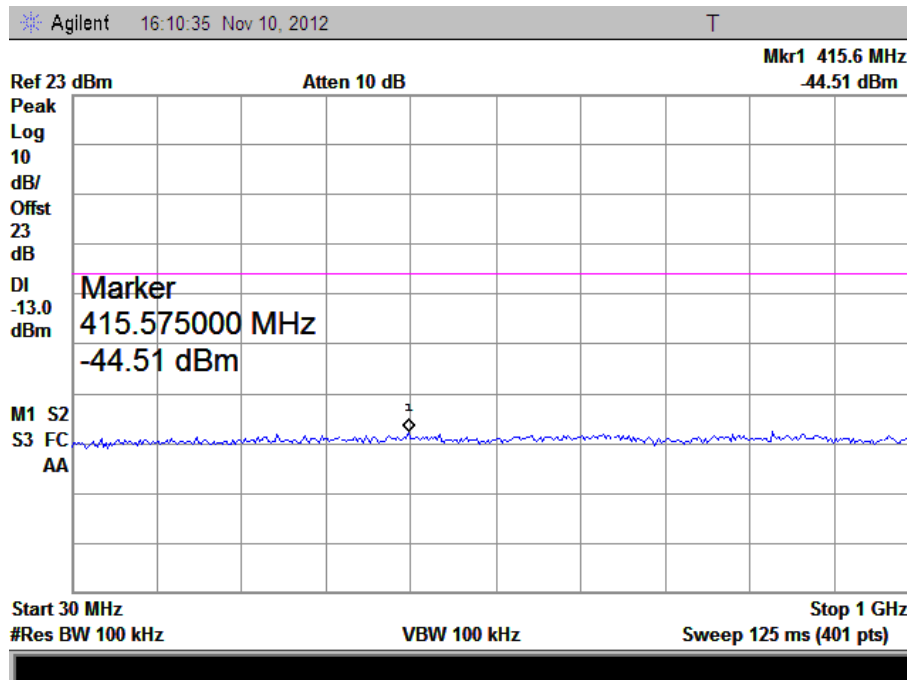


Above 1GHz

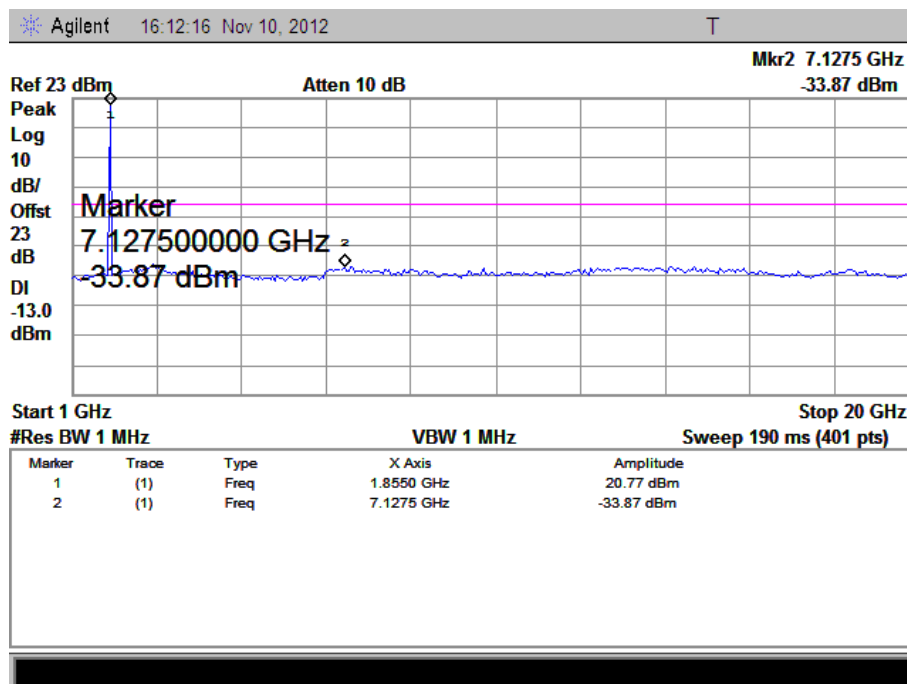


# WCDMA Middle Channel


30MHz to 1GHz

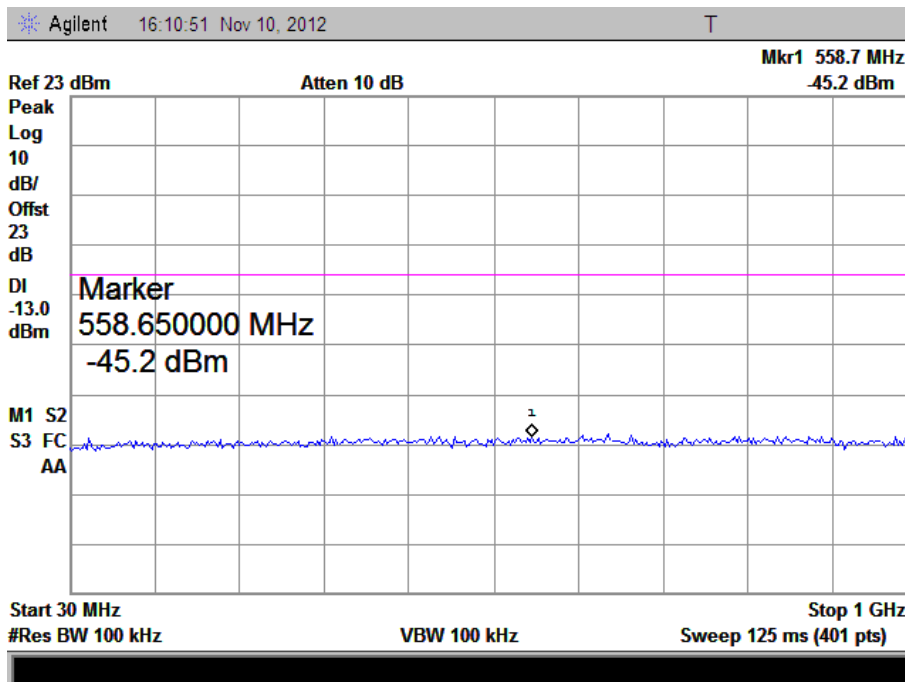


# Above 1GHz

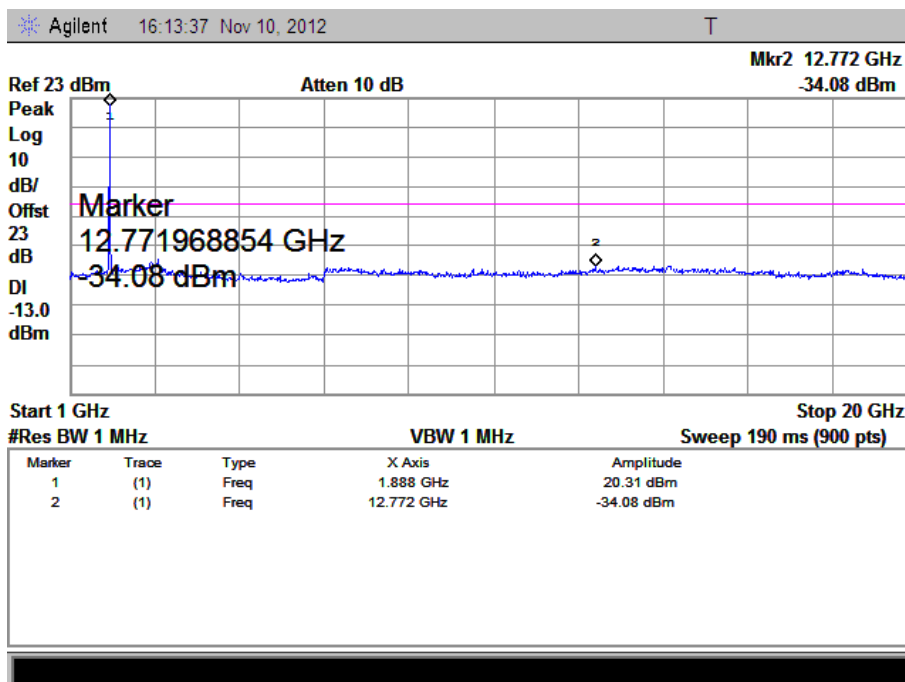

WCDMA High Channel  
30MHz to 1GHz

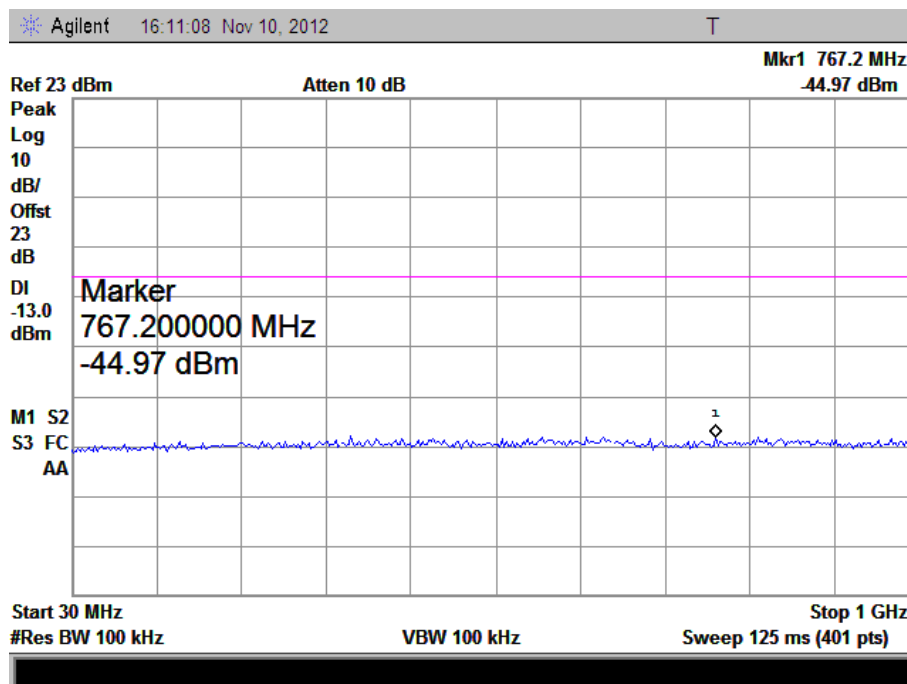


Above 1GHz

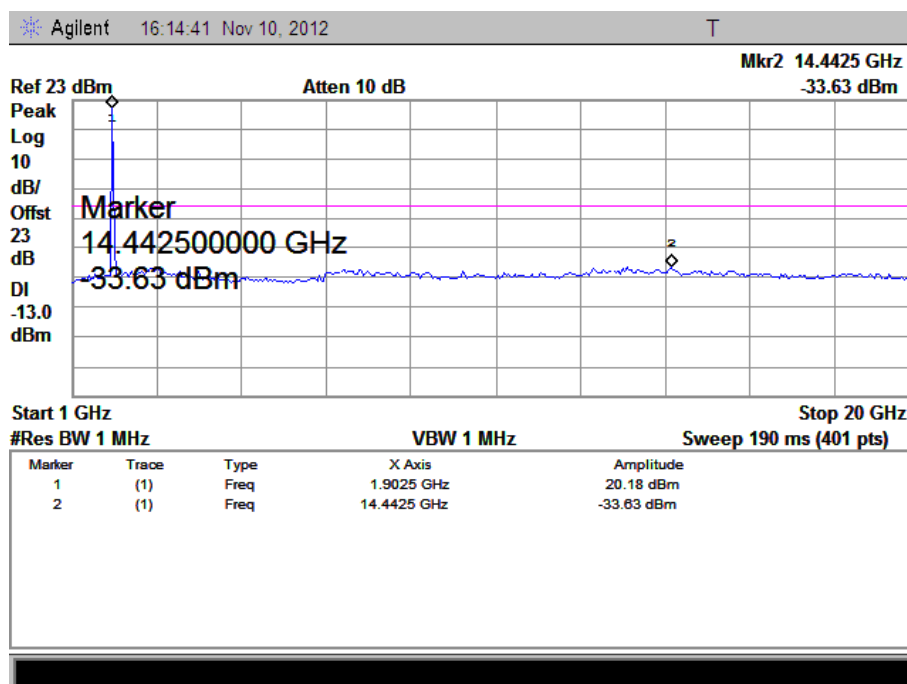




# WCDMA Low Band Spurious Emission

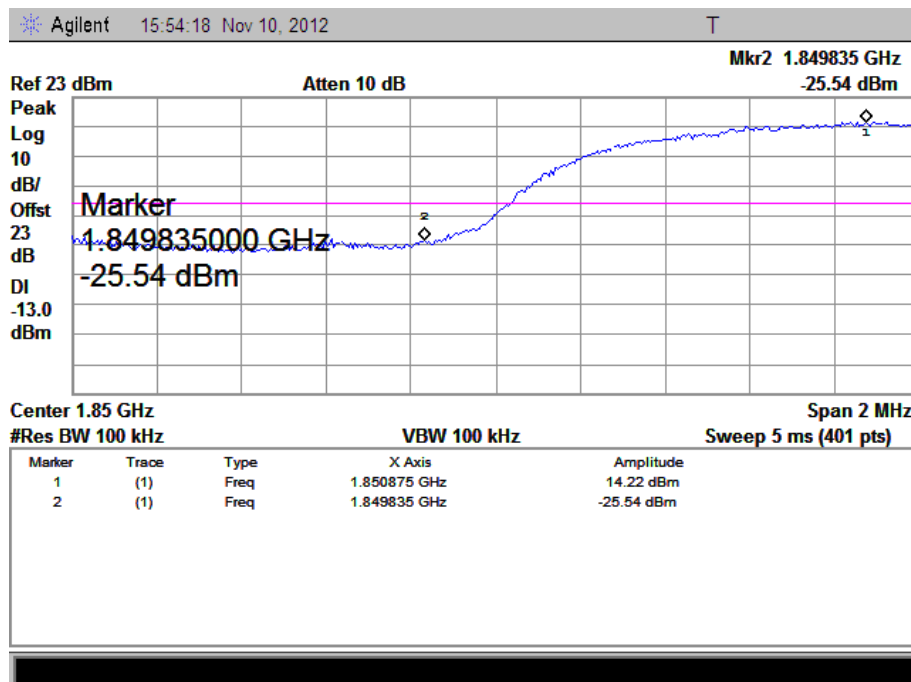


# WCDMA High Band Spurious Emission

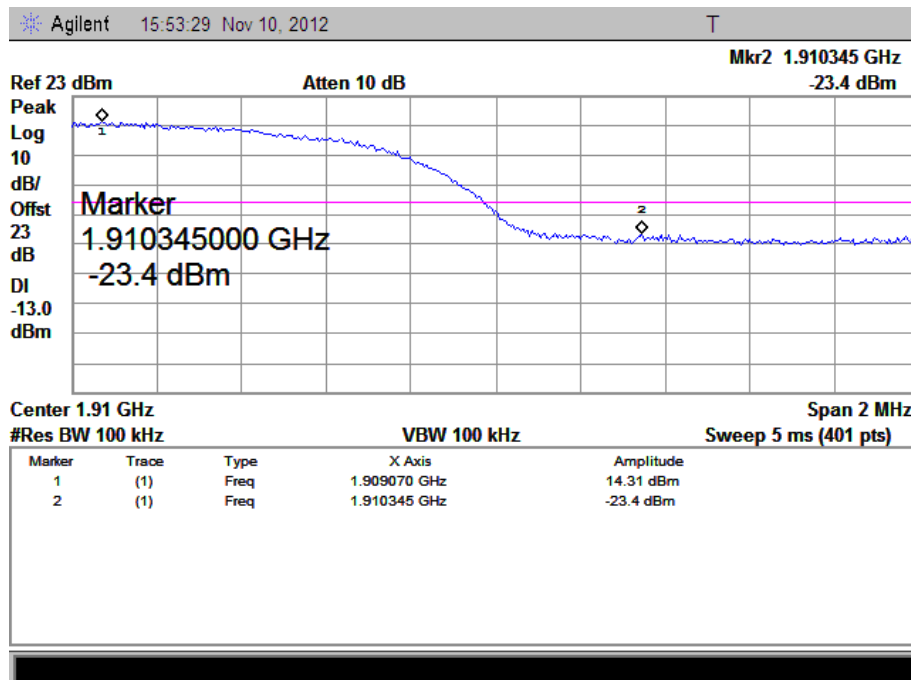


# HSUPA Low Channel

30MHz to 1GHz

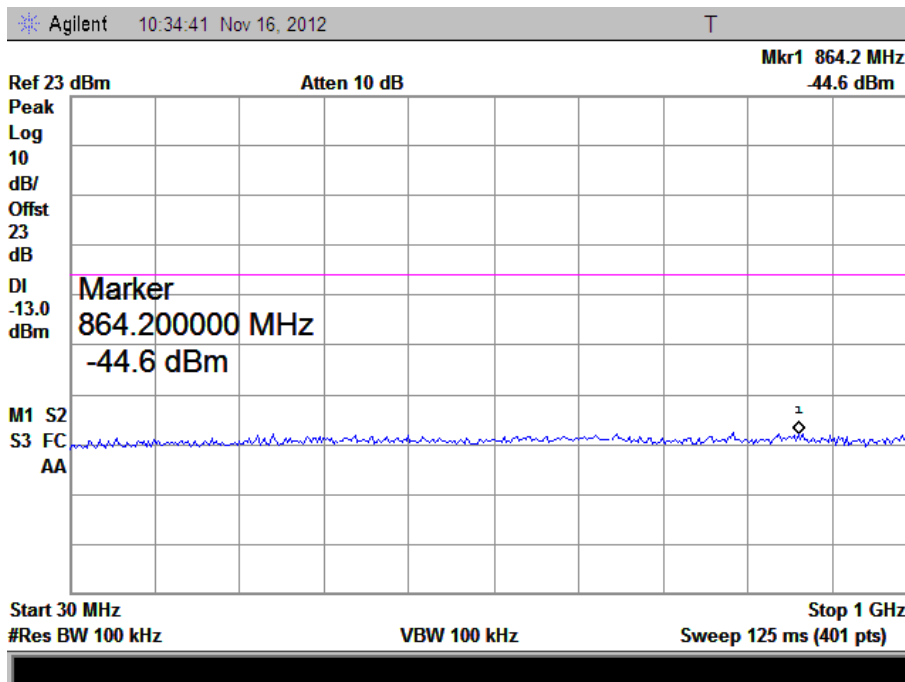


Above 1GHz

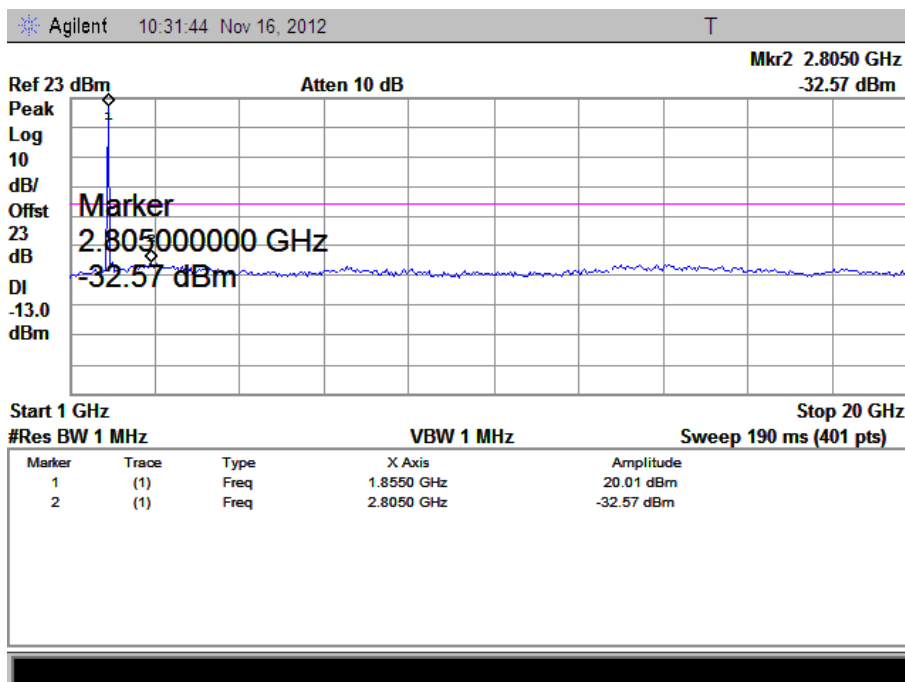


# HSUPA Middle Channel

30MHz to 1GHz

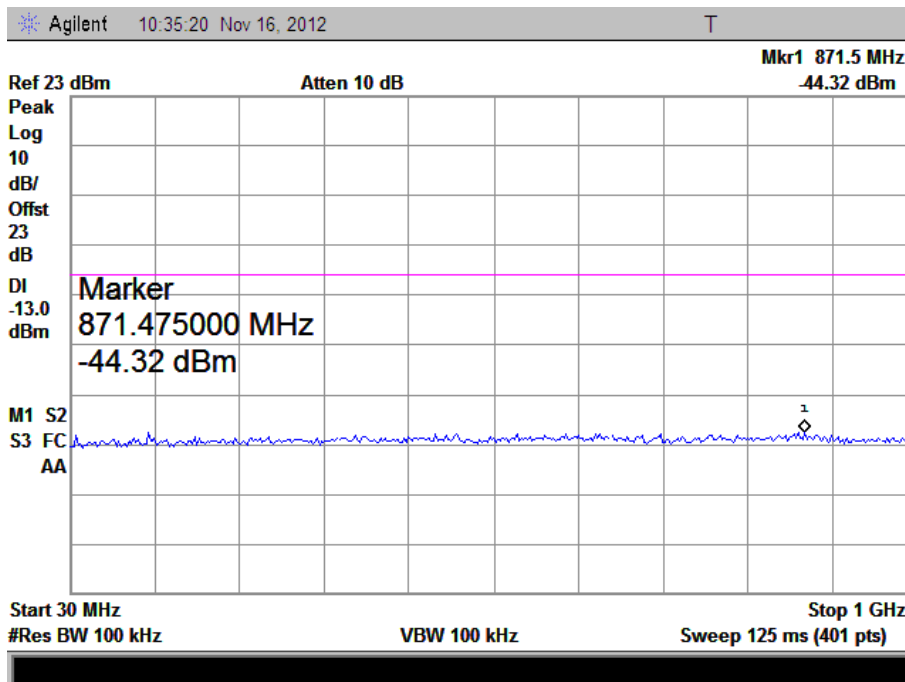


Above 1GHz

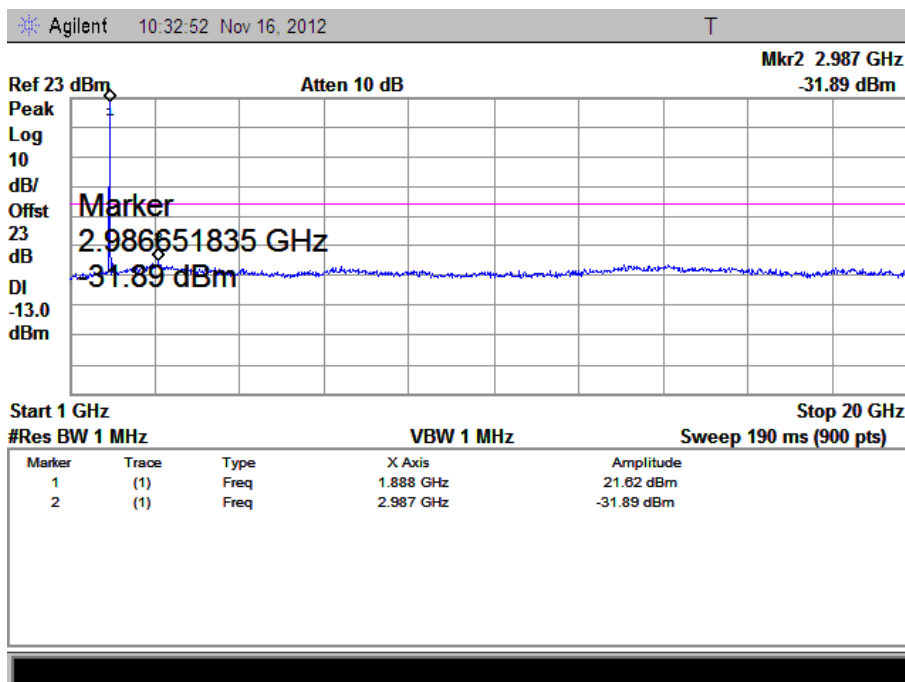


# HSUPA High Channel


30MHz to 1GHz

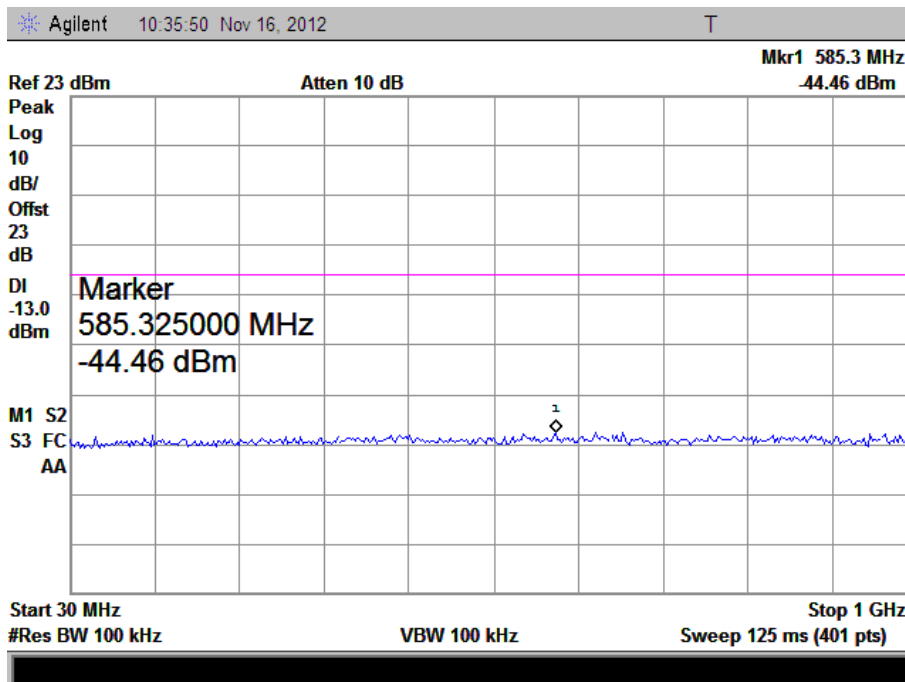


Above 1GHz

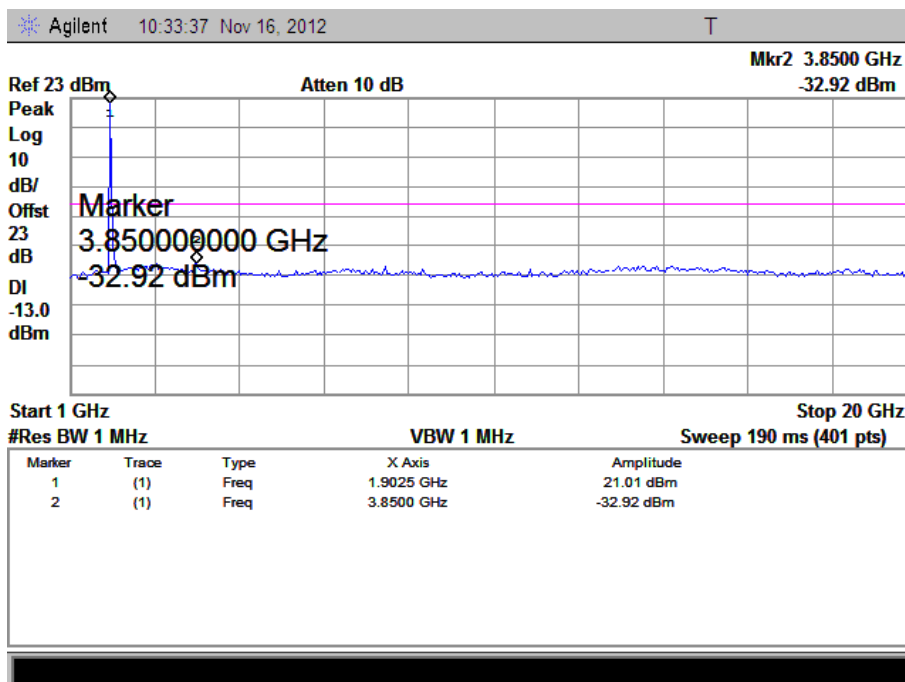

# HSUPA Low Band Spurious Emission

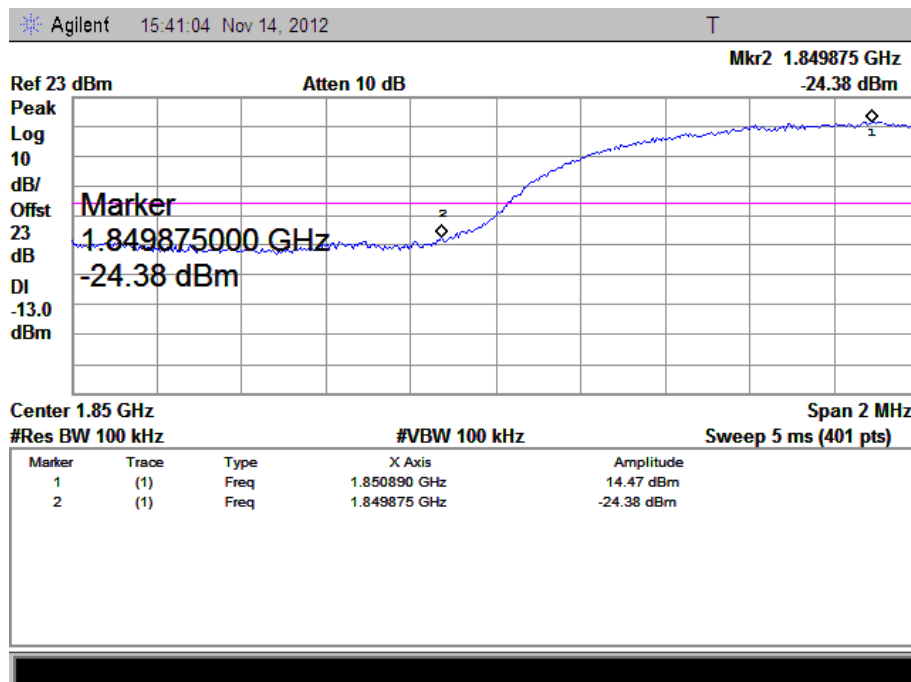


# HSUPA High Band Spurious Emission

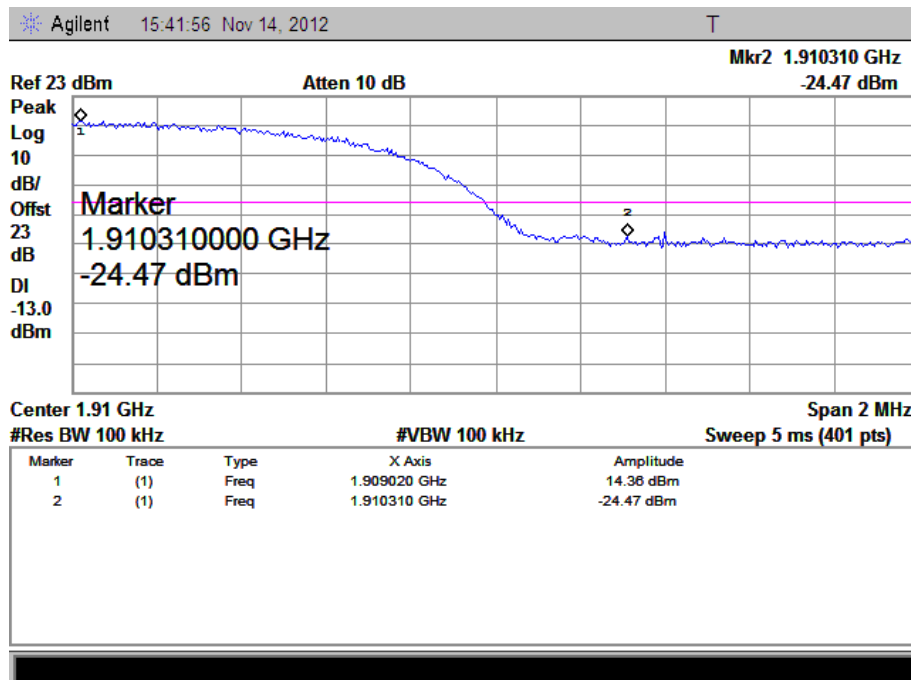


# HSDPA Low Channel

30MHz to 1GHz

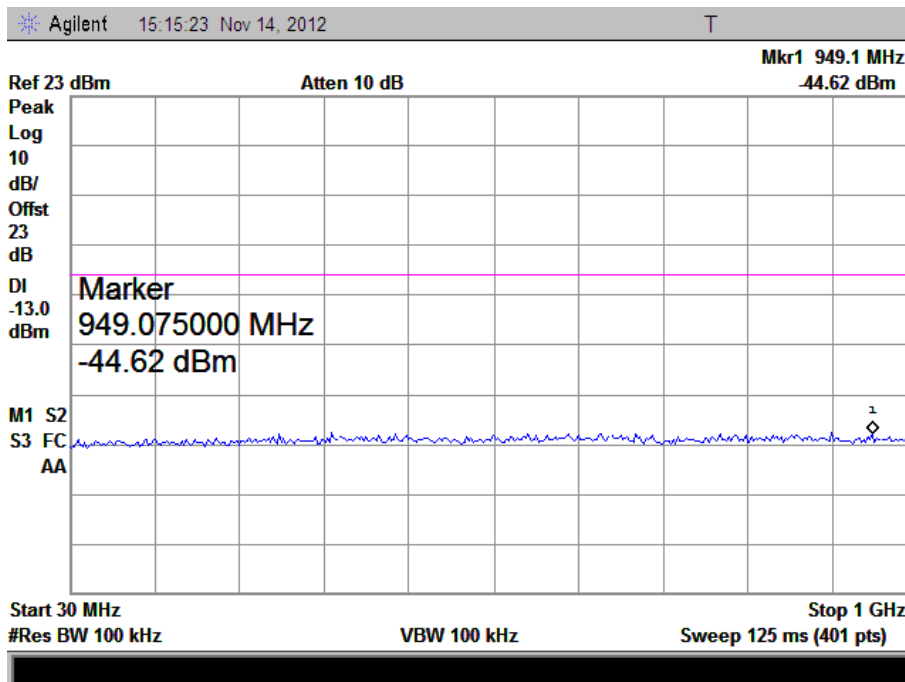


# Above 1GHz

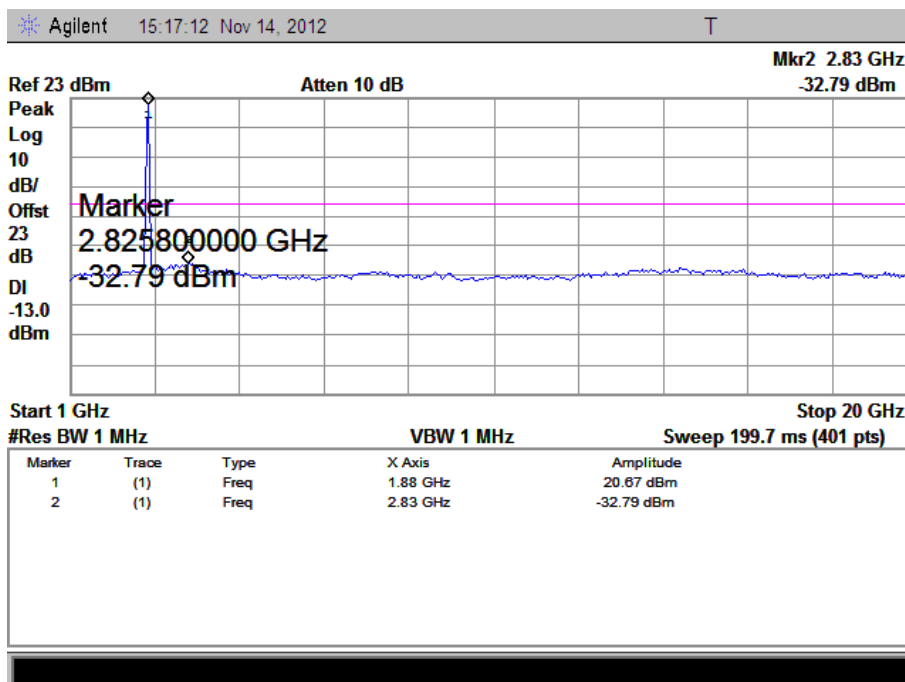


# HSDPA Middle Channel

30MHz to 1GHz

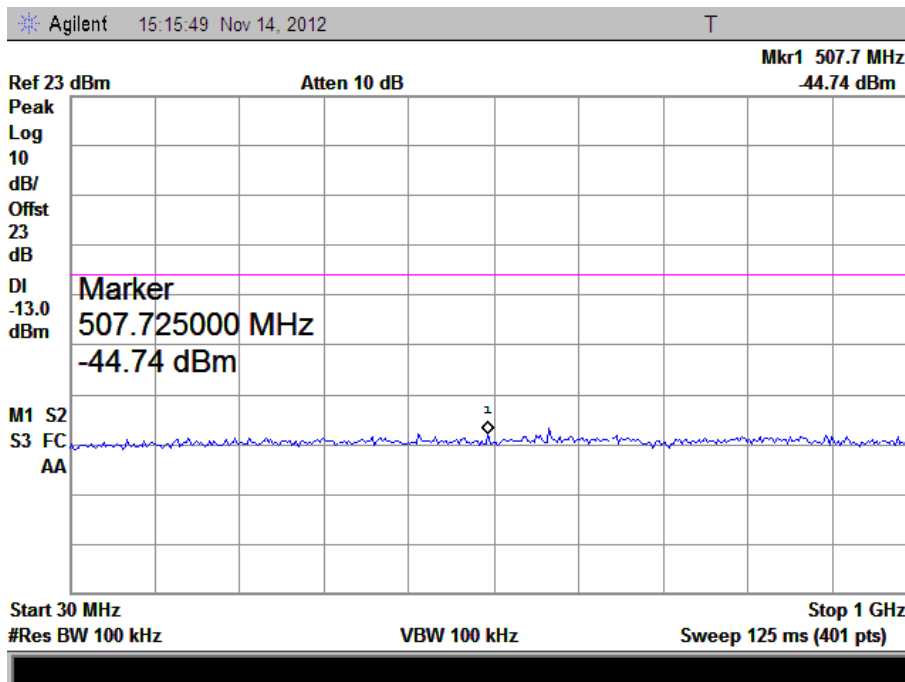


Above 1GHz

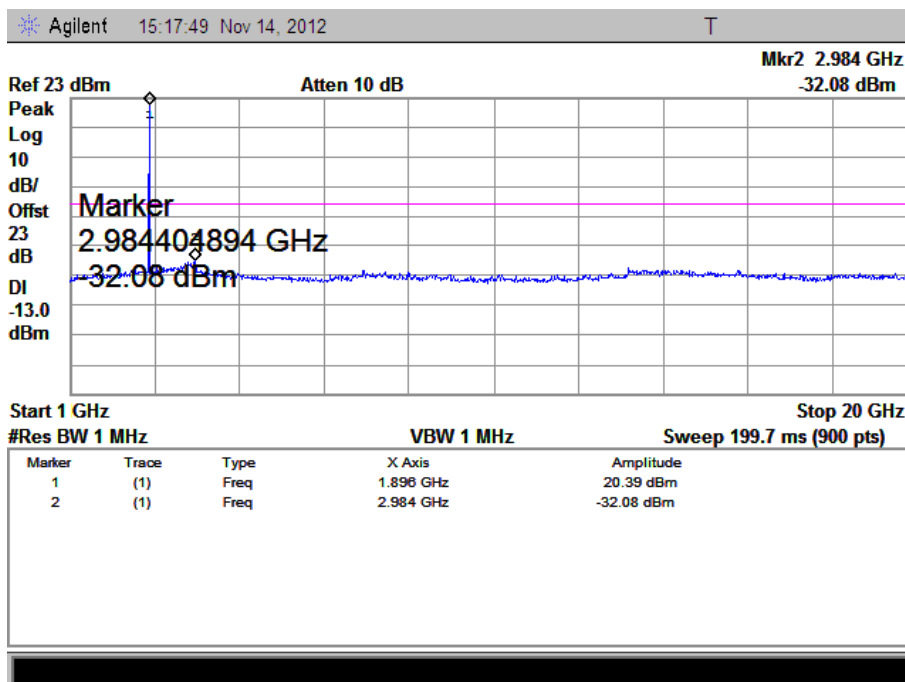


# HSDPA High Channel

30MHz to 1GHz

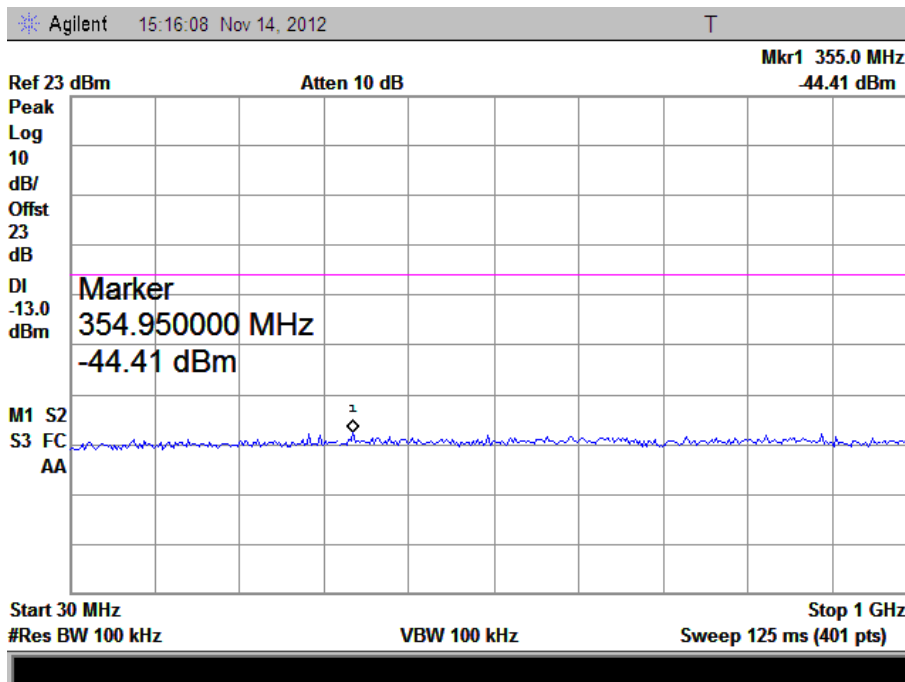


Above 1GHz

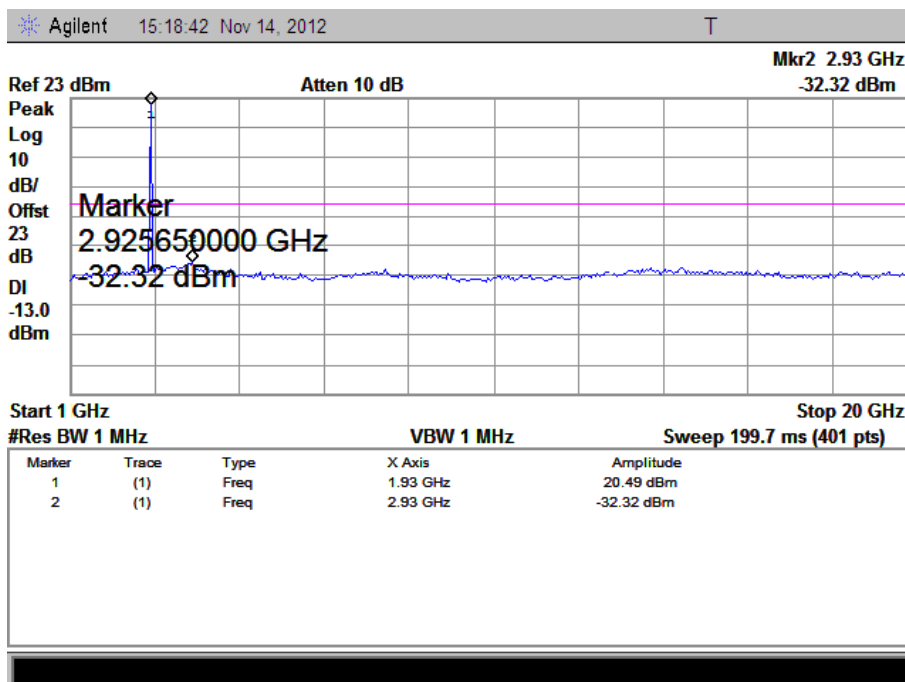




## HSDPA Low Band Spurious Emission

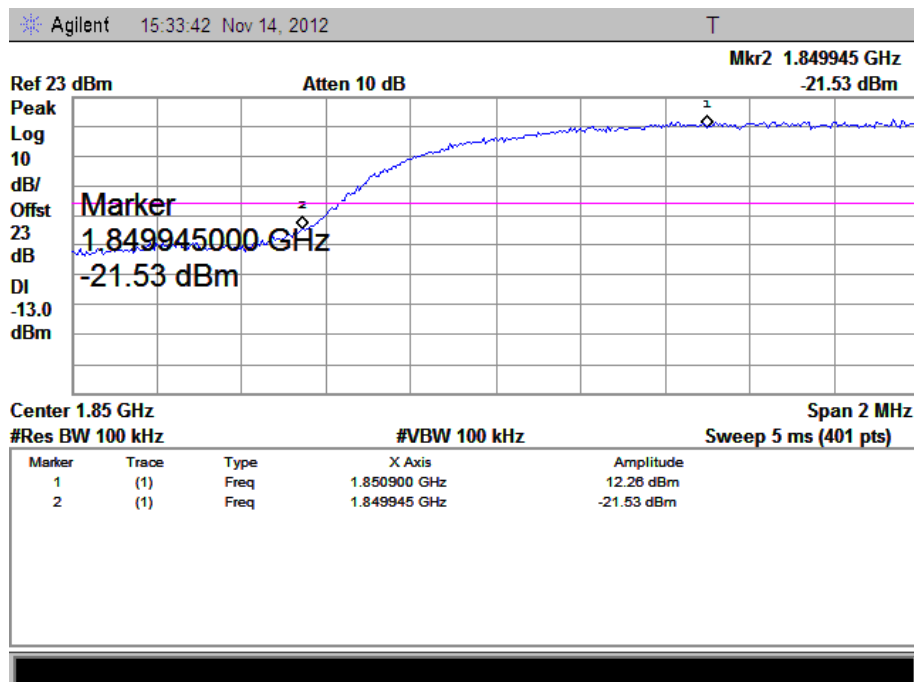


## HSDPA High Band Spurious Emission

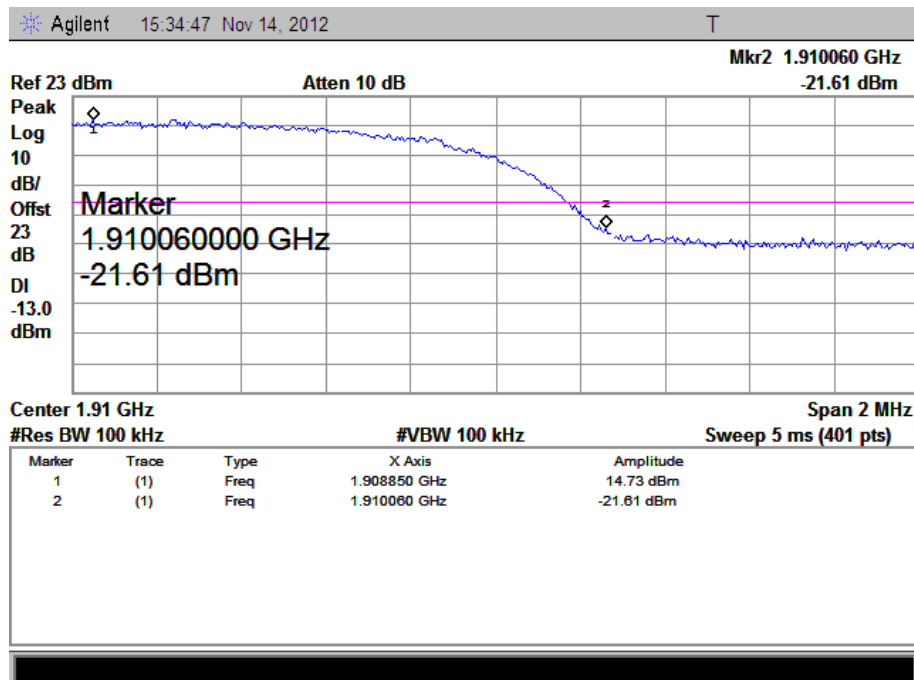


**For Band V**

WCDMA Low Channel

30MHz to 1GHz

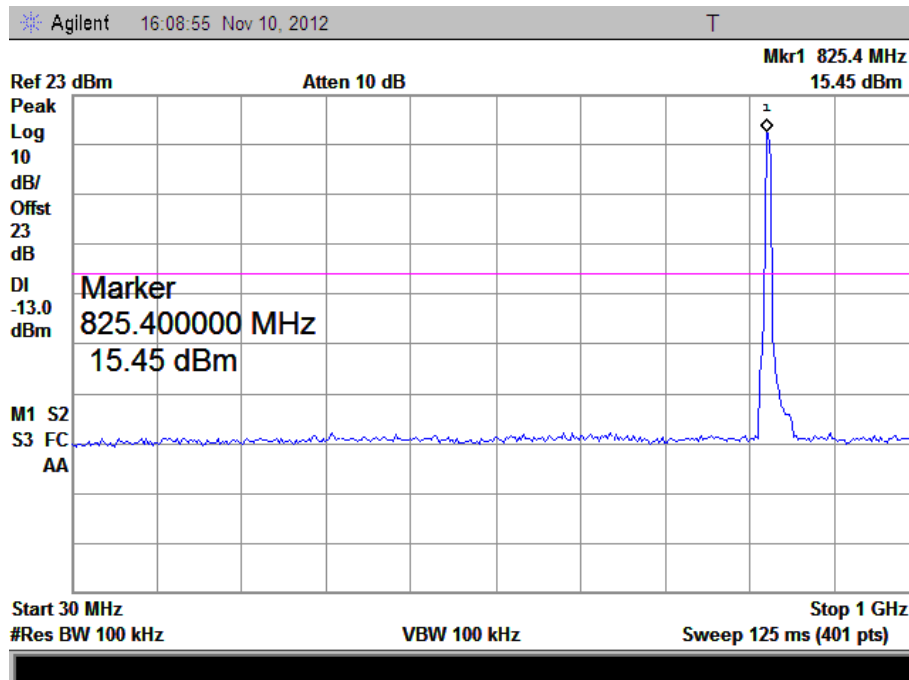


Above 1GHz

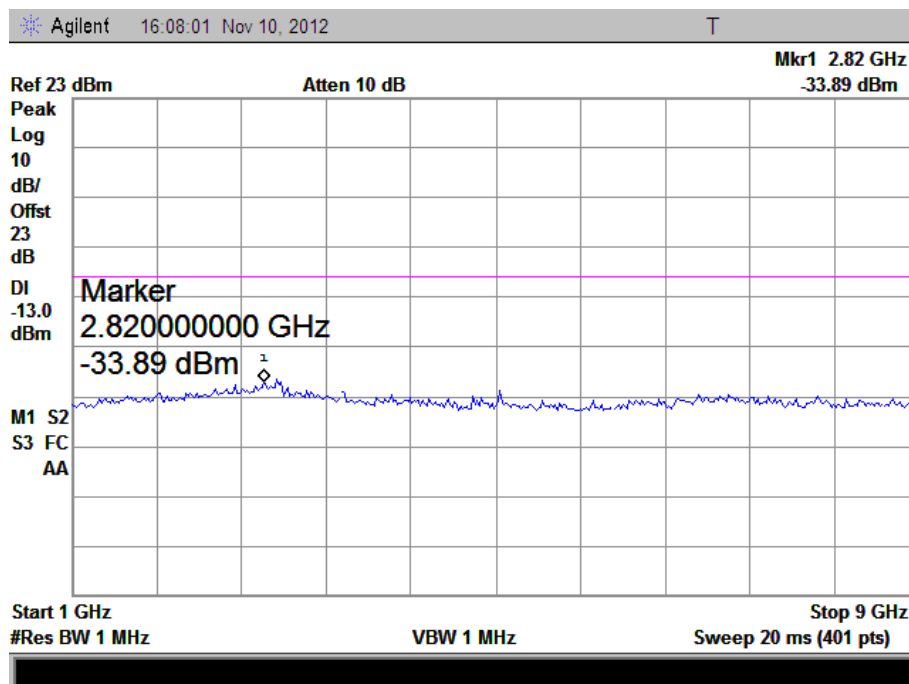


## WCDMA Middle Channel

30MHz to 1GHz

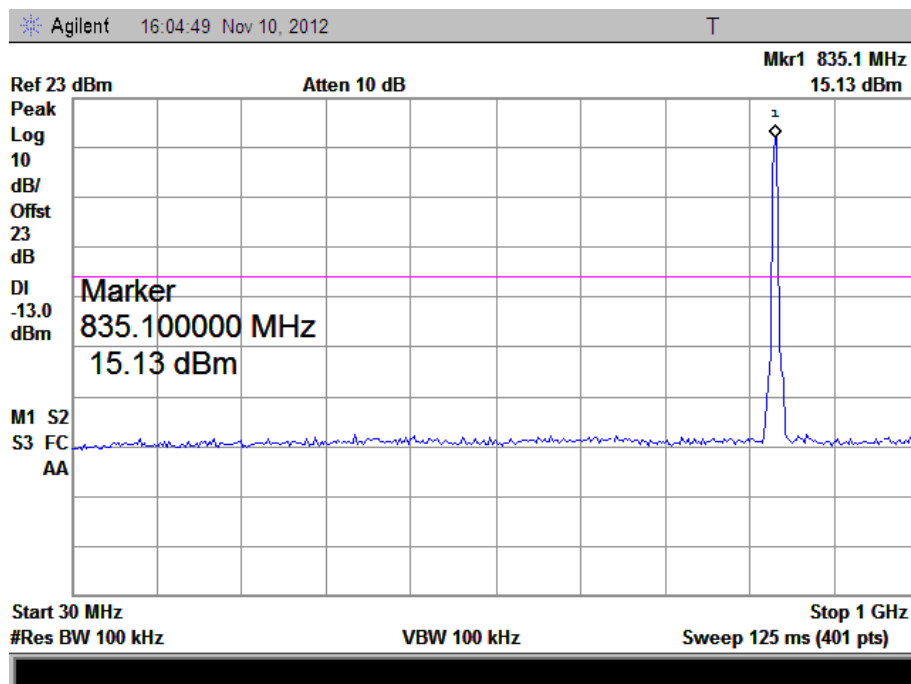


## Above 1GHz

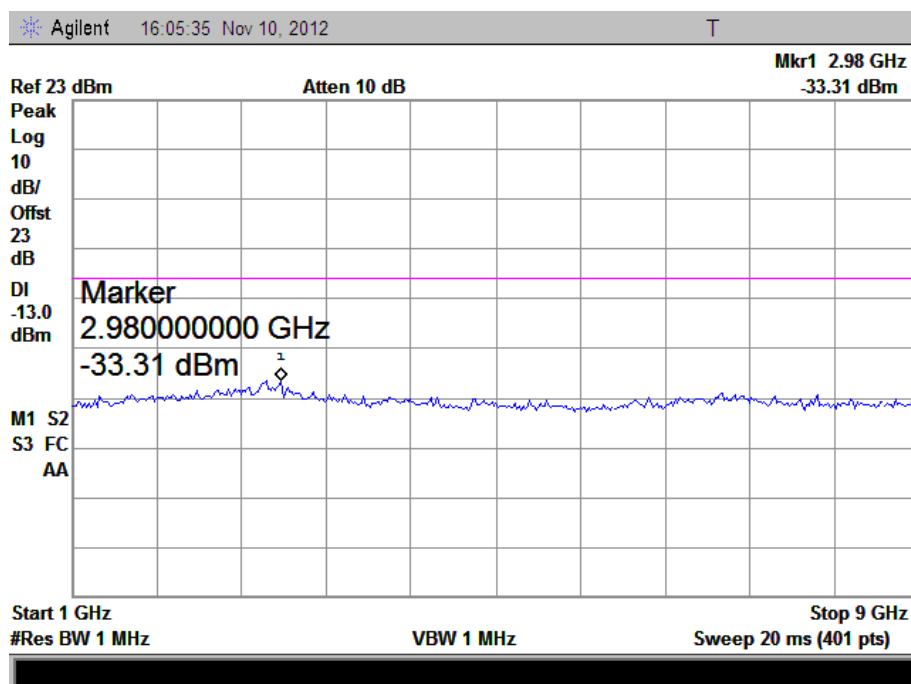


## WCDMA High Channel


30MHz to 1GHz

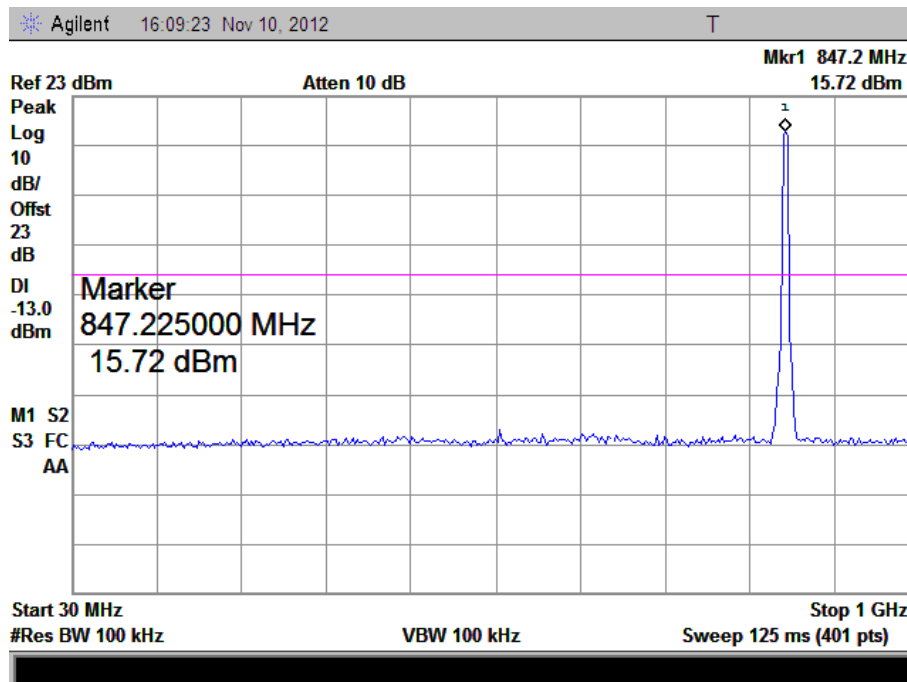


## Above 1GHz

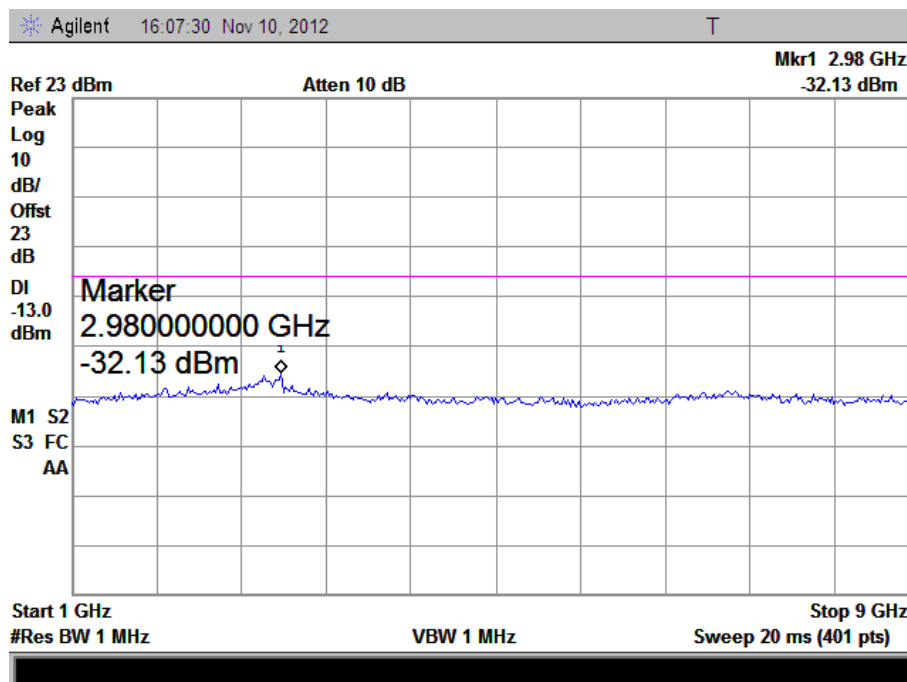

# WCDMA Low Band Spurious Emission

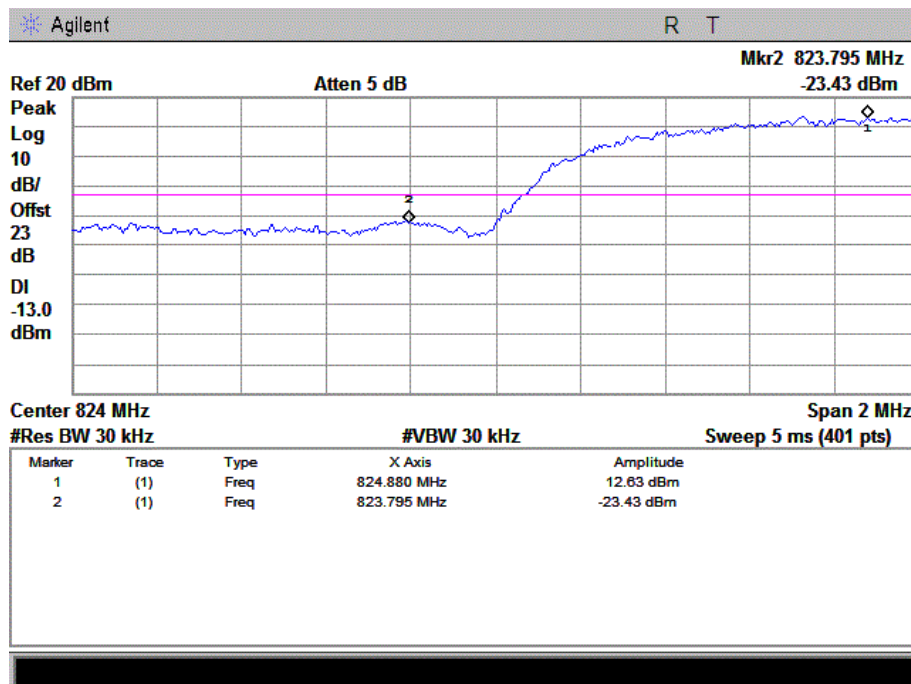


# WCDMA High Band Spurious Emission

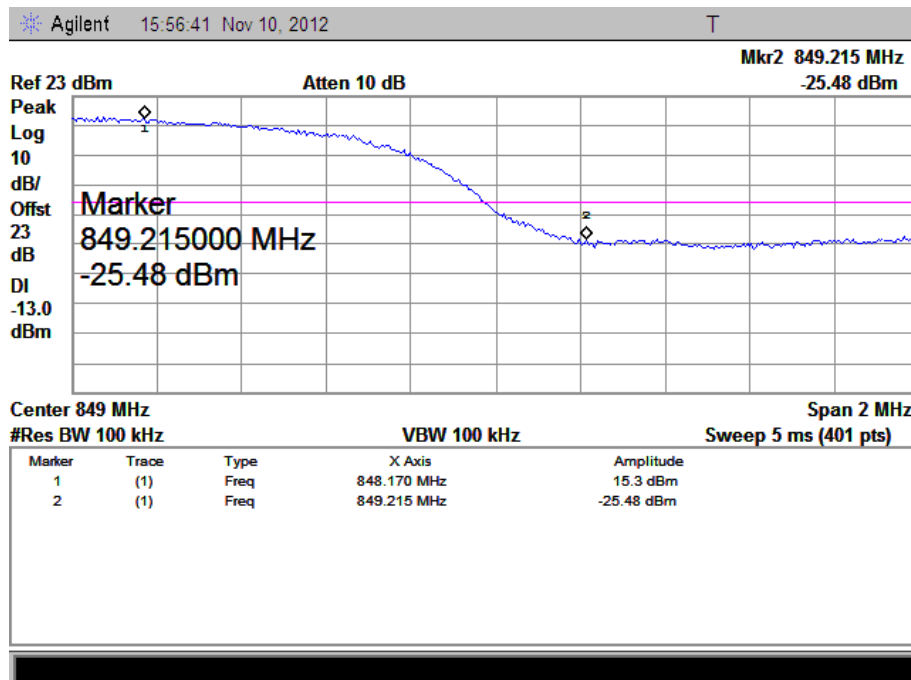


## HSUPA Low Channel

30MHz to 1GHz

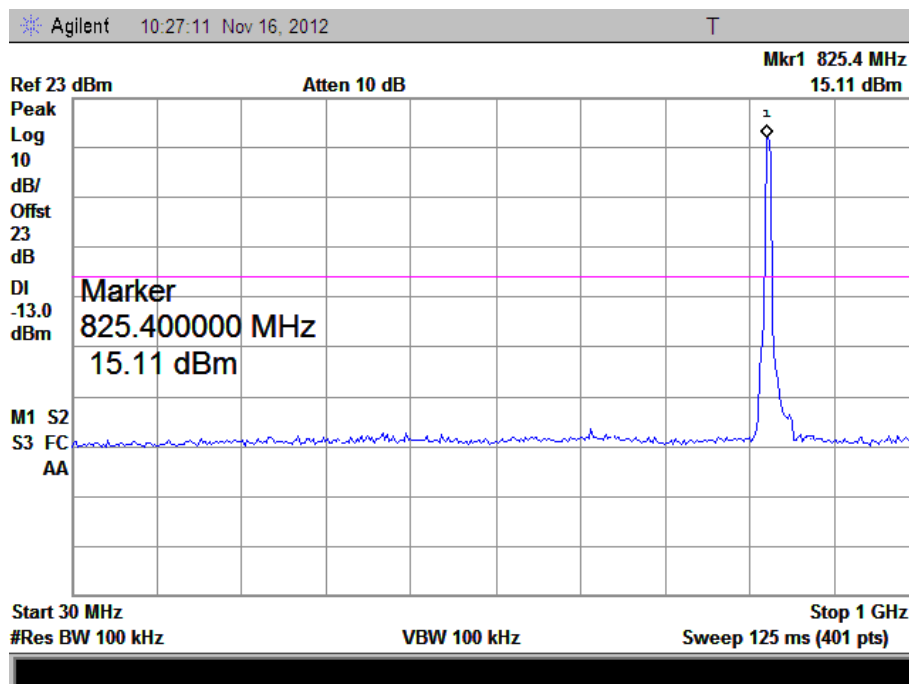


## Above 1GHz

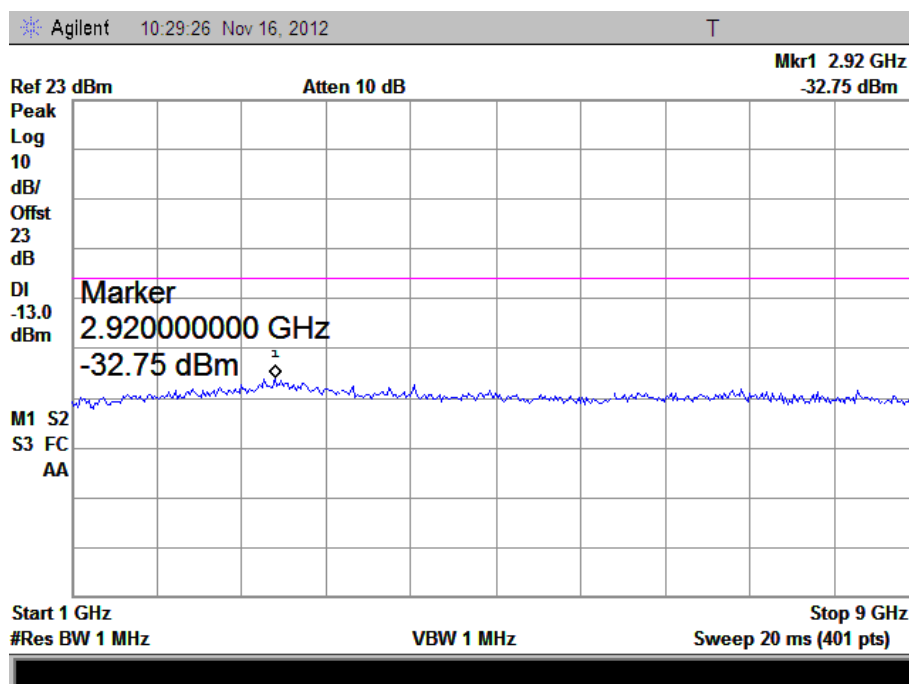


## HSUPA Middle Channel

30MHz to 1GHz

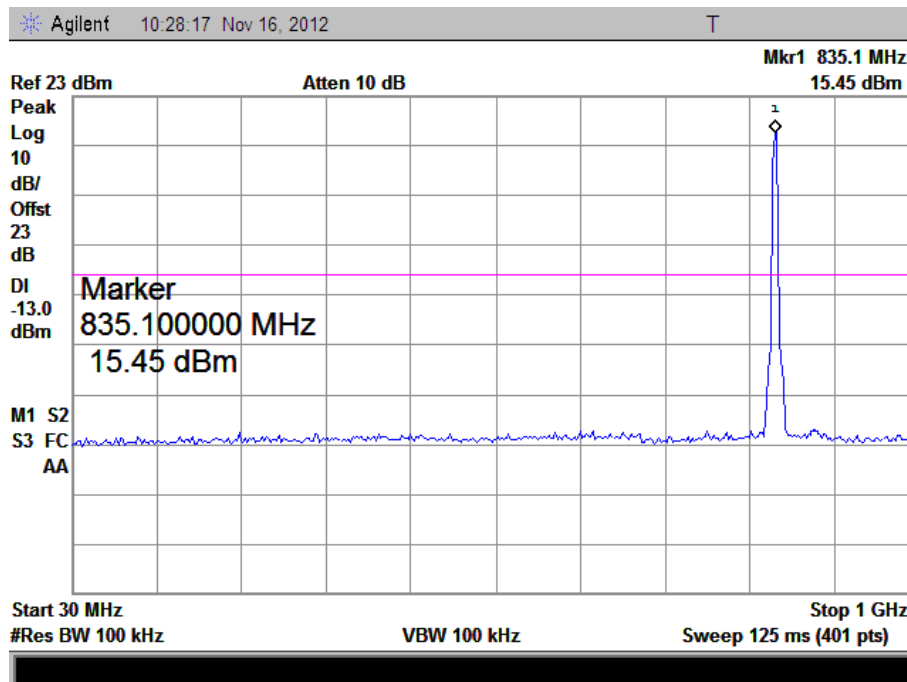


## Above 1GHz

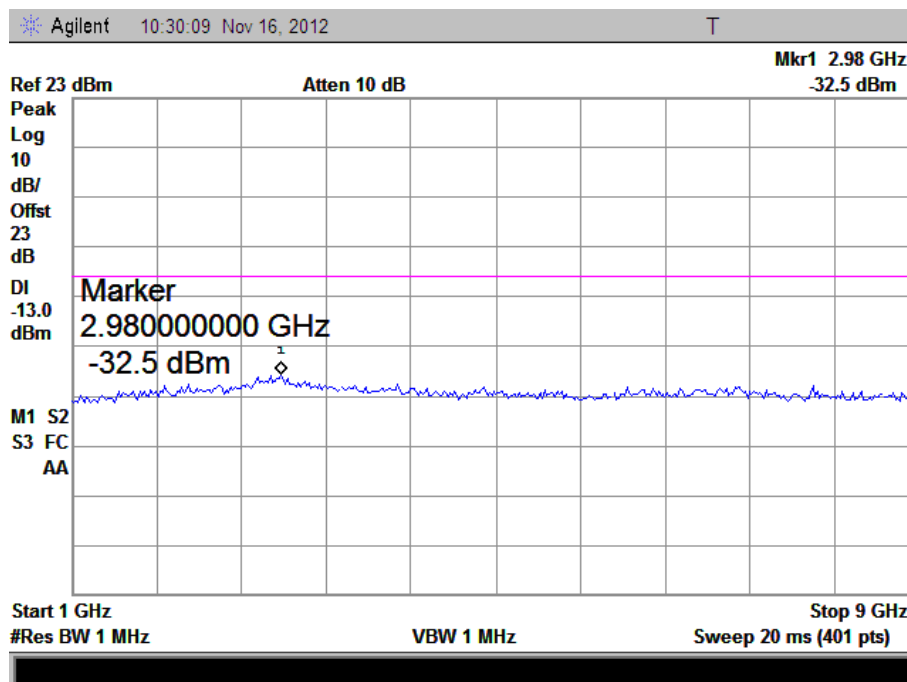


## HSUPA High Channel

30MHz to 1GHz

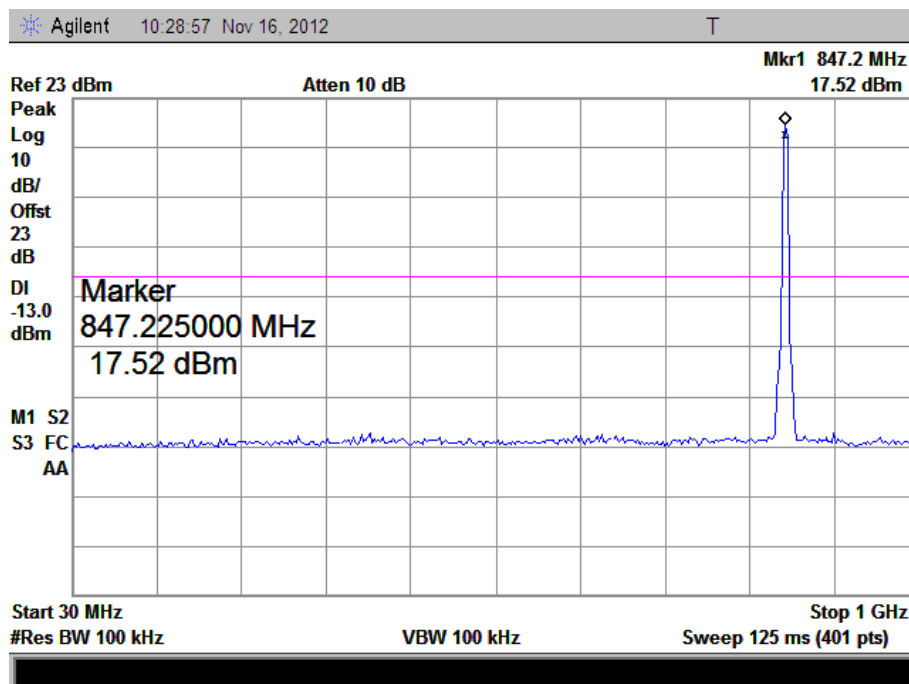


## Above 1GHz

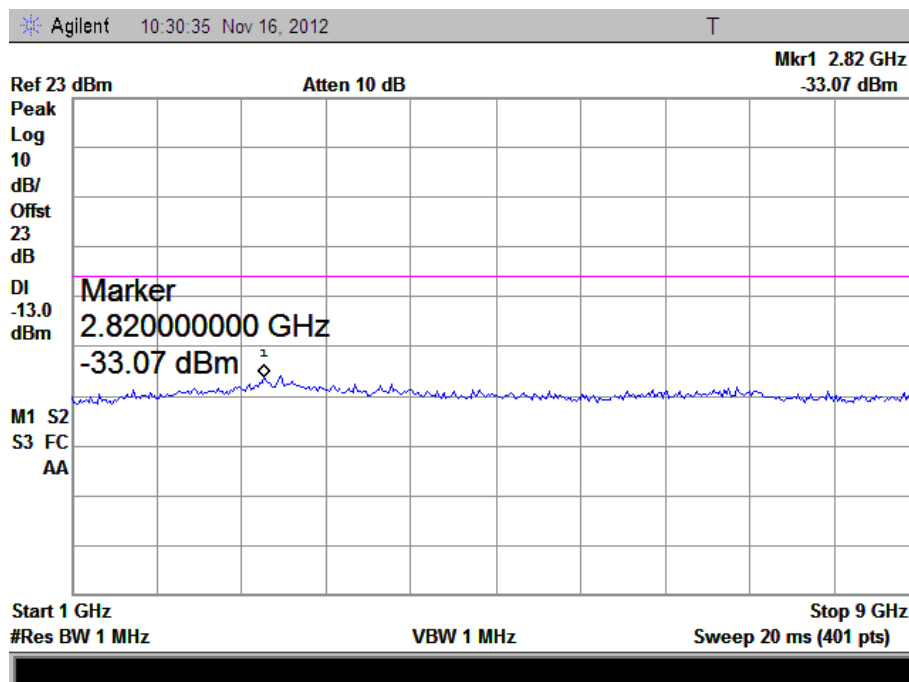




## HSUPA Low Band Spurious Emission

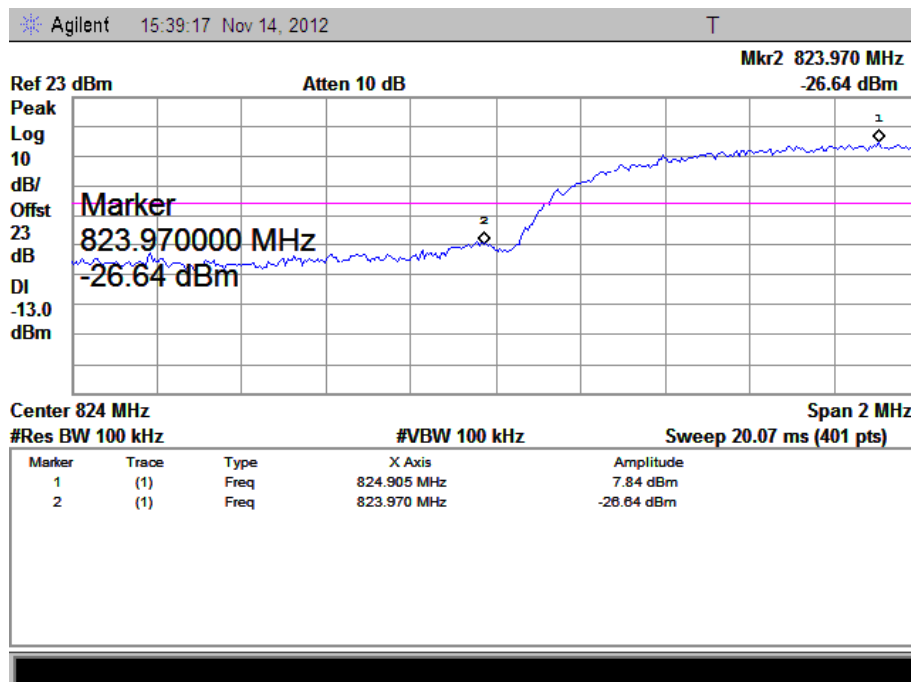


## HSUPA High Band Spurious Emission

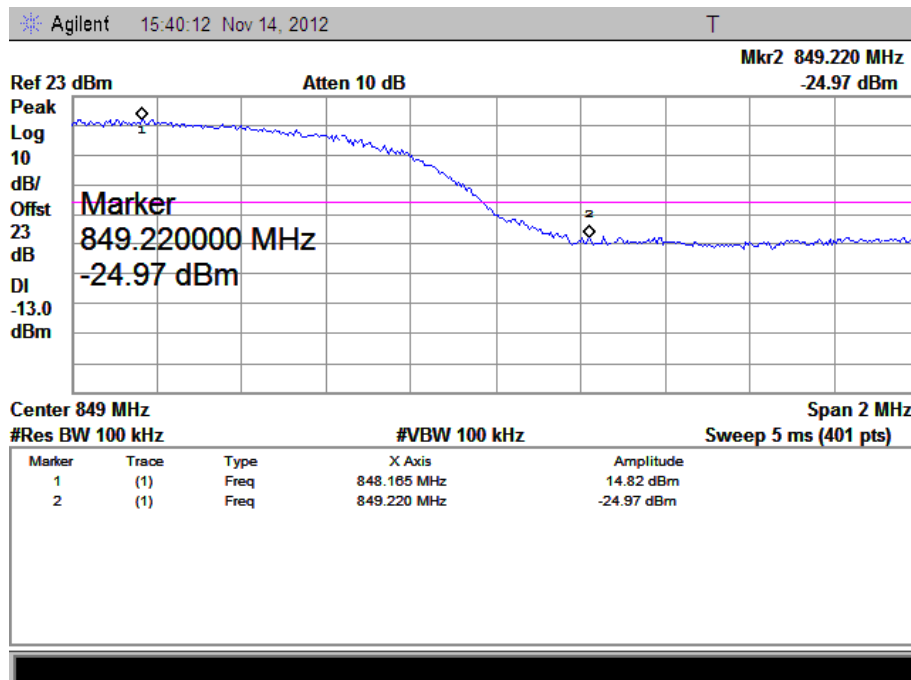


## HSDPA Low Channel

30MHz to 1GHz

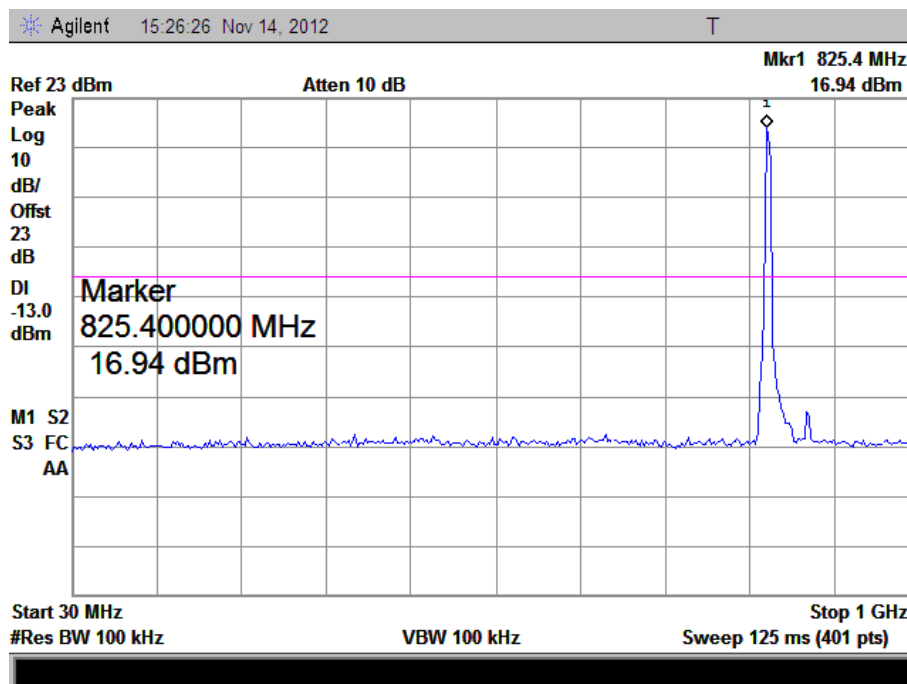


## Above 1GHz

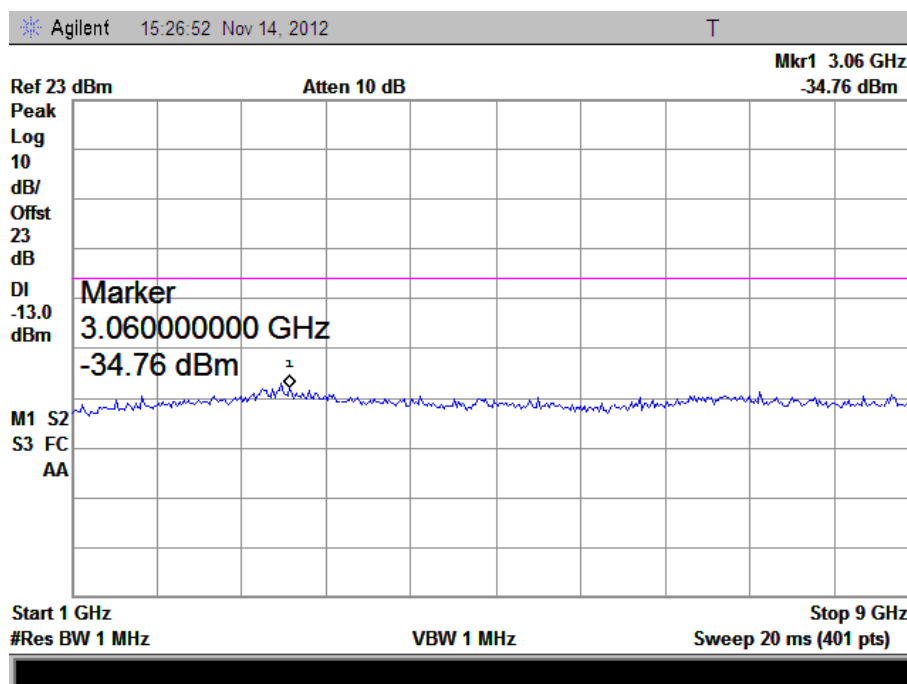


## HSDPA Middle Channel

30MHz to 1GHz

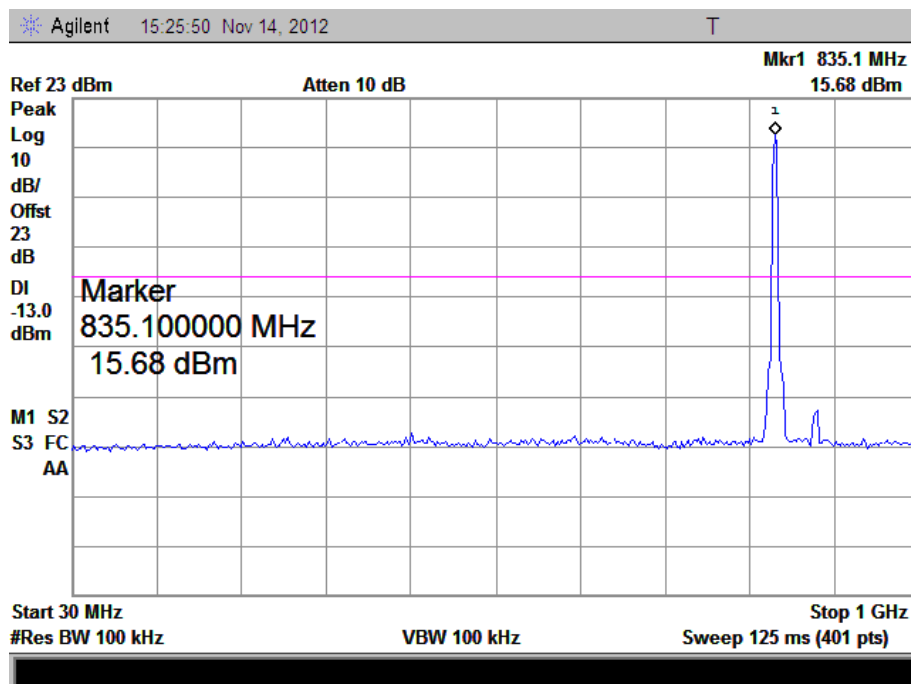


## Above 1GHz

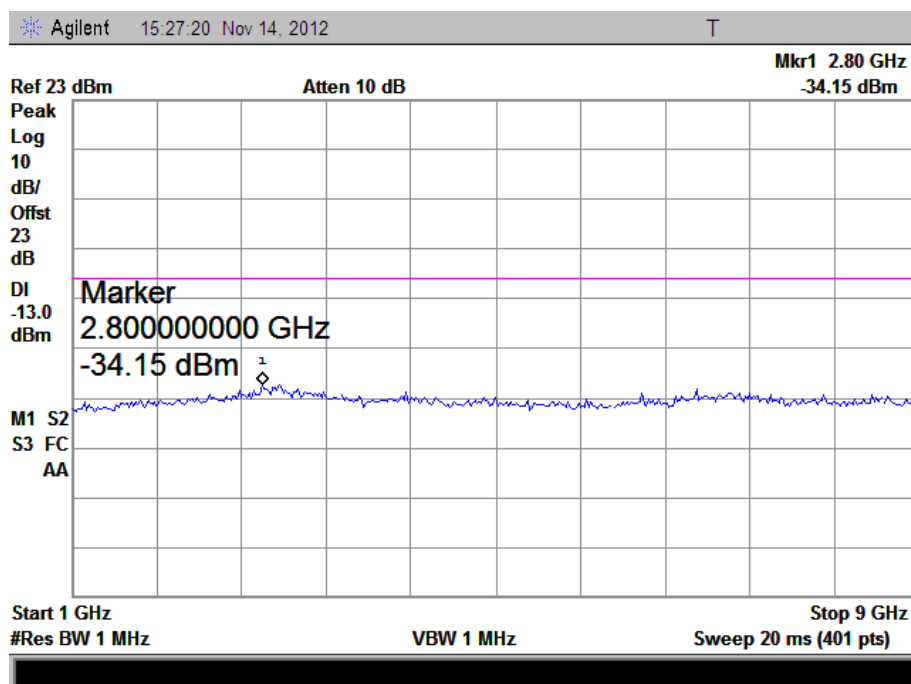


## HSDPA High Channel


30MHz to 1GHz

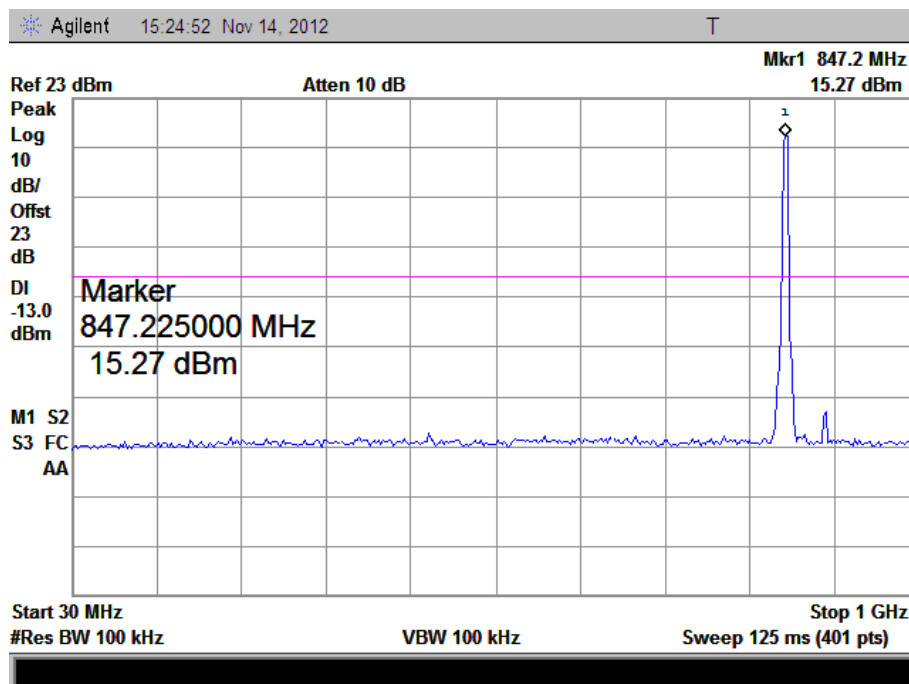


## Above 1GHz

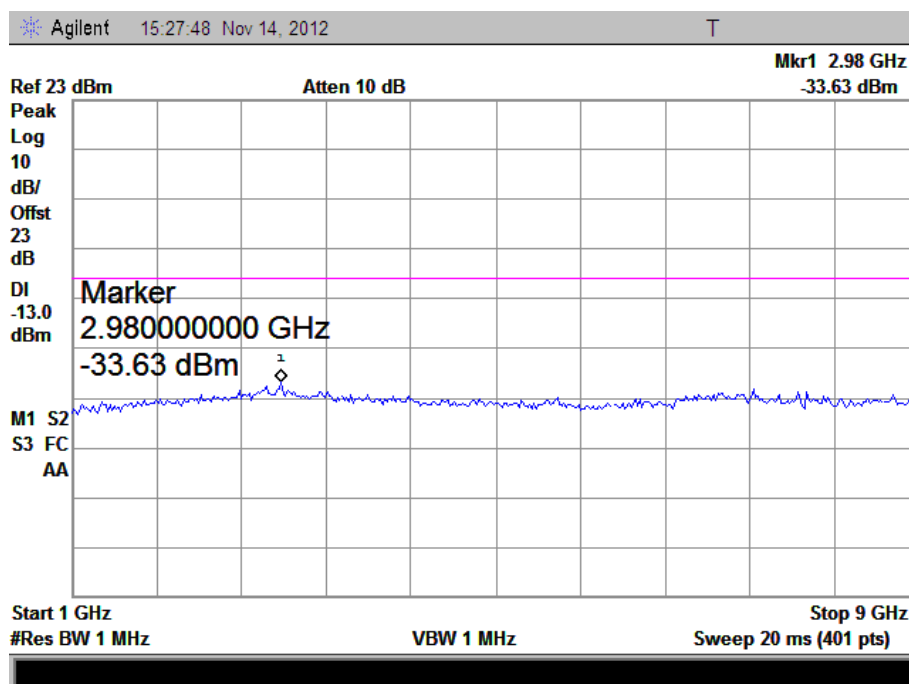

# HSDPA Low Band Spurious Emission

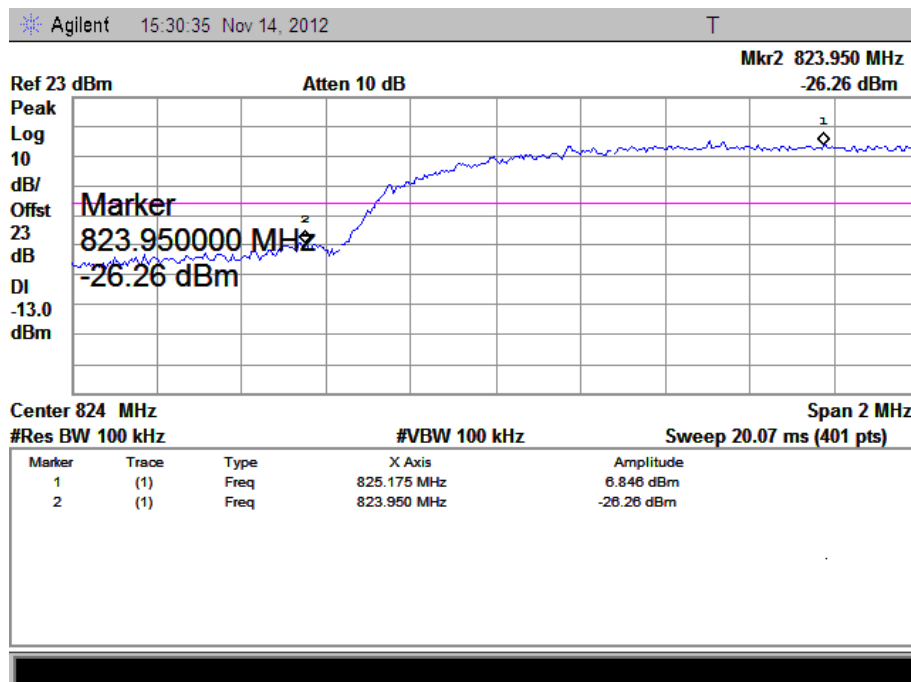


# HSDPA High Band Spurious Emission

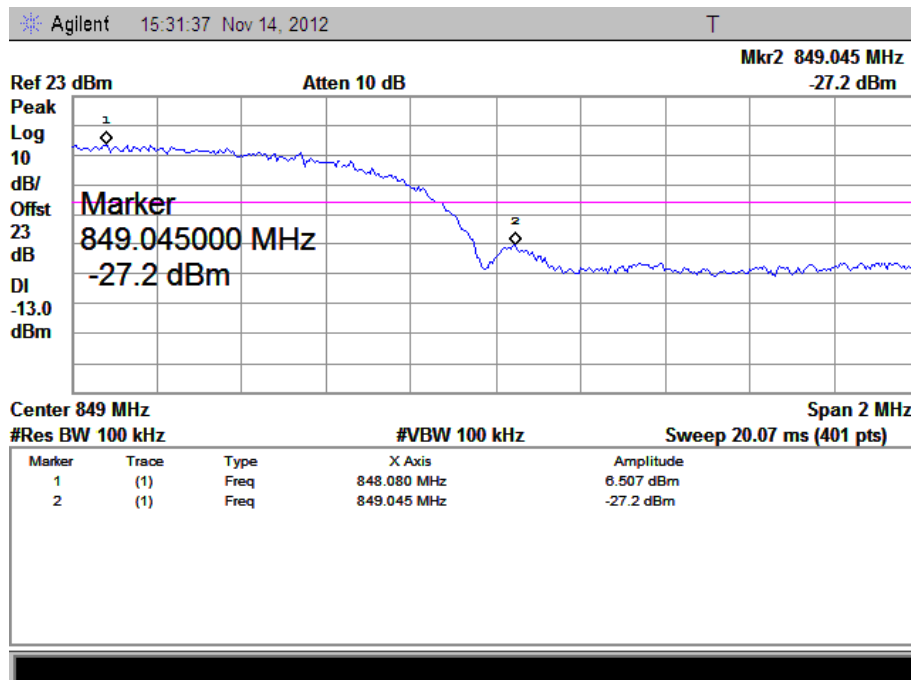


# For Band IV

WCDMA Low Channel

30MHz to 1GHz

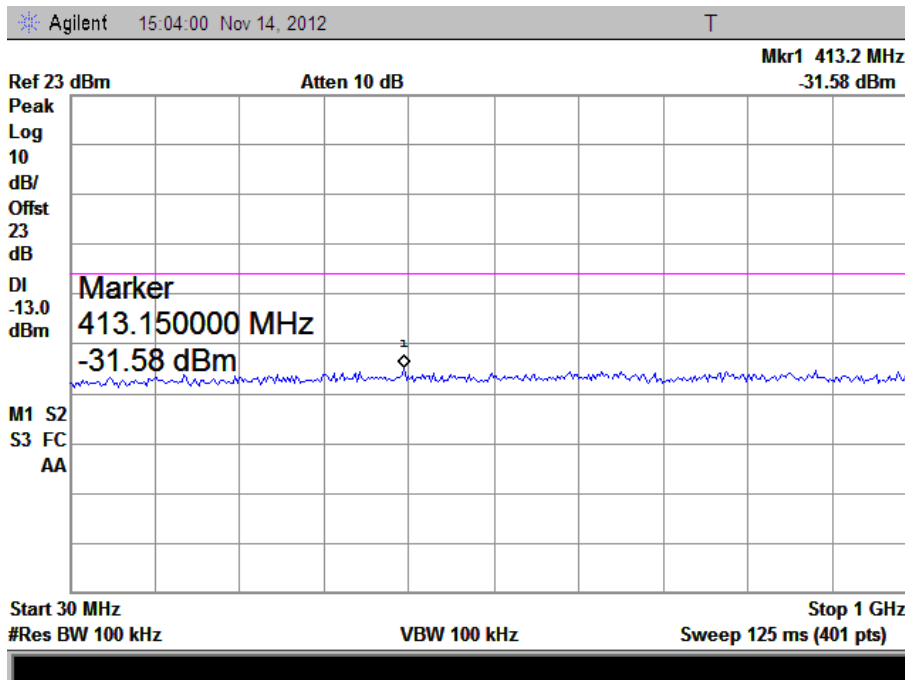


Above 1GHz

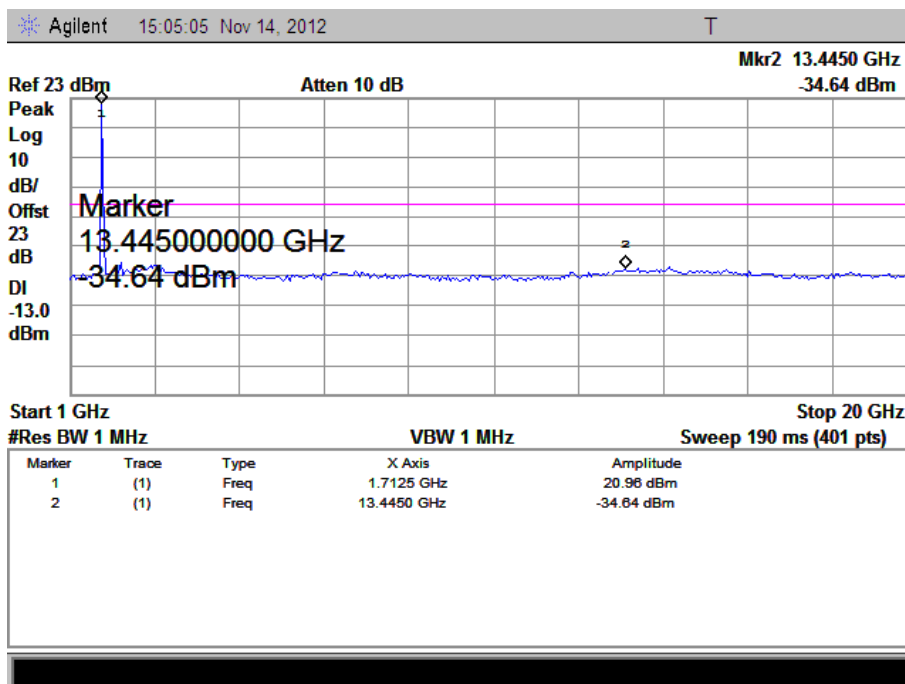


# WCDMA Middle Channel

30MHz to 1GHz

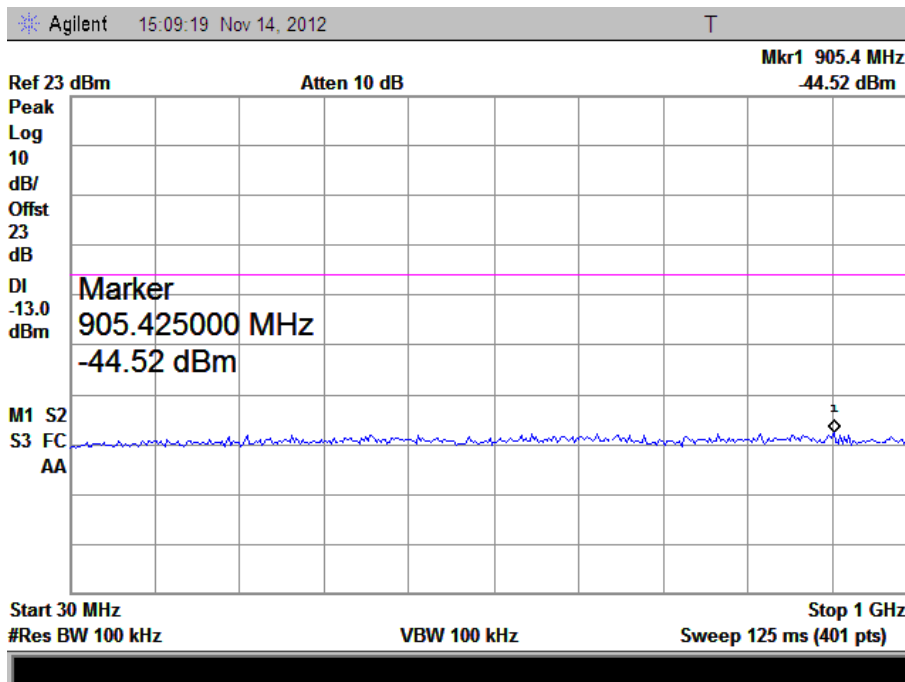


# Above 1GHz

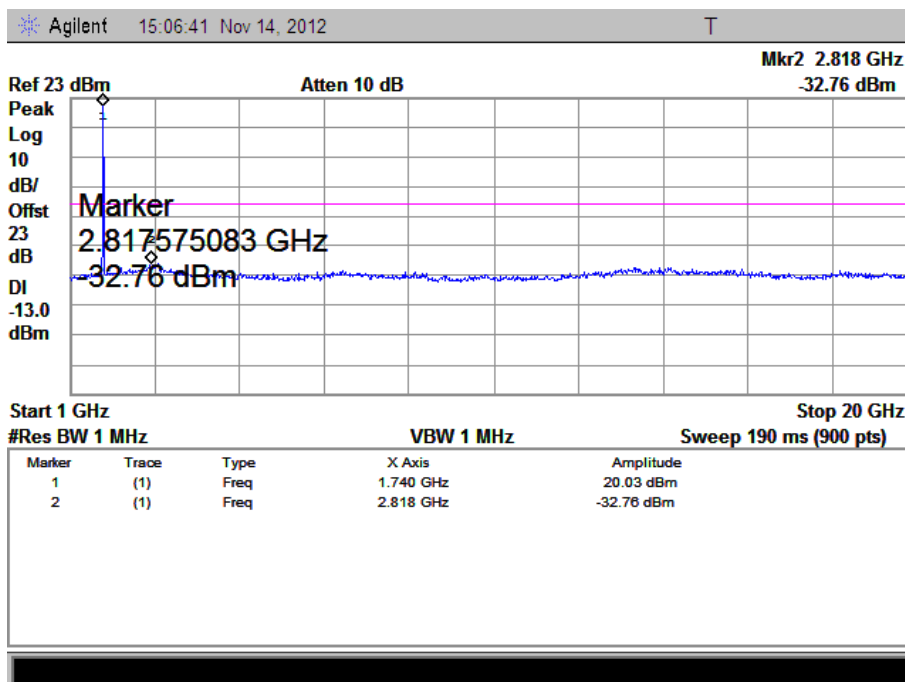


# WCDMA High Channel

30MHz to 1GHz

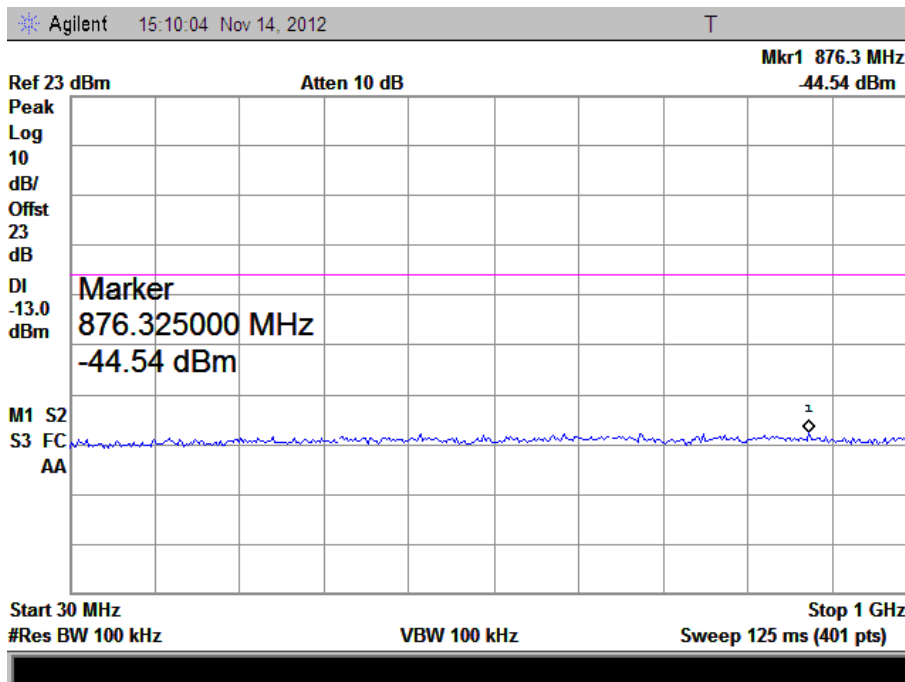


Above 1GHz

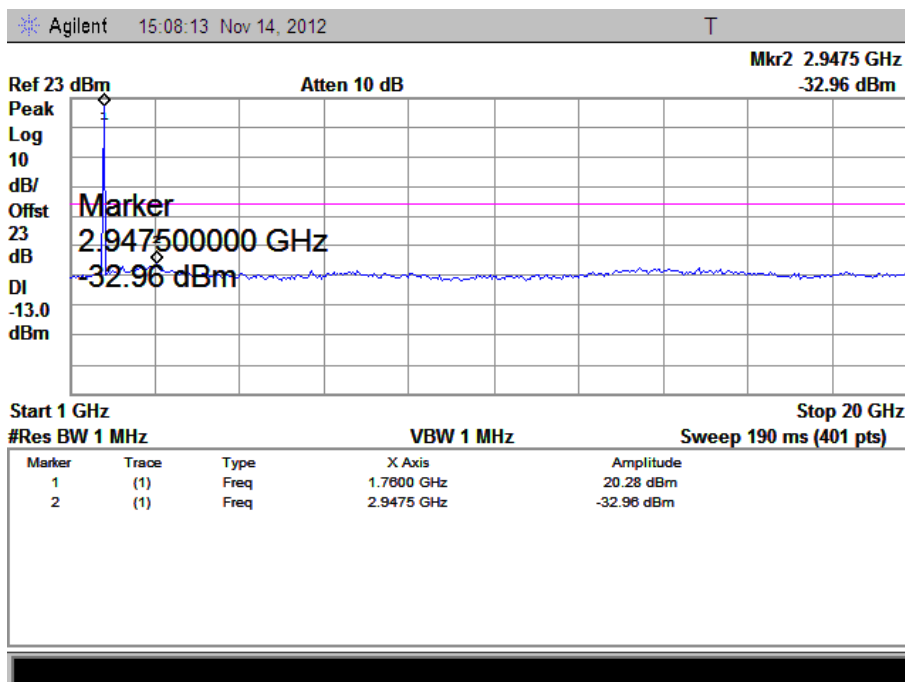




# WCDMA Low Band Spurious Emission

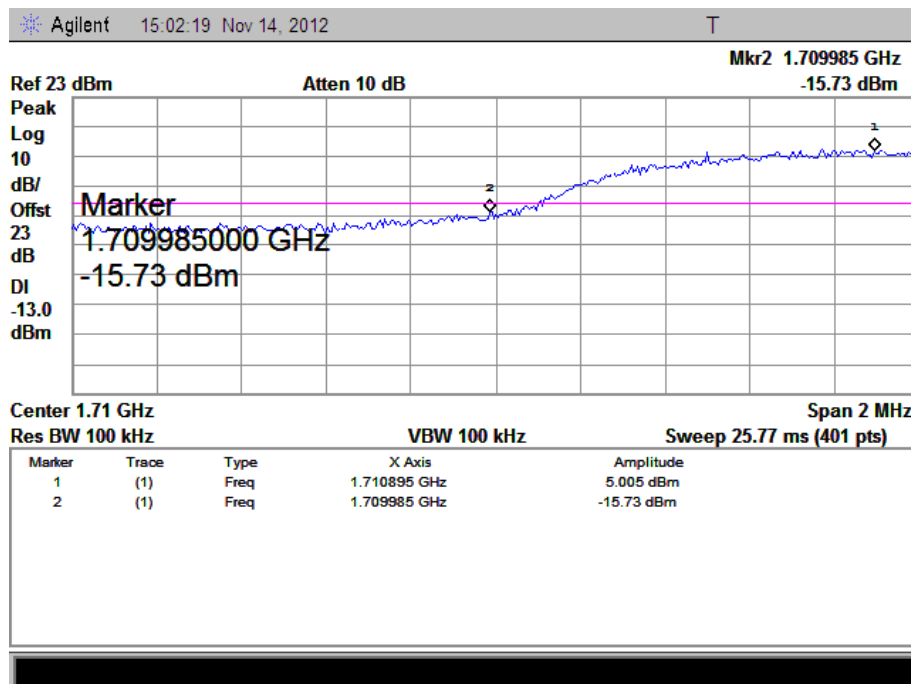


# WCDMA High Band Spurious Emission

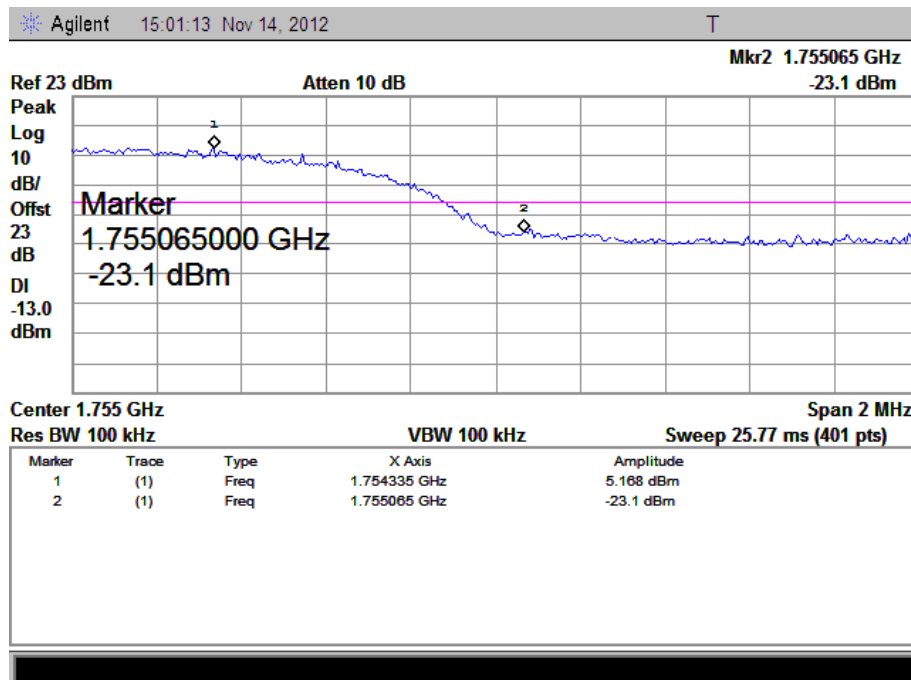


# HSUPA Low Channel

30MHz to 1GHz

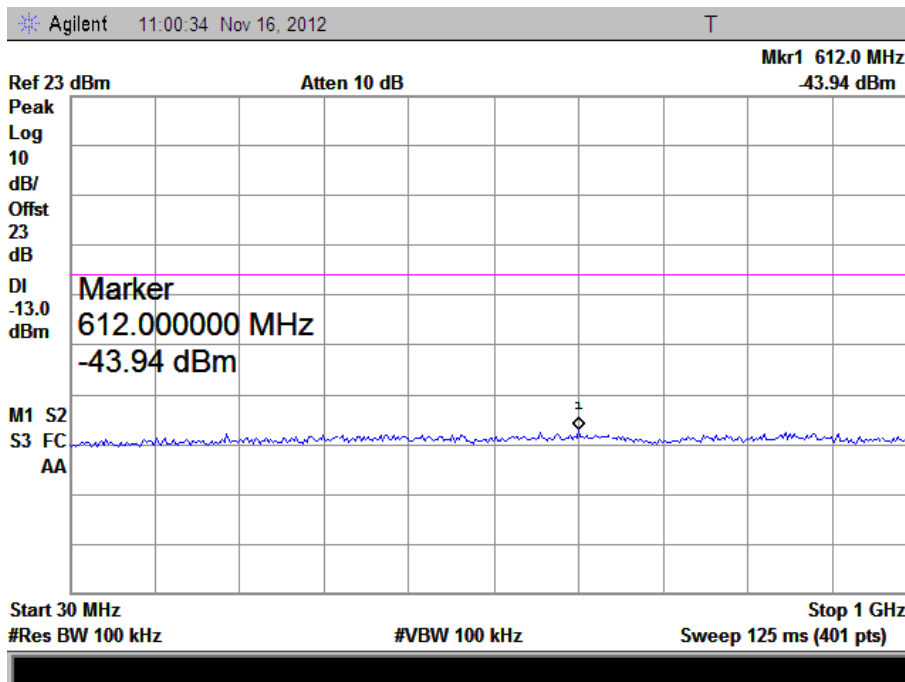


# Above 1GHz

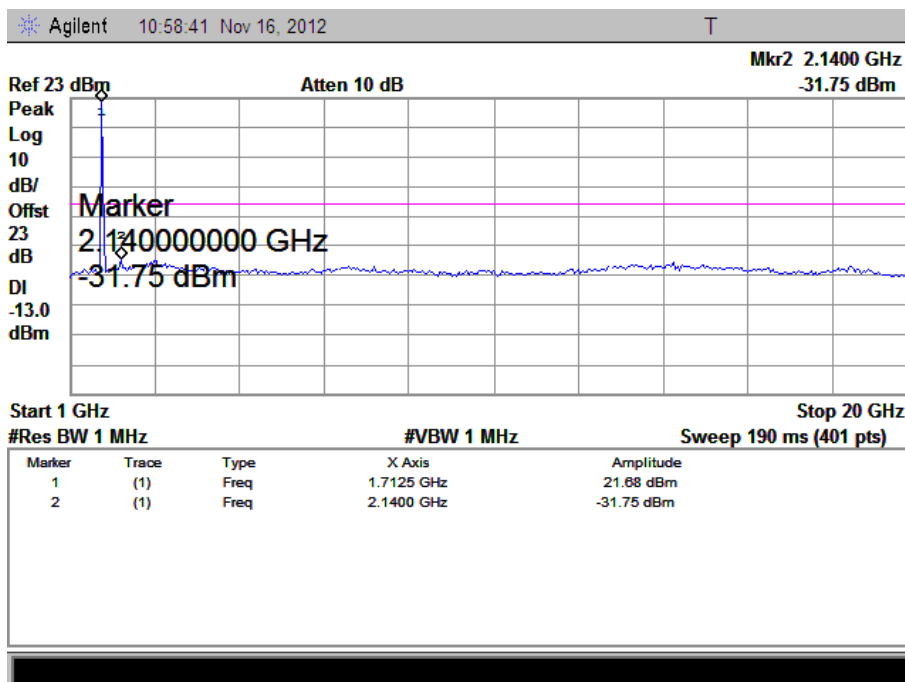


# HSUPA Middle Channel

30MHz to 1GHz

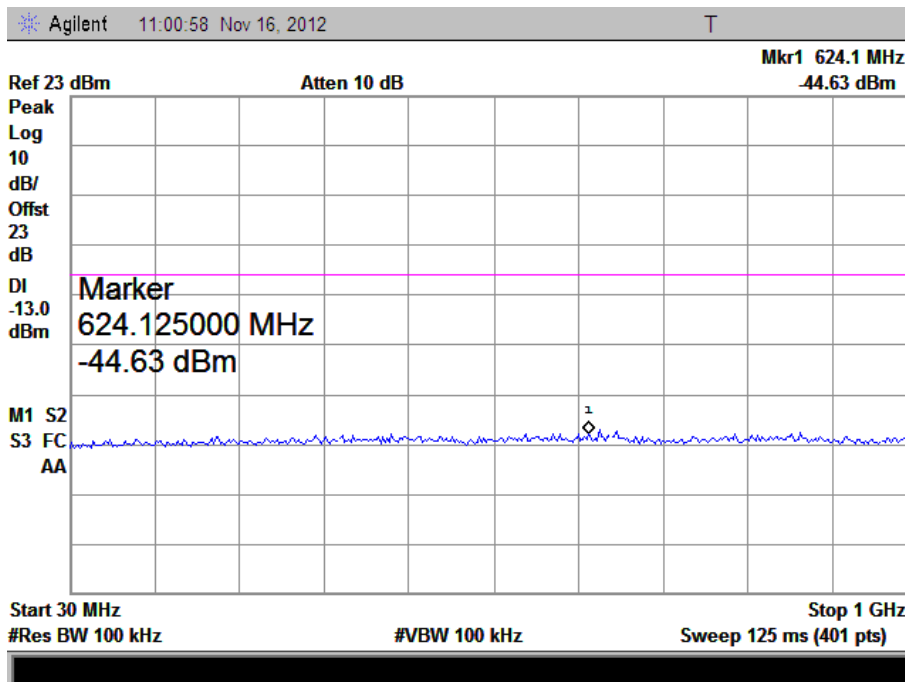


Above 1GHz

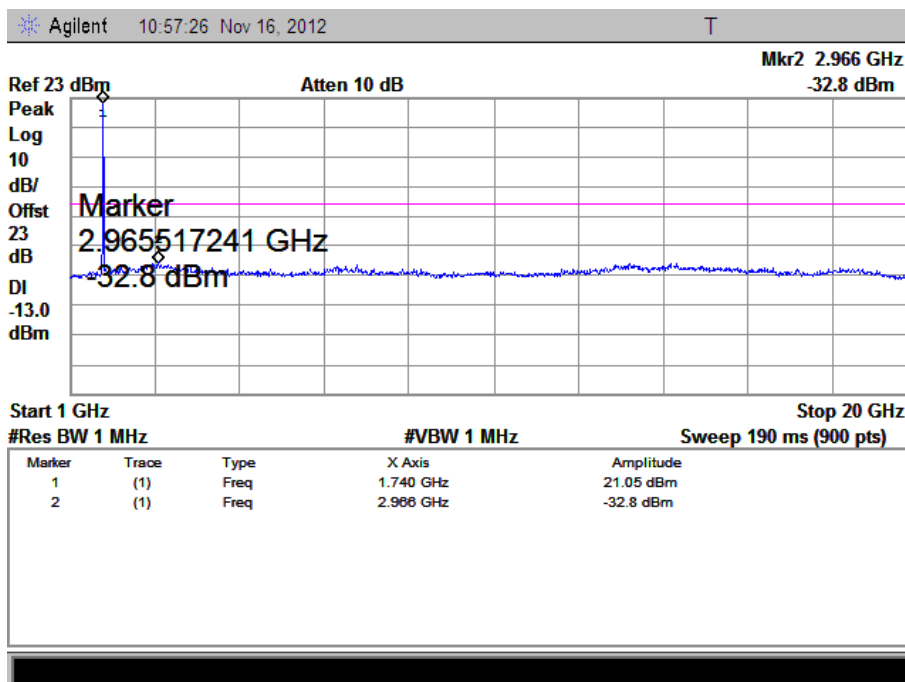


# HSUPA High Channel


30MHz to 1GHz

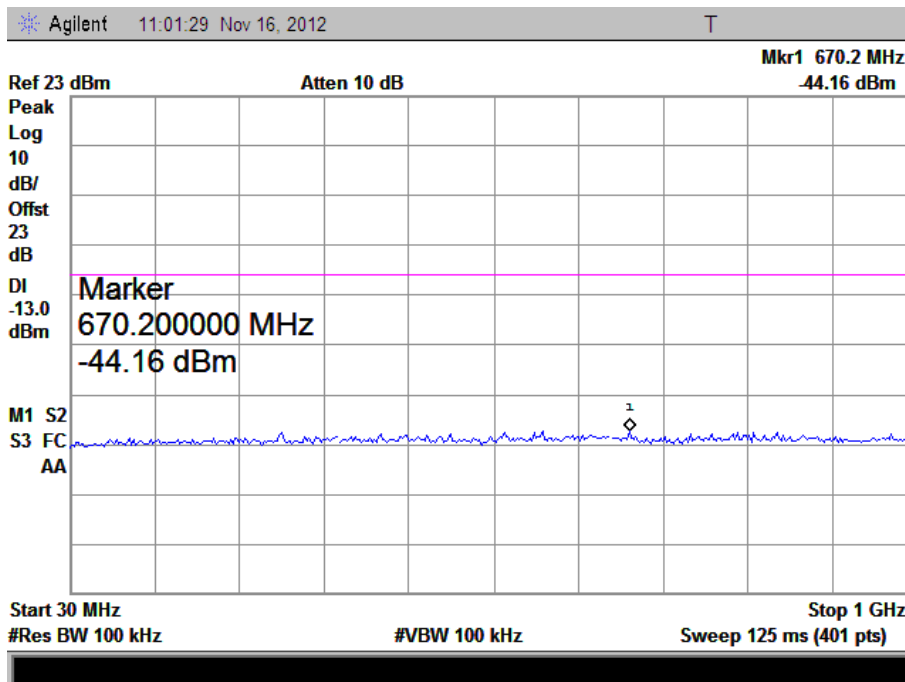


Above 1GHz

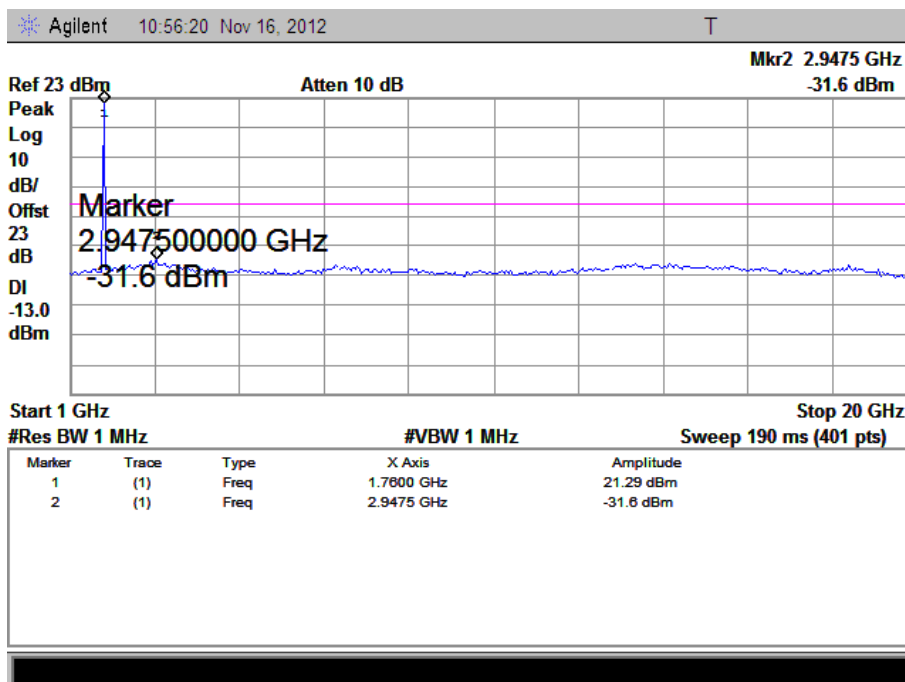

# HSUPA Low Band Spurious Emission

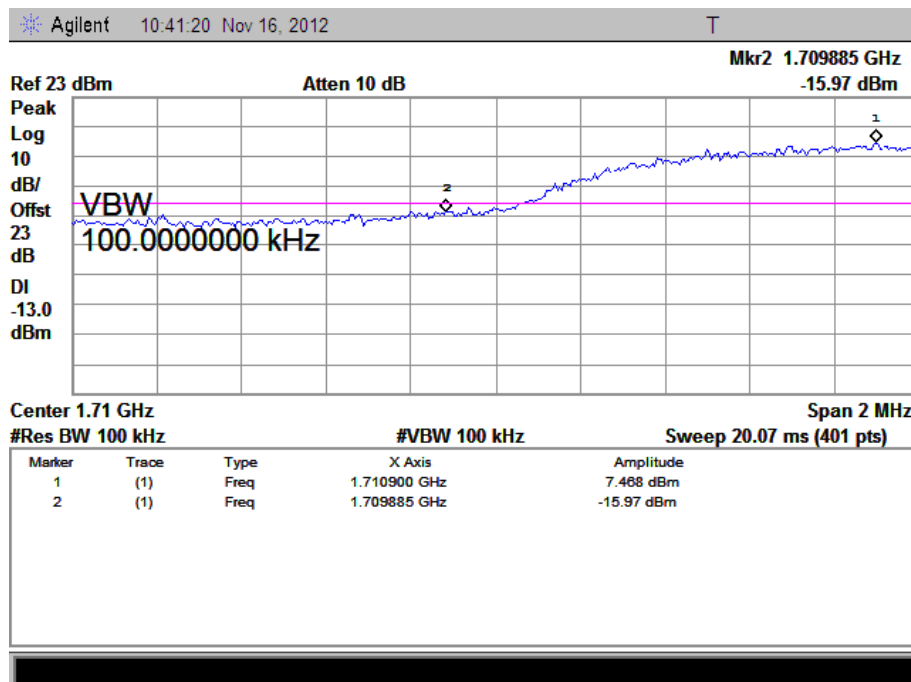


# HSUPA High Band Spurious Emission

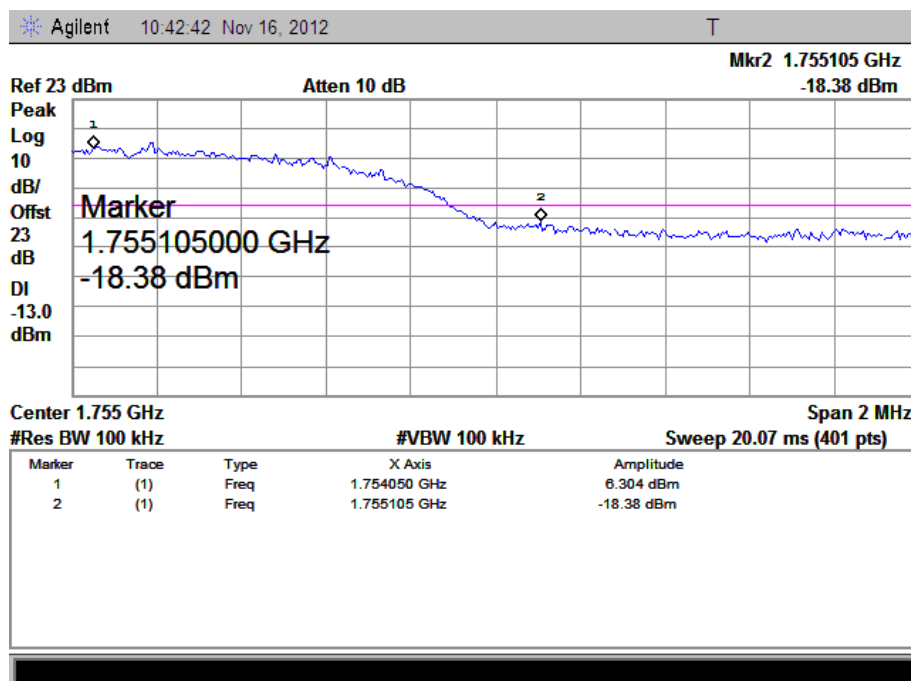


# HSDPA Low Channel

30MHz to 1GHz

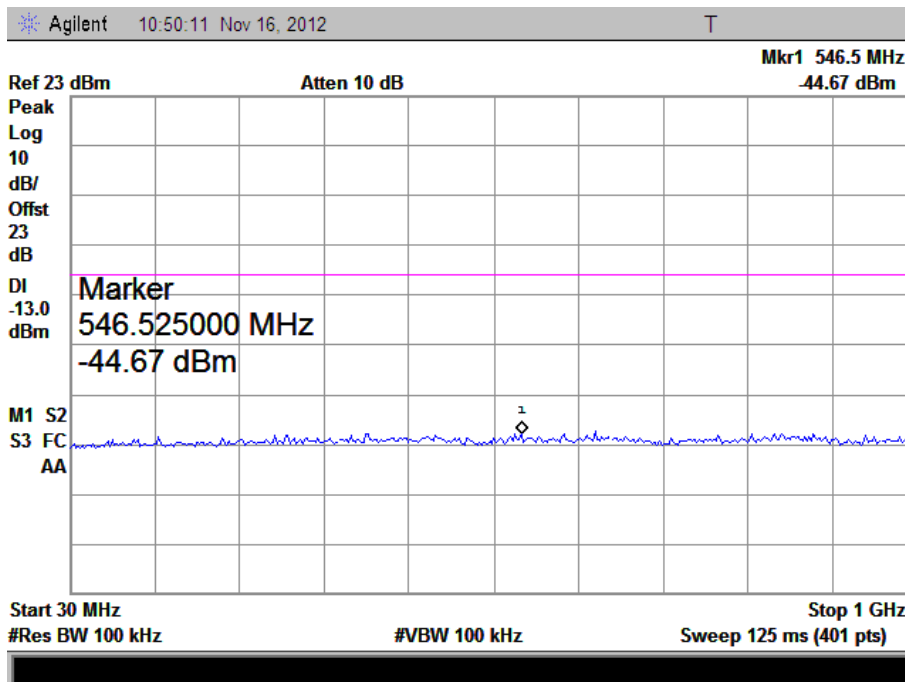


# Above 1GHz

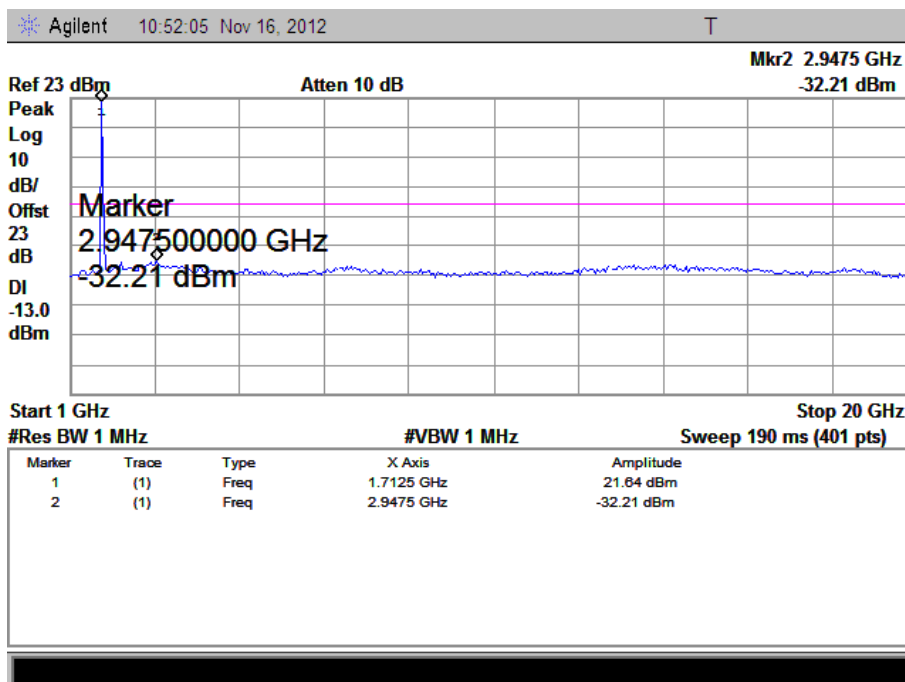


# HSDPA Middle Channel

30MHz to 1GHz

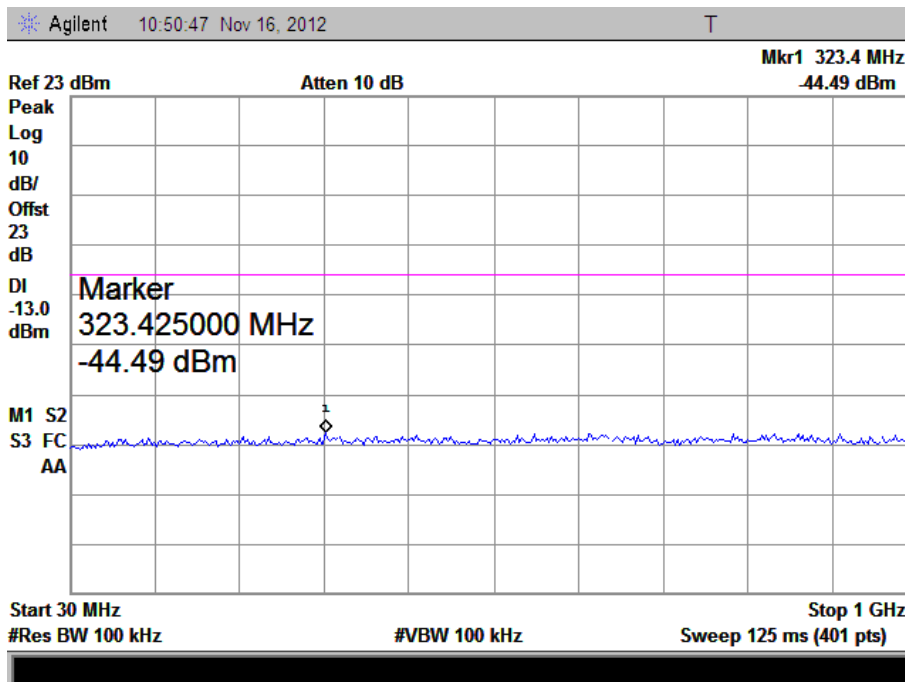


Above 1GHz

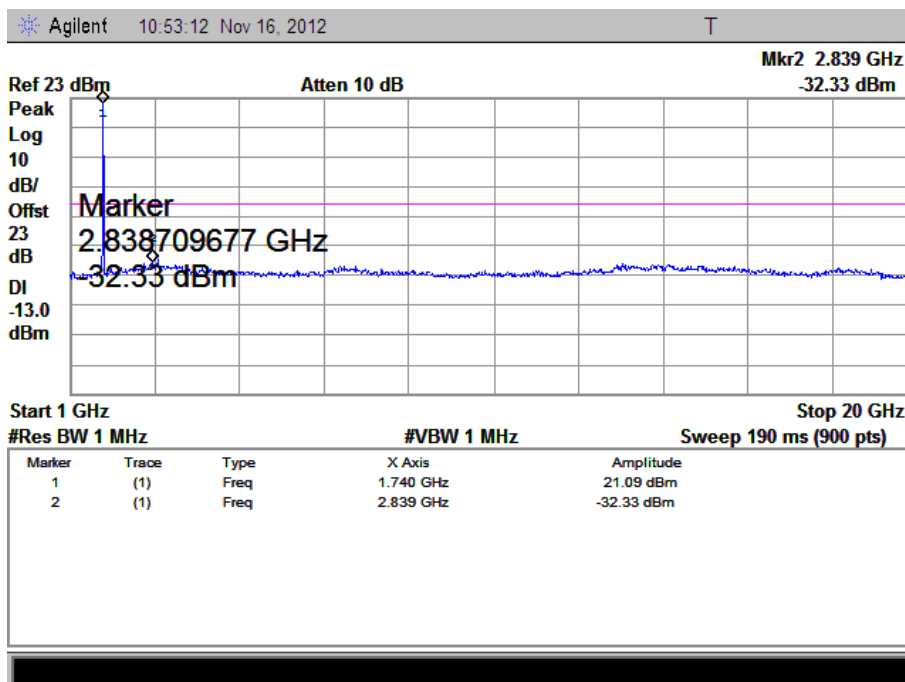


# HSDPA High Channel

30MHz to 1GHz

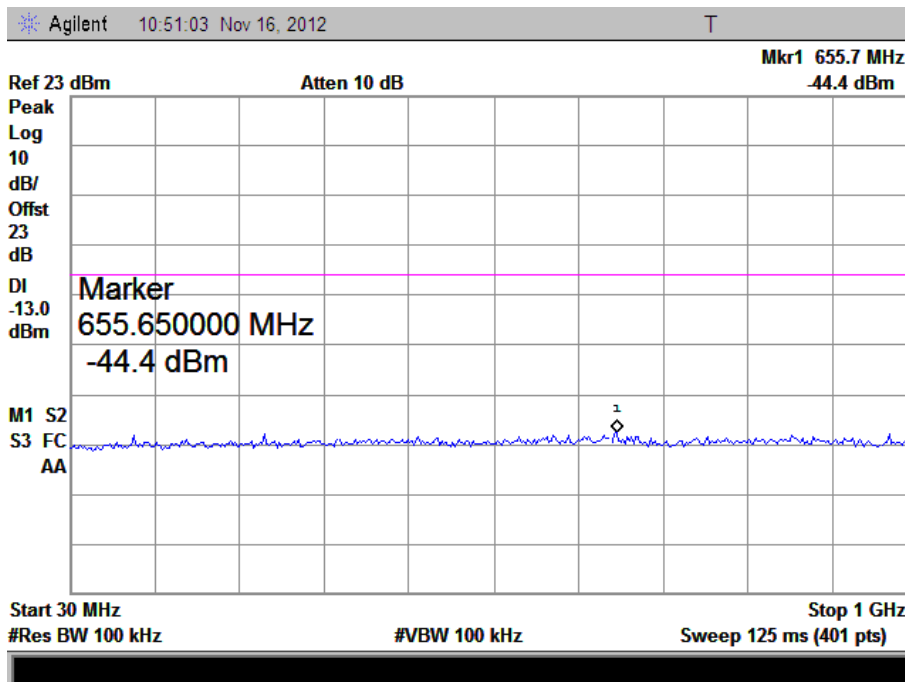


Above 1GHz

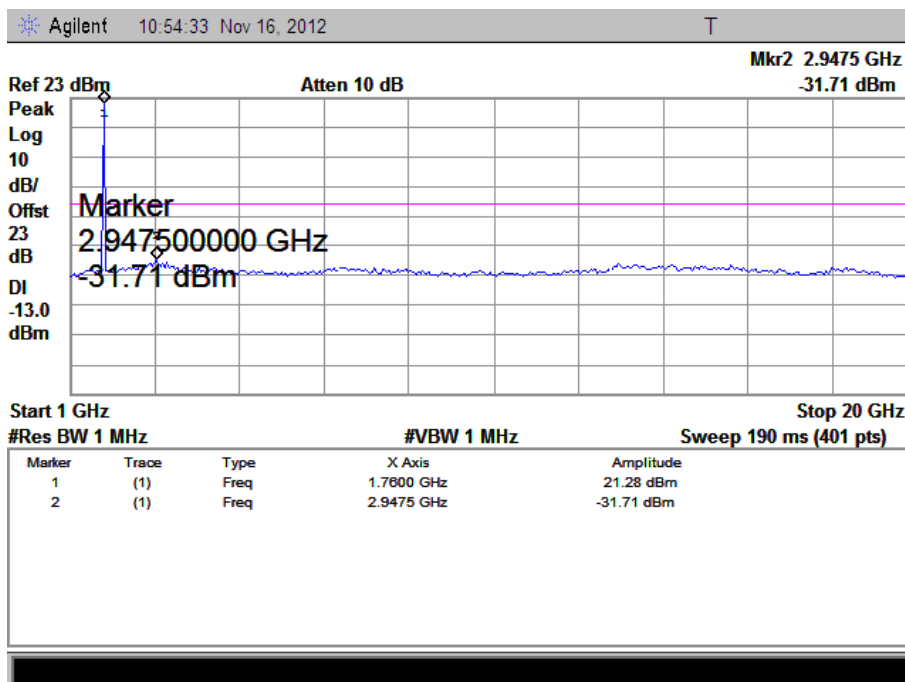




## HSDPA Low Band Spurious Emission

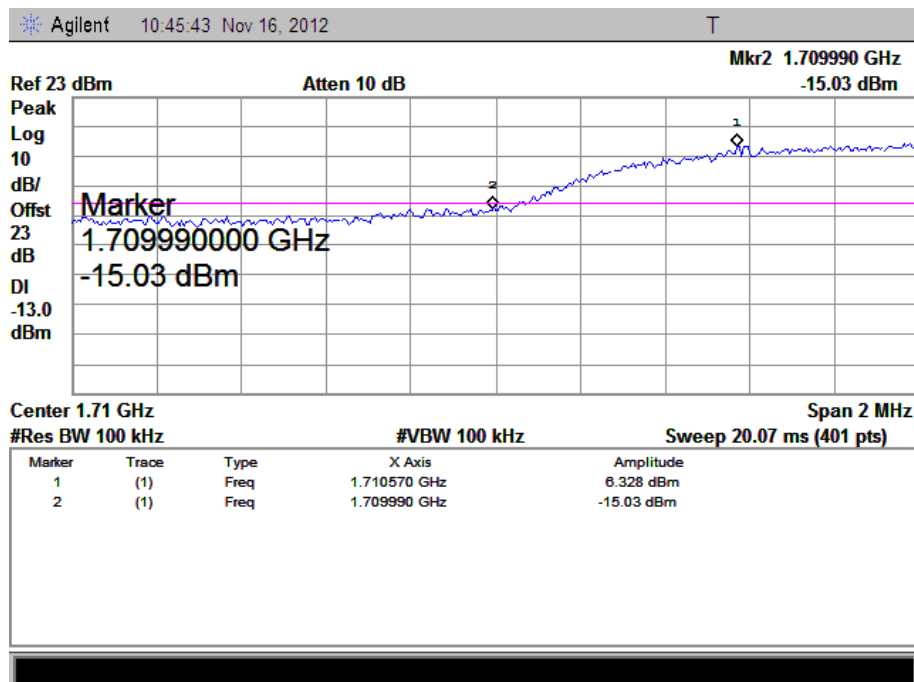

## HSDPA High Band Spurious Emission

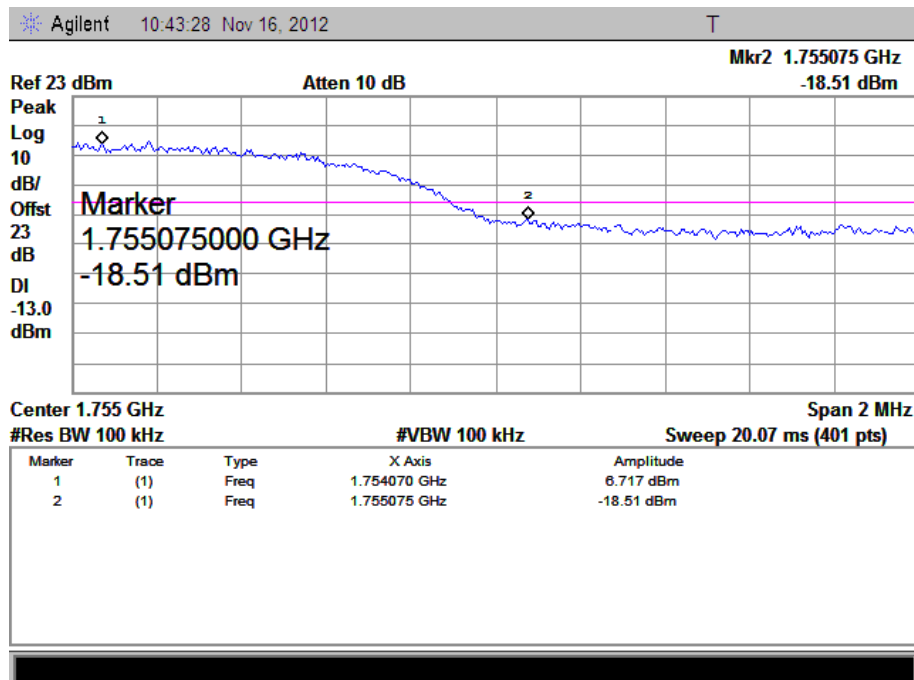

## 7. Spurious Radiated Emissions

### 7.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.20$  dB.

### 7.2 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h) For operations in the 1710-1755 MHz and 2110-2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB

### 7.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	112012	2012-03-28	2013-03-27
Signal Generator	R&S	SMR20	100047	2012-03-28	2013-03-27

### 7.4 Test Procedure

1. The setup of EUT is according with per TIA/EIA Standard 603C and ANSI C63.4-2003 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB =  $43 + 10 \log_{10}(\text{power out in Watts})$

## 7.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 7.6 Summary of Test Results/Plots


According to the data below, the FCC Part 22.917 and 24.238 standards, and had the worst margin of:

**-27.14 at 945.4399 MHz in the Vertical polarization for HSDPA Band II Mode Middle channel,  
9 kHz to 18 GHz.**

*Spurious Emission From 30MHz to 1GHz*


*For Cellular Band\_GSM Mode*

*Horizontal:*

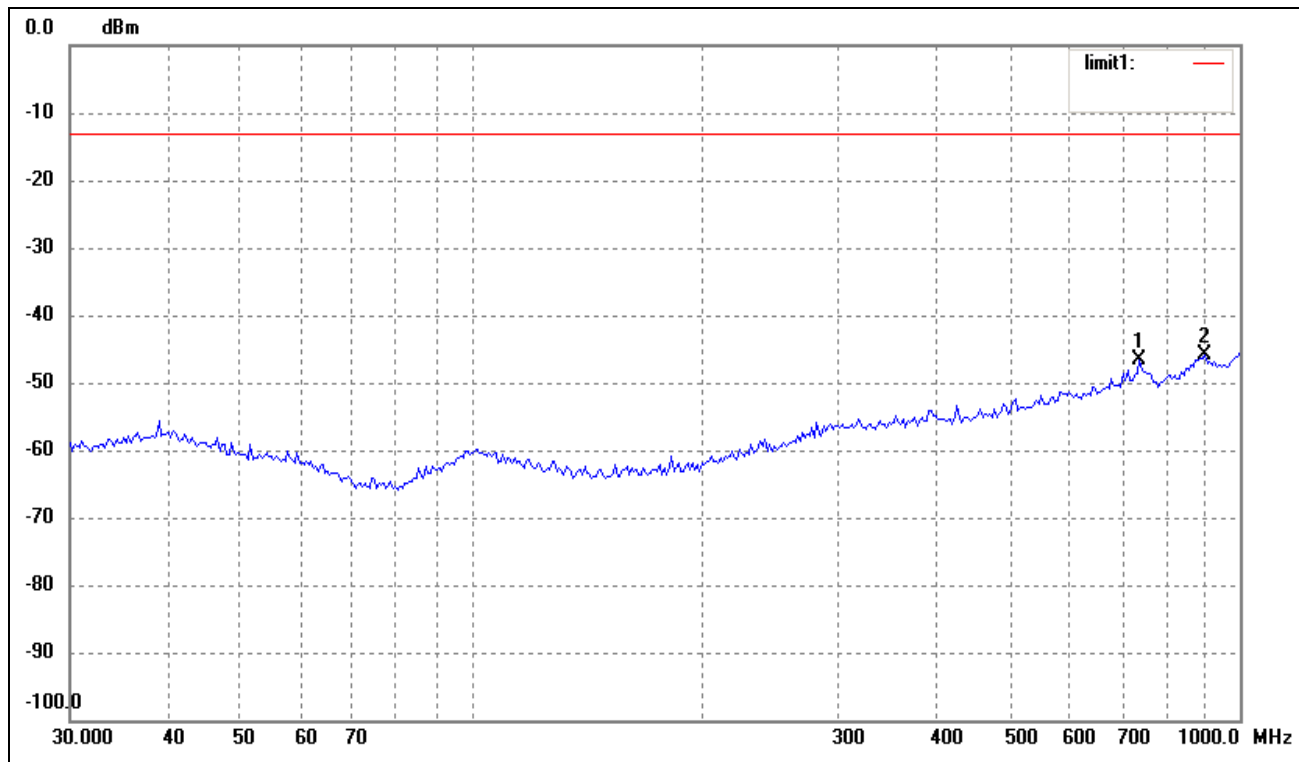

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	739.6604	-76.39	29.87	-46.52	-13.00	-33.52	ERP
2	900.1474	-77.00	31.18	-45.82	-13.00	-32.82	ERP


Vertical:

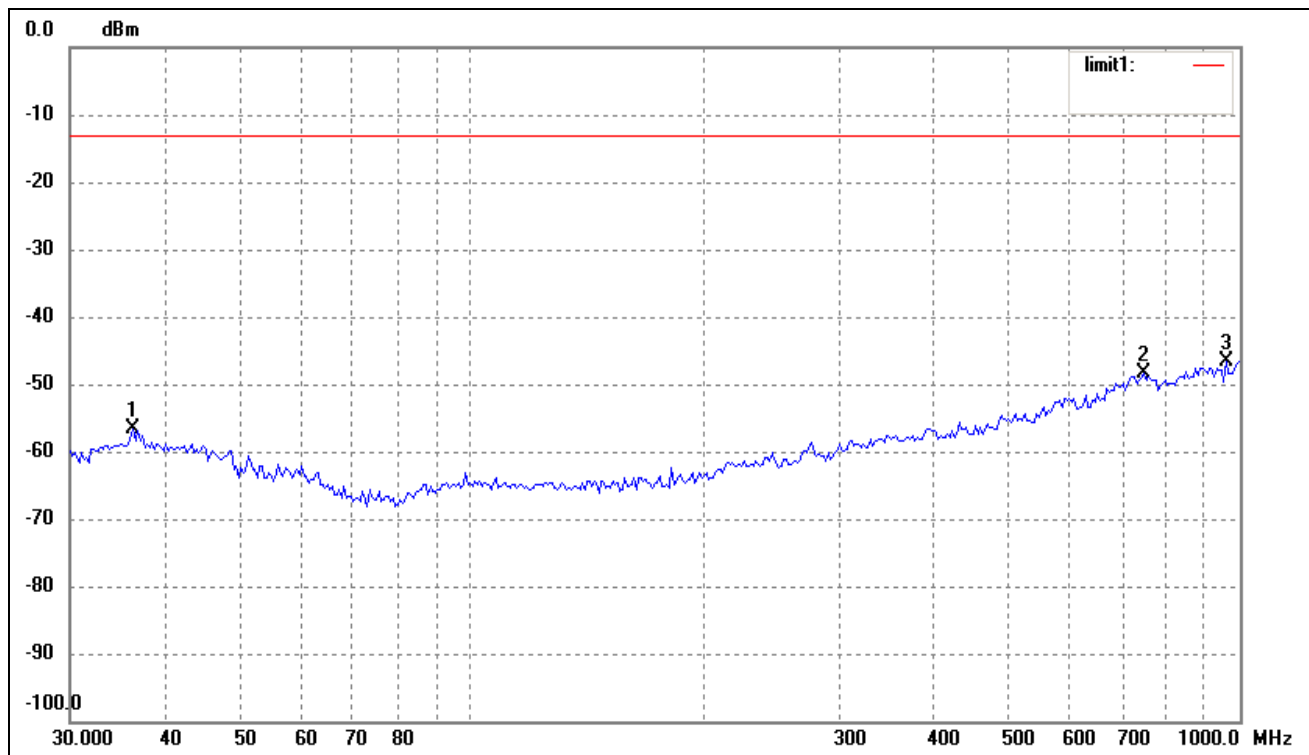

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-77.52	20.89	-56.63	-13.00	-43.63	ERP
2	750.1082	-77.94	29.58	-48.36	-13.00	-35.36	ERP
3	958.7943	-76.69	29.96	-46.73	-13.00	-33.73	ERP


For Cellular Band\_GPRS Mode

Horizontal:

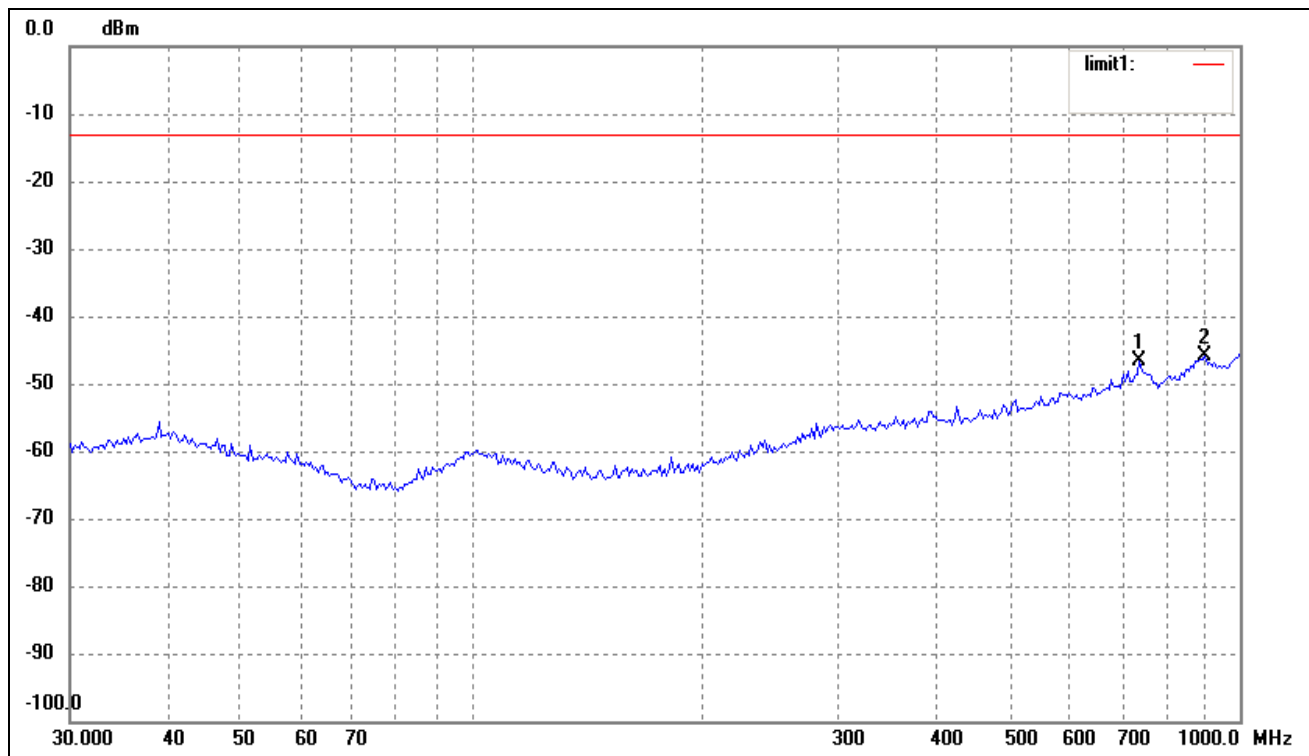

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	739.6604	-76.39	29.87	-46.52	-13.00	-33.52	ERP
2	900.1474	-77.00	31.18	-45.82	-13.00	-32.82	ERP


Vertical:

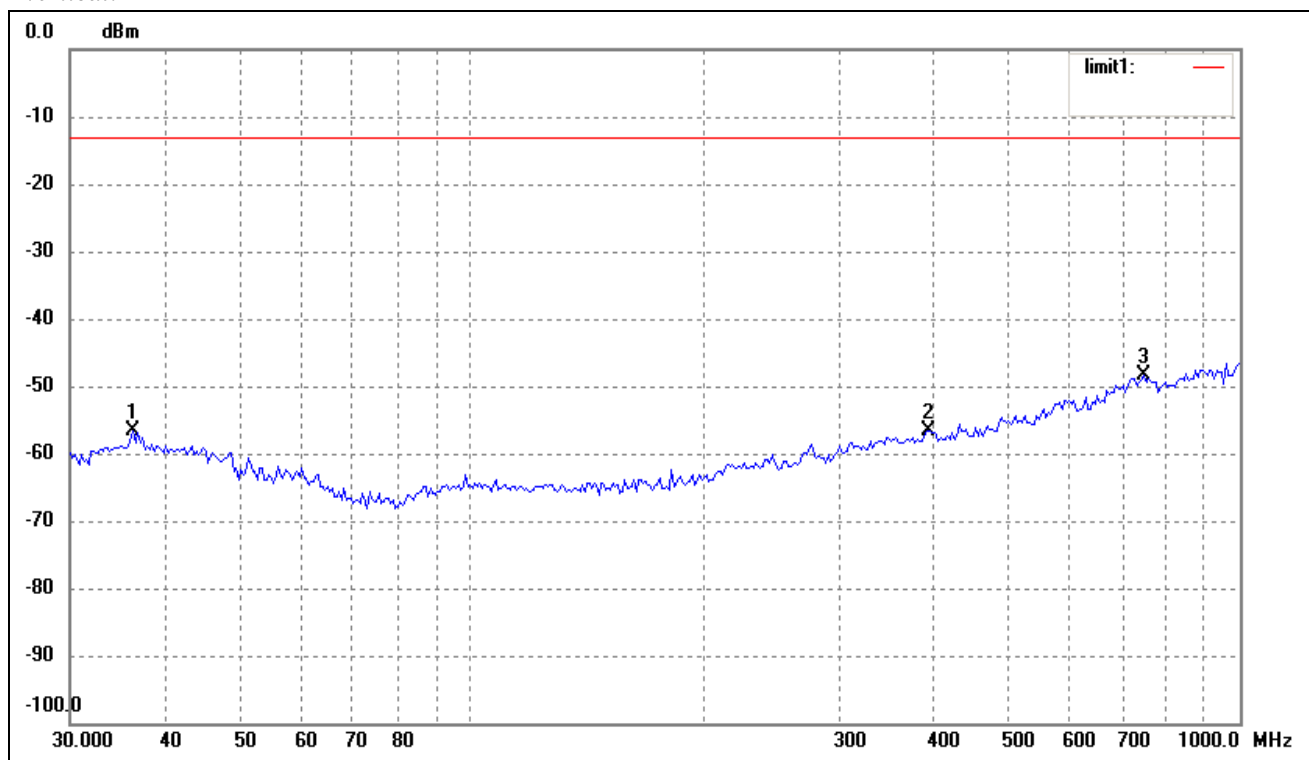

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	
1	36.2541	-77.52	20.89	-56.63	-13.00	-43.63	ERP
2	393.4723	-79.58	23.04	-56.54	-13.00	-43.54	ERP
3	750.1082	-77.94	29.58	-48.36	-13.00	-35.36	ERP


For Cellular Band\_EDGE Mode

Horizontal:

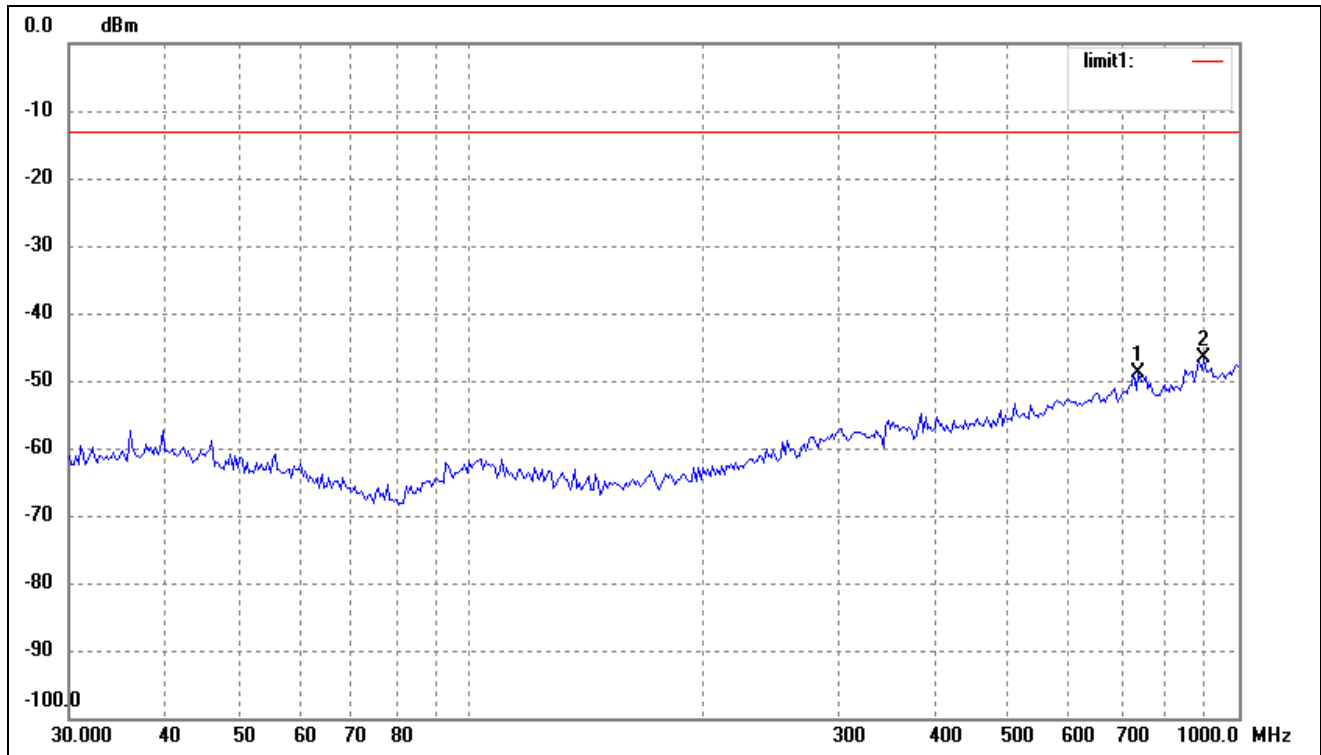

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	739.6604	-78.84	29.87	-48.97	-13.00	-35.97	ERP
2	900.1474	-77.73	31.18	-46.55	-13.00	-33.55	ERP

Vertical:

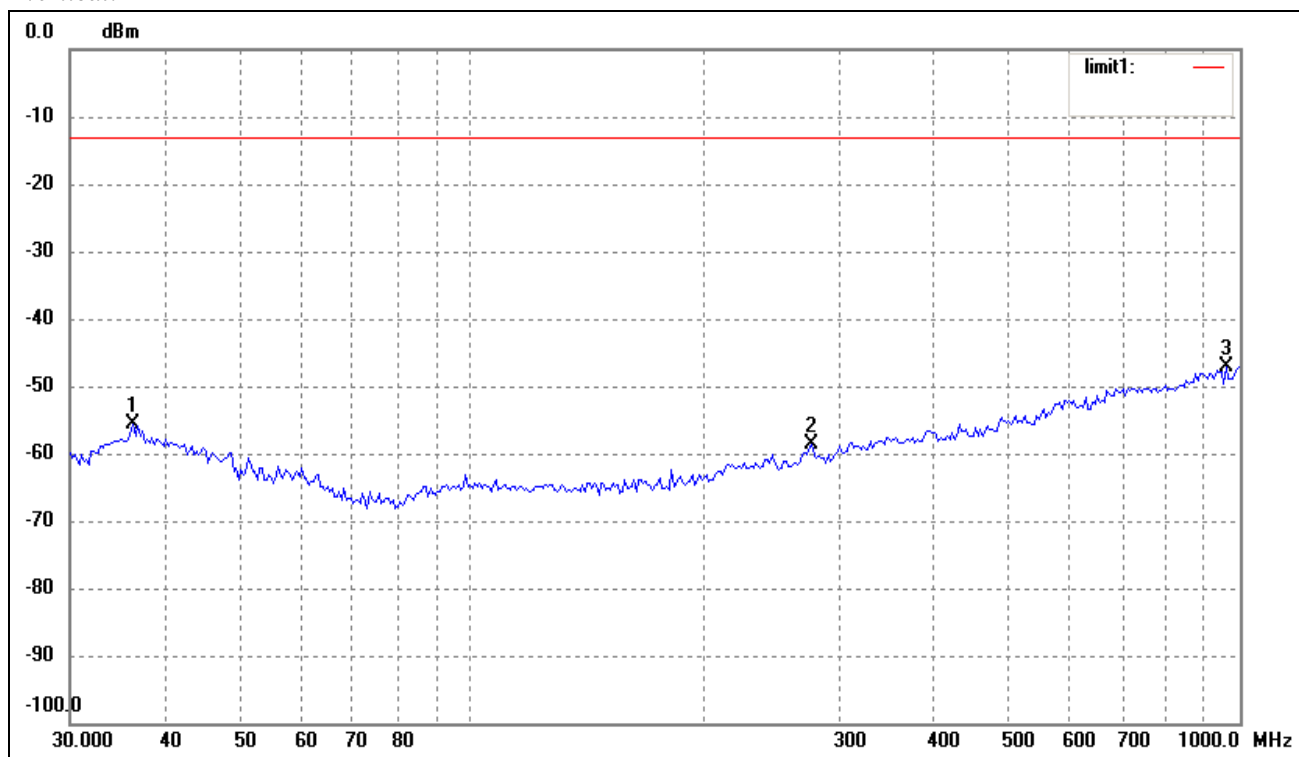


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-76.52	20.89	-55.63	-13.00	-42.63	ERP
2	277.0935	-79.46	20.81	-58.65	-13.00	-45.65	ERP
3	958.7943	-77.19	29.96	-47.23	-13.00	-34.23	ERP




For PCS Band\_GSM Mode

Horizontal:

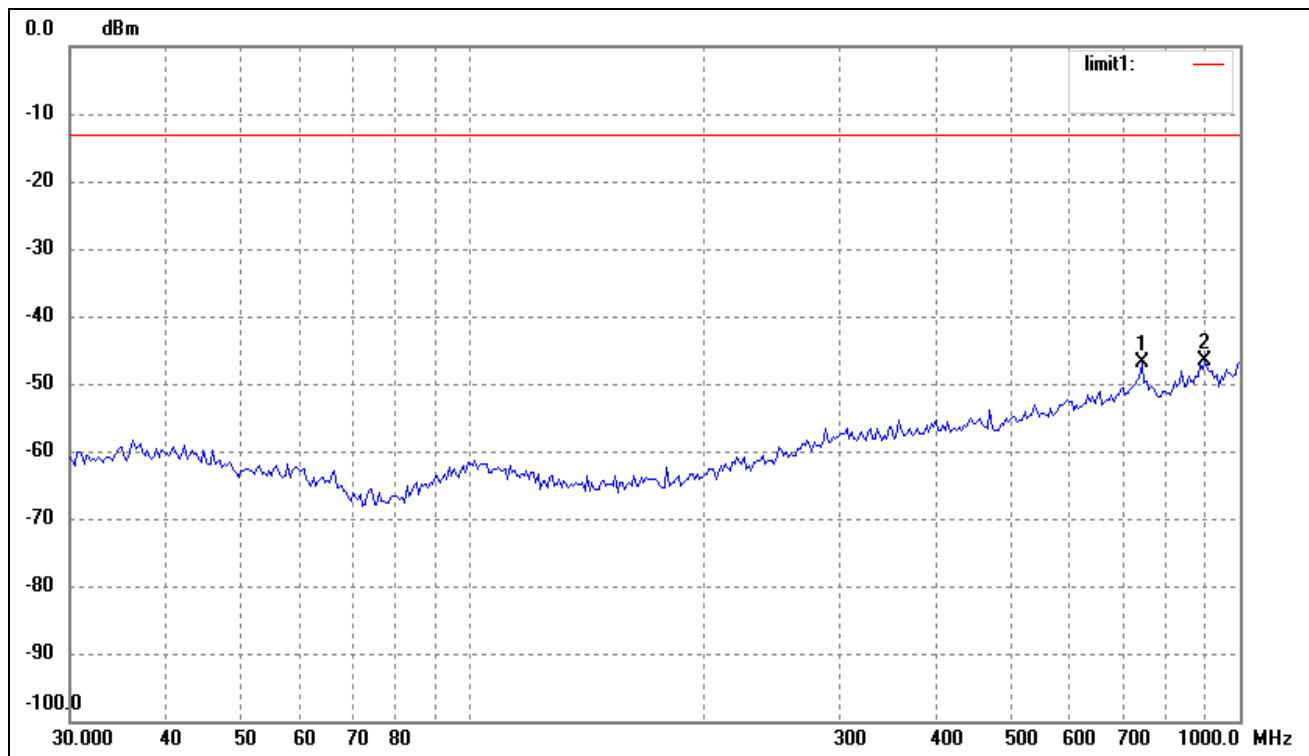

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	744.8661	-76.59	29.74	-46.85	-13.00	-33.85	ERP
2	900.1474	-77.91	31.18	-46.73	-13.00	-33.73	ERP


Vertical:

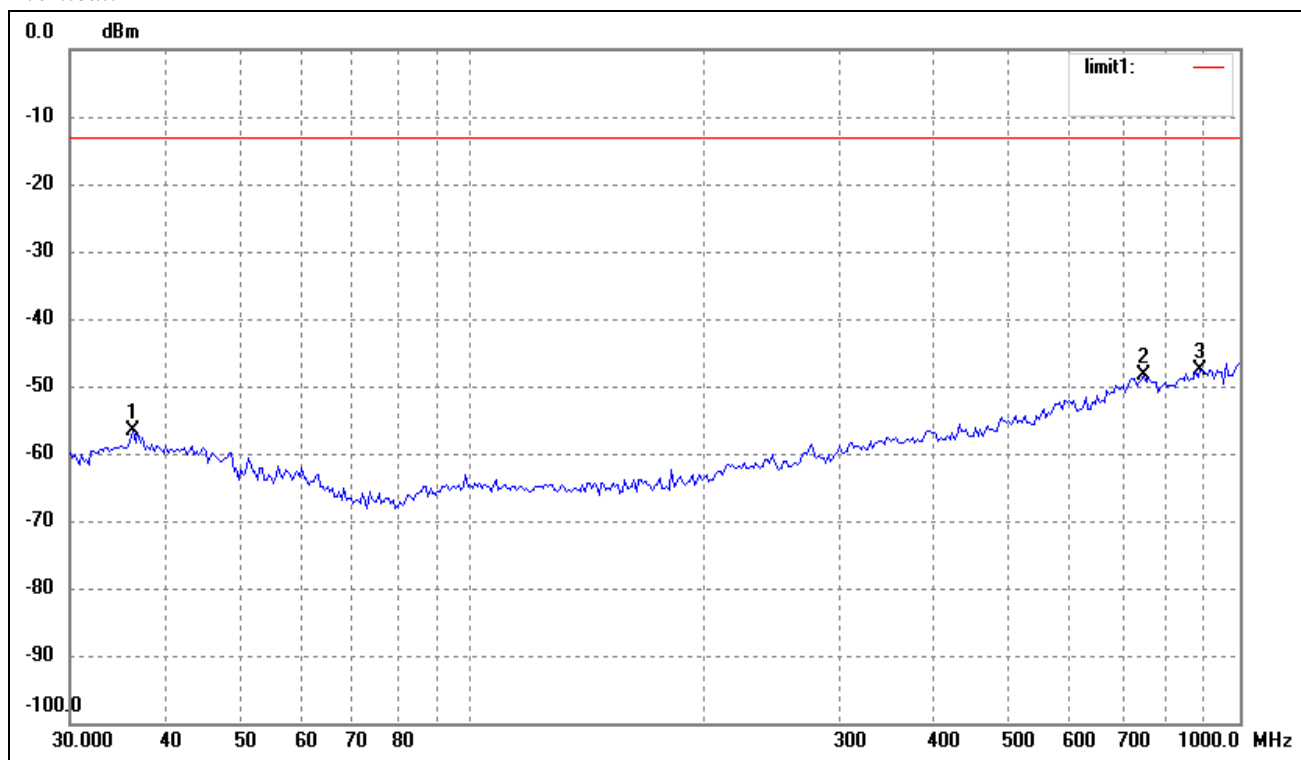

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-77.52	20.89	-56.63	-13.00	-43.63	ERP
2	750.1082	-77.94	29.58	-48.36	-13.00	-35.36	ERP
3	887.6099	-78.51	30.95	-47.56	-13.00	-34.56	ERP


For PCS Band\_GPRS Mode

Horizontal:

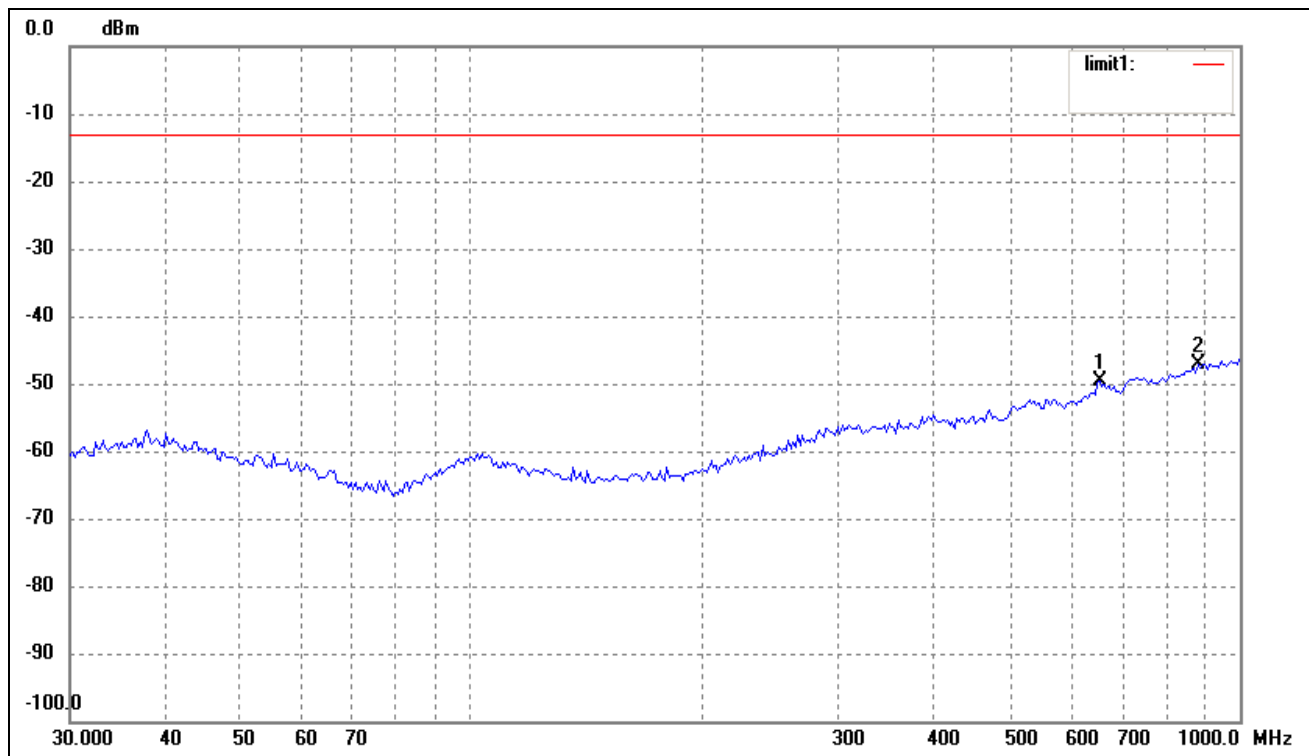

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	656.5300	-76.31	26.70	-49.61	-13.00	-36.61	ERP
2	881.4067	-77.87	30.83	-47.04	-13.00	-34.04	ERP


Vertical:

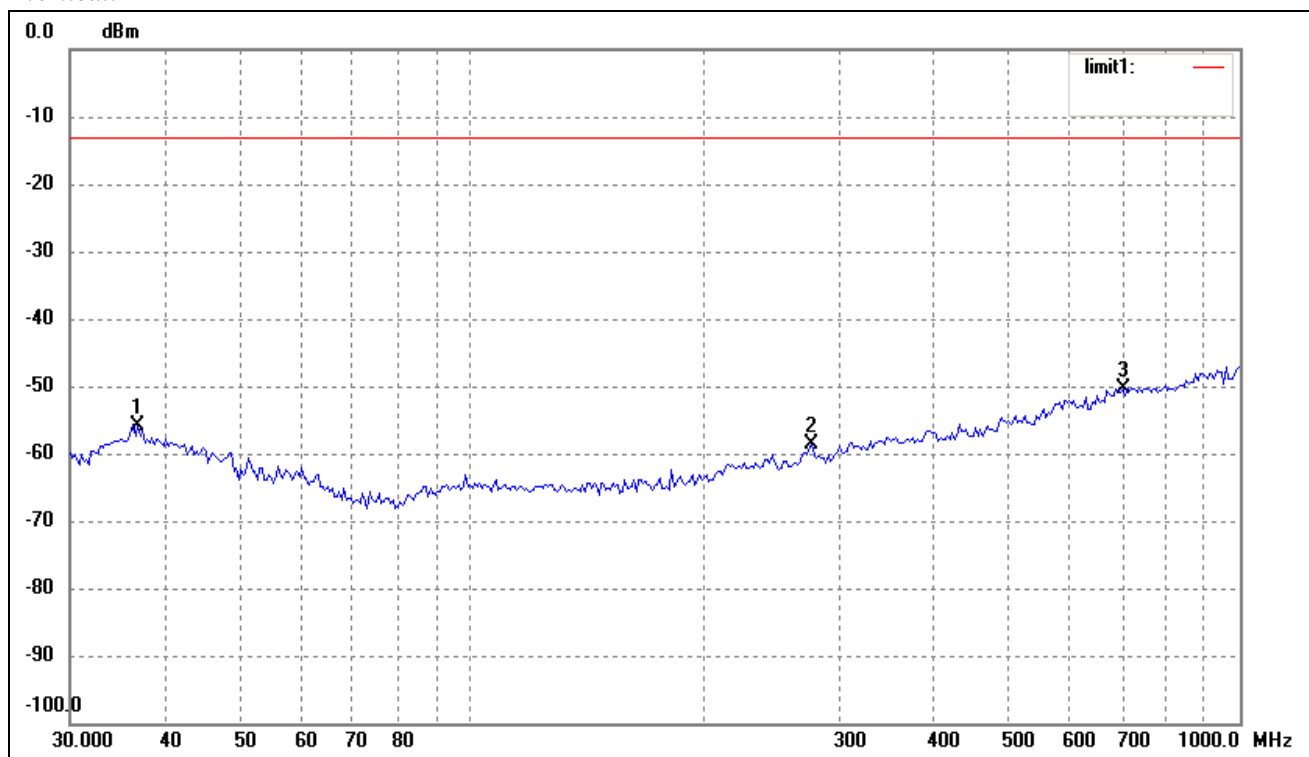

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.7661	-76.87	20.96	-55.91	-13.00	-42.91	ERP
2	277.0935	-79.46	20.81	-58.65	-13.00	-45.65	ERP
3	704.2259	-77.98	27.73	-50.25	-13.00	-37.25	ERP


For PCS Band\_EDGE Mode

Horizontal:

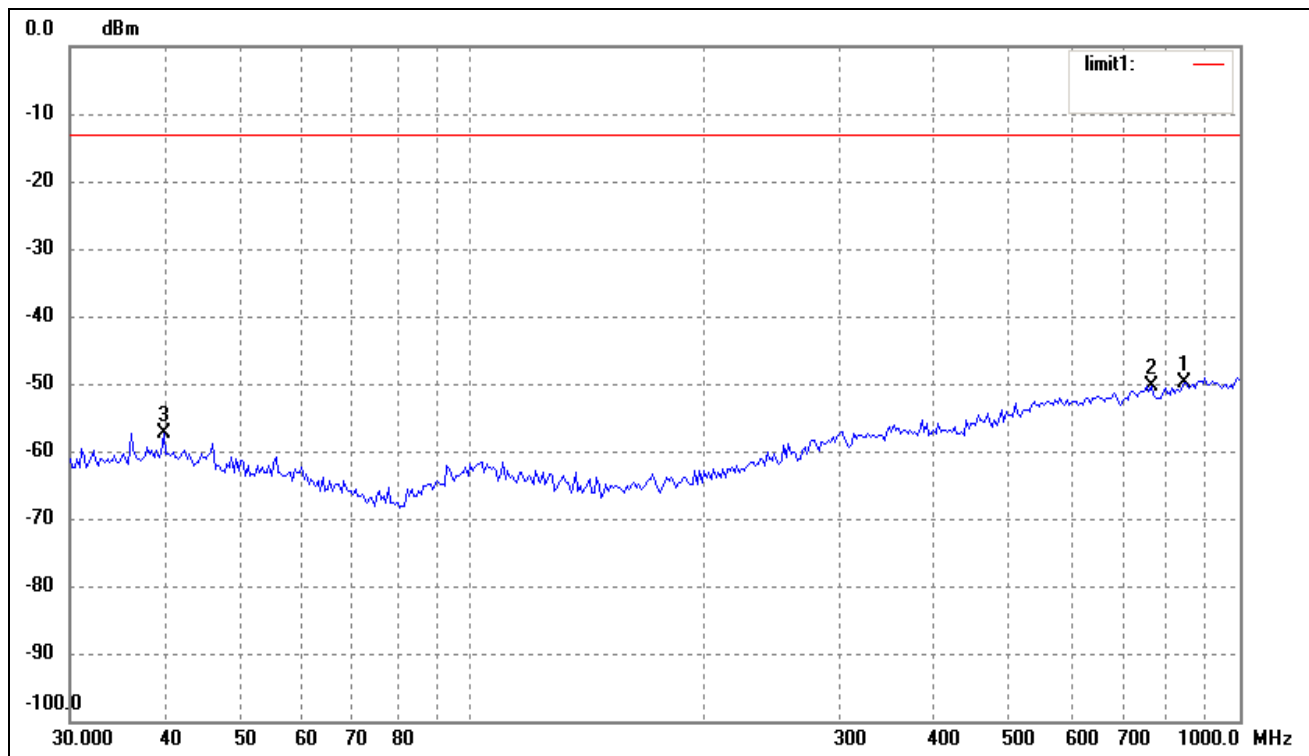

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	845.0878	-79.04	29.25	-49.79	-13.00	-36.79	ERP
2	766.0570	-78.83	28.57	-50.26	-13.00	-37.26	ERP
3	39.7147	-78.89	21.44	-57.45	-13.00	-44.45	ERP

Vertical:

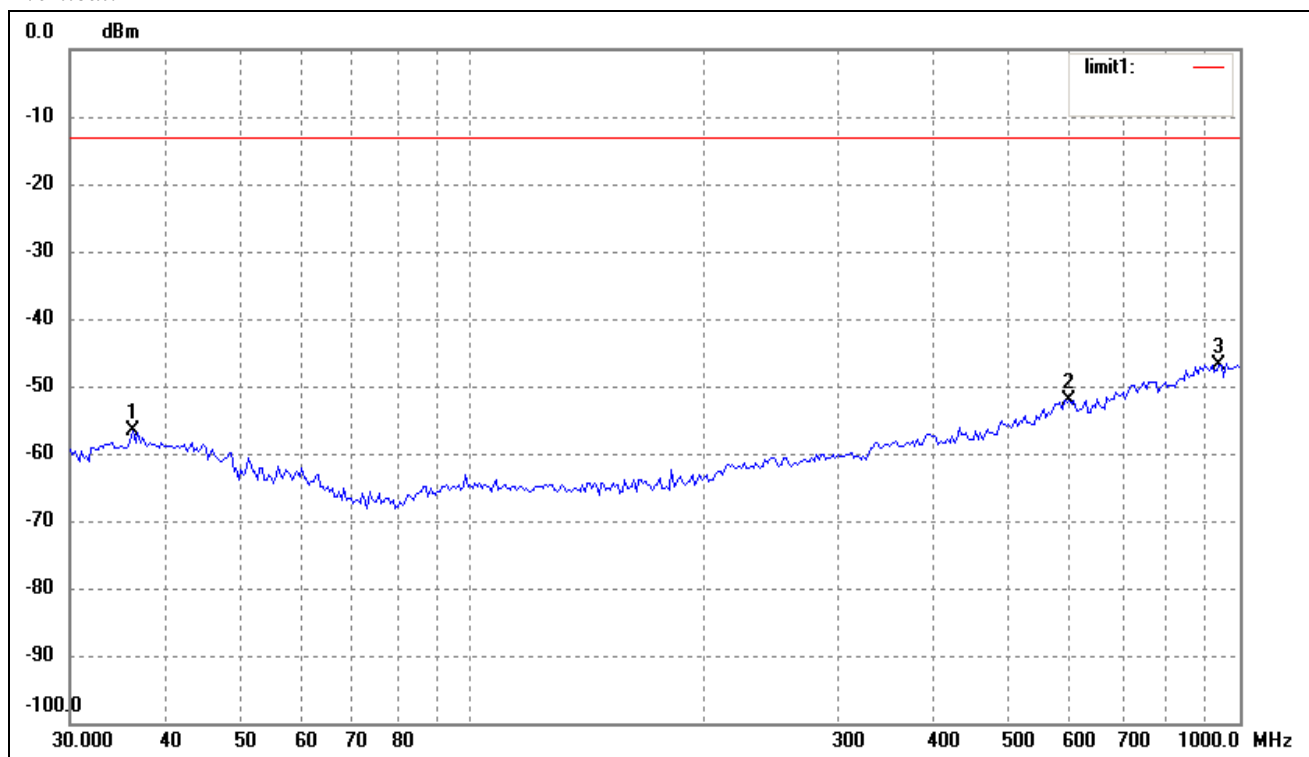


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-77.52	20.89	-56.63	-13.00	-43.63	ERP
2	599.3211	-78.56	26.56	-52.00	-13.00	-39.00	ERP
3	938.8324	-76.72	29.91	-46.81	-13.00	-33.81	ERP

Spurious Emission From 30MHz to 1GHz


For band V WCDMA Mode

Horizontal:

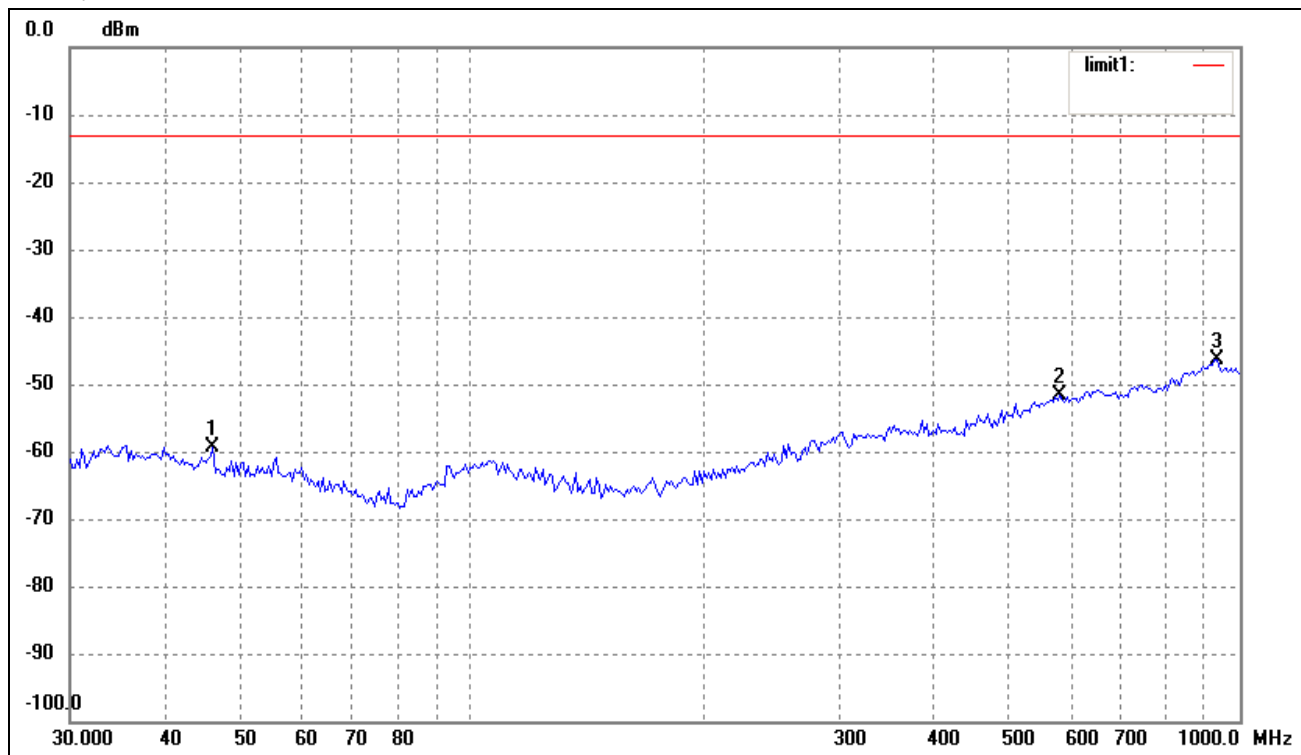

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0163	-79.05	19.65	-59.40	-13.00	-46.40	ERP
2	582.7423	-77.80	26.07	-51.73	-13.00	-38.73	ERP
3	932.2713	-76.49	30.11	-46.38	-13.00	-33.38	ERP

Vertical:

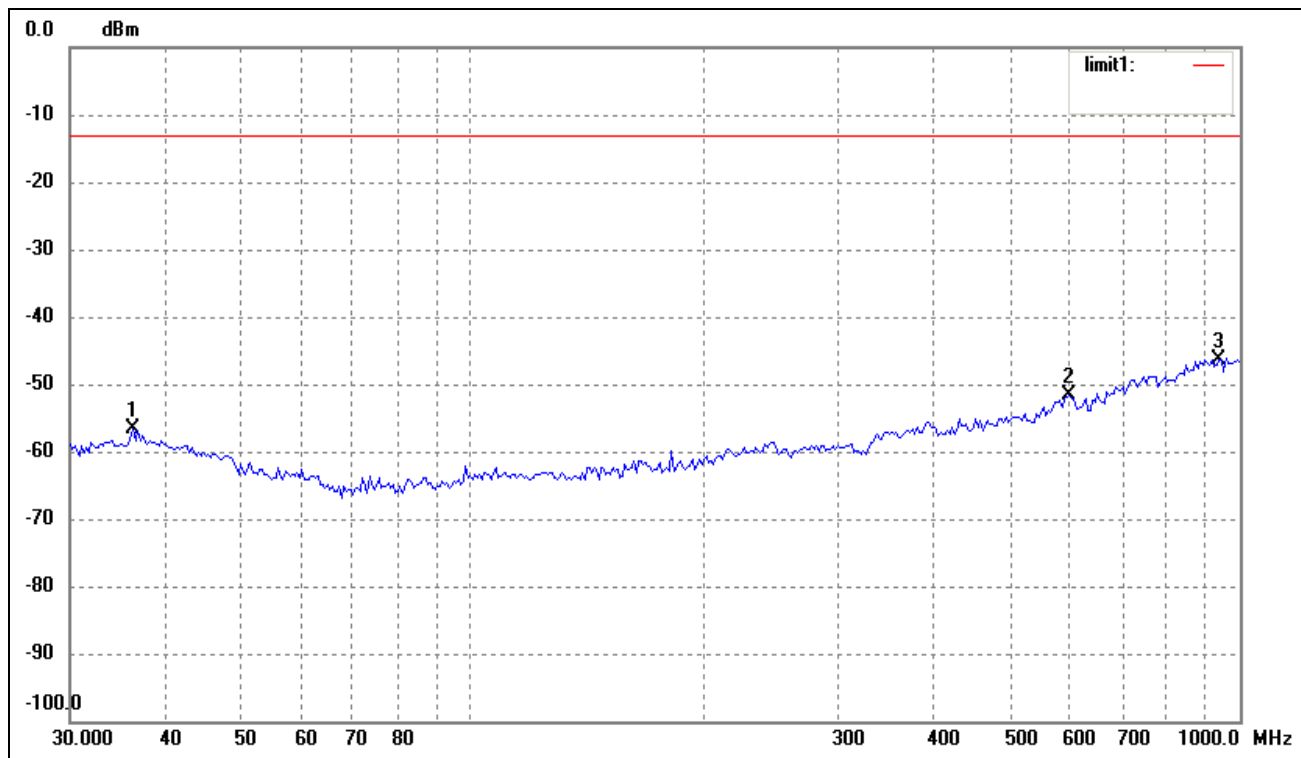


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-77.52	20.89	-56.63	-13.00	-43.63	ERP
2	599.3211	-78.06	26.56	-51.50	-13.00	-38.50	ERP
3	938.8324	-76.22	29.91	-46.31	-13.00	-33.31	ERP




For band V HSDPA Mode

Horizontal:

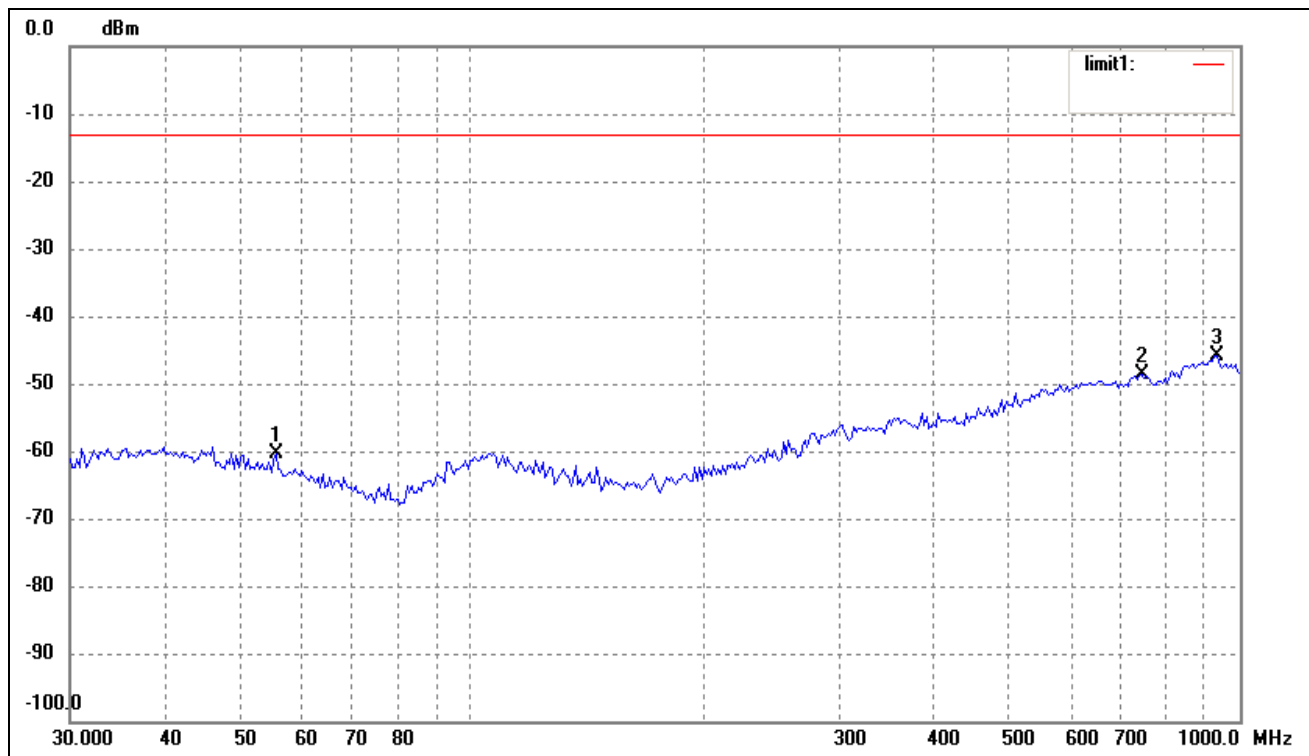

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	55.6094	-78.32	17.91	-60.41	-13.00	-47.41	ERP
2	744.8659	-78.26	29.74	-48.52	-13.00	-35.52	ERP
3	932.2713	-75.99	30.11	-45.88	-13.00	-32.88	ERP


Vertical:

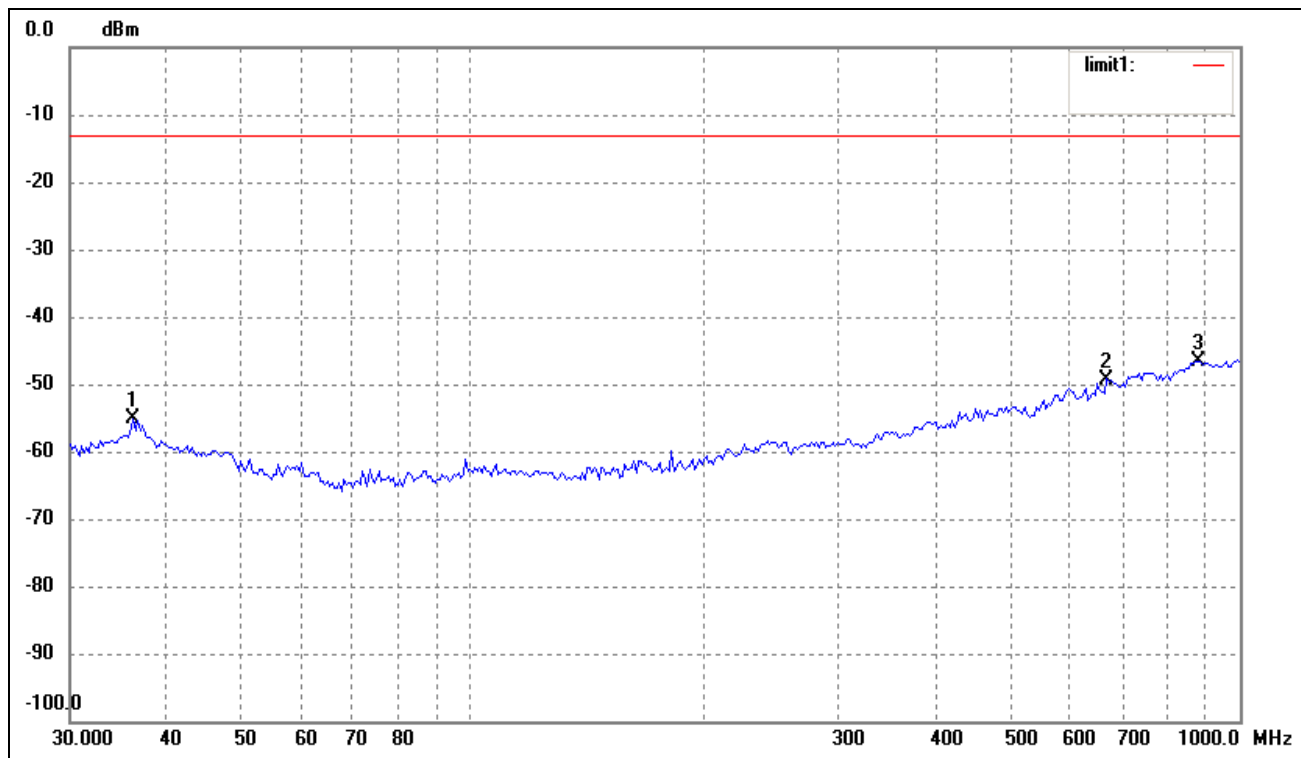

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-76.02	20.89	-55.13	-13.00	-42.13	ERP
2	670.4891	-76.22	26.97	-49.25	-13.00	-36.25	ERP
3	881.4067	-77.38	30.83	-46.55	-13.00	-33.55	ERP


For band V HSDPA Mode

Horizontal:

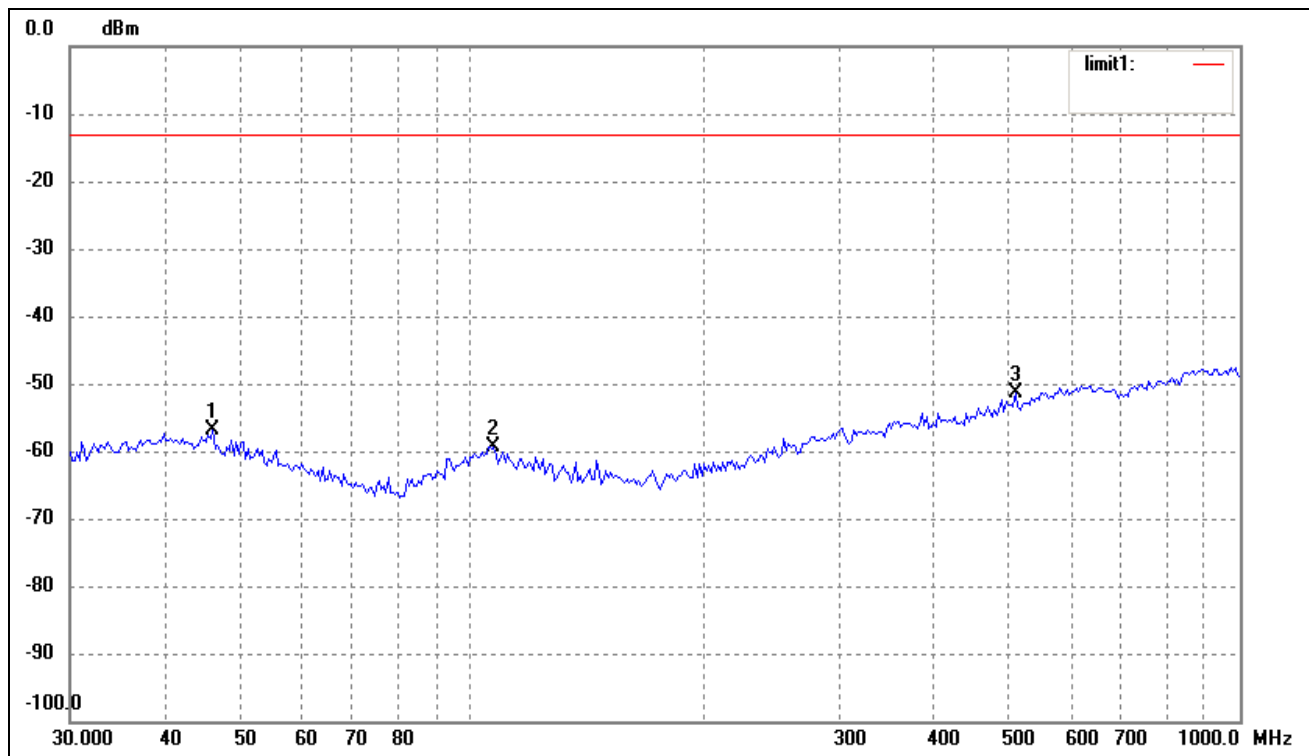

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0163	-76.55	19.65	-56.90	-13.00	-43.90	ERP
2	106.7587	-77.35	17.98	-59.37	-13.00	-46.37	ERP
3	510.0436	-75.85	24.36	-51.49	-13.00	-38.49	ERP

Vertical:

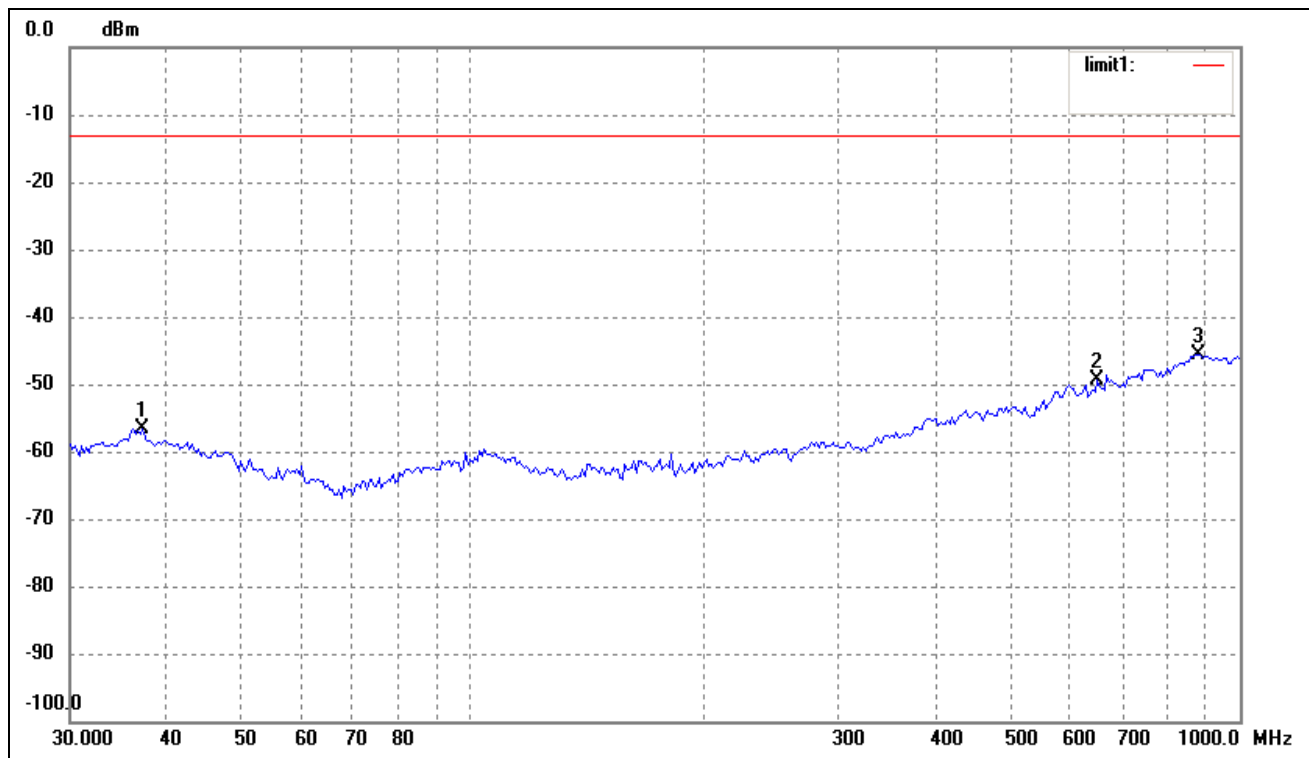


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	37.2854	-77.65	21.05	-56.60	-13.00	-43.60	ERP
2	651.9415	-76.30	26.87	-49.43	-13.00	-36.43	ERP
3	881.4067	-76.38	30.83	-45.55	-13.00	-32.55	ERP

Spurious Emission From 30MHz to 1GHz


For band II WCDMA Mode

Horizontal:

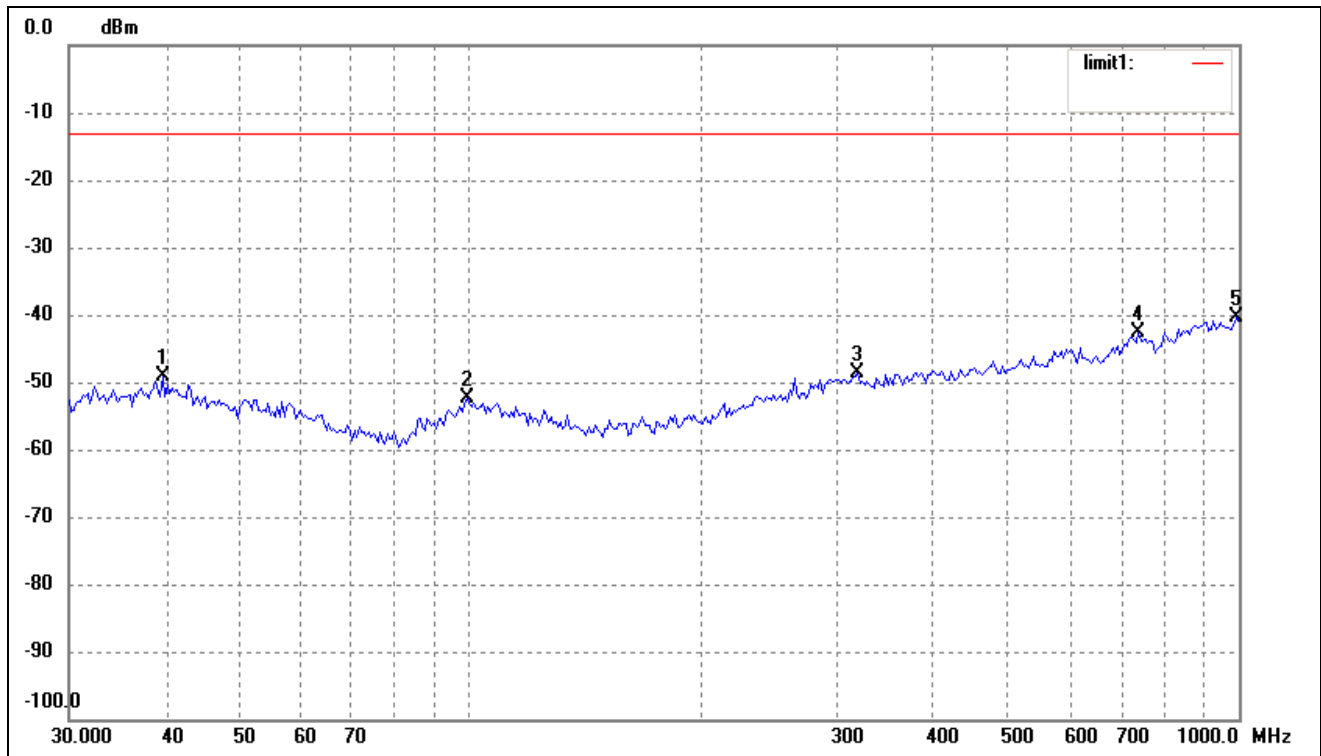

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	39.7147	-69.80	20.62	-49.18	-13.00	-36.18	ERP
2	98.8326	-70.14	17.65	-52.49	-13.00	-39.49	ERP
3	318.8170	-69.67	21.07	-48.60	-13.00	-35.60	ERP
4	739.6605	-69.99	27.29	-42.70	-13.00	-29.70	ERP
5	993.0114	-69.15	28.80	-40.35	-13.00	-27.35	ERP


Vertical:

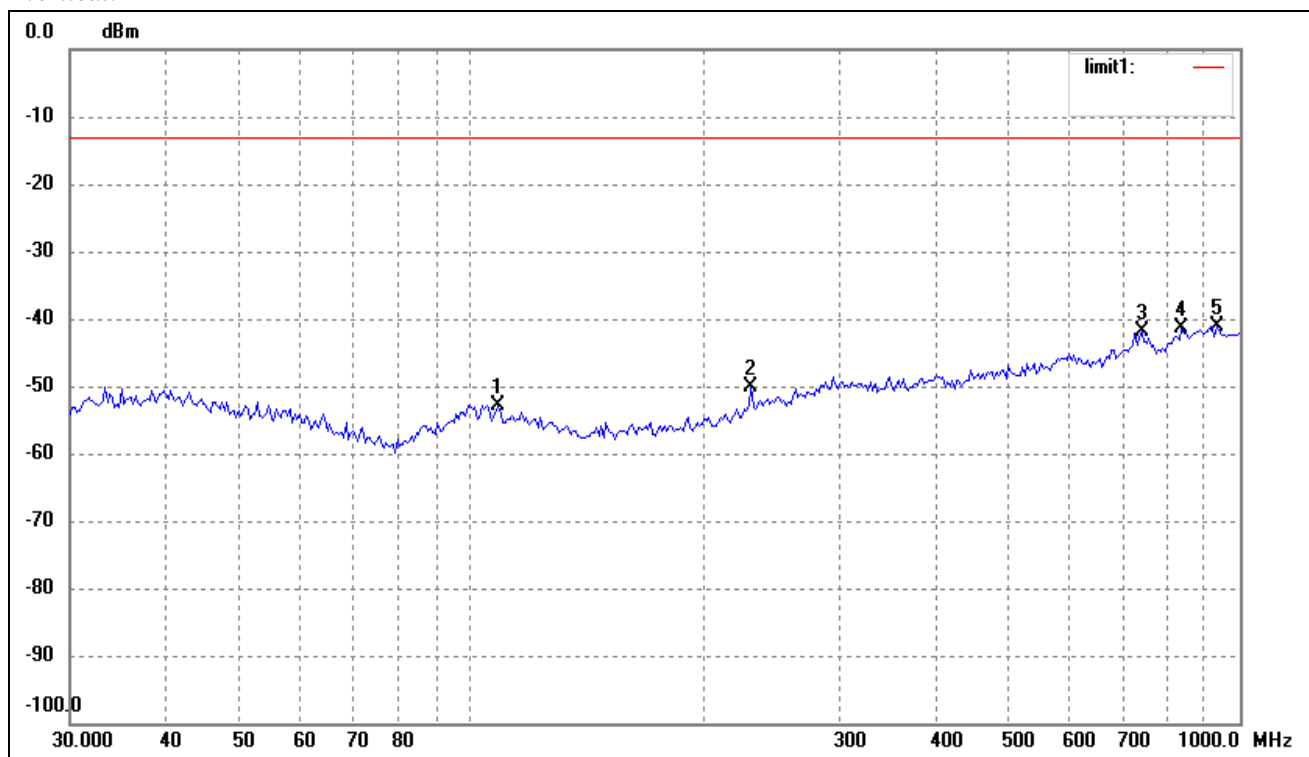

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	108.2667	-69.84	17.08	-52.76	-13.00	-39.76	ERP
2	230.9068	-67.66	17.52	-50.14	-13.00	-37.14	ERP
3	744.8661	-69.06	27.10	-41.96	-13.00	-28.96	ERP
4	839.1818	-68.75	27.27	-41.48	-13.00	-28.48	ERP
5	932.2715	-69.03	28.01	-41.02	-13.00	-28.02	ERP


For band II HSDPA Mode

Horizontal:

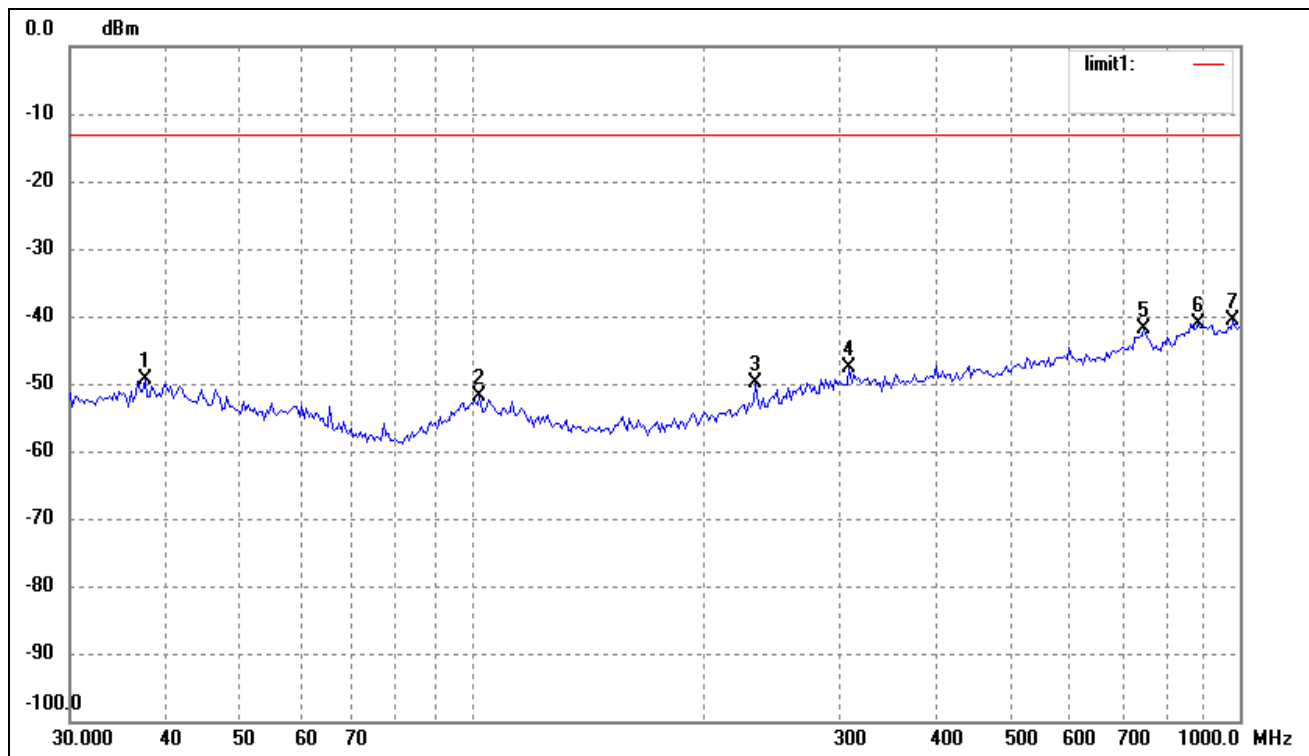

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	37.5479	-69.55	20.27	-49.28	-13.00	-36.28	ERP
2	102.3597	-69.65	17.71	-51.94	-13.00	-38.94	ERP
3	234.1684	-67.63	17.72	-49.91	-13.00	-36.91	ERP
4	309.9977	-68.70	21.01	-47.69	-13.00	-34.69	ERP
5	750.1083	-68.72	26.87	-41.85	-13.00	-28.85	ERP
6	881.4067	-69.66	28.53	-41.13	-13.00	-28.13	ERP
7	979.1804	-69.00	28.32	-40.68	-13.00	-27.68	ERP

Vertical:

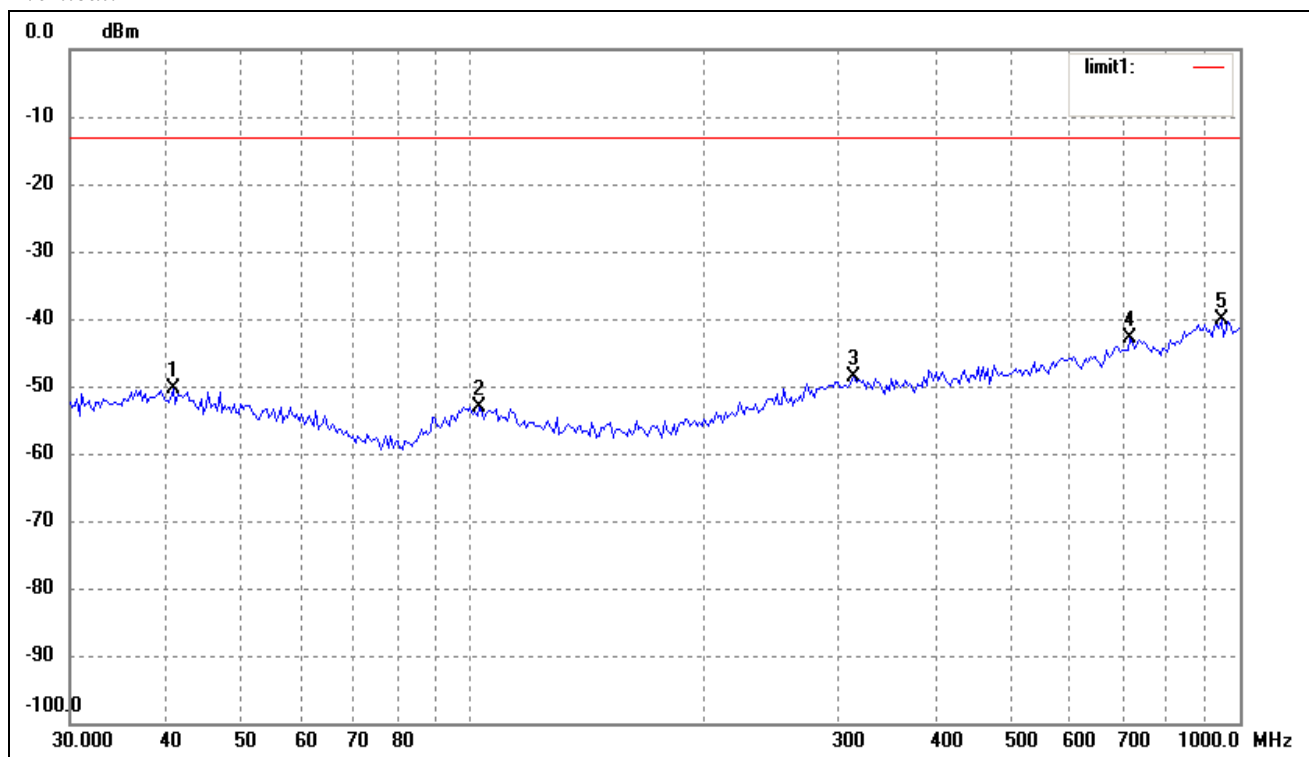


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	
1	40.8446	-70.83	20.42	-50.41	-13.00	-37.41	ERP
2	102.3597	-70.80	17.71	-53.09	-13.00	-40.09	ERP
3	314.3765	-69.63	21.05	-48.58	-13.00	-35.58	ERP
4	719.1995	-68.94	26.08	-42.86	-13.00	-29.86	ERP
5	945.4399	-68.06	27.92	-40.14	-13.00	-27.14	ERP




For band II HSDPA Mode

Horizontal:

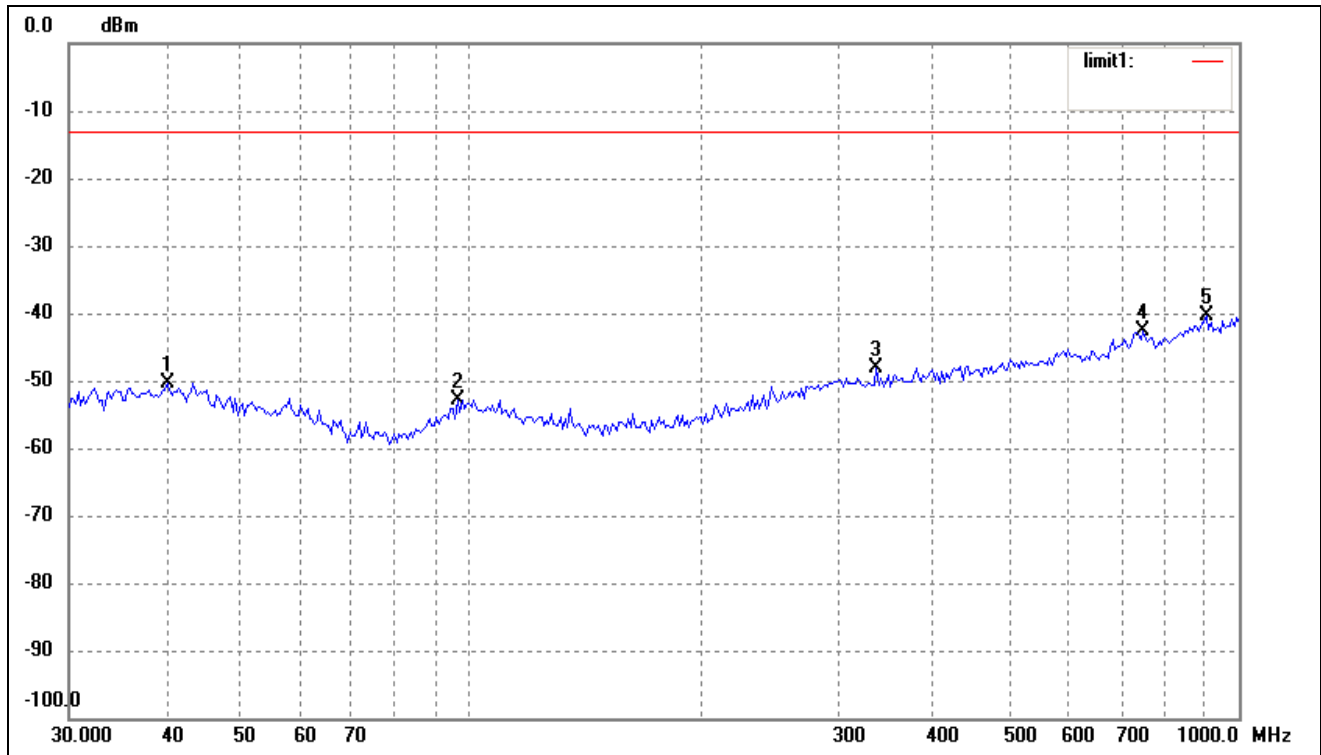

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	40.2757	-70.91	20.58	-50.33	-13.00	-37.33	ERP
2	96.0986	-69.78	16.94	-52.84	-13.00	-39.84	ERP
3	337.2155	-68.73	20.60	-48.13	-13.00	-35.13	ERP
4	750.1083	-69.58	26.87	-42.71	-13.00	-29.71	ERP
5	906.4824	-68.84	28.43	-40.41	-13.00	-27.41	ERP

Vertical:

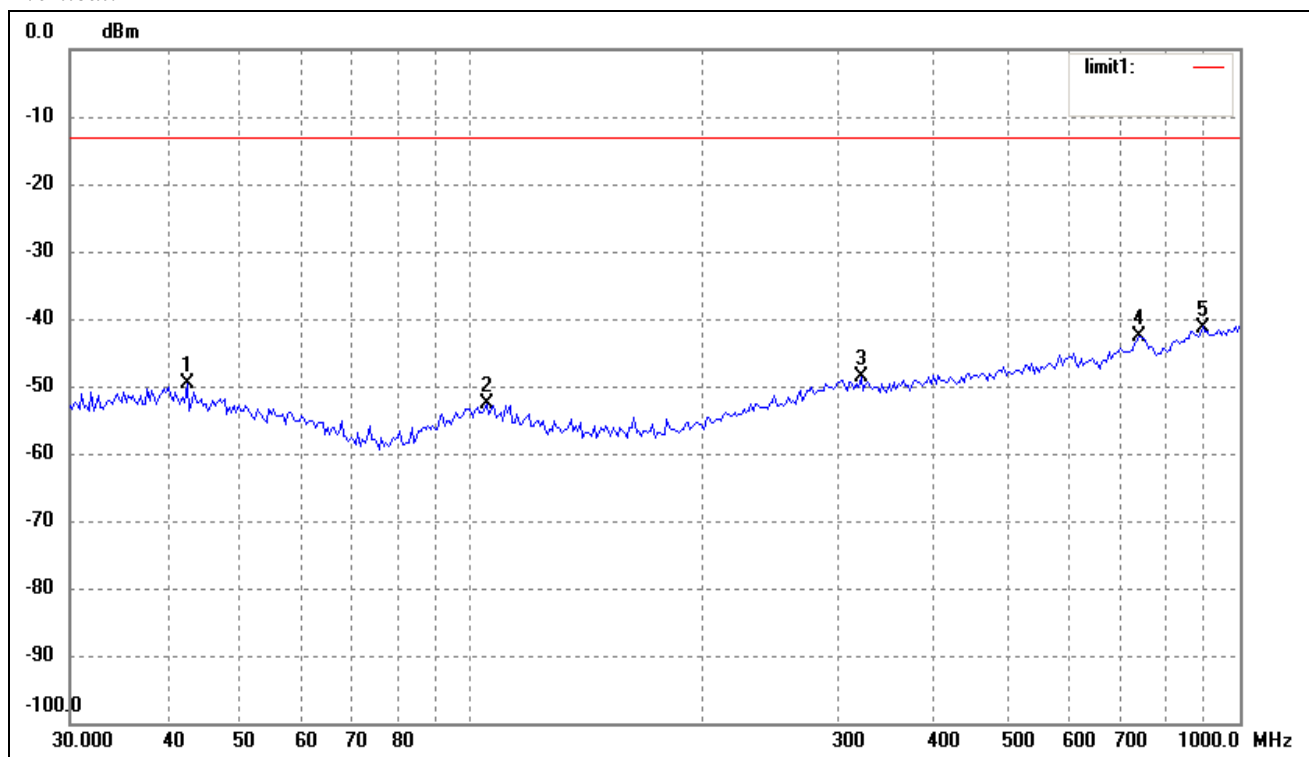


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.6000	-69.49	19.90	-49.59	-13.00	-36.59	ERP
2	104.5361	-70.19	17.47	-52.72	-13.00	-39.72	ERP
3	321.0608	-69.77	21.05	-48.72	-13.00	-35.72	ERP
4	739.6605	-69.80	27.29	-42.51	-13.00	-29.51	ERP
5	893.8567	-69.80	28.55	-41.25	-13.00	-28.25	ERP

Spurious Emission From 30MHz to 1GHz


For band IV WCDMA Mode

Horizontal:

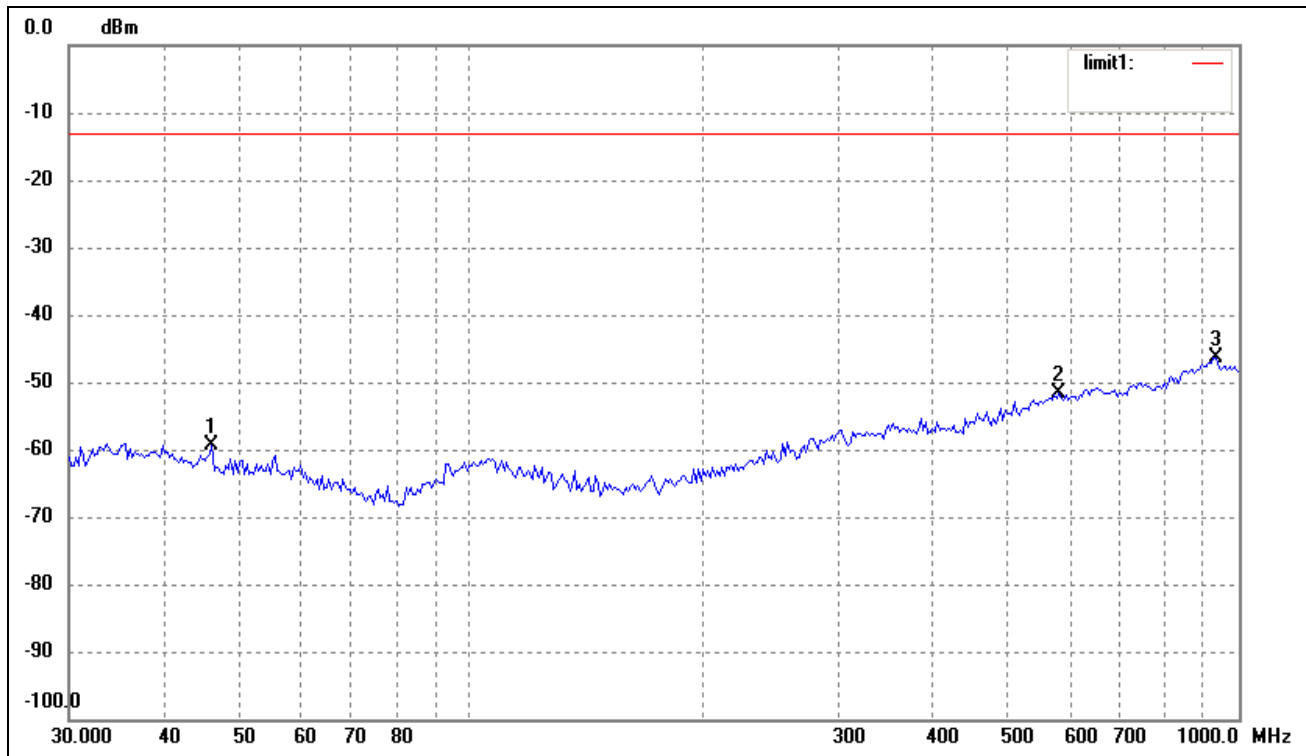

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0163	-79.05	19.65	-59.40	-13.00	-46.40	ERP
2	582.7423	-77.80	26.07	-51.73	-13.00	-38.73	ERP
3	932.2713	-76.49	30.11	-46.38	-13.00	-33.38	ERP


Vertical:

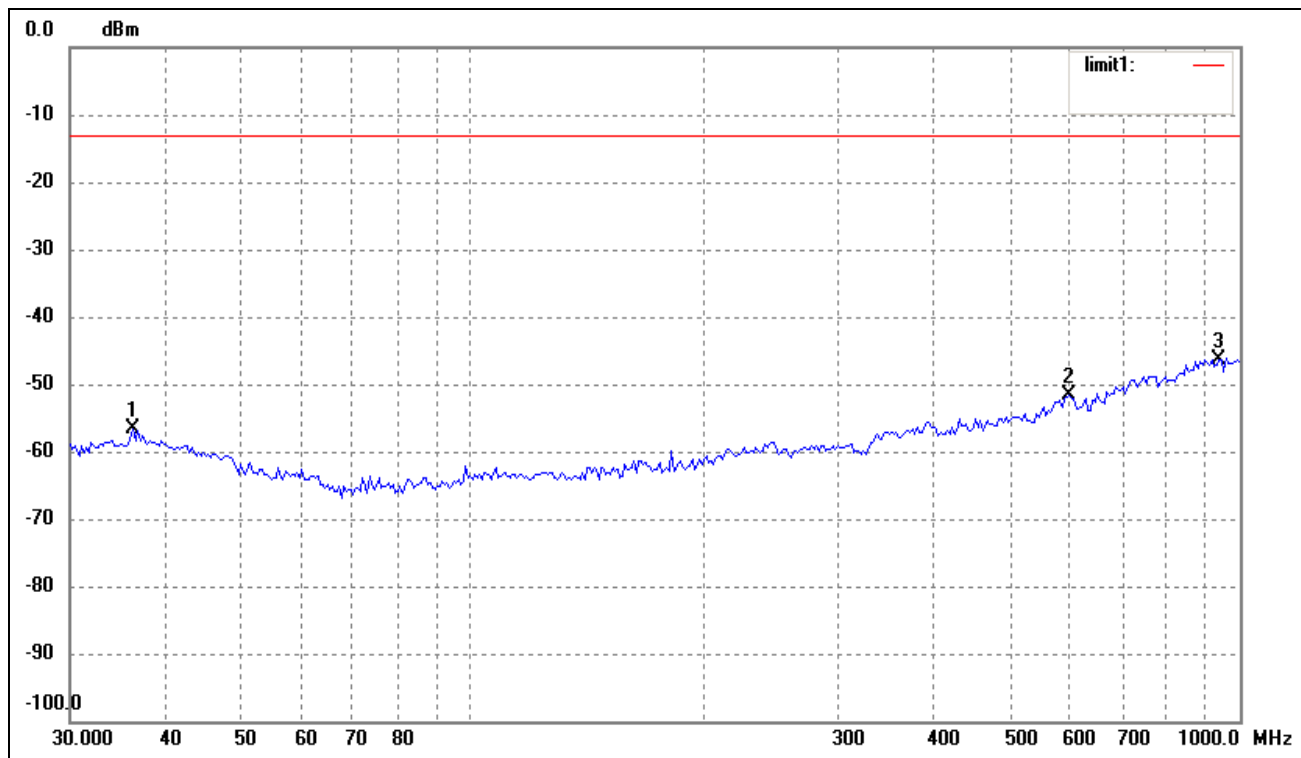

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-77.52	20.89	-56.63	-13.00	-43.63	ERP
2	599.3211	-78.06	26.56	-51.50	-13.00	-38.50	ERP
3	938.8324	-76.22	29.91	-46.31	-13.00	-33.31	ERP


For band IV HSDPA Mode

Horizontal:

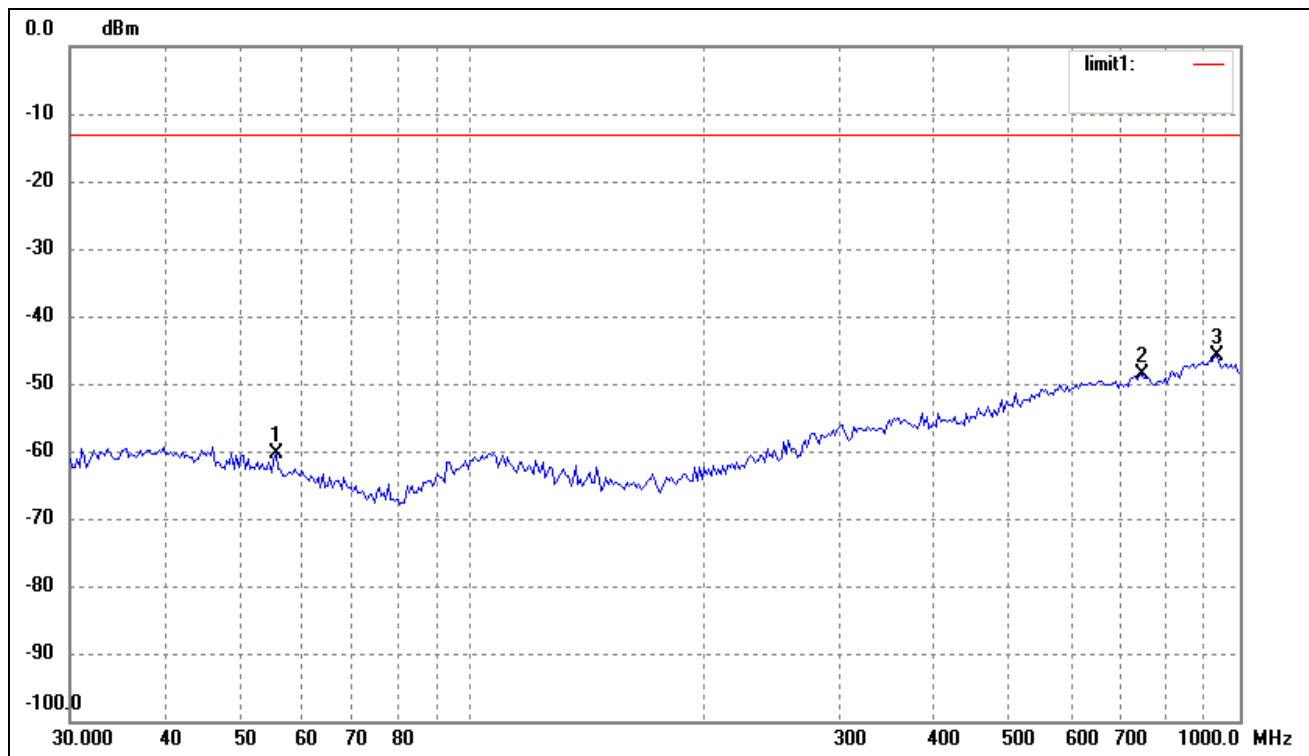

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	55.6094	-78.32	17.91	-60.41	-13.00	-47.41	ERP
2	744.8659	-78.26	29.74	-48.52	-13.00	-35.52	ERP
3	932.2713	-75.99	30.11	-45.88	-13.00	-32.88	ERP


Vertical:

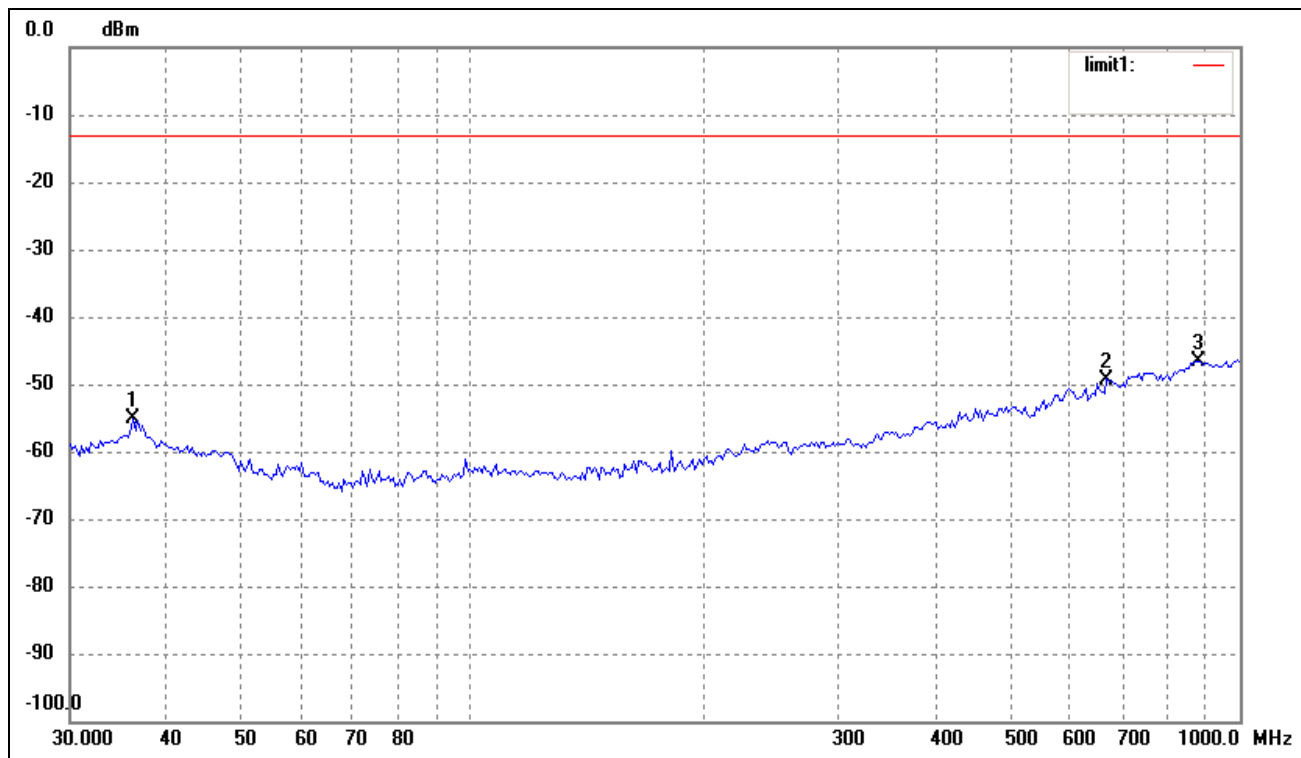

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	36.2541	-76.02	20.89	-55.13	-13.00	-42.13	ERP
2	670.4891	-76.22	26.97	-49.25	-13.00	-36.25	ERP
3	881.4067	-77.38	30.83	-46.55	-13.00	-33.55	ERP


For band IV HSDPA Mode

Horizontal:

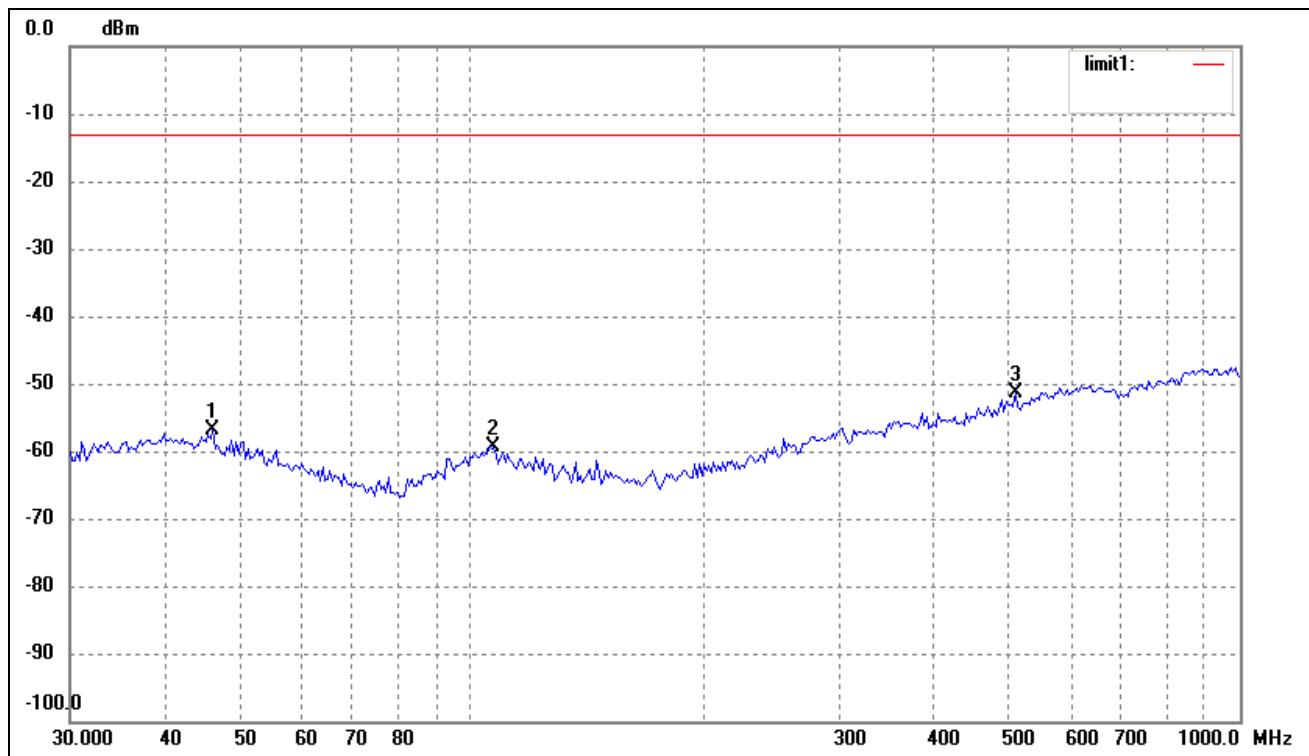

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0163	-76.55	19.65	-56.90	-13.00	-43.90	ERP
2	106.7587	-77.35	17.98	-59.37	-13.00	-46.37	ERP
3	510.0436	-75.85	24.36	-51.49	-13.00	-38.49	ERP

Vertical:

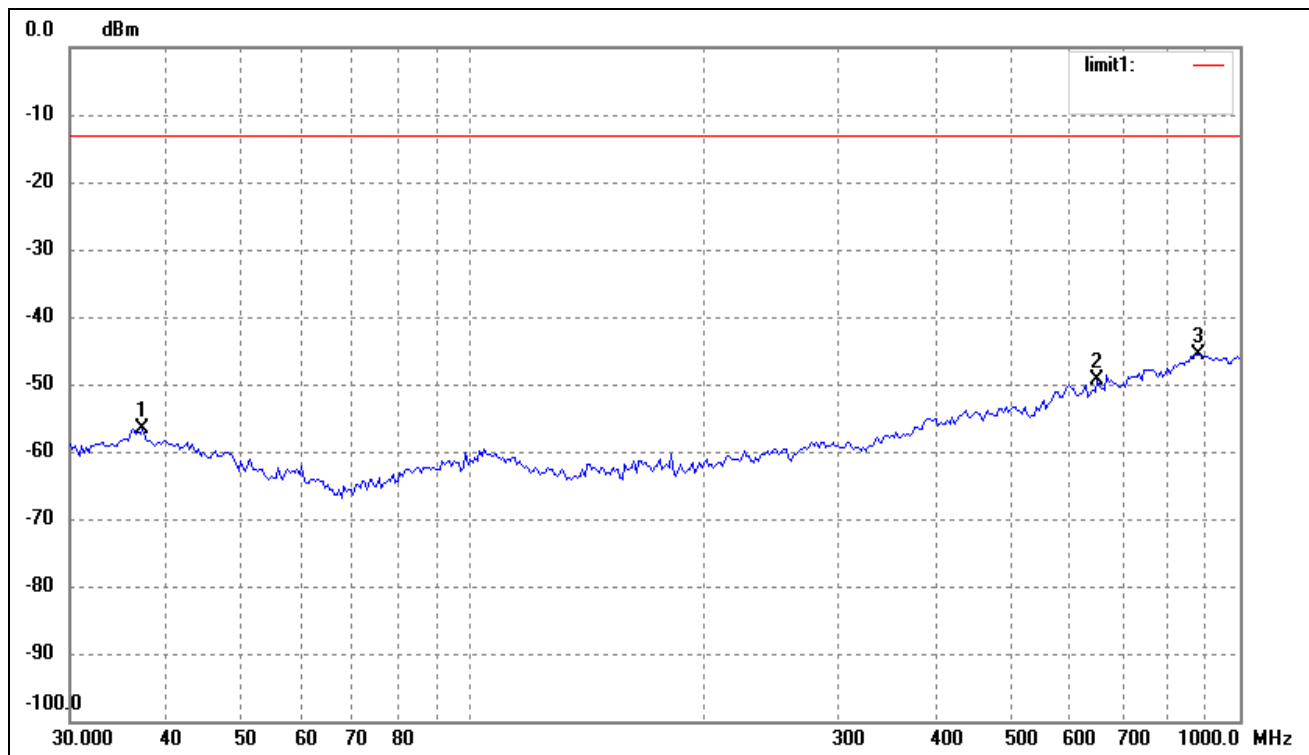

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	37.2854	-77.65	21.05	-56.60	-13.00	-43.60	ERP
2	651.9415	-76.30	26.87	-49.43	-13.00	-36.43	ERP
3	881.4067	-76.38	30.83	-45.55	-13.00	-32.55	ERP



*Spurious Emissions Above 1GHz**For Cellular Band\_GSM Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.09	-1.84	-38.93	-13.00	-25.93	H
2472.6	-42.34	0.02	-42.32	-13.00	-29.32	H
1648.4	-38.47	-1.84	-40.31	-13.00	-27.31	V
2472.6	-45.70	0.02	-45.68	-13.00	-32.68	V
Middle Channel (836.6MHz)						
1673.2	-38.82	-1.70	-40.52	-13.00	-27.52	H
2509.8	-45.71	0.10	-45.61	-13.00	-32.61	H
1673.2	-39.60	-1.70	-41.30	-13.00	-28.30	V
2509.8	-46.87	0.10	-46.77	-13.00	-33.77	V
High Channel (848.8MHz)						
1697.6	-38.25	-1.55	-39.80	-13.00	-26.80	H
2546.4	-43.90	0.38	-43.52	-13.00	-30.52	H
1697.6	-39.09	-1.55	-40.64	-13.00	-27.64	V
2546.4	-43.74	0.38	-43.36	-13.00	-30.36	V

*For Cellular Band\_GPRS Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-38.16	-1.84	-40.0	-13.00	-27.00	H
2472.6	-42.62	0.02	-42.6	-13.00	-29.60	H
1648.4	-39.36	-1.84	-41.2	-13.00	-28.20	V
2472.6	-44.62	0.02	-44.6	-13.00	-31.60	V
Middle Channel (836.6MHz)						
1673.2	-38.30	-1.70	-40.0	-13.00	-27.00	H
2509.8	-43.30	0.10	-43.2	-13.00	-30.20	H
1673.2	-38.80	-1.70	-40.5	-13.00	-27.50	V
2509.8	-43.10	0.10	-43.0	-13.00	-30.00	V
High Channel (848.8MHz)						
1697.6	-37.25	-1.55	-38.8	-13.00	-25.80	H
2546.4	-43.58	0.38	-43.2	-13.00	-30.20	H
1697.6	-38.75	-1.55	-40.3	-13.00	-27.30	V
2546.4	-44.38	0.38	-44.0	-13.00	-31.00	V

*For Cellular Band\_EDGE Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.76	-1.84	-39.6	-13.00	-26.60	H
2472.6	-42.52	0.02	-42.5	-13.00	-29.50	H
1648.4	-38.76	-1.84	-40.6	-13.00	-27.60	V
2472.6	-43.52	0.02	-43.5	-13.00	-30.50	V
Middle Channel (836.6MHz)						
1673.2	-38.50	-1.70	-40.2	-13.00	-27.20	H
2509.8	-42.60	0.10	-42.5	-13.00	-29.50	H
1673.2	-38.90	-1.70	-40.6	-13.00	-27.60	V
2509.8	-43.90	0.10	-43.8	-13.00	-30.80	V
High Channel (848.8MHz)						
1697.6	-37.05	-1.55	-38.6	-13.00	-25.60	H
2546.4	-41.68	0.38	-41.3	-13.00	-28.30	H
1697.6	-38.65	-1.55	-40.2	-13.00	-27.20	V
2546.4	-43.18	0.38	-42.8	-13.00	-29.80	V

*For PCS Band\_GSM Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-46.44	5.92	-40.52	-13.00	-27.52	H
5550.6	-53.85	10.24	-43.61	-13.00	-30.61	H
3700.4	-46.59	5.92	-40.67	-13.00	-27.67	V
5550.6	-55.59	10.24	-45.35	-13.00	-32.35	V
Middle Channel (1880MHz)						
3760.0	-44.91	6.11	-38.80	-13.00	-25.80	H
5640.0	-52.48	10.17	-42.31	-13.00	-29.31	H
3760.0	-45.86	6.11	-39.75	-13.00	-26.75	V
5640.0	-53.18	10.17	-43.01	-13.00	-30.01	V
High Channel (1909.8MHz)						
3819.6	-45.95	6.28	-39.67	-13.00	-26.67	H
5729.4	-52.47	10.11	-42.36	-13.00	-29.36	H
3819.6	-46.83	6.28	-40.55	-13.00	-27.55	V
5729.4	-54.92	10.11	-44.81	-13.00	-31.81	V

*For PCS Band\_GPRS Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
3700.4	-46.44	5.92	-40.52	-13.00	-27.52	H
5550.6	-53.84	10.24	-43.60	-13.00	-30.60	H
3700.4	-47.16	5.92	-41.24	-13.00	-28.24	V
5550.6	-55.61	10.24	-45.37	-13.00	-32.37	V
Middle Channel (1880MHz)						
3760.0	-45.59	6.11	-39.48	-13.00	-26.48	H
5640.0	-53.12	10.17	-42.95	-13.00	-29.95	H
3760.0	-46.53	6.11	-40.42	-13.00	-27.42	V
5640.0	-53.90	10.17	-43.73	-13.00	-30.73	V
High Channel (1909.8MHz)						
3819.6	-46.60	6.28	-40.32	-13.00	-27.32	H
5729.4	-54.71	10.11	-44.60	-13.00	-31.60	H
3819.6	-47.28	6.28	-41.00	-13.00	-28.00	V
5729.4	-55.92	10.11	-45.81	-13.00	-32.81	V

*For PCS Band\_EDGE Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-46.27	5.92	-40.35	-13.00	-27.35	H
5550.6	-53.45	10.24	-43.21	-13.00	-30.21	H
3700.4	-46.17	5.92	-40.25	-13.00	-27.25	V
5550.6	-55.11	10.24	-44.87	-13.00	-31.87	V
Middle Channel (1880MHz)						
3760.0	-45.69	6.11	-39.58	-13.00	-26.58	H
5640.0	-53.37	10.17	-43.20	-13.00	-30.20	H
3760.0	-46.43	6.11	-40.32	-13.00	-27.32	V
5640.0	-54.99	10.17	-44.82	-13.00	-31.82	V
High Channel (1909.8MHz)						
3819.6	-46.61	6.28	-40.33	-13.00	-27.33	H
5729.4	-52.83	10.11	-42.72	-13.00	-29.72	H
3819.6	-47.56	6.28	-41.28	-13.00	-28.28	V
5729.4	-54.96	10.11	-44.85	-13.00	-31.85	V

*Spurious Emission Test Data for WCDMA/HSUPA/HSDPA**For Band V\_WCDMA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.800	-42.65	-1.82	-44.47	-13.00	-31.47	H
2479.200	-42.98	0.03	-42.95	-13.00	-29.95	H
1652.800	-52.10	-1.82	-53.92	-13.00	-40.92	V
2479.200	-45.91	0.03	-45.88	-13.00	-32.88	V
Middle Channel (836.4MHz)						
1672.800	-50.12	-1.70	-51.82	-13.00	-38.82	H
2509.200	-44.65	0.10	-44.55	-13.00	-31.55	H
1672.800	-42.26	-1.70	-43.96	-13.00	-30.96	V
2509.200	-43.75	0.10	-43.65	-13.00	-30.65	V
High Channel (846.6MHz)						
1693.200	-49.34	-1.59	-50.93	-13.00	-37.93	H
2539.800	-46.11	0.33	-45.78	-13.00	-32.78	H
1693.200	-49.84	-1.59	-51.43	-13.00	-38.43	V
2539.800	-46.40	0.33	-46.07	-13.00	-33.07	V

*For Band II\_WCDMA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.800	-55.35	5.93	-49.42	-13.00	-36.42	H
5557.200	-55.90	10.23	-45.67	-13.00	-32.67	H
3704.800	-50.12	5.93	-44.19	-13.00	-31.19	V
5557.200	-54.19	10.23	-43.96	-13.00	-30.96	V
Middle Channel (1880.0MHz)						
3760.000	-59.04	6.11	-52.93	-13.00	-39.93	H
5640.000	-54.17	10.17	-44.00	-13.00	-31.00	H
3760.000	-52.59	6.11	-46.48	-13.00	-33.48	V
5640.000	-61.60	10.17	-51.43	-13.00	-38.43	V
High Channel (1907.6MHz)						
3815.200	-51.94	6.27	-45.67	-13.00	-32.67	H
5722.800	-53.06	10.11	-42.95	-13.00	-29.95	H
3815.200	-50.30	6.27	-44.03	-13.00	-31.03	V
5722.800	-53.06	10.11	-42.95	-13.00	-29.95	V

*For Band IV\_WCDMA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.800	-44.02	-1.82	-45.84	-13.00	-32.84	H
5137.200	-44.07	0.03	-44.04	-13.00	-31.04	H
3424.800	-47.28	-1.82	-49.10	-13.00	-36.10	V
5137.200	-45.49	0.03	-45.46	-13.00	-32.46	V
Middle Channel (1732.6MHz)						
3465.200	-44.50	-1.70	-46.20	-13.00	-33.20	H
5197.800	-43.05	0.10	-42.95	-13.00	-29.95	H
3465.200	-52.22	-1.70	-53.92	-13.00	-40.92	V
5197.800	-45.98	0.10	-45.88	-13.00	-32.88	V
High Channel (1752.6MHz)						
3505.200	-41.59	-1.59	-43.18	-13.00	-30.18	H
5257.800	-49.23	0.33	-48.90	-13.00	-35.90	H
3505.200	-44.66	-1.59	-46.25	-13.00	-33.25	V
5257.800	-43.51	0.33	-43.18	-13.00	-30.18	V

*For Band V\_HSUPA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.800	-51.11	-1.82	-52.93	-13.00	-39.93	H
2479.200	-44.03	0.03	-44.00	-13.00	-31.00	H
1652.800	-49.87	-1.82	-51.69	-13.00	-38.69	V
2479.200	-44.15	0.03	-44.12	-13.00	-31.12	V
Middle Channel (836.4MHz)						
1672.800	-47.42	-1.70	-49.12	-13.00	-36.12	H
2509.200	-44.55	0.10	-44.45	-13.00	-31.45	H
1672.800	-42.49	-1.70	-44.19	-13.00	-31.19	V
2509.200	-43.01	0.10	-42.91	-13.00	-29.91	V
High Channel (846.6MHz)						
1693.200	-50.83	-1.59	-52.42	-13.00	-39.42	H
2539.800	-44.37	0.33	-44.04	-13.00	-31.04	H
1693.200	-42.37	-1.59	-43.96	-13.00	-30.96	V
2539.800	-49.23	0.33	-48.90	-13.00	-35.90	V

*For Band II\_HSUPA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.800	-62.90	5.93	-56.97	-13.00	-43.97	H
5557.200	-54.11	10.23	-43.88	-13.00	-30.88	H
3704.800	-63.14	5.93	-57.21	-13.00	-44.21	V
5557.200	-59.03	10.23	-48.80	-13.00	-35.80	V
Middle Channel (1880.0MHz)						
3760.000	-57.93	6.11	-51.82	-13.00	-38.82	H
5640.000	-56.70	10.17	-46.53	-13.00	-33.53	H
3760.000	-52.59	6.11	-46.48	-13.00	-33.48	V
5640.000	-54.06	10.17	-43.89	-13.00	-30.89	V
High Channel (1907.6MHz)						
3815.200	-49.76	6.27	-43.49	-13.00	-30.49	H
5722.800	-57.56	10.11	-47.45	-13.00	-34.45	H
3815.200	-60.45	6.27	-54.18	-13.00	-41.18	V
5722.800	-59.78	10.11	-49.67	-13.00	-36.67	V

*For Band IV\_HSUPA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.800	-53.86	-1.82	-55.68	-13.00	-42.68	H
5137.200	-54.50	0.03	-54.47	-13.00	-41.47	H
3424.800	-41.36	-1.82	-43.18	-13.00	-30.18	V
5137.200	-45.49	0.03	-45.46	-13.00	-32.46	V
Middle Channel (1732.6MHz)						
3465.200	-44.50	-1.70	-46.20	-13.00	-33.20	H
5197.800	-44.26	0.10	-44.16	-13.00	-31.16	H
3465.200	-44.45	-1.70	-46.15	-13.00	-33.15	V
5197.800	-44.13	0.10	-44.03	-13.00	-31.03	V
High Channel (1752.6.6MHz)						
3505.200	-41.59	-1.59	-43.18	-13.00	-30.18	H
5257.800	-49.23	0.33	-48.90	-13.00	-35.90	H
3505.200	-44.66	-1.59	-46.25	-13.00	-33.25	V
5257.800	-43.51	0.33	-43.18	-13.00	-30.18	V

*For Band V\_HSDPA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.800	-47.30	-1.82	-49.12	-13.00	-36.12	H
2479.200	-44.94	0.03	-44.91	-13.00	-31.91	H
1652.800	-40.97	-1.82	-42.79	-13.00	-29.79	V
2479.200	-42.94	0.03	-42.91	-13.00	-29.91	V
Middle Channel (836.4MHz)						
1672.800	-42.30	-1.70	-44.00	-13.00	-31.00	H
2509.200	-42.67	0.10	-42.57	-13.00	-29.57	H
1672.800	-57.19	-1.70	-58.89	-13.00	-45.89	V
2509.200	-51.79	0.10	-51.69	-13.00	-38.69	V
High Channel (846.6MHz)						
1693.200	-50.83	-1.59	-52.42	-13.00	-39.42	H
2539.800	-44.37	0.33	-44.04	-13.00	-31.04	H
1693.200	-42.37	-1.59	-43.96	-13.00	-30.96	V
2539.800	-49.23	0.33	-48.90	-13.00	-35.90	V

*For Band II\_HSDPA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.800	-58.45	5.93	-52.52	-13.00	-39.52	H
5557.200	-56.58	10.23	-46.35	-13.00	-33.35	H
3704.800	-59.17	5.93	-53.24	-13.00	-40.24	V
5557.200	-59.85	10.23	-49.62	-13.00	-36.62	V
Middle Channel (1880.0MHz)						
3760.000	-58.68	6.11	-52.57	-13.00	-39.57	H
5640.000	-57.82	10.17	-47.65	-13.00	-34.65	H
3760.000	-59.69	6.11	-53.58	-13.00	-40.58	V
5640.000	-57.97	10.17	-47.80	-13.00	-34.80	V
High Channel (1907.6MHz)						
3815.200	-58.62	6.27	-52.35	-13.00	-39.35	H
5722.800	-58.76	10.11	-48.65	-13.00	-35.65	H
3815.200	-58.85	6.27	-52.58	-13.00	-39.58	V
5722.800	-58.34	10.11	-48.23	-13.00	-35.23	H

*For Band IV\_HSDPA Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.800	-52.65	-1.82	-54.47	-13.00	-41.47	H
5137.200	-42.60	0.03	-42.57	-13.00	-29.57	H
3424.800	-54.02	-1.82	-55.84	-13.00	-42.84	V
5137.200	-43.69	0.03	-43.66	-13.00	-30.66	V
Middle Channel (1732.6MHz)						
3465.200	-55.27	-1.70	-56.97	-13.00	-43.97	H
5197.800	-47.55	0.10	-47.45	-13.00	-34.45	H
3465.200	-41.25	-1.70	-42.95	-13.00	-29.95	V
5197.800	-44.12	0.10	-44.02	-13.00	-31.02	V
High Channel (1752.6MHz)						
3505.200	-42.00	-1.59	-43.59	-13.00	-30.59	H
5257.800	-44.84	0.33	-44.51	-13.00	-31.51	H
3505.200	-43.00	-1.59	-44.59	-13.00	-31.59	V
5257.800	-52.19	0.33	-51.86	-13.00	-38.86	V

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 10<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*



## 8. Frequency Stability

### 8.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 8.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Aglient	Spectrum Analyzer	E4402B-ESA	US41192821	2012-03-28	2013-03-27
Rohde & Schwarz	Universal Radio Communication	CMU200	112012	2012-03-28	2013-03-27
GONGWEN	Moisture Test Chamber	GDS-150	SEMT-0013	2012-03-28	2013-03-27

### 8.3 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

Temperature:	Supply Voltage
20°C	85-115% of declared nominal voltage
-30°C to +50°C	Normal

## 8.4 Environmental Conditions

Temperature:	20°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 8.5 Summary of Test Results/Plots

For Cellular Band GSM Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	46	0.0550
40	3.7	30	0.0359
30	3.7	21	0.0251
20	3.7	25	0.0299
10	3.7	32	0.0383
0	3.7	38	0.0454
-10	3.7	46	0.0550
-20	3.7	40	0.0478
-30	3.7	48	0.0574

For PCS Band GSM Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-73	-0.0388
40	3.7	-69	-0.0367
30	3.7	-51	-0.0271
20	3.7	-67	-0.0356
10	3.7	-48	-0.0255
0	3.7	-37	-0.0197
-10	3.7	-43	-0.0229
-20	3.7	-57	-0.0303
-30	3.7	-53	-0.0282

## For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	63	0.0753
40	3.7	57	0.0681
30	3.7	46	0.0550
20	3.7	36	0.0430
10	3.7	28	0.0335
0	3.7	37	0.0442
-10	3.7	42	0.0502
-20	3.7	45	0.0538
-30	3.7	48	0.0574

## For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-30	-0.0160
40	3.7	-19	-0.0101
30	3.7	-21	-0.0112
20	3.7	-27	-0.0144
10	3.7	-30	-0.0160
0	3.7	-38	-0.0202
-10	3.7	-46	-0.0245
-20	3.7	-43	-0.0229
-30	3.7	-50	-0.0266

## For Cellular Band EDGE Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-48	-0.0574
40	3.7	-57	-0.0681
30	3.7	-35	-0.0418
20	3.7	-46	-0.0550
10	3.7	-52	-0.0622
0	3.7	-46	-0.0550
-10	3.7	-55	-0.0657
-20	3.7	-60	-0.0717
-30	3.7	-63	-0.0753

## For PCS Band EDGE Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	62	0.0330
40	3.7	53	0.0282
30	3.7	48	0.0255
20	3.7	45	0.0239
10	3.7	48	0.0255
0	3.7	52	0.0277
-10	3.7	58	0.0309
-20	3.7	63	0.0335
-30	3.7	70	0.0372

## For WCDMA Band V Mode

Reference Frequency(Middle Channel): 836.4 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-50	-0.0598
40	3.7	-45	-0.0538
30	3.7	-38	-0.0454
20	3.7	-33	-0.0394
10	3.7	-38	-0.0454
0	3.7	-40	-0.0478
-10	3.7	-45	-0.0538
-20	3.7	-56	-0.0669
-30	3.7	-63	-0.0753

## For WCDMA Band II Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	65	0.0346
40	3.7	62	0.0330
30	3.7	47	0.0250
20	3.7	35	0.0186
10	3.7	40	0.0213
0	3.7	36	0.0191
-10	3.7	44	0.0234
-20	3.7	58	0.0309
-30	3.7	60	0.0319

## For WCDMA Band IV Mode

Reference Frequency(Middle Channel): 1732.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	57	0.0329
40	3.7	48	0.0277
30	3.7	45	0.0260
20	3.7	40	0.0231
10	3.7	35	0.0202
0	3.7	43	0.0248
-10	3.7	52	0.0300
-20	3.7	56	0.0323
-30	3.7	60	0.0346

## For HSUPA Band V Mode

Reference Frequency(Middle Channel): 836.4 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-55	-0.0658
40	3.7	-43	-0.0514
30	3.7	-38	-0.0454
20	3.7	-40	-0.0478
10	3.7	-46	-0.0550
0	3.7	-53	-0.0634
-10	3.7	-47	-0.0562
-20	3.7	-55	-0.0658
-30	3.7	-63	-0.0753

## For HSUPA Band II Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-44	-0.0234
40	3.7	-37	-0.0197
30	3.7	-52	-0.0277
20	3.7	-33	-0.0176
10	3.7	-40	-0.0213
0	3.7	-37	-0.0197
-10	3.7	-45	-0.0239
-20	3.7	-53	-0.0282
-30	3.7	-49	-0.0261

## For HSUPA Band IV Mode

Reference Frequency(Middle Channel): 1732.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-58	-0.0335
40	3.7	-54	-0.0312
30	3.7	-42	-0.0242
20	3.7	-38	-0.0219
10	3.7	-39	-0.0225
0	3.7	-42	-0.0242
-10	3.7	-50	-0.0289
-20	3.7	-53	-0.0306
-30	3.7	-55	-0.0317

## For HSDPA Band V Mode

Reference Frequency(Middle Channel): 836.4 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-64	-0.0765
40	3.7	-58	-0.0693
30	3.7	-47	-0.0562
20	3.7	-52	-0.0622
10	3.7	-66	-0.0789
0	3.7	-70	-0.0837
-10	3.7	-73	-0.0873
-20	3.7	-82	-0.0980
-30	3.7	-78	-0.0933

## For HSDPA Band II Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	-70	-0.0372
40	3.7	-64	-0.0340
30	3.7	-56	-0.0298
20	3.7	-48	-0.0255
10	3.7	-45	-0.0239
0	3.7	-52	-0.0277
-10	3.7	-58	-0.0309
-20	3.7	-63	-0.0335
-30	3.7	-60	-0.0319



For HSDPA Band IV Mode

Reference Frequency(Middle Channel): 1732.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	73	0.0421
40	3.7	62	0.0358
30	3.7	55	0.0317
20	3.7	47	0.0271
10	3.7	42	0.0242
0	3.7	46	0.0265
-10	3.7	58	0.0335
-20	3.7	60	0.0346
-30	3.7	65	0.0375

So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	34	0.0406
	3.7	25	0.0299
	4.2	38	0.0454
Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-72	-0.0383
	3.7	-67	-0.0356
	4.2	-70	-0.0372
Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	44	0.0526
	3.7	36	0.0430
	4.2	42	0.0502
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-33	-0.0176
	3.7	-27	-0.0144
	4.2	-38	-0.0202

Reference Frequency(Middle Channel): EDGE 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-55	-0.0657
	3.7	-46	-0.0550
	4.2	-43	-0.0514
Reference Frequency(Middle Channel): EDGE 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	43	0.0229
	3.7	45	0.0239
	4.2	52	0.0277
Reference Frequency(Middle Channel): WCDMA 836.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-38	-0.0454
	3.7	-33	-0.0395
	4.2	-30	-0.0359
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	42	0.0223
	3.7	35	0.0186
	4.2	38	0.0202
Reference Frequency(Middle Channel): WCDMA 1732.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	35	0.0418
	3.7	40	0.0411
	4.2	46	0.0412

Reference Frequency(Middle Channel): HSUPA 836.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-46	-0.0245
	3.7	-40	-0.0213
	4.2	-38	-0.0202
Reference Frequency(Middle Channel): HSUPA1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-38	-0.0202
	3.7	-33	-0.0176
	4.2	-42	-0.0223
Reference Frequency(Middle Channel): HSUPA1732.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-42	-0.0242
	3.7	-38	-0.0219
	4.2	-45	-0.0260
Reference Frequency(Middle Channel): HSDPA 836.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-48	-0.0574
	3.7	-52	-0.0622
	4.2	-55	-0.0658
Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	-52	-0.0277
	3.7	-48	-0.0255
	4.2	-50	-0.0266

Reference Frequency(Middle Channel): HSDPA 1732.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	55	0.0317
	3.7	47	0.0271
	4.2	50	0.0289

\*\*\*\*\* END OF REPORT \*\*\*\*\*