



NVLAP LAB CODE 200707-0



FCC PART 24E MEASUREMENT AND TEST REPORT

For

Bravo Tech (Shenzhen) Co., Ltd.

No.8 Building, The 3rd Zone, Tangtou Industrial Park, Shiyan, Baoan District,

Shenzhen, Guangdong, P.R. of China

FCC ID: WBKMBSC081921-19

Report Type: Original Report	Product Type: Multi-Band, Multi-Standard, Multi-Carrier Coverage System (CDMA 1900)
Test Engineer:	Weir Zhong
Report Number:	RSZ09121101-24E
Report Date:	2010-05-14
Reviewed By:	Merry Zhao
Prepared By:	EMC Engineer
Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
EUT PHOTO	4
OBJECTIVE	5
RELATED SUBMITTAL(S)/GRANT(S)	5
TEST METHODOLOGY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1307(B)(1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
STANDARD APPLICABLE	9
MPE PREDICATION	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046 & § 24.232(A) - RF OUTPUT POWER	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049 & §24.238 - OCCUPIED BANDWIDTH.....	19
APPLICABLE STANDARDS.....	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19
FCC §2.1051 & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	33
APPLICABLE STANDARDS.....	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §2.1053 & §24.238 - SPURIOUS RADIATED EMISSIONS	36
APPLICABLE STANDARDS.....	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	37
FCC §24.238(A) - BAND EDGES	39
APPLICABLE STANDARDS.....	39
TEST PROCEDURE	39

TEST EQUIPMENT LIST AND DETAILS.....39

TEST DATA39

FCC §2.1055 & §24.235 - FREQUENCY STABILITY45

APPLICABLE STANDARD45

TEST PROCEDURE45

TEST EQUIPMENT LIST AND DETAILS.....45

TEST DATA46

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Bravo Tech (Shenzhen) Co., Ltd.*'s product, model number: *mBSC081921-12 (CDMA 1900, FCC ID: WBKMBSC081921-19)* or the "EUT" as referred to in this report is a *Multi-Band, Multi-Standard, Multi-Carrier Coverage System*, which measures approximately: 50 cm L x 25 cm W x 12 cm H, rated input voltage: AC 120V power source.

Frequency Range:

PCS Band: 1930-1990 MHz (Downlink)

Transmitter Output Power:

PCS Band: 46±1 dBm (Downlink)

** All measurement and test data in this report was gathered from production sample serial number: 0912031 (Assigned by BACL). The EUT was received on 2009-12-11.*

EUT Photo



Please see additional photos in Exhibit B & C

Objective

This type approval report is prepared on behalf of *Bravo Tech (Shenzhen) Co., Ltd.* in accordance with Part 2, Subpart J and Part 24 Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, band edge and radiated margin.

Related Submittal(s)/Grant(s)

None

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications

No modifications were made to the EUT.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number	FCC ID
AEROFLEX	Signal Generator	IFR3416	3410051025	N/A
ASTEC	DC Power Supply	JF101B-9000-0000	BY4748	N/A
IBM	Laptop	T400	GTVQC-2KWCD-VXM8V-KPRM9-KKVDB	DoC
Bravo	Host Unit	mBSC081921-12 (Host Unit)	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable AC Cable	7.0	LISN / AC mains	EUT
Unshielded Detachable Fiber Cable	1.2	Host Unit / Fiber Port	Remote Unit (AWS 2100 Unit)
Shielded Detachable Blue RF Cable	1.5	Host Unit / SMA Port	Remote Unit
Shielded Detachable Yellow RF Cable	3.0	Signal Generator / SMA Port	Remote Unit
Unshielded Detachable DC Cable	1.3	DC Supply / DC Port	Host Unit
Unshielded Detachable Network Cable	10.0	Laptop / Network Port	Host Unit


Configuration of Test Setup

For Downlink mode-CDMA PCS band:

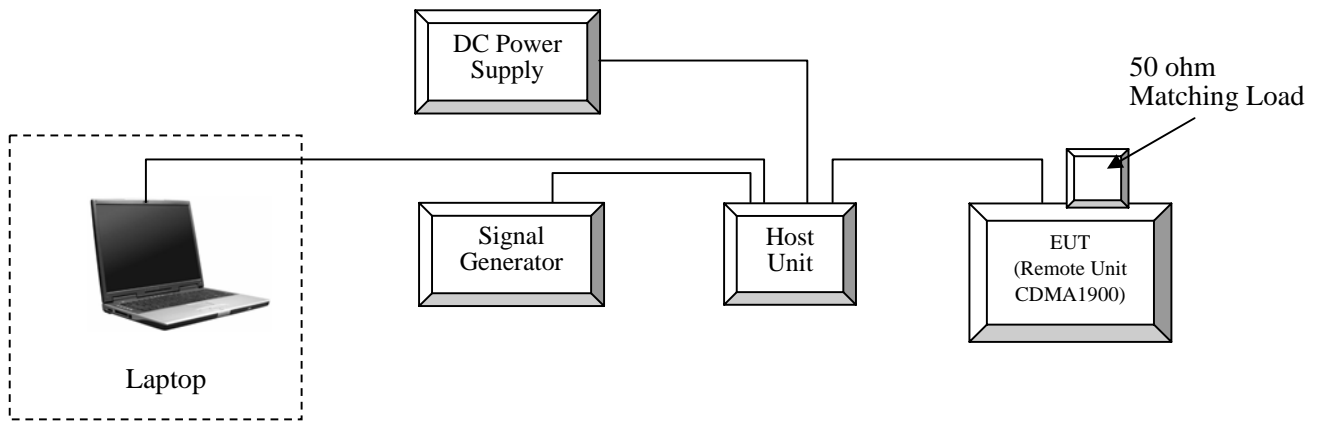

Block Diagram of Test Setup

For Downlink mode- CDMA PCS band:

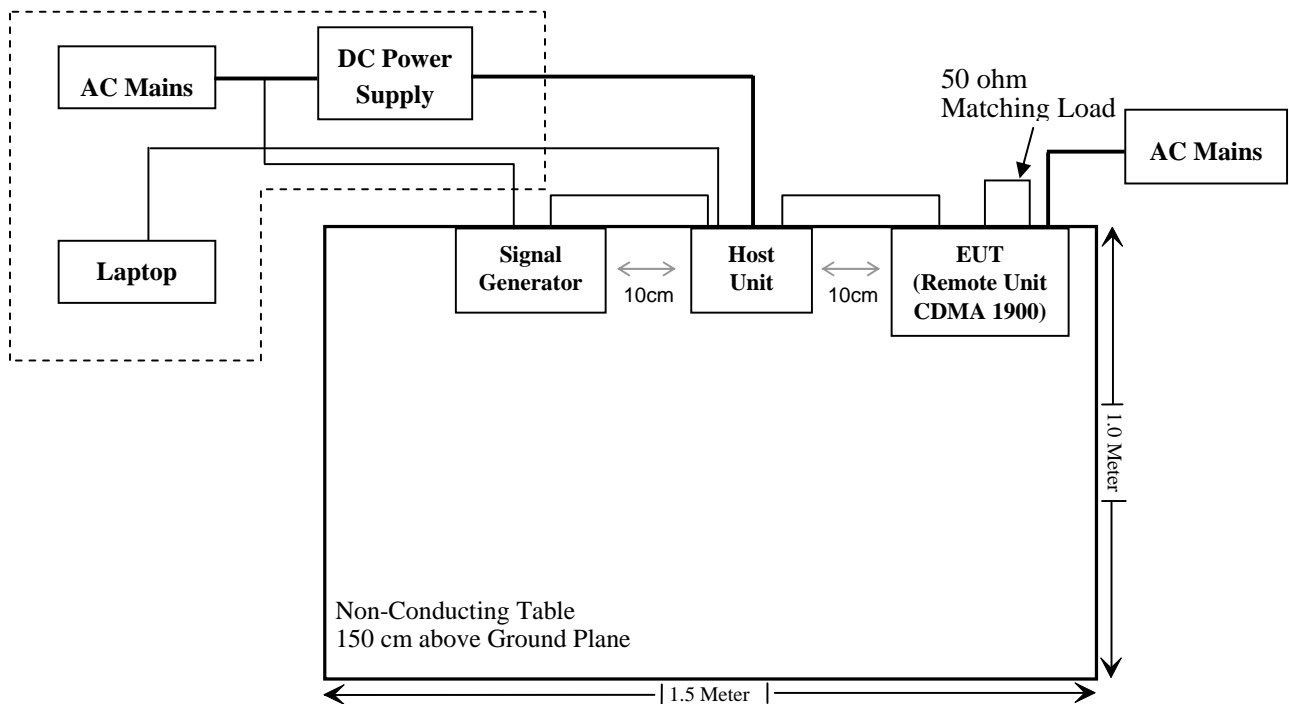

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1) & §2.1091	Maximum Permissible exposure (MPE)	Compliant
§2.1046; §24.232 (c)	RF Output Power	Compliant
§2.1047	Modulation Characteristics	N/A
§2.1049; §24.238	99% & -26 dB Occupied Bandwidth	Compliant
§2.1051 & §24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§2.1053 & §24.238 (a)	Field Strength of Spurious Radiation	Compliant
§24.238 (a)	Out of band emission, Band Edge	Compliant
§2.1055 & §24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant

FCC §1.1307(b)(1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Occupational/Controlled Exposures

Limits for Occupational/Controlled Exposures				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-3.0	614	1.63	*(100)	6
3.0-30.0	1824/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5.0	6

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Predication

Predication of MPE at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally **numeric** gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input terminal: 45.56(dBm)

Maximum peak output power at antenna input terminal: 35974.93 (mW)

Prediction safety distance: 400 (cm)

Predication frequency: 1960 (MHz)

Antenna Gain (typical): 11(dBi)

Antenna Gain (typical): 12.59 (numeric)

Power density predication frequency at 400 cm: 0.23 (mW/cm²)

MPE limit for general population exposure at prediction frequency: 5 (mW/cm²)

Result: compliant

FCC §2.1047 - MODULATION CHARACTERISTIC


According to FCC §2.1047(d), 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046 & § 24.232(a) - RF OUTPUT POWER**Applicable Standard**

FCC §2.1046 and §24.232 (a).

Test Procedure*Conducted method:*

The RF output of the EUT system was connected to the wireless test set and the EMI test receiver through sufficient attenuation.

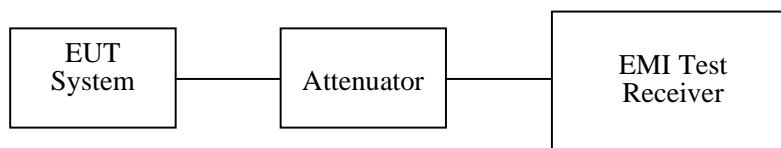*Radiated method:*

TIA 603-C section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-24	2010-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Weir Zhong on 2009-12-18 to 2010-04-27.


PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Output Power (dBm)	Result
Downlink	One Carrier			
	Low	1931.250	45.20	Compliant
	Middle	1960.000	45.38	Compliant
	High	1988.750	45.09	Compliant
	Two Carriers			
	Low	1931.875	45.31	Compliant
	Middle	1960.000	45.20	Compliant
	High	1988.125	45.40	Compliant
	Three Carriers			
	Low	1932.500	45.52	Compliant
	Middle	1960.000	45.42	Compliant
	High	1987.500	45.32	Compliant
	Four Carriers			
	Low	1933.125	45.49	Compliant
	Middle	1960.000	45.56	Compliant
	High	1986.875	45.20	Compliant

Note: The antenna gain for CDMA 1900 is less than 11dBi.

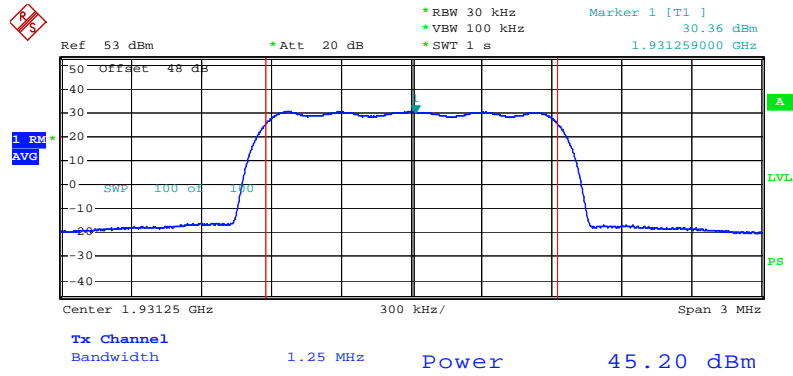
Downlink mode (One carrier):**Low Channel**

Date: 17.DEC.2009 03:38:44

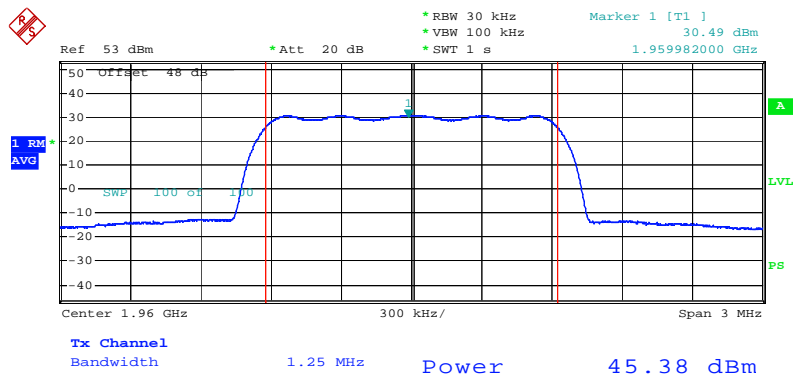Middle Channel

Date: 17.DEC.2009 03:41:37


High Channel

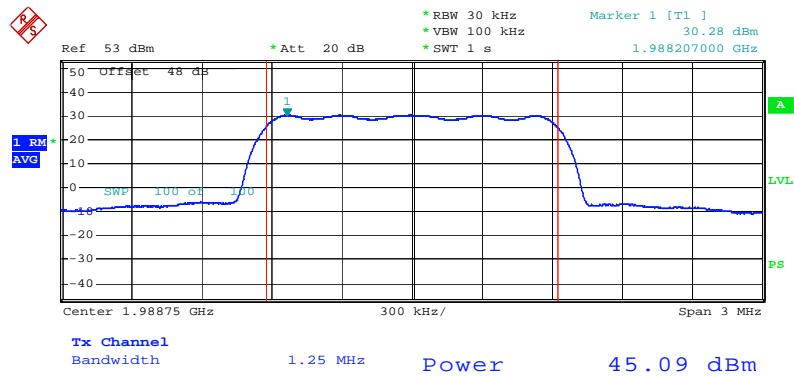

Date: 17.DEC.2009 03:44:43


Downlink mode (Two carriers):

Low Channel

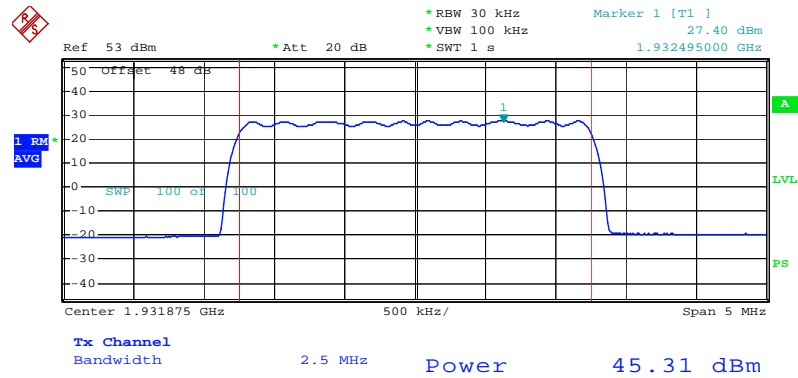


Date: 27.APR.2010 15:32:56

Middle Channel

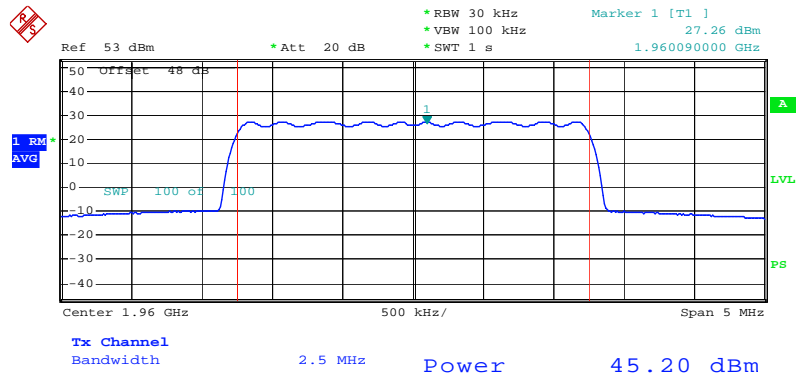


Date: 27.APR.2010 15:28:33


High Channel

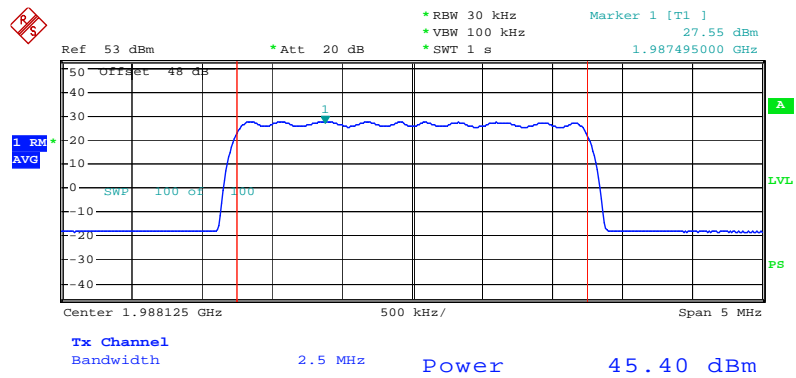

Date: 27.APR.2010 15:35:53

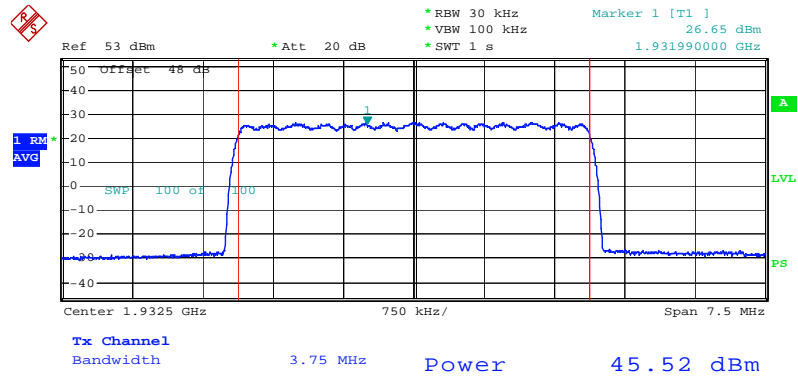
Downlink mode (Three carriers):**Low Channel**

Date: 27.APR.2010 16:20:02

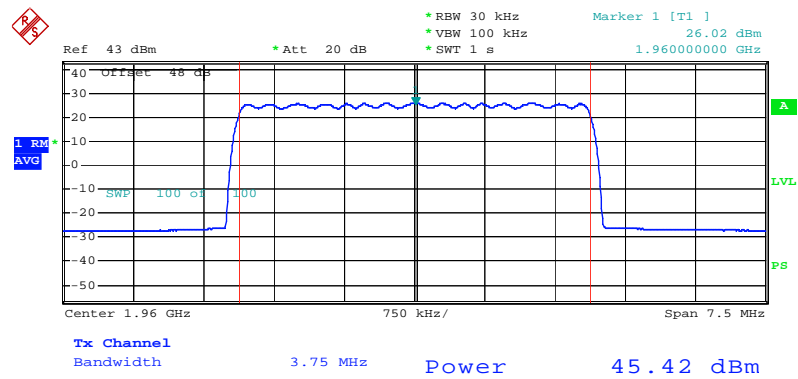Middle Channel

Date: 27.APR.2010 16:12:50


High Channel

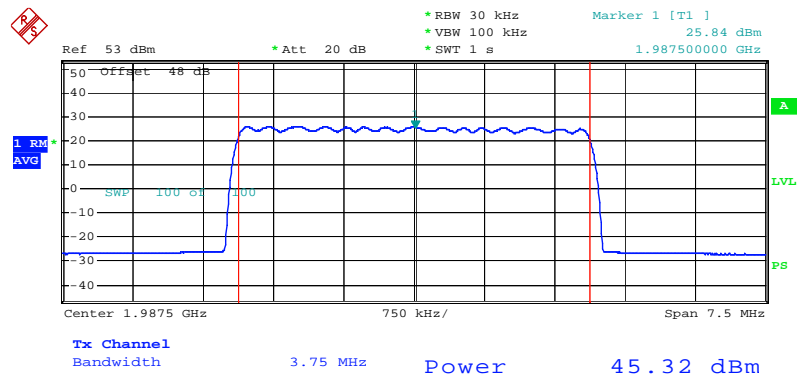

Date: 27.APR.2010 16:27:38


Downlink mode (Four carriers):

Low Channel

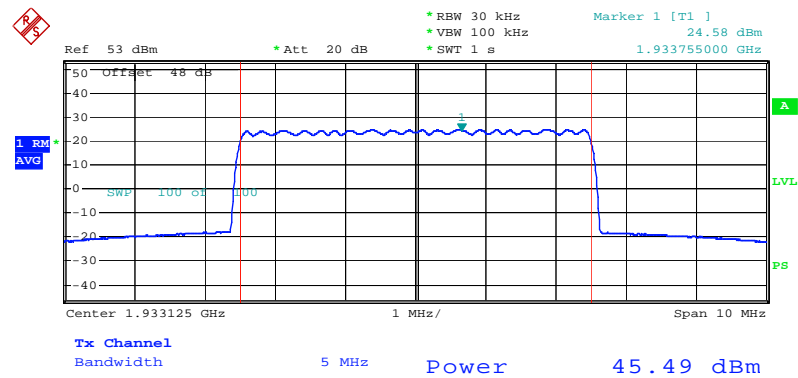


Date: 17.DEC.2009 03:30:23

Middle Channel

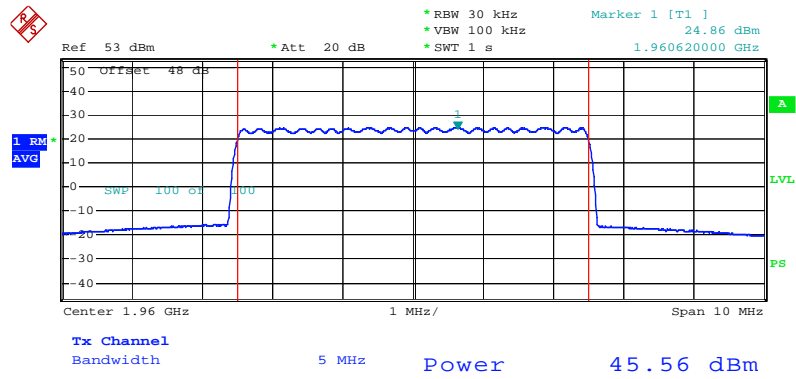

Date: 17.DEC.2009 03:25:33

High Channel

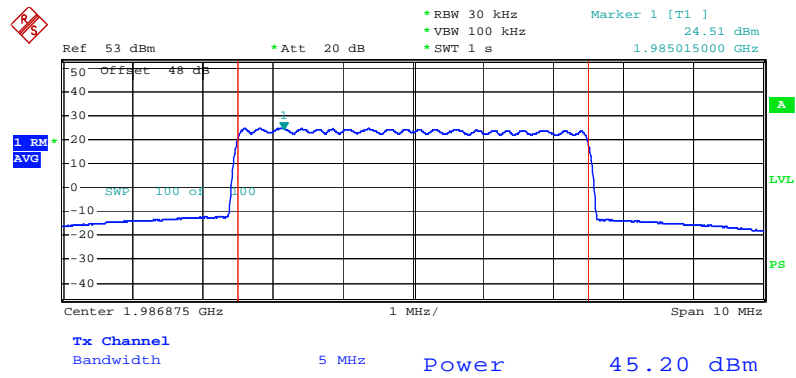

Date: 17.DEC.2009 03:21:59

FCC §2.1049 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standards

FCC §2.1049 and §24.238.

Test Procedure

The RF output of the EUT system was connected to the simulator and the EMI test receiver through sufficient attenuation.

The resolution bandwidth of the EMI test receiver was set at 30 kHz (PCS) and the 26 dB & 99% bandwidth was recorded.

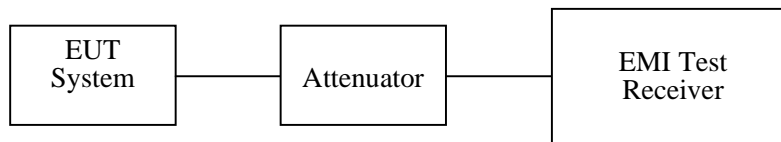

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-24	2010-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

The testing was performed by Weir Zhong on 2010-01-08 to 2010-04-27.


PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Downlink	One Carrier			
	Low	1931.250	1.278	1.434
	Mid	1960.000	1.278	1.440
	High	1988.750	1.284	1.434
	Two Carriers			
	Low	1931.875	2.490	2.680
	Mid	1960.000	2.495	2.685
	High	1988.125	2.500	2.680
	Three Carriers			
	Low	1932.500	3.7275	3.93
	Mid	1960.000	3.7275	3.93
	High	1987.500	3.7275	3.93
	Four Carriers			
	Low	1933.125	4.96	5.20
	Mid	1960.000	4.96	5.20
	High	1986.875	4.94	5.20

Please refer to the following plots.

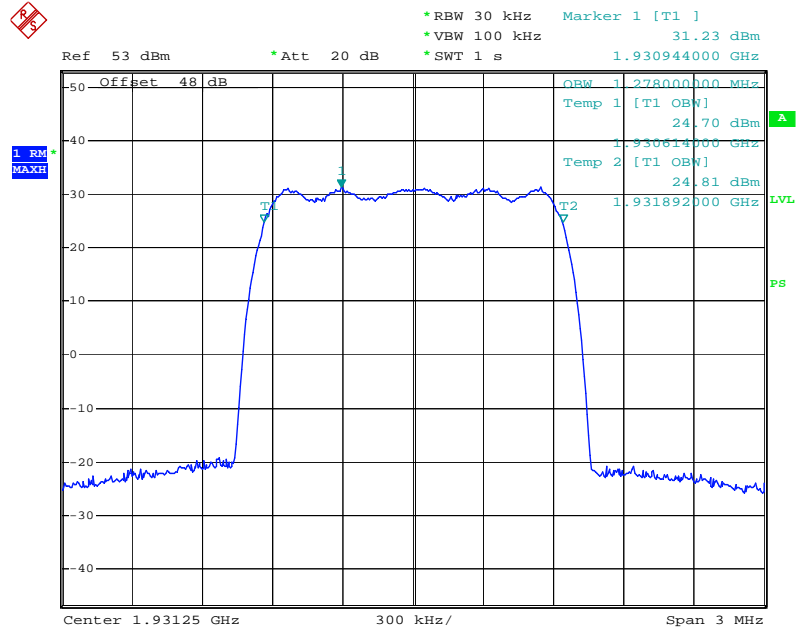
Downlink mode (One carrier):**99% Occupied Bandwidth****Low Channel**

Date: 8.JAN.2010 11:43:39

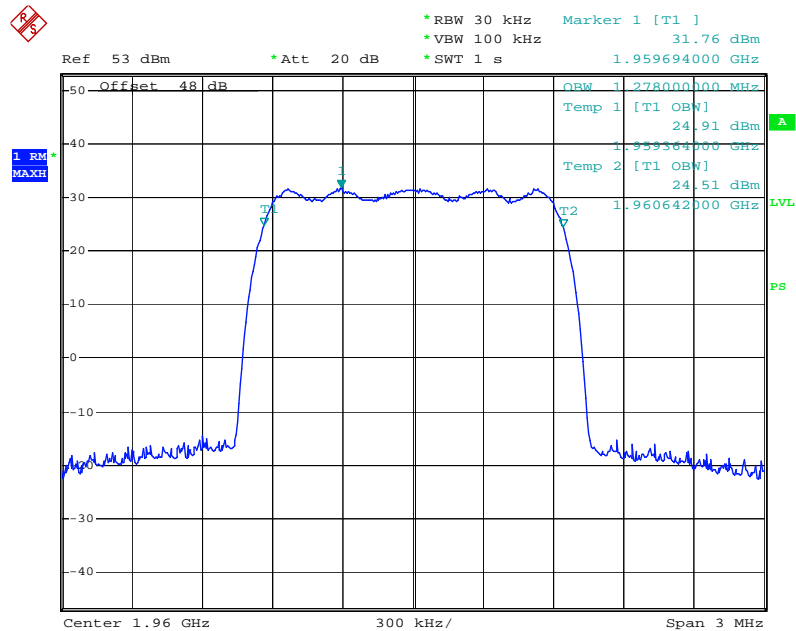Middle Channel

Date: 8.JAN.2010 11:40:08


High Channel

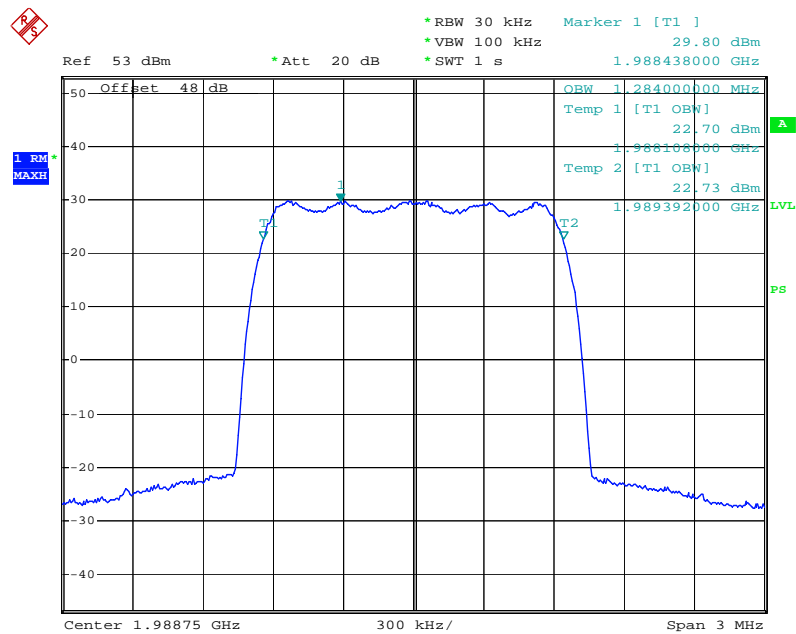

Date: 8.JAN.2010 11:47:32


26 dB Occupied Bandwidth

Low Channel

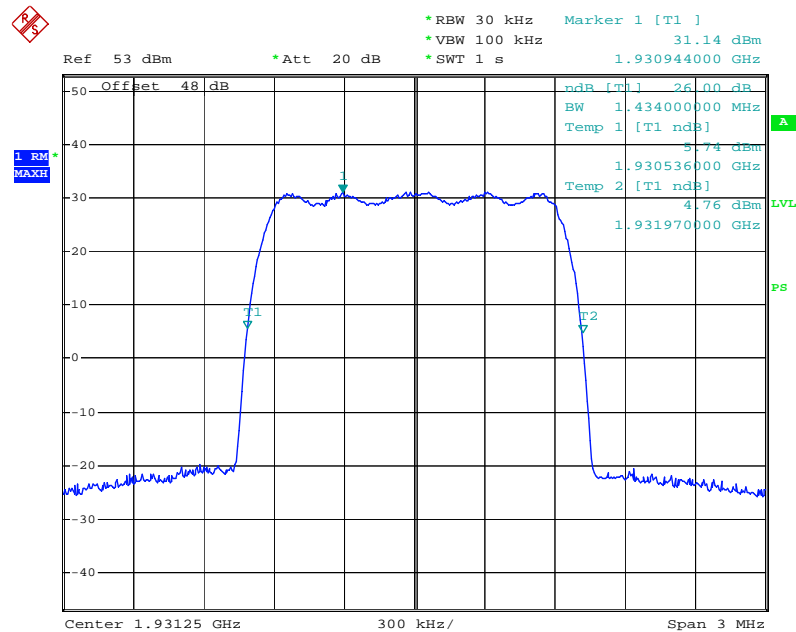


Date: 8.JAN.2010 11:43:56

Middle Channel

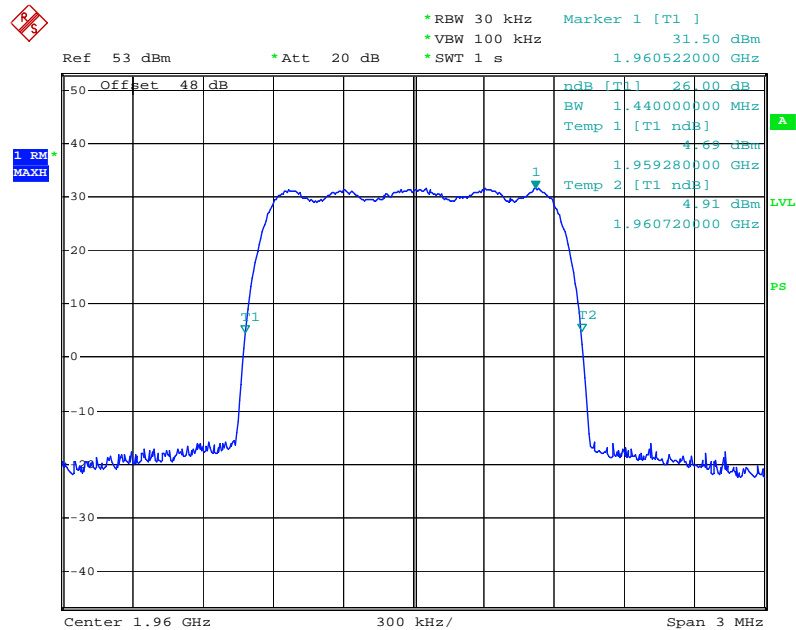


Date: 8.JAN.2010 11:40:31


High Channel

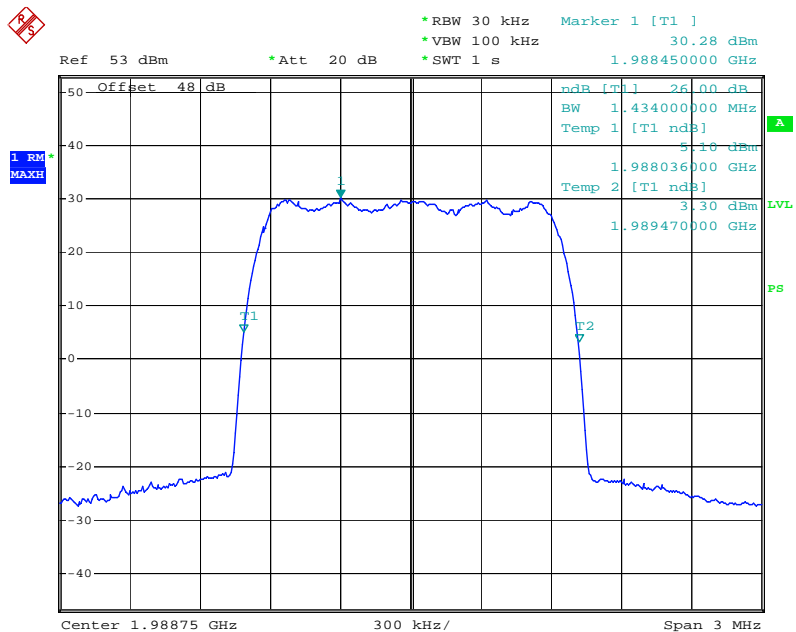

Date: 8.JAN.2010 11:47:06

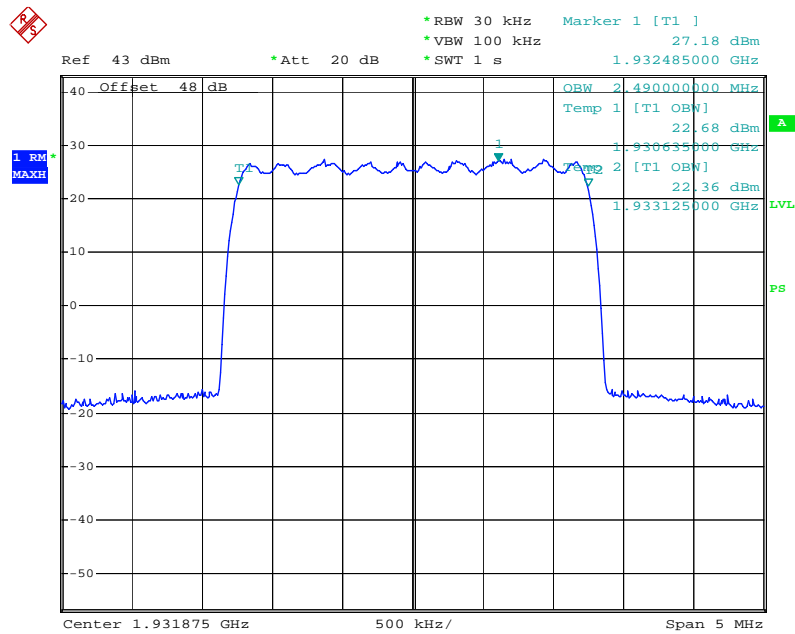
Downlink mode (Two carriers):**99% Occupied Bandwidth****Low Channel**

Date: 27.APR.2010 15:54:28

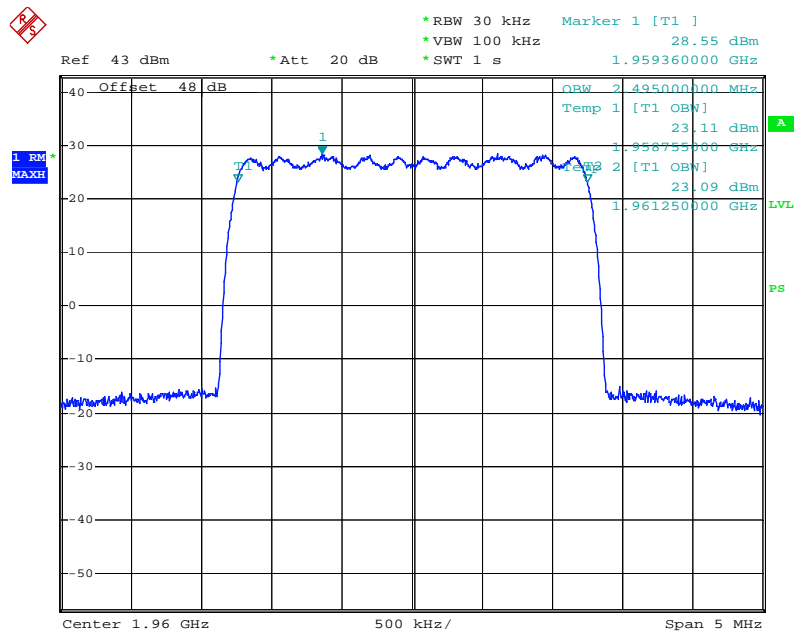Middle Channel

Date: 27.APR.2010 15:57:40


High Channel

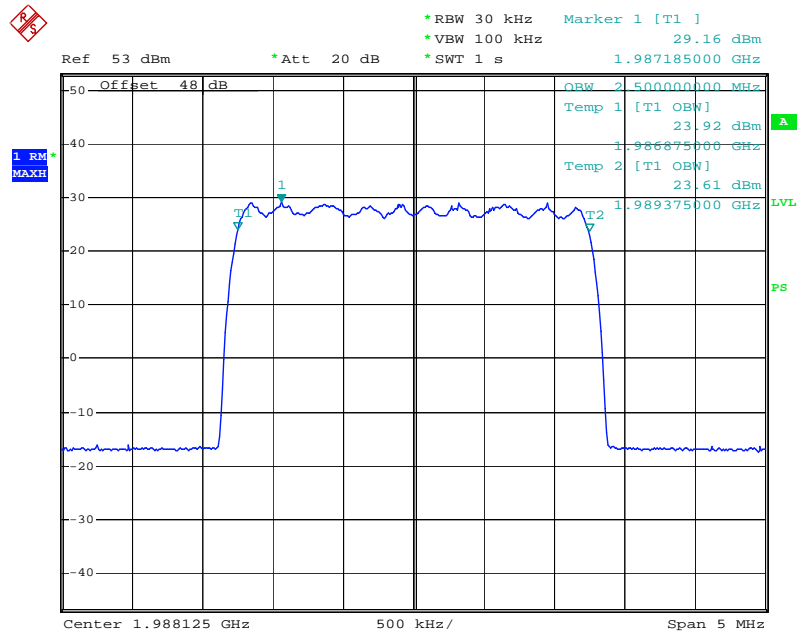

Date: 27.APR.2010 15:39:50


26 dB Occupied Bandwidth

Low Channel

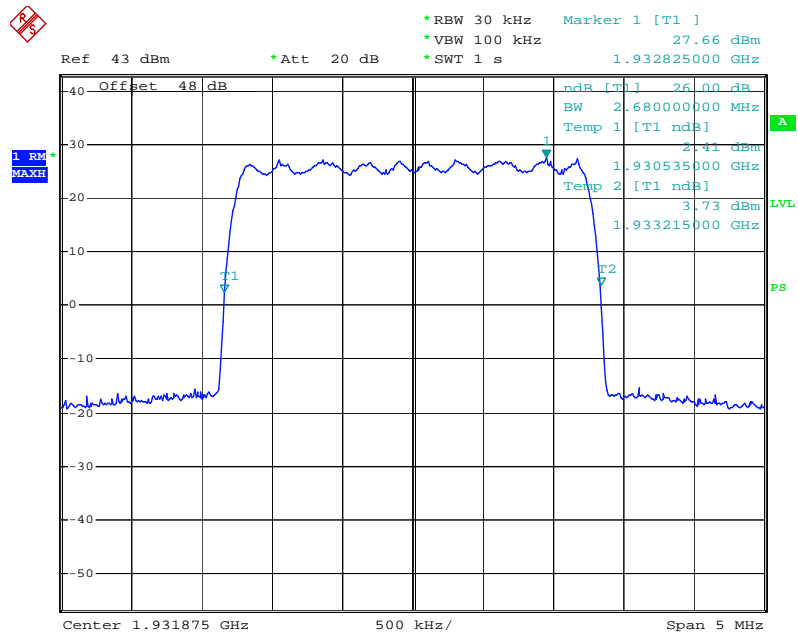


Date: 27.APR.2010 15:54:55

Middle Channel

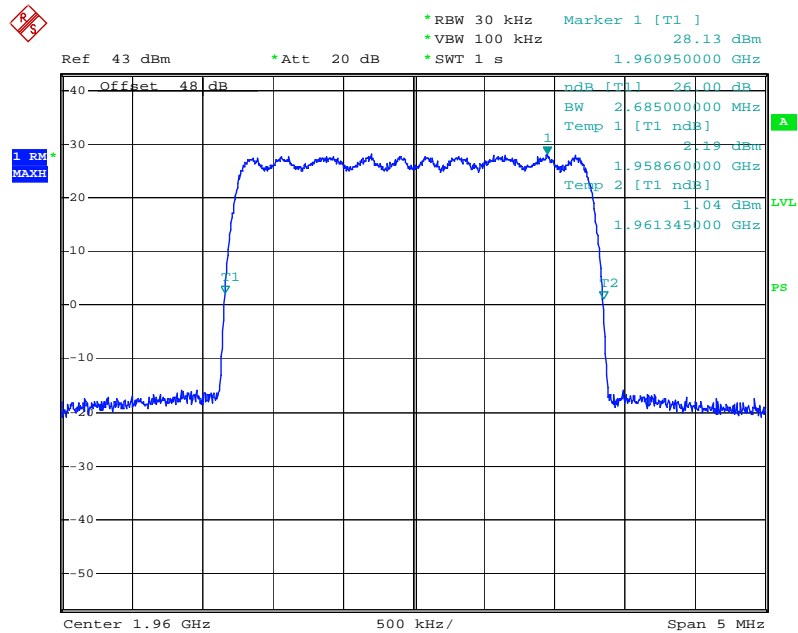


Date: 27.APR.2010 15:58:13


High Channel

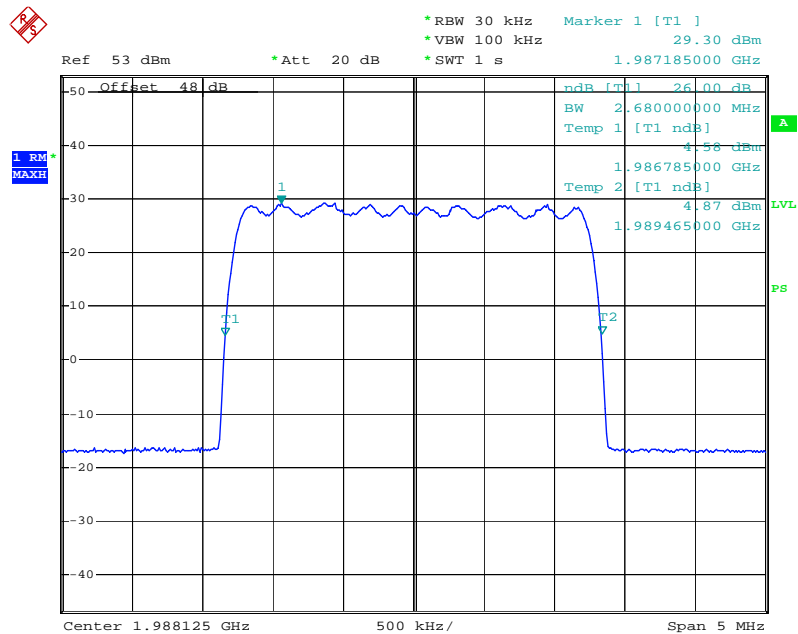

Date: 27.APR.2010 15:40:50

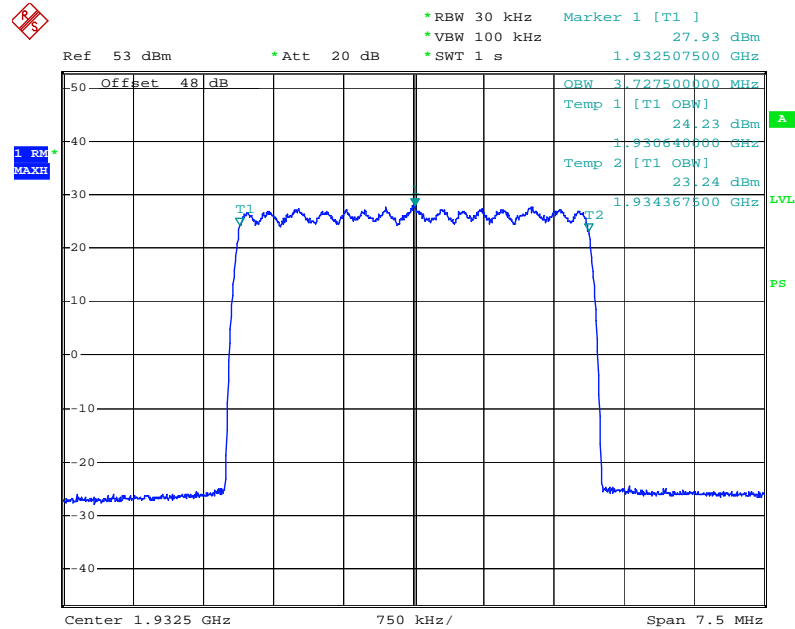
Downlink mode (Three carriers):**99% Occupied Bandwidth****Low Channel**

Date: 27.APR.2010 16:20:53

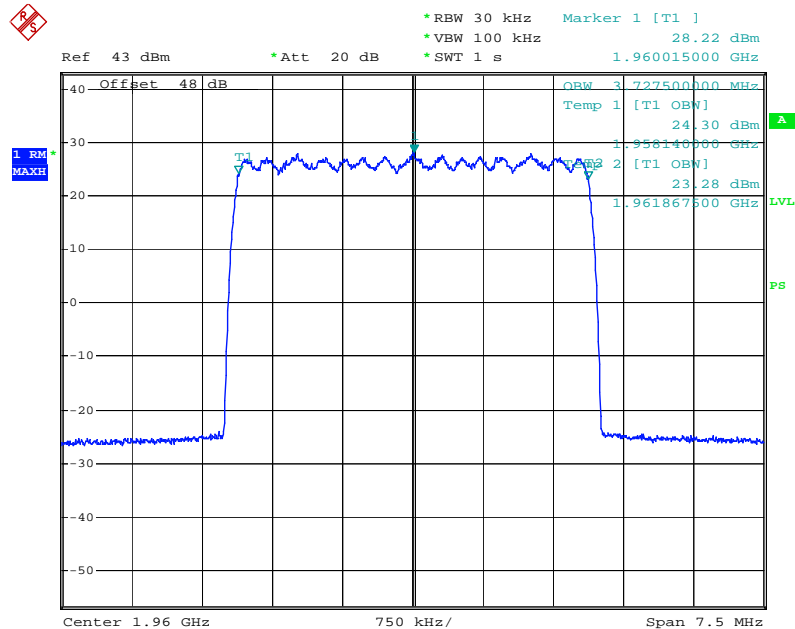Middle Channel

Date: 27.APR.2010 16:13:53


High Channel

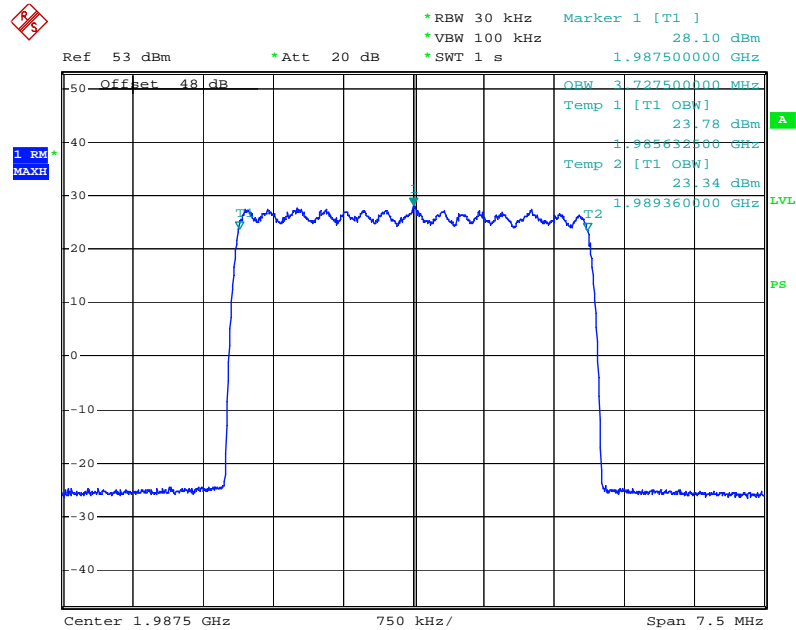

Date: 27.APR.2010 16:28:33


26 dB Occupied Bandwidth

Low Channel

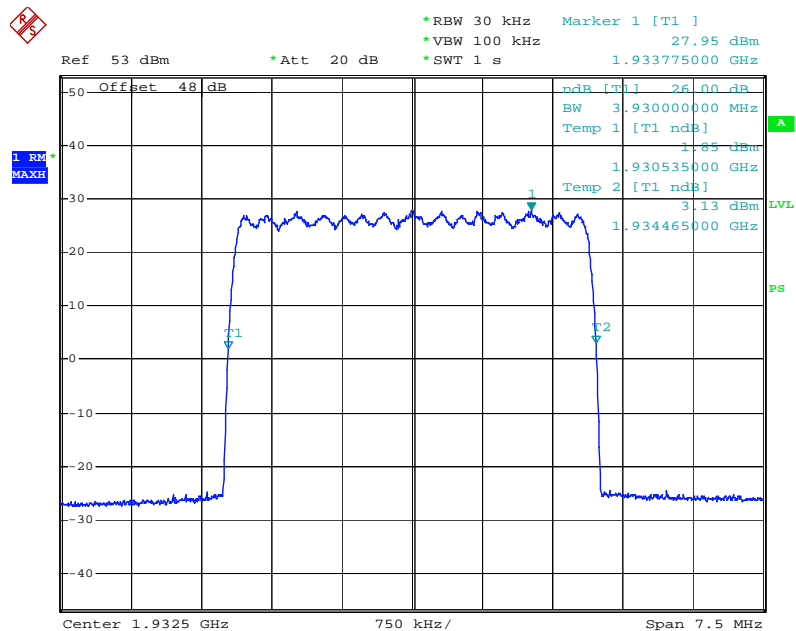


Date: 27.APR.2010 16:21:41

Middle Channel

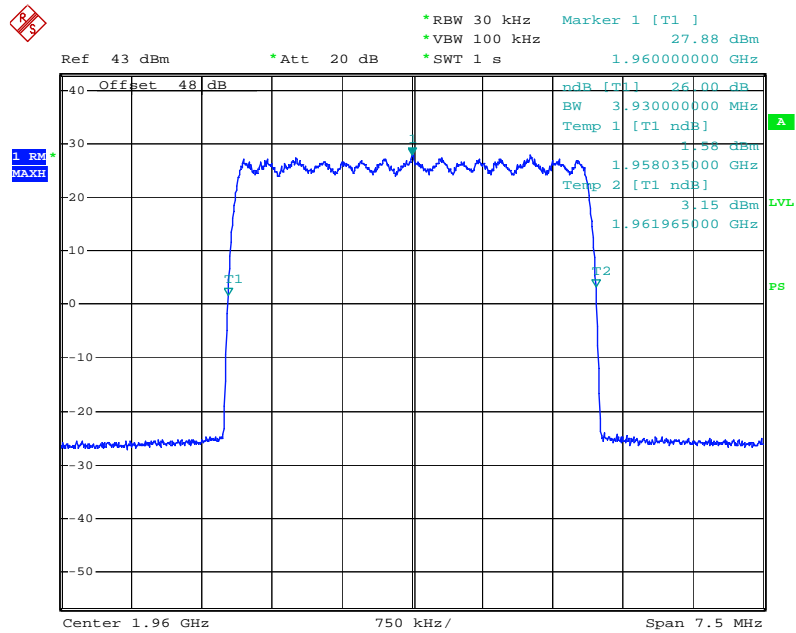


Date: 27.APR.2010 16:14:26


High Channel

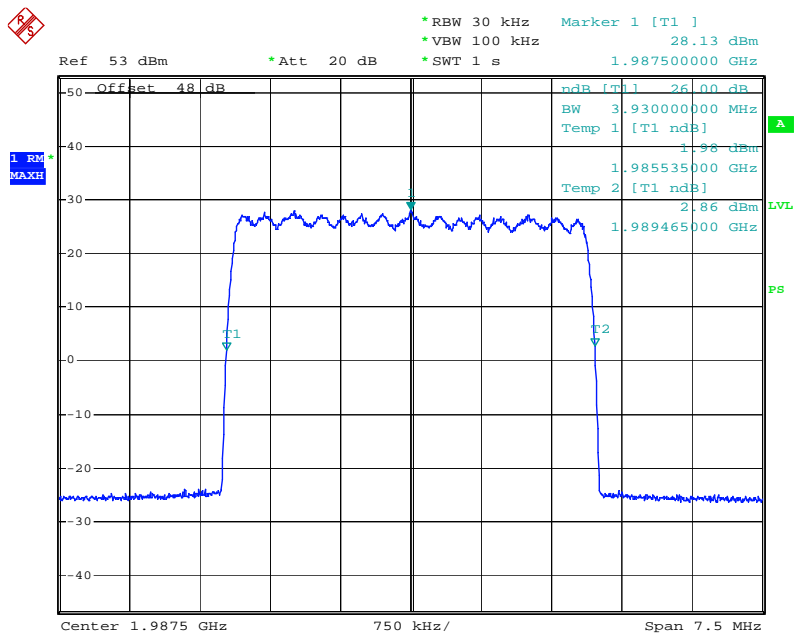

Date: 27.APR.2010 16:29:07

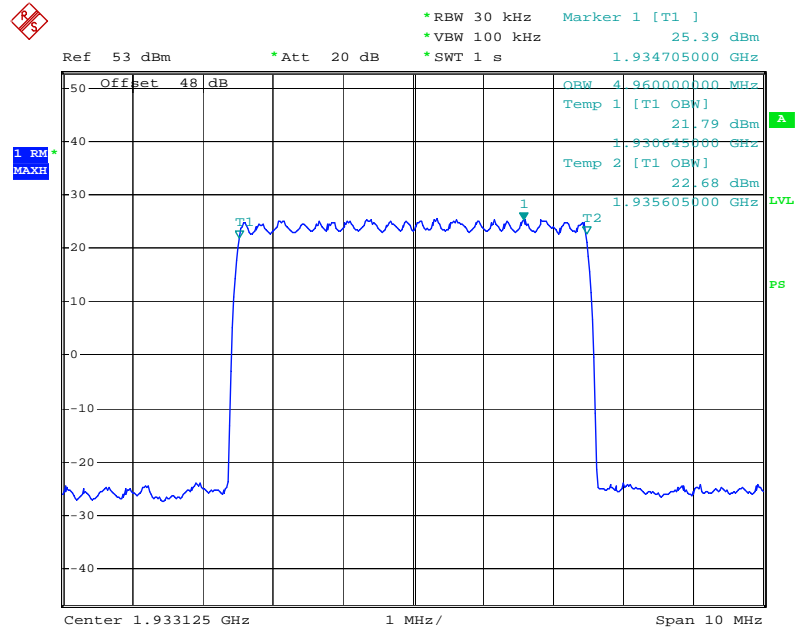
Downlink mode (Four carriers):**99% Occupied Bandwidth****Low Channel**

Date: 8.JAN.2010 11:32:18

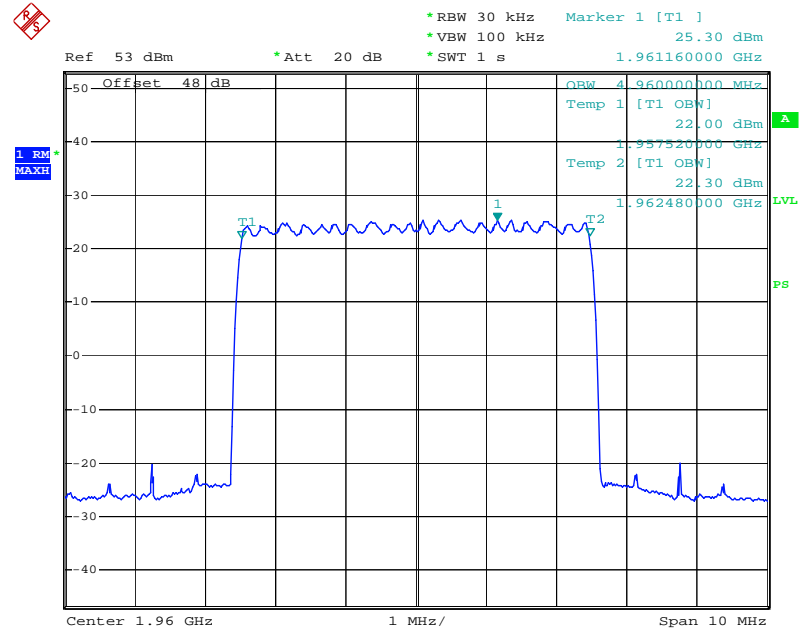Middle Channel

Date: 8.JAN.2010 11:36:51


High Channel

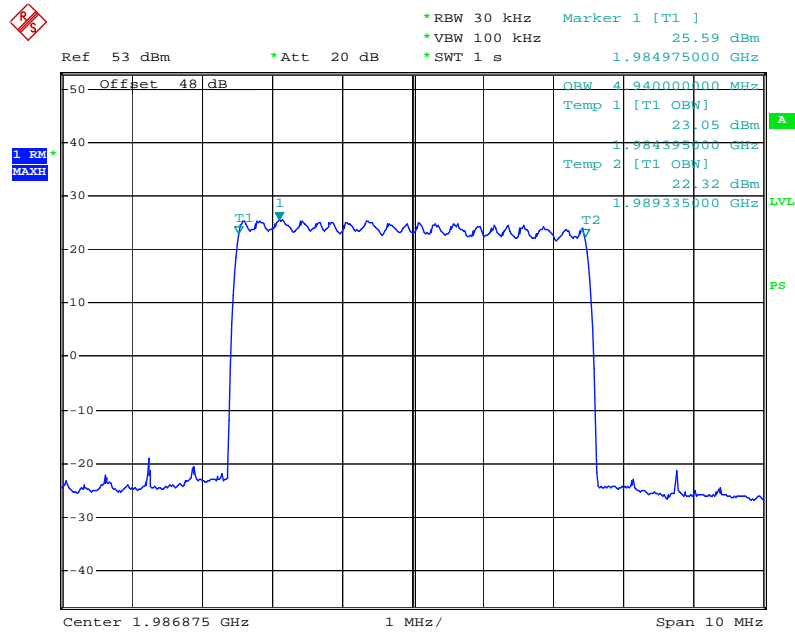

Date: 8.JAN.2010 11:33:46


26 dB Occupied Bandwidth

Low Channel

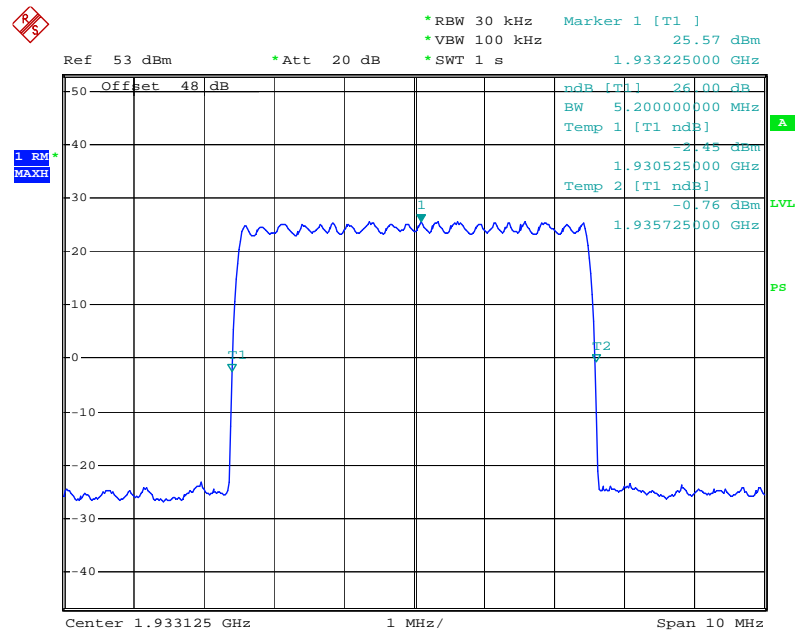


Date: 8.JAN.2010 11:31:57

Middle Channel

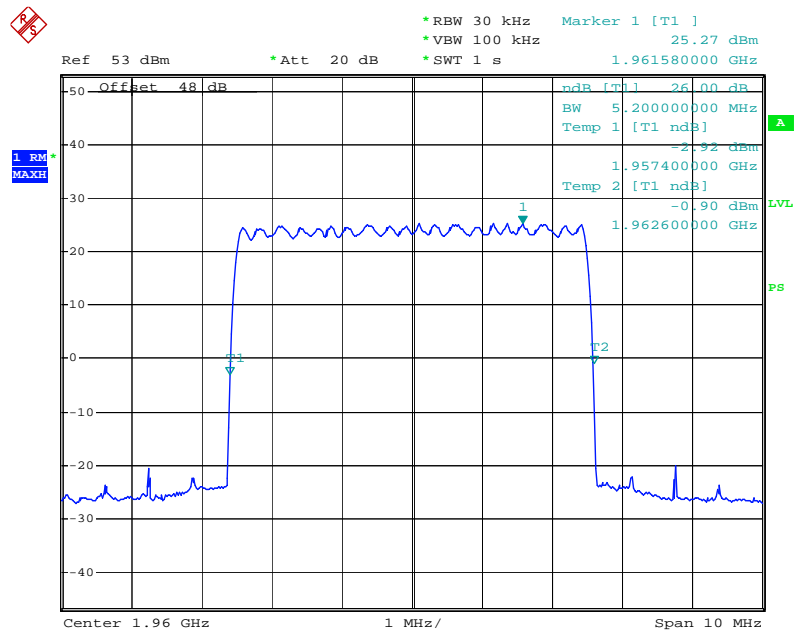

Date: 8.JAN.2010 11:36:23

High Channel

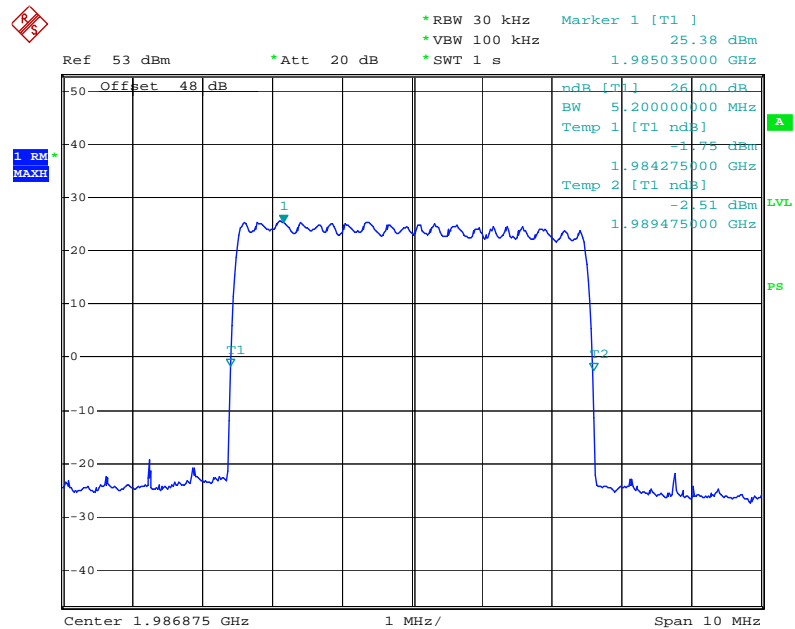

Date: 8.JAN.2010 11:34:05

FCC §2.1051 & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards


FCC §2.1051 and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the EUT system was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at as following table. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Frequency	RBW	VBW
9 ~ 150 kHz	1 kHz	3 kHz
150 kHz ~ 30 MHz	10 kHz	30 kHz
30 MHz ~ 1 GHz	100 kHz	300 kHz
Above 1 GHz	1 MHz	3 MHz



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-07-08	2010-07-07
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-24	2010-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Weir Zhong on 2009-12-20 to 2009-12-22.

Please refer to the following plots.

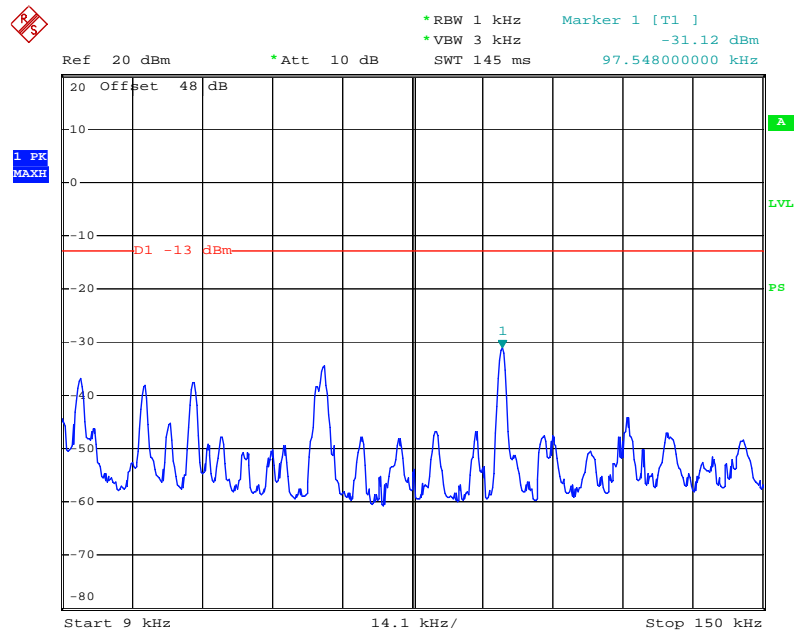
Downlink mode (worse case):**9 kHz – 150 kHz - Middle Channel**

Date: 22.DEC.2009 01:11:59

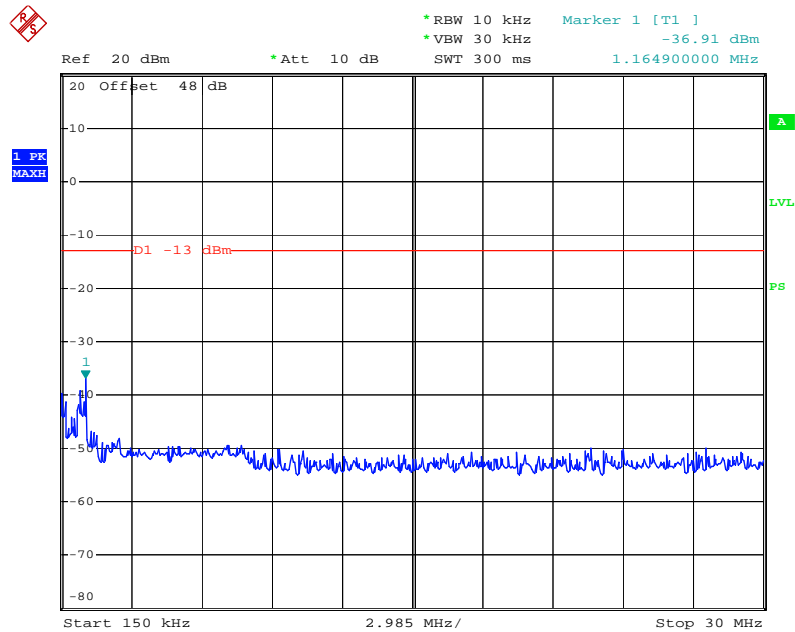150 kHz - 30 MHz - Middle Channel


Date: 22.DEC.2009 00:58:30

30 MHz - 1000 MHz - Middle Channel

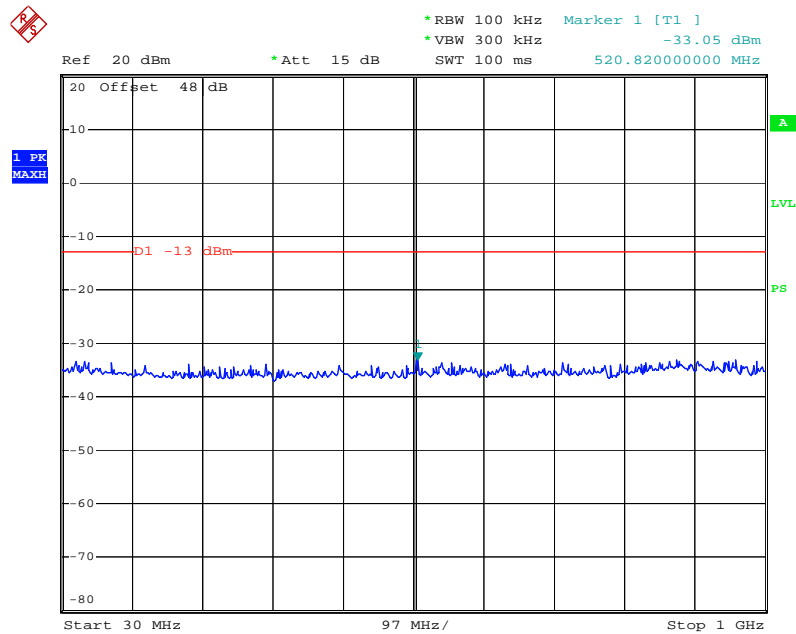

Date: 22.DEC.2009 01:13:51

1 - 20 GHz - Middle Channel

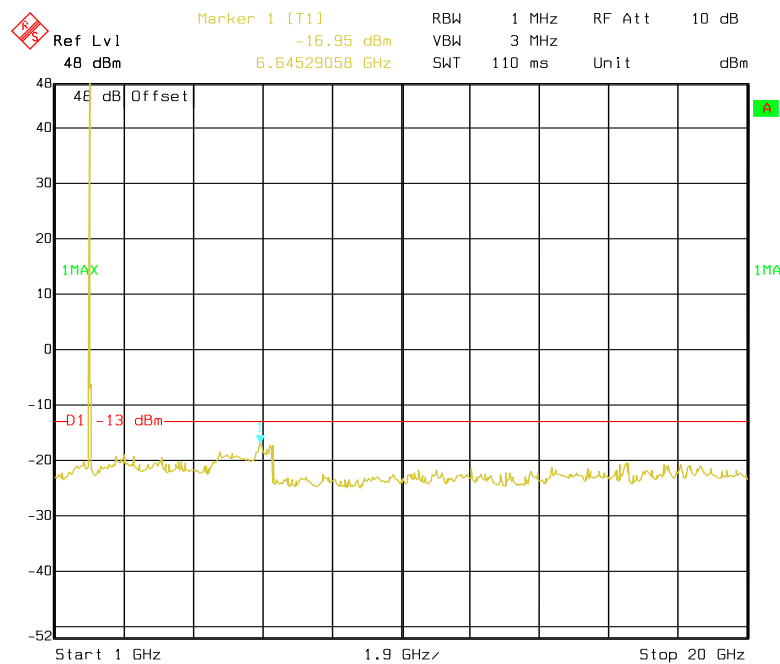

Date: 22.DEC.2009 00:17:38

FCC §2.1053 & §24.238 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC §2.1053 and §24.238.

Test Procedure

The EUT system was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-05-05	2010-05-04
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-07-08	2010-07-07
HP	Preamplifier	8449B	3008A00277	2009-09-12	2010-09-11
HP	Signal Generator	HP8657A	2849U00982	2009-10-28	2010-10-27
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
HP	Synthesized Sweeper	8341B	2624A00116	2009-11-07	2010-11-06
COM POWER	Dipole Antenna	AD-100	041000	2009-09-25	2010-09-25
A.H. System	Horn Antenna	SAS-200/571	135	2009-05-17	2010-05-17

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Weir Zhong on 2009-12-20 to 2010-4-28.


Test mode: Transmitting

PCS 1900 Unit (Part 24E):

Two tone Intermodulation

In the band 1952.5 MHz- 1967.5 MHz, intermodulation products levels as follows, and the max level are less than -13 dBm;

Set the operating frequency to 1960 MHz, and the other input signal at 1961.25 MHz

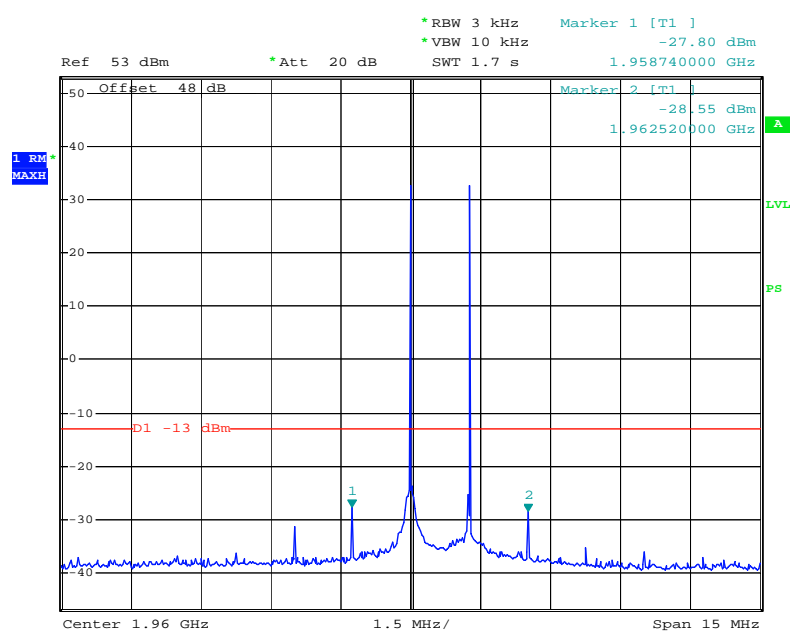

Date: 28.APR.2010 13:16:12

Downlink mode (worse case)

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)			
30 MHz -20 GHz Middle Channel											
36.25	63.20	225	1.0	V	36.25	-31.3	0	0.20	-31.5	-13	18.5
6735.47	46.30	360	1.4	V	6735.47	-43.8	8.7	1.88	-36.98	-13	23.98
6989.37	46.32	175	1.7	H	6989.37	-43.2	7.6	1.97	-37.57	-13	24.57
85.89	54.73	185	1.1	V	85.89	-43.0	0	0.25	-43.25	-13	30.25
2749.49	46.62	256	1.1	V	2749.49	-51.5	7.3	1.23	-45.43	-13	32.43
1829.65	47.58	182	1.2	V	1829.65	-50.9	6.1	1.01	-45.81	-13	32.81
2907.81	46.96	142	1.3	H	2907.81	-52.7	7.4	1.27	-46.57	-13	33.57
1170.34	48.15	188	1.4	H	1170.34	-53.4	6.2	0.78	-47.98	-13	34.98
173.20	41.85	150	1.0	V	173.20	-52.8	0	0.27	-53.07	-13	40.07
85.29	38.83	144	1.0	H	85.29	-59.9	0	0.25	-60.15	-13	47.15
171.99	30.20	222	1.1	H	171.99	-65.0	0	0.27	-65.27	-13	52.27
40.27	30.12	184	1.6	H	40.27	-66.2	0	0.20	-66.4	-13	53.4

FCC §24.238(a) - BAND EDGES


Applicable Standards

According to FCC §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the EUT system was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency, RBW set to 10 kHz.

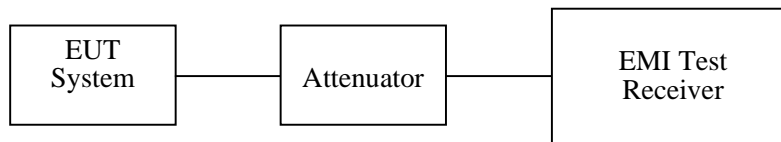

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-24	2010-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa


The testing was performed by Weir Zhong on 2010-01-08 to 2010-04-27.

Please refer to the following tables and plots.


Mode	Channel	Frequency (MHz)	Emission (dBm)	Limit (dBm)
Downlink	One Carrier			
	Lowest	1930.0	-24.61	-13
	Highest	1990.0	-26.15	-13
	Two Carriers			
	Lowest	1930	-26.42	-13
	Highest	1990	-25.44	-13
	Three Carriers			
	Lowest	1930	-26.35	-13
	Highest	1990	-25.69	-13
	Four Carriers			
	Lowest	1930.0	-24.39	-13
	Highest	1990.0	-22.84	-13

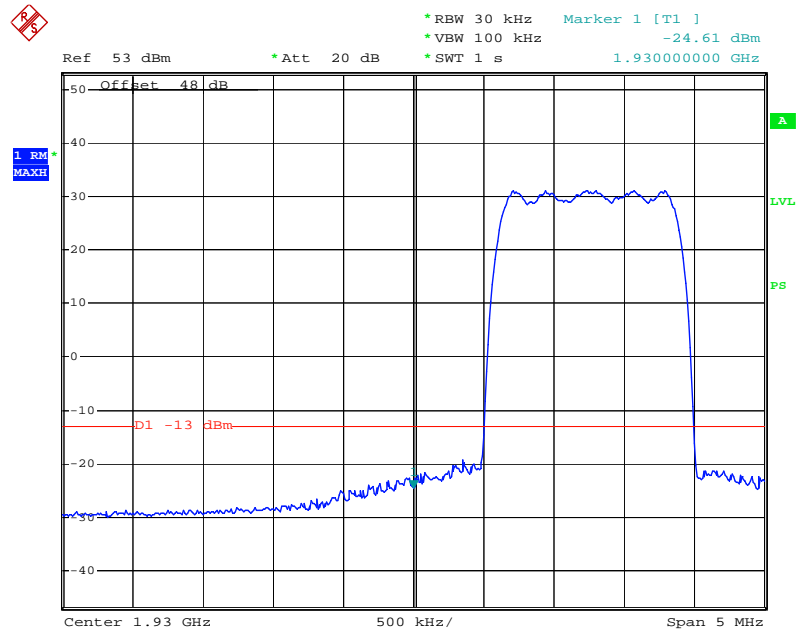Downlink mode (One carrier), Lowest Channel


Date: 8.JAN.2010 11:44:36

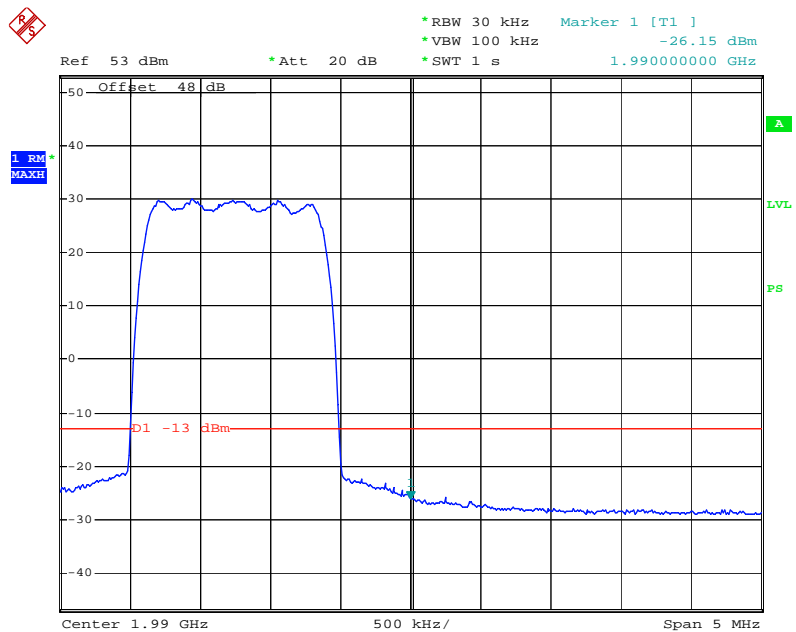Downlink mode (One carrier), Highest Channel


Date: 8.JAN.2010 11:46:29

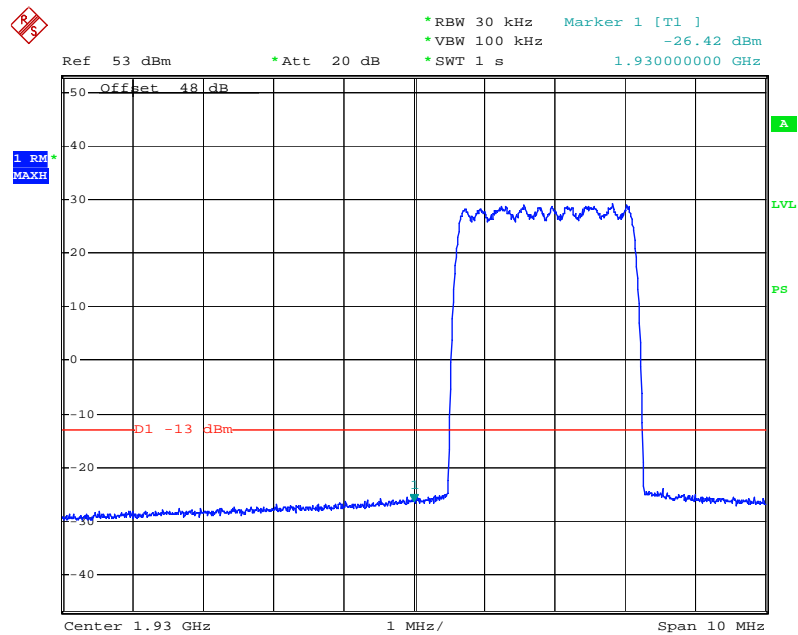Downlink mode (Two carriers), Lowest Channel


Date: 27.APR.2010 16:35:40

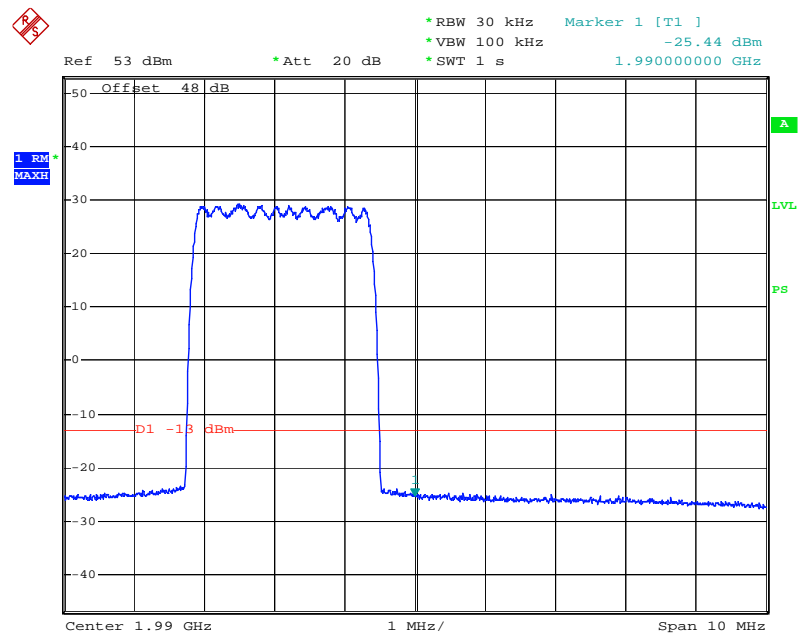Downlink mode (Two carriers), Highest Channel


Date: 27.APR.2010 16:33:59

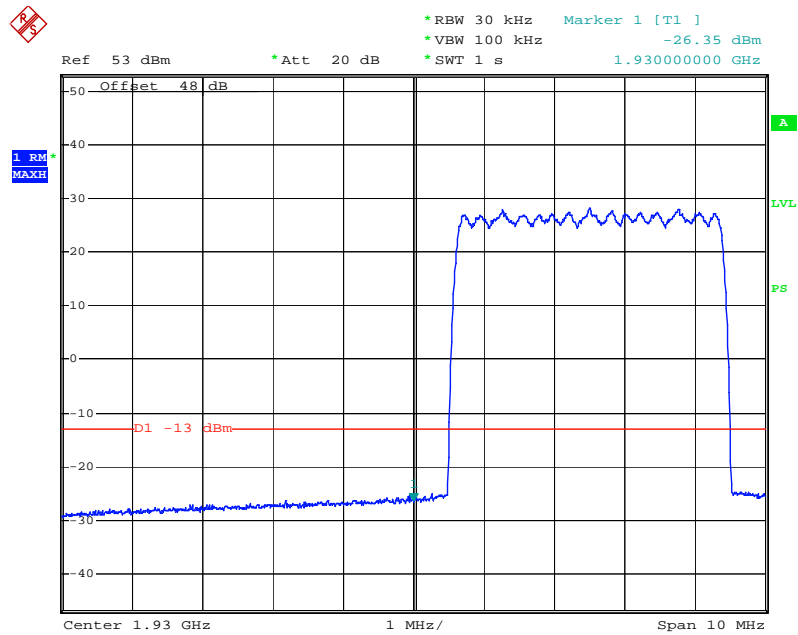Downlink mode (Three carriers), Lowest Channel


Date: 27.APR.2010 16:23:56

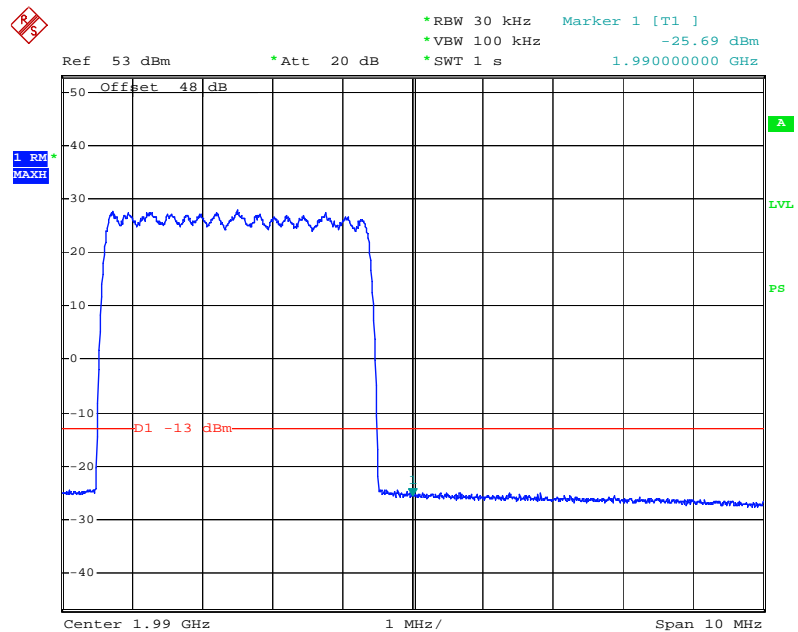Downlink mode (Three carriers), Highest Channel

Date: 27.APR.2010 16:30:06

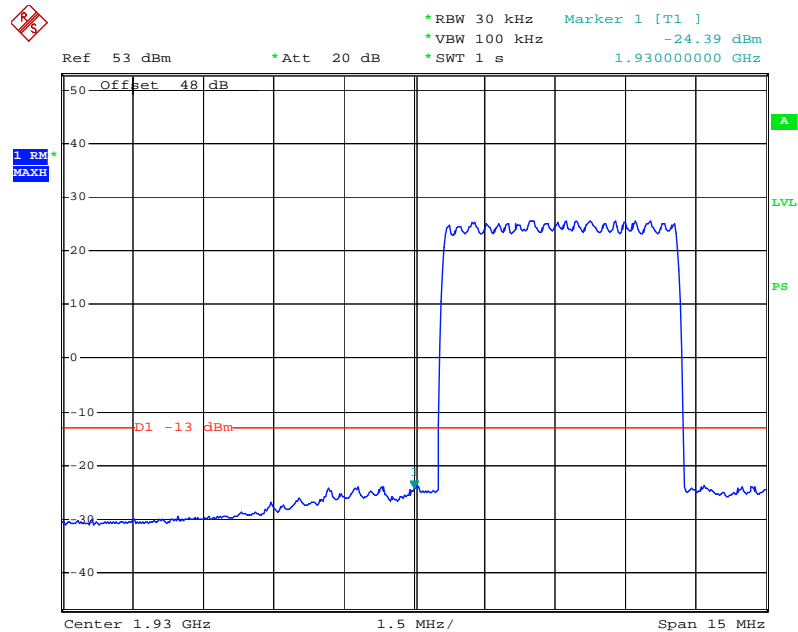Downlink mode (Four carriers), Lowest Channel

Date: 8.JAN.2010 11:30:17

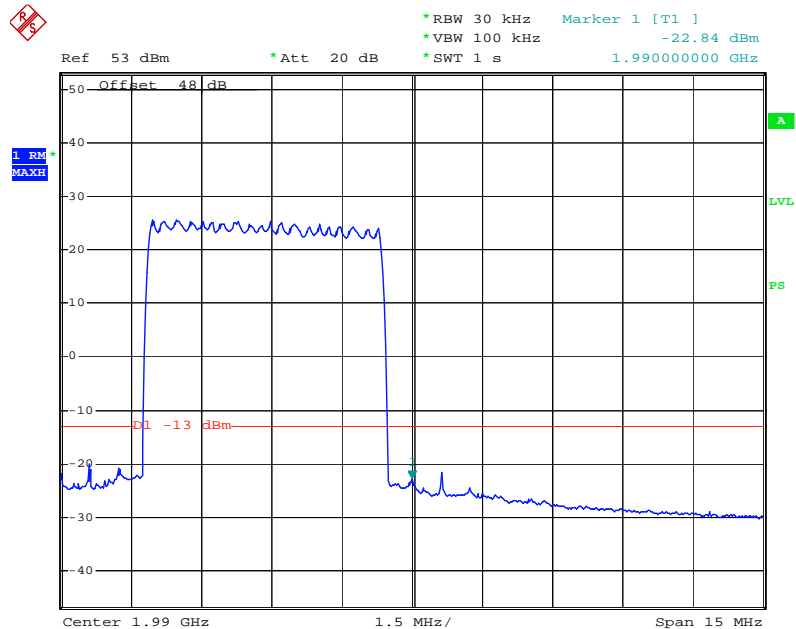Downlink mode (Four carriers), Highest Channel

Date: 8.JAN.2010 11:35:17

FCC §2.1055 & §24.235 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055 (a), §2.1055 (d), §24.235


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

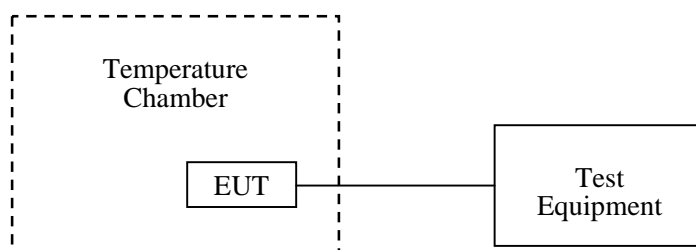

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2009-05-09	2010-05-09
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-24	2010-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Weir Zhong on 2009-12-23.

Downlink mode:

Middle Channel, $f_0 = 1960$ MHz			
Temperature (°C)	Power Supplied (Vac) RU Unit	Frequency Error (Hz)	Frequency Error (ppm)
-30	102	12	0.006122
	120	9	0.004592
	138	17	0.008673
-20	102	20	0.010204
	120	13	0.006633
	138	9	0.004592
-10	102	14	0.007143
	120	20	0.010204
	138	16	0.008163
0	102	18	0.009184
	120	16	0.008163
	138	10	0.005102
10	102	7	0.003571
	120	19	0.009694
	138	15	0.007653
20	102	20	0.010204
	120	14	0.007143
	138	26	0.013265
30	102	30	0.015306
	120	24	0.012245
	138	23	0.011735
40	102	31	0.015816
	120	27	0.013776
	138	18	0.009184
50	102	19	0.009694
	120	16	0.008163
	138	25	0.012755

******* END OF REPORT *******