

# **TEMPEST INC.**

**112 Elden Street Herndon, Virginia 20170**  
**(703) “TEMPEST” (836-7378) FAX: (703) 709-9565**  
**<http://www.tempest-inc.com>**  
**\*\*\* *Our 23rd Year in Business: 1985 - 2008* \*\*\***

**Results of Electromagnetic Compatibility Testing  
Performed in Accordance with  
Title 47, Part 15 of the  
United States Code of Federal Regulations  
on the Model TTID-GT1 Transmitter of the  
Trailer Tracking Transmitter (TTTX) System,  
Sold by  
International Marketing, Inc.  
25 Penncraft Ave., Suite C  
Chambersburg, Pennsylvania 17201**

**by  
Louis T. Gnecco, M.S.E.E., President  
Certified Electromagnetic Compatibility Engineer: Cert.# EMC-000544-NE**

**June 10, 2008**

**COPYRIGHT 2008 BY TEMPEST INC.: This document may be  
transmitted to Leighton Design Services, International Marketing, Inc. and  
to the United States Federal Communications Commission. This document  
may not be further disseminated, reproduced, recorded electronically, or  
transmitted electronically, in whole or in part, without the written consent of  
International Marketing, Inc. and TEMPEST INC.**

### Abstract

As requested by a verbal purchase order issued by International Marketing, Inc., during the period of May 20 - June 10, 2008 TEMPEST INC. performed the Electromagnetic Compatibility Tests that are required by Title 47, Part 15 of the United States Code Of Federal Regulations, for intentional transmitters operating periodically at frequencies that are higher than 70 MHz, on the Model TTID-GT1 transmitter, FCC ID# to be determined, of the TTTX system; a trailer tracking system sold by International Marketing, Inc.

The TTTX system is called the "Trailer Tracking Transmitter system." It consists of a transmitter powered by a 3 Volt Lithium watch battery, and a receiver.

The model TTID-GT1 transmitter operates at a frequency of 433.92 MHz with an output power of +5 dBm. It is normally located in the trailer of a commercial tractor-trailer. The transmitter signals the receiver, located in the cab. The information is used to track and locate trailers.

Using Amplitude Shift Keying, the transmitter sends 14 characters at 9600 baud (approximate duration 14.6 milliseconds) approximately every 15 seconds.

The transmitter has a 13.56 MHz crystal-controlled local oscillator; this is multiplied by 32 using a phase locked loop to obtain 433.92 MHz. This signal is transmitted by a loop antenna etched into the transmitter's printed circuit board.

This report presents the results of testing performed on the Model TTID-GT1 transmitter. Receiver testing is described in a separate report.

The Transmitter's radiated emissions were measured, as required for intentional radiators by Title 47 of the United States Code of Federal Regulations, Part 15, sections 15.33(a), 15.33(a)(1), 15.209(a), 15.231

The testing was performed in accordance with ANSI C63.4-2003.

The field strength of the fundamental transmit frequency did not exceed 12,500 microvolts per meter at 3 meters. The field strengths of the spurious emissions and of the first ten harmonics did not exceed 1,250 microvolts per meter at 3 meters.

The transmitter that was tested, Model TTID-GT1, serial number 0001-C8F3, complies with the requirements of Title 47, Part 15 of the United States Code of Federal Regulations for intentional radiators.

## Table of Contents

| <u>Section</u> | <u>Title</u>   | <u>Page</u> |
|----------------|--|-------------|
|                | Cover page   | 1           |
|                | Abstract   | 2           |
|                | Table of Contents  | 3           |
|                | List Of Illustrations  | 4           |
|                | List of Tables   | 4           |
|                | Reference Documents  | 4           |
| 1.0            | Introduction.  | 5           |
| 1.1            | Purpose.   | 5           |
| 1.2            | Test Location.   | 5           |
| 1.3            | Cognizant Personnel.   | 5           |
| 2.0            | Description of the TTTX Transmitter.                                     | 6           |
| 3.0            | Test Procedures.   | 7           |
| 3.1            | Instruments.   | 7           |
| 3.2            | Calibration Check  | 7           |
| 3.3            | Dynamic Range and<br>Detection System Sensitivity Tests.                 | 7           |
| 3.4            | Local Interference Test.   | 7           |
| 3.5            | Measurements.  | 8           |
| 3.5.1          | Radiated Measurements  | 8           |
| 3.5.2          | Cables   | 8           |
| 4.0            | Results.   | 9           |
| 5.0            | Conclusions  | 9           |
|                | Illustrations  | 10          |
|                | Tables   | 13          |
| Appendix A:    | Cross-reference to the Documentation<br>Requirements of ANSI C63.4-2003. | 16          |

### List of Illustrations

The following illustrations are also submitted electronically as .jpg files:

| <u>Figure</u> | <u>File Name</u> | <u>TITLE</u>                                       | <u>Page.</u> |
|---------------|------------------|--|--------------|
| 1             | Fig1.jpg         | TTTX Transmitter                                   | 11           |
| 2             | Fig2.jpg         | Block Diagram of Test Setup,<br>Radiated Emissions | 12           |

### List of Tables

| <u>Table</u> | <u>Title</u> | <u>Page</u> |
|--------------|--------------|-------------|
| 1            | Instruments  | 14          |
| 2            | Data         | 15          |

### Reference Documents:

(a) United States Code Of Federal Regulations, Title 47, Part 15

(b) ANSI C63.4-2003: “American National Standard for Methods of Measurement of Radio-Noise Emissions of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”

(c) “Results of Electromagnetic Compatibility Testing Performed in Accordance with Title 47, Part 15 of the United States Code of Federal Regulations on the Model TTID-GR1 Receiver of the Trailer Tracking Transmitter (TTTX) System, Sold by International Marketing, Inc. 25 Penncraft Ave., Suite C Chambersburg, Pennsylvania 17201”  
TEMPEST INC.: May 24, 2008

## 1.0 Introduction.

As requested by a verbal purchase order issued by International Marketing, Inc., during the period of May 20 - June 10, 2008 TEMPEST INC. performed Electromagnetic Compatibility tests in accordance with References (a) and (b) on the Receiver of the TTTX system sold by International Marketing, Inc.

### 1.1 Purpose.

The purpose of this test was to determine if the TTTX Receiver complies with the requirements of Reference (a.)

### 1.2 Test Location.

Testing was performed in the Electromagnetic Compatibility Laboratory and the FCC-listed Open Area Test Site of TEMPEST INC.

### 1.3 Cognizant Personnel.

The following personnel conducted, witnessed, or are cognizant of the test:

Louis T. Gnecco, President, Paula Levin Gnecco Vice President  
TEMPEST INC. 112 Elden Street, Herndon, Virginia 20170  
(703) 836-7378 e-mail: info-2008@tempest-inc.com

Mr. Harold Leighton, President, Leighton Design Services  
4019 Windward Drive, Tega Cay, South Carolina 29708  
(803) 548-4355 hleighton@componium.net

Mr. Randy Jansen, Vice President, Technology  
International Marketing, Inc. 25 Penncraft Avenue, Suite C,  
Chambersburg, Pennsylvania 17201  
(717) 496-0547 FAX: (717) 496-0604 raj@imiproducts.net

## 2.0 Description of the TTTX Transmitter.

The TTTX system is called the “Trailer Tracking Transmitter system.” It consists of a transmitter powered by a 3-Volt Lithium watch battery, and a receiver. The transmitter, model TTID-GT1, is 2 1/2 inches high, 2 1/4 inches wide, and 1 inch thick.

The transmitter operates at a frequency of 433.92 MHz with an output power of +5 dBm. It is normally located in the trailer of a commercial tractor-trailer. The transmitter signals the receiver, located in the cab. The information is used to track and locate trailers.

Using Amplitude Shift Keying, the transmitter sends 14 characters at 9600 baud (approximate duration 14.6 milliseconds) approximately every 15 seconds.

The transmitter has a 13.56 MHz crystal-controlled local oscillator; this is multiplied by 32 using a phase locked loop to obtain 433.92 MHz. This signal is transmitted by a loop antenna etched into the transmitter’s printed circuit board.

The transmitter that was tested was Model TTID-GT1, serial number 0001-C8F3.

### 3.0 Test Procedures.

As described below, testing was performed in accordance with references (a) and (b.) Radiated emissions were measured.

#### 3.1 Instruments.

Table 1 is a list of the instruments used. No ancillary equipment was needed to make the TTTX Transmitter operate normally.

A double-ridged waveguide horn antenna, a log periodic antenna, a biconical antenna, an active rod antenna, and two Hewlett-Packard spectrum analyzers were used in a three meter Open Area Test Site to detect radiated emissions.

#### 3.2 Calibration Check.

Using their internal calibration sources, the calibration of the spectrum analyzers was verified both immediately before and immediately after the test.

#### 3.3 Dynamic Range and Detection System Sensitivity Tests.

Before testing, the dynamic range of the instrumentation was determined to be 80 dB, and the detection system sensitivity was -95 dBm.

#### 3.4 Local Interference Test.

With the model TTID-GT1 Transmitter turned off, the ambient signals in the Open Area Test Site were measured and recorded, to verify that any signals being measured were coming from the transmitter, and not from other local sources, such as cellular telephones.

##### 3.4.1 Preliminary Tests.

Since the transmitter sends a short 14.6 millisecond burst only once in every 15 seconds, its fundamental frequency, its harmonics, and its spurious signals are difficult to detect. For this reason, an identical transmitter was first programmed to transmit continuously. In the laboratory, this continuously-running transmitter was used a hand held probe and the horn antenna to identify the fundamental, the first ten harmonics, and the spurious emissions. This process was then repeated in the open area test site. At each frequency, the transmitter under test was then substituted, and the spectrum analyzer was set to operate in the multiple sweep, storage mode. This ensured that all of the spurious emissions and the first ten harmonics would be detected as they occurred.

### 3.5 Measurements.

All measurements were performed in accordance with reference (b.)

#### 3.5.1 Radiated Measurements.

The model TTID-GT1 Transmitter was placed normally, with its loop antenna facing the test antenna, on a nonconductive turntable 3 meters from the antenna hoist. It was then rotated about 360 degrees in 16 equal increments of 22.5 degrees each, as recommended by reference (b.) With the exception of the active rod antenna, the receive antennas were raised from 1 to 4 meters above the ground plane while the emissions were measured. The peak values of the signals detected from the transmitter were recorded in dBm. These were converted to  $\mu\text{V/m}$  using the following formulas:

$$\text{Field strength (dB}\mu\text{V/m)} = \text{measured level (dBm)} + 107 \text{ dB} \\ + \text{antenna factor (dB)} + \text{cable loss (dB)}$$

$$\text{Field Strength in dB}\mu\text{V/m} = 20 \text{ Log}_{10} ( \text{Field Strength in } \mu\text{V/m} )$$

$$\text{Field Strength (}\mu\text{V/m)} = \text{Anti Log}_{10}[ ( \text{Field Strength in dB}\mu\text{V/m} ) / 20 ]$$

The battery voltage was checked before and after the tests.

#### 3.5.2 Cables.

Twenty feet of constant-phase cable were used. The cable loss ranged from less than 1 dB at 1 GHz to 9 dB at 11 GHz.



#### 4.0 Results.

As shown in Table 2, The transmitter passed all tests.

Radiated emissions consisted of the main carrier frequency of 433.92 MHz and its first ten harmonics, all of whose field strengths were within the limits of reference (a.)

The field strength of the fundamental transmit frequency did not exceed 12,500 microvolts per meter at 3 meters.

No harmonics or spurious emissions were found to exceed 1,250 microvolts per meter at 3 meters.


#### 5.0 Conclusions.

The model TTID-GT1 Transmitter that was tested complies with the requirements of Reference (a) for intentional radiators.

## Illustrations.

Figure 1: TTTX Transmitter

Figure 2: Block Diagram of Test Setup,  
Radiated Emissions

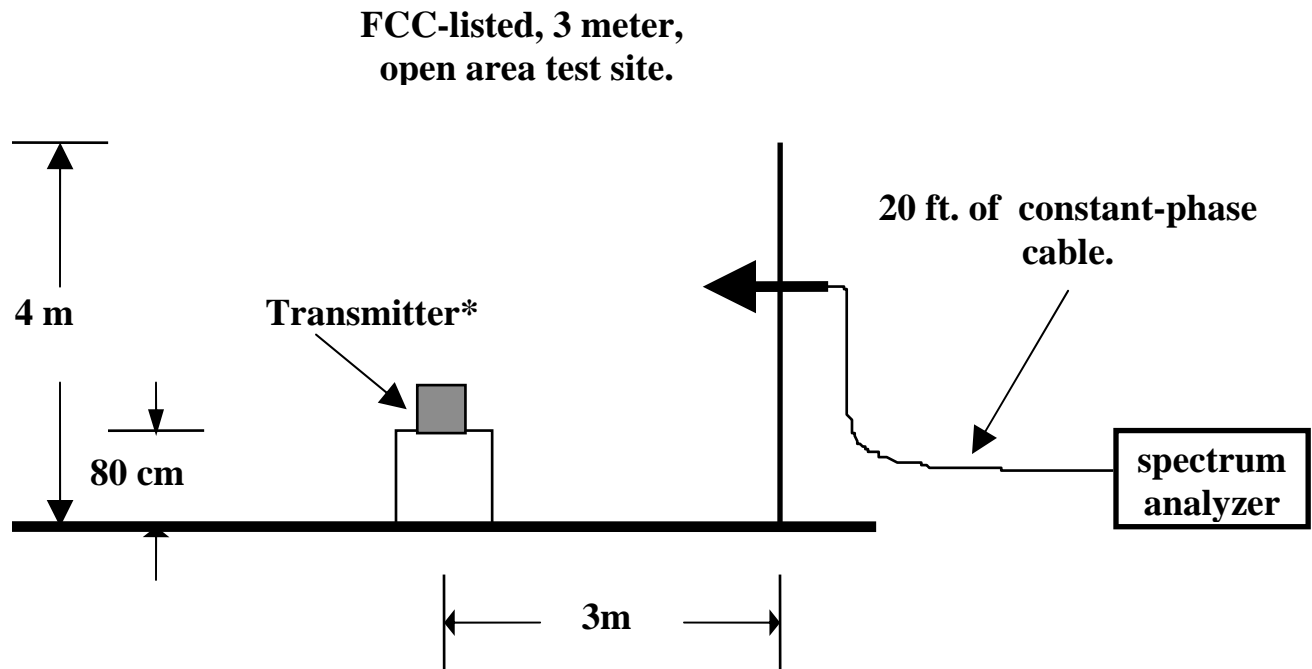

\* powered by an internal 3 Volt Lithium watch battery.

Tables.

Table 1: Instruments

| <u>Mfg.</u>     | <u>Model</u> | <u>Name</u>                          | <u>Serial No.</u> | <u>calibrated:</u> | <u>Due date:</u> |
|-----------------|--------------|--------------------------------------|-------------------|--------------------|------------------|
| Hewlett-Packard | 141T         | Spectrum Analyzer Display            | 2233A-22141       | 12/15/07           | 12/15/08         |
| “               | 8555A        | RF Section                           | TI-750            | “                  | “                |
| “               | 8552B        | IF Section                           | TI-751            | “                  | “                |
| Hewlett-Packard | 141T         | Spectrum Analyzer Display            | 2506A-23966       | 12/07              | 12/08            |
| “               | 8553B        | RF Section                           | 050301            | “                  | “                |
| “               | 8552B        | IF Section                           | 050302            | “                  | “                |
| Tensor          | 4104         | Biconical antenna                    | 2154              | 12/30/07           | 12/30/08         |
| TEMPEST INC.    | NA 200/2G    | Log Periodic Antenna                 | 82                | 12/29/07           | 12/29/08         |
| EMCO            | 3115         | Double-Ridged waveguide Horn Antenna | 99045797          | 3/27/08            | 3/27/11          |
| EMCO            | 3301B        | active rod antenna                   | 2883              | 12/07              | 12/08            |
| Velleman        | 850BL        | Volt-Ohmmeter                        | TI-2              | 12/07              | 12/08            |

Cable C2: 20 ft (total) of constant-phase cable with SMA connectors: checked on May 23, 2008.

Spectrum analyzer calibration was spot checked both before and after each test.

Table 2: Data

Horizontal polarization, antenna height: 1 meter.

Frequency accuracy: 2%    Amplitude accuracy: +/- 2 dB

| Frequency<br>MHz   | Level<br>dBm | level<br>dB $\mu$ V<br>rms | Antenna<br>Factor,<br>dB | Cable<br>loss,*<br>dB | Level<br>dB $\mu$ V/m | Level<br>$\mu$ V/m | Limit at<br>3 meters,<br>$\mu$ V/m |
|--|--------------|----------------------------|--------------------------|-----------------------|-----------------------|--------------------|------------------------------------|
| transmitter's signal & harmonics: NA/200-2G Log periodic antenna |              |                            |                          |                       |                       |                    |                                    |
| 434  | -40          | 67                         | 11                       | 1                     | 79                    | 10,000             | 12,500                             |
| 868  | -78          | 29                         | 14                       | 1                     | 44                    | 160                | 1,250                              |
| EMCO 3115 Horn antenna   |              |                            |                          |                       |                       |                    |                                    |
| 1302   | -82          | 25                         | 26                       | 1                     | 52                    | 400                | 1,250                              |
| 1736   | -84          | 23                         | 29                       | 2                     | 54                    | 500                | 1,250                              |
| 2170   | -84          | 23                         | 30                       | 3                     | 56                    | 640                | 1,250                              |
| 2604   | -86          | 21                         | 30                       | 3                     | 54                    | 500                | 1,250                              |
| 3038   | -85          | 22                         | 32                       | 4                     | 58                    | 800                | 1,250                              |
| 3472   | -84          | 23                         | 33                       | 4                     | 60                    | 1,000              | 1,250                              |
| 3906   | -88          | 19                         | 34                       | 5                     | 58                    | 800                | 1,250                              |
| 4340   | -95**        | 12                         | 34                       | 5                     | 51                    | 360                | 1,250                              |
| 4774   | -95**        | 12                         | 35                       | 6                     | 53                    | 450                | 1,250                              |
| 5208   | -95**        | 12                         | 36                       | 6                     | 54                    | 500                | 1,250                              |

\*20 feet of constant-phase cable    \*\* Detection system noise.

|   |     |    |    |   |    |      |       |
|---|-----|----|----|---|----|------|-------|
| Typical ambient Signals - Biconical antenna - vertical polarization   |     |    |    |   |    |      |       |
| 20  | -80 | 27 | 14 | 0 | 31 | 40   | 1,250 |
| 58  | -80 | 27 | 10 | 0 | 37 | 70   | 1,250 |
| 66  | -40 | 67 | 10 | 0 | 77 | 7000 | 1,250 |
| 70  | -82 | 25 | 7  | 0 | 32 | 40   | 1,250 |
| Typical ambient signals- Log Periodic Antenna - Vertical polarization |     |    |    |   |    |      |       |
| 418   | -77 | 30 | 11 | 0 | 41 | 113  | 1,250 |
| 525   | -46 | 61 | 14 | 0 | 75 | 5700 | 1,250 |
| 1000  | -78 | 29 | 14 | 0 | 43 | 145  | 1,250 |

### Appendix A: Cross-reference.

As a courtesy to the reviewer, the following is a cross reference between this report and the documentation requirements of Ref. (b).

| Requirement         | Section        | Page |
|---------------------|----------------|------|
| 10.1.1              | Abstract       | 2    |
| 10.1.2              | Abstract       | 2    |
| 10.1.3              | Figure 2       | 12   |
| 10.1.4              | Table 1        | 15   |
| 10.1.5              | Table 2        | 17   |
| 10.1.6              | Section 1.1    | 5    |
| 10.1.7              | Section 3.0    | 7    |
| 10.1.8              | Table 2        | 17   |
| 10.1.8.1            | Table 2        | 17   |
| 10.1.8.2            | Table 2        | 17   |
| 10.1.8.3 - 10.1.8.9 | not applicable |      |
| 10.1.10             | Section 4.0    | 9    |
| 10.1.11             | Title page     | 1    |
| 10.1.12 - 10.1.13   | not applicable |      |