

Nebraska Center for Excellence in Electronics
4740 Discovery Drive
Lincoln, NE 68521-5376
Phone: 402.472.5880
Fax: 402.472.5881



Amendment to FCC Test Report

(Includes R041808-01-02)

Company: HEMS Technology, Inc.
3013 Saint Bartholomew Drive
Mansfield, TX 76063

Contact: Bill Melendez

Product: HEMS-TXR USB

FCC ID: WFS-TXR-USB

Test Report No: R041808-01-02A

APPROVED BY: Doug Kramer
Senior Test Engineer

A handwritten signature in black ink, appearing to read "Doug Kramer", is written over a horizontal line.

DATE: 15 October 2008

Total Pages: 39

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested. NCEE is a FCC and Industry Canada registered lab.



1.0 Summary of test results

- 1.1 Test Results
- 1.2 Test Methods
 - 1.2.1 Conducted Emissions
 - 1.2.2 Radiated Emissions

2.0 Description

- 2.1 Equipment under test
- 2.2 Laboratory description
- 2.3 Description of test modes
- 2.4 Applied standards
- 2.5 Description of support units
- 2.6 Configuration of system under test

3.0 Test equipment used

4.0 Detailed Results

- 4.1 Unique antenna requirement
- 4.2 Radiated Emissions
- 4.3 Bandwidth
- 4.4 Maximum peak output power
- 4.5 Bandedges
- 4.6 Power spectral density
- 4.7 Conducted Emissions

Appendix A – Test photos

Appendix B – Sample calculation

Appendix C – RF exposure evaluation

Appendix D – Table of figures

1.0 Summary of test results**1.1 Test Results**

The EUT has been tested according to the following specifications:

APPLIED STANDARDS: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.203	Unique Antenna Requirement	Pass	PCB Antenna
15.207	Conducted Emissions	Pass	Meets the requirement of the limit.
15.209	Radiated Emissions	Pass	Meets the requirement of the limit.
15.247(a)(2)	Minimum Bandwidth, Limit: min. 500kHz	Pass	Meets the requirement of the limit.
15.247(b)	Maximum Peak Output Power, Limit: Max. 23.9dBm	Pass	Meets the requirement of the limit.
15.247(e)	Power Spectral Density, Limit: Max. 8dBm	Pass	Meets the requirement of the limit.
15.247(d)	Band Edge Measurement, Limit: 20dB less than the peak value of fundamental frequency	Pass	Meets the requirement of the limit.

1.2 Test Methods

1.2.1 Conducted AC Emissions

The EUT was powered by 5VDC from the USB port of a laptop PC. Conducted emissions were measured from the AC input to the PC to detect if the presence of the EUT created any emissions in excess of the limits. Compliance to 47 CFR Part 15.207 was tested in accordance with the methods of ANSI/IEEE C63.4: 2003.

1.2.2 Radiated Emissions

Compliance to 47 CFR Parts 15.209 and 15.247 was tested in accordance with the methods of ANSI/IEEE C63.4: 2003. Several configurations were examined and the results presented represent a worst-case scenario. The EUT was placed on a wooden table approximately 80cm high and centered on a 4m diameter turntable. The table was rotated to find the angles of maximum emissions and the receiving antenna was moved from 1m to 4m in both vertical and horizontal positions. The EUT was tested while sitting both vertically and horizontally. The horizontal configuration produced the highest emissions, and that position was used for all radiated testing. All measurements were taken at a distance of 3m from the EUT for Part 15.209 intentional radiator measurements, and 3m for 15.247 measurements of the fundamental frequency in the 902MHz to 928MHz band and subsequent harmonics.

1.3 Reason for amendment

- KDB Publication No. 558074: 2005 was added to section 2.4
- Section 4 was modified to state the EUT was powered by 5VDC via USB
- The test description in section 4.6 was modified to indicate that the measurements were made conducted, not radiated.
- Section 4.7 was modified to include the resolution bandwidth used for conducted testing
- Section 4.2 (f) was modified to state that all results shown are worse case, and that all antenna polarizations, angles and antenna heights were examined.
- Appendix C: RF Exposure Evaluation was removed from the report. It will be supplied in a separate document

2.0 Description

2.1 Equipment under test

The HEMS USB Stick is used to allow a host computer running custom application software to control one or more HEMS220 Plug-In Power Monitor devices. The HEMS USB Stick is an integrated device housed in a plastic enclosure designed to be plugged directly into the USB port of a computer. It contains a USB-to-serial converter, power supply, a wireless transceiver, and a microcontroller.

EUT Received Date: 22 May 2008

EUT Tested Dates: 29 May 2008, 30 July 2008

PRODUCT	HEMS-TXR USB
MODULATION TYPE	FSK
RADIO TECHNOLOGY	Half-duplex RF Link
FREQUENCY RANGE	903.50 – 926.75 MHz
NUMBER OF CHANNELS	32
MAX OUTPUT POWER	12.74dBm (18.79mW)
ANTENNA TYPE	Internal
ASSOCIATED DEVICES	Dell Latitude Notebook PC

NOTE:

1. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

2.2 Laboratory description

All testing was performed at the NCEE Lincoln facility, which is a FCC and IC registered lab. This site has been fully described in previously submitted reports. Laboratory environmental conditions varied slightly throughout the tests:

Relative humidity of $45 \pm 4\%$

Temperature of $20 \pm 3^\circ$ Celsius

2.3 Description of test modes

The EUT was tested at the frequencies below:

Channel	Frequency
1	903.50
16	914.43
32	926.75

2.4 Applied standards

The EUT uses digital modulation and operates between 902 MHz and 928 MHz. It has no AC mains connection. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247) using ANSI/IEEE C63.4: 2003
FCC Part 15, Subpart C (15.209) using ANSI/IEEE C63.4: 2003
KDB Publication No. 558074: 2005

All test items have been performed and recorded as per the above standards.

2.5 Description of support units

None

2.6 Configuration of system under test

This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously and a switch was added to change between channel 1, 16 and 32.

The EUT was tested while connected to a notebook PC as specified in section 2.1.

3.0 Test equipment used

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE
Rohde & Schwarz Test Receiver	ESIB26	100037	14 August 2007
EMCO Biconilog Antenna	3142B	1647	8 Feb 2008
EMCO Horn Antenna	3115	6416	5 Feb 2008
Rohde & Schwarz LISN	ESH3-Z5	100023	6 Feb 2008

4.0 Detailed results

4.1 Unique antenna requirement

4.1.1 Standard applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.1.2 Antenna description

The antenna is internal to the EUT and not replaceable.

4.2 Radiated emissions

4.2.1 Limits for radiated emissions measurements

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.

4.2.2 Test procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The worse-case emissions were recorded, along with the height, angle and polarization of that produced the highest emission.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for peak and average detectors at frequencies above 1GHz. For peak measurements the video bandwidth

4.2.3 Deviations from test standard

No deviation.

4.2.4 Test setup

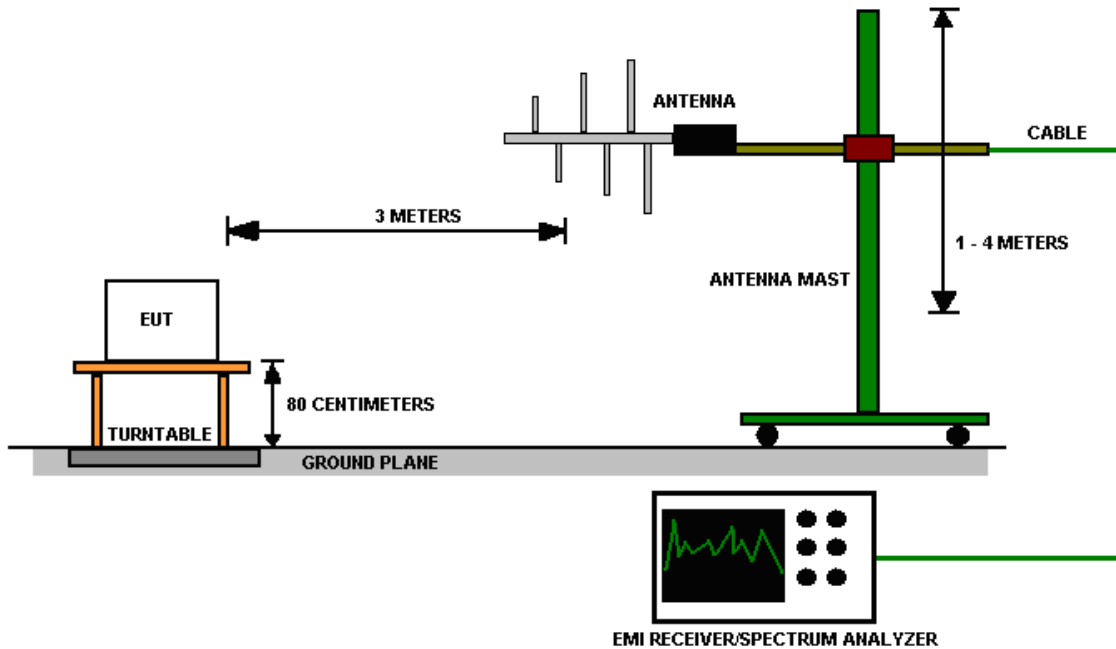


Figure 1 - Radiated Emissions Test Setup

For the actual test configuration, please refer to Appendix A for photographs of the test configuration.

4.2.5 EUT operating conditions

The EUT was powered by 5VDC from the USB port of a laptop PC.

4.2.6 Test results

EUT	HEMS-TXR USB	MODE	Channel 1
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	30MHz – 1GHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	NJohnson

Quasi-peak Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
35.28	24.20	40.00	15.80	98	145	VERT
35.52	29.92	40.00	10.10	100	252	VERT
35.76	29.44	40.00	10.60	99	127	VERT
36.54	31.80	40.00	8.20	99	220	VERT
36.60	29.76	40.00	10.20	101	28	VERT
36.96	27.80	40.00	12.20	101	239	VERT
465.96	35.62	46.00	10.40	106	134	VERT
466.02	36.26	46.00	9.70	109	134	VERT
498.18	32.26	46.00	13.70	196	233	HORI
498.78	32.72	46.00	13.30	183	234	HORI
499.08	32.16	46.00	13.80	173	225	HORI
499.74	35.70	46.00	10.30	190	248	HORI
902.56	76.52	NA*	NA*	156	213	VERT
903.24	107.99	NA*	NA*	129	168	VERT
903.78	107.46	NA*	NA*	125	178	VERT
904.92	57.96	NA*	NA*	125	174	VERT
905.82	48.08	NA*	NA*	101	65	HORI

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. *Radiated limits do not apply within the 902MHz to 928MHz band.
6. ** Radiated emissions outside of the 902MHz to 928MHz band must be at least 20dB below the highest emission

EUT	HEMS-TXR USB	MODE	Channel 16
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	30MHz – 1GHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	NJohnson

Quasi-peak Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
34.98	31.59	40.00	8.40	99	145	VERT
35.34	31.73	40.00	8.30	99	148	VERT
35.40	31.26	40.00	8.70	101	93	VERT
35.76	31.32	40.00	8.70	101	126	VERT
106.32	37.27	44.00	6.70	100	326	VERT
464.28	34.97	46.00	11.00	106	89	VERT
464.58	25.69	46.00	20.30	399	0	VERT
465.96	37.20	46.00	8.80	112	125	VERT
466.02	22.24	46.00	23.80	100	134	VERT
466.26	39.47	46.00	6.50	105	139	VERT
495.24	39.82	46.00	6.20	190	143	VERT
913.02	56.51	NA*	NA*	131	172	VERT
914.52	107.02	NA*	NA*	125	172	VERT
915.06	101.86	NA*	NA*	100	65	HORI
916.74	49.62	NA*	NA*	100	323	VERT
916.80	49.76	NA*	NA*	115	65	HORI

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. *Radiated limits do not apply within the 902MHz to 928MHz band.
6. ** Radiated emissions outside of the 902MHz to 928MHz band must be at least 20dB below the highest emission

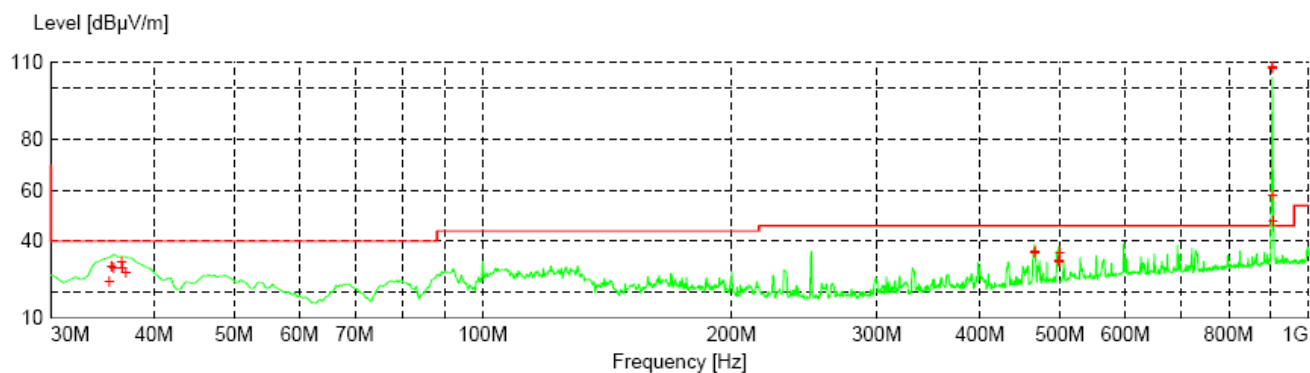
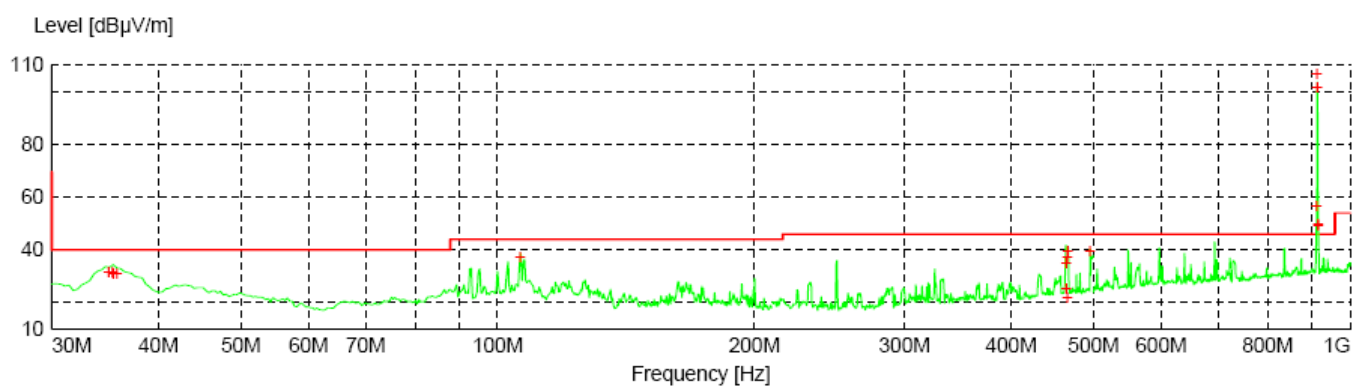
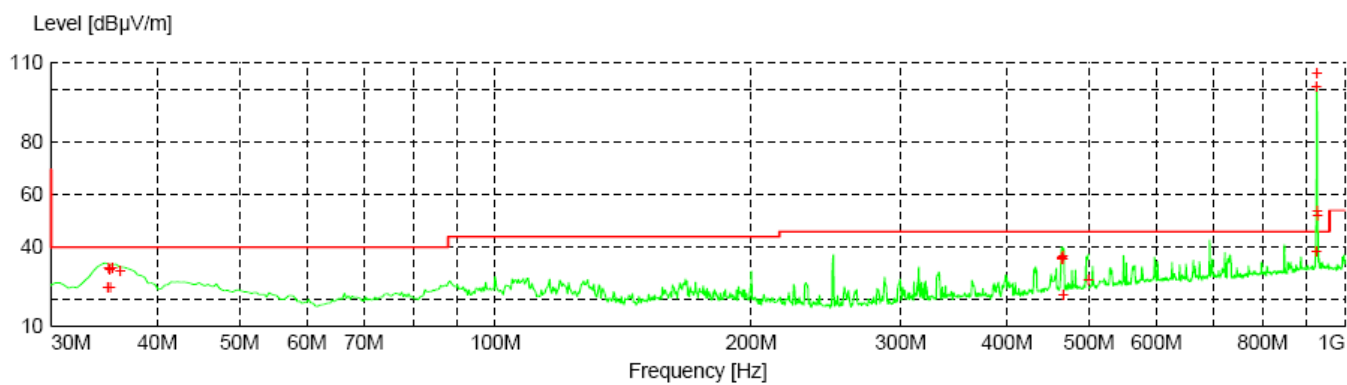
EUT	HEMS-TXR USB	MODE	Channel 32
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	30MHz – 1GHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	NJohnson

Quasi-peak Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
34.98	25.11	40.00	14.90	98	148	VERT
35.04	32.01	40.00	8.00	101	173	VERT
35.16	31.99	40.00	8.00	99	206	VERT
35.22	24.81	40.00	15.20	101	99	VERT
35.40	32.00	40.00	8.00	99	188	VERT
36.18	31.26	40.00	8.70	98	275	VERT
464.28	35.78	46.00	10.20	115	135	VERT
464.40	36.12	46.00	9.90	100	134	VERT
466.02	36.78	46.00	9.20	99	134	VERT
466.08	35.49	46.00	10.50	119	111	VERT
466.32	22.30	46.00	23.70	101	271	HORI
499.02	27.45	46.00	18.50	199	243	HORI
925.92	38.73	NA*	NA*	100	65	HORI
926.52	101.09	NA*	NA*	100	64	HORI
927.12	106.16	NA*	NA*	122	172	VERT
928.26	53.92	NA*	NA*	122	168	VERT
928.80	52.43	NA*	NA*	118	167	VERT

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. *Radiated limits do not apply within the 902MHz to 928MHz band.
6. **All emissions outside of the 902MHz to 928MHz bands are required to be 20dB below the highest emission

**Figure 2 - Radiated Emissions Plot, Channel 1****Figure 3 - Radiated Emissions Plot, Channel 16****Figure 4 - Radiated Emissions Plot, Channel 32**

EUT	HEMS-TXR USB	MODE	Channel 1
INPUT POWER	55V _{DC} via USB	FREQUENCY RANGE	1GHz – 10GHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	NJohnson

Average Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
1807.55	48.50	54.00	5.50	100	115	HOR
2711.49	17.09	54.00	36.91	100	115	HOR
3615.00	29.34	54.00	24.66	100	115	HOR
4519.00	28.44	54.00	25.56	100	115	HOR

Peak Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
1807.55	58.68	74.00	15.32	100	115	HOR
2711.49	28.14	74.00	45.86	100	115	HOR
3615.00	35.99	74.00	38.01	100	115	HOR
4519.00	34.91	74.00	39.09	100	115	HOR

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	HEMS-TXR USB	MODE	Channel 16
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	1GHz – 10GHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	Njohnson

Average Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
1807.55	48.43	54.00	5.57	100	115	HOR
2711.49	20.24	54.00	33.76	100	115	HOR
3615.00	27.89	54.00	26.11	100	115	HOR
4519.00	25.47	54.00	28.53	100	115	HOR

Peak Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
1807.55	58.68	74.00	15.32	100	115	HOR
2711.49	30.41	74.00	43.59	100	115	HOR
3615.00	34.18	74.00	39.82	100	115	HOR
4519.00	33.38	74.00	40.62	100	115	HOR

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	HEMS-TXR USB	MODE	Channel 32
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	1GHz – 10GHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	Njohnson

Average Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
1807.55	49.16	54.00	4.84	100	115	HOR
2711.49	20.49	54.00	33.51	100	115	HOR
3615.00	28.3	54.00	25.7	100	115	HOR
4519.00	22.83	54.00	31.17	100	115	HOR

Peak Measurements

Frequency	Level	Limit	Margin	Height	Angle	Pol.
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
1807.55	59.19	74.00	14.81	100	115	HOR
2711.49	30.78	74.00	43.22	100	115	HOR
3615.00	34.82	74.00	39.18	100	115	HOR
4519.00	32.49	74.00	41.51	100	115	HOR

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.3 Bandwidth

4.3.1 Limits of bandwidth measurements

The minimum 6dB bandwidth shall be at least 500kHz.

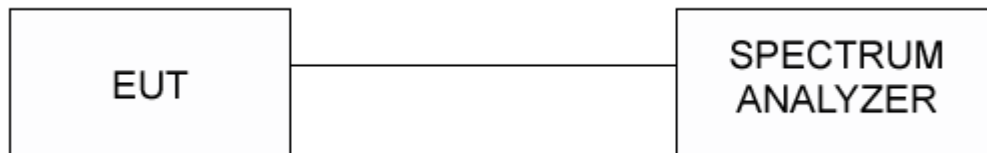
4.3.2 Test procedures

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the bandwidth of which is higher than peak power minus 6dB.

4.3.3 Deviations from test standard

No deviation.

4.3.4 Test setup



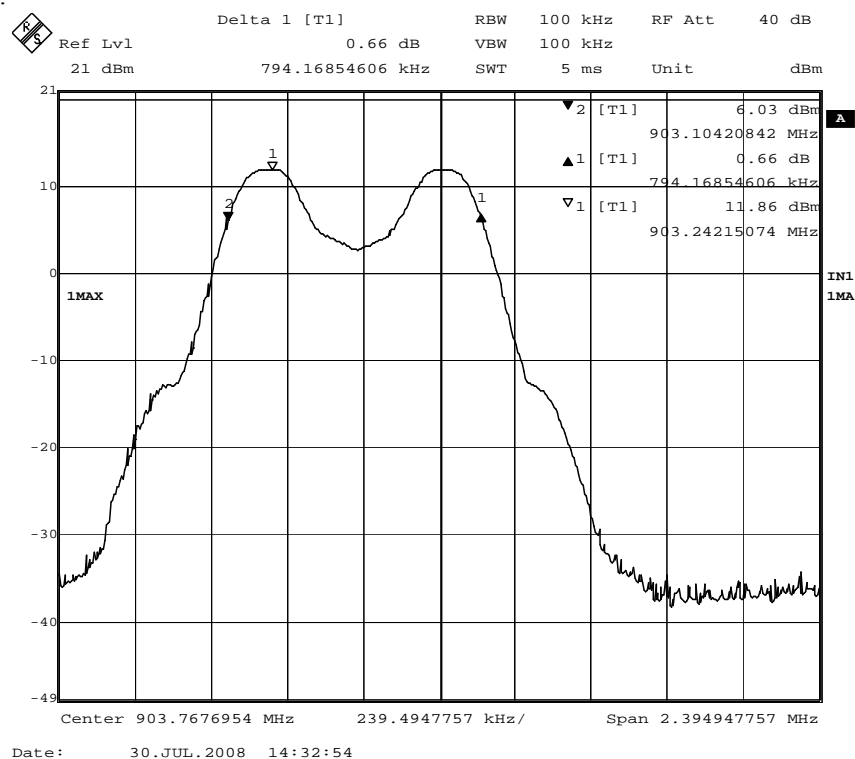
4.3.5 EUT operating conditions

The EUT was powered by 5V_{DC} via USB from a PC and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

4.3.6 Test results

EUT	HEMS-TXR USB	MODE	Channel 1, 16, 32
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	902-928MHz
ENVIRONMENTAL CONDITIONS	45% \pm 5% RH 20 \pm 3°C	TECHNICIAN	NJohnson

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BW (kHz)	6dB Min LIMIT (kHz)	RESULT
1	903.50	794.169	500.00	PASS
16	914.43	815.914	500.00	PASS
32	926.75	835.112	500.00	PASS

REMARKS:**Figure 5 - 6dB Bandwidth, Channel 1**

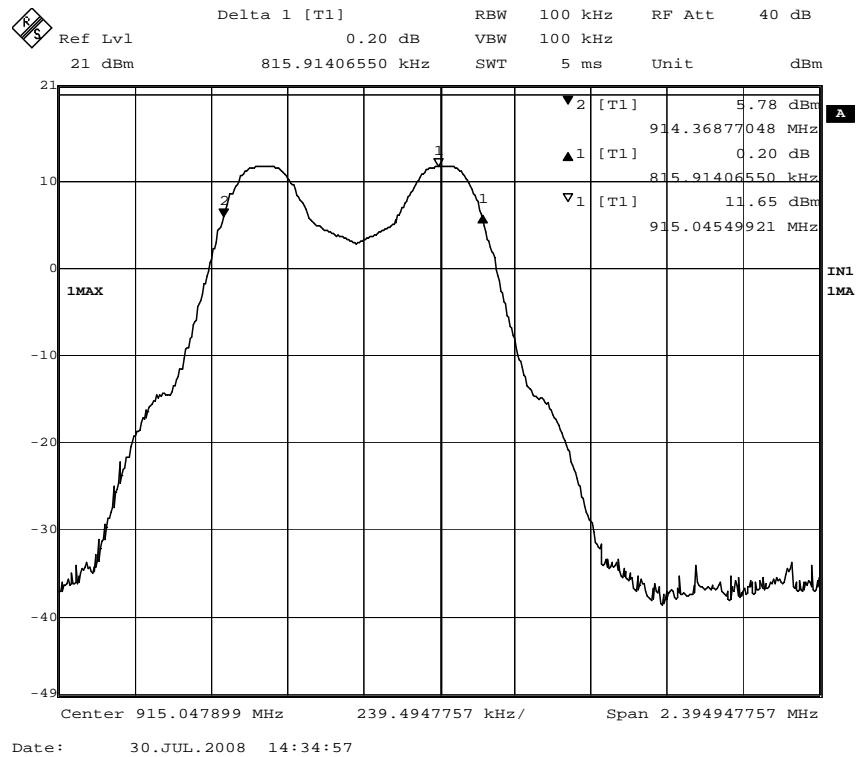


Figure 6 - 6dB Bandwidth, Channel 16

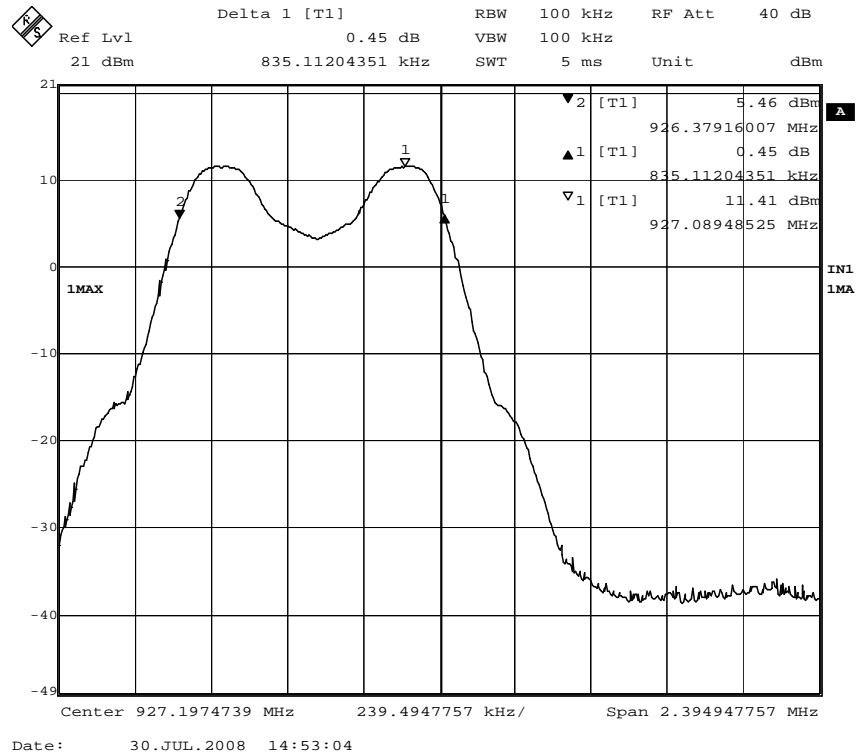


Figure 7 - 6dB Bandwidth, Channel 32

4.4 Maximum peak output power

4.4.1 Limits of power measurements

The maximum peak output power allowed is 30dBm (1000mW).

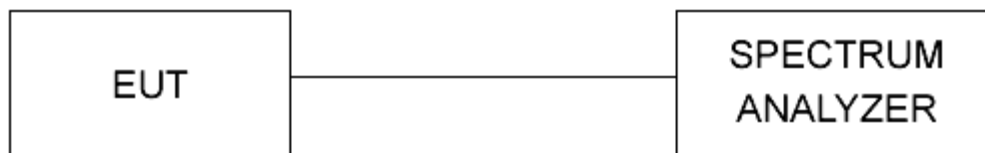
4.4.2 Test procedures

1. The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable.
2. The resolution bandwidth was set to 10MHz and the video bandwidth was set to 10MHz to capture the maximum amount of signal. The analyzer used a peak detector in max hold mode. This represented the maximum output power.

4.4.3 Deviations from test standard

No deviation.

4.4.4 Test setup



4.4.5 EUT operating conditions

The EUT was powered by 5V_{DC} via USB from a PC and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

4.4.6 Test results

EUT	HEMS-TXR USB	MODE	Channel 1, 16, 32
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	902-928MHz
ENVIRONMENTAL CONDITIONS	45% \pm 5% RH 20 \pm 3°C	TECHNICIAN	NJohnson

Maximum peak output power

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	RESULT
1	902.50	12.74	30	PASS
16	914.43	12.53	30	PASS
32	926.75	12.35	30	PASS

REMARKS:

None

4.5 Bandedges

4.5.1 Limits of bandedge measurements

For emissions outside of the allowed band of operation (902MHz – 928MHz), the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

4.5.2 Test procedures

The EUT was tested in the same method as described in section 4.2 - *Radiated emissions*. The EUT was oriented as to produce the maximum emission levels. The resolution bandwidth was set to 120kHz and the EMI receiver was used to scan from the bandedge to the fundamental frequency with a quasi-peak detector. The highest emissions level beyond the bandedge was measured and recorded. If the out of band emissions do not fall within a restricted band from 15.205, then it is required that the out of band emission be 20dB below that of the fundamental emission level. If the out of band emission falls with a restricted band from 15.205, then it is required that the emission be below the limits from 15.209.

4.5.3 Deviations from test standard

No deviation.

4.5.4 Test setup

See 4.2.4

4.5.5 EUT operating conditions

The EUT was powered by 5V_{DC} via USB from a PC and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

4.5.6 Test results

EUT	HEMS-TXR USB	MODE	Channel 1, 16, 32
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	902-928MHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	NJohnson

Highest Out of Band Emissions

CHANNEL	Band edge /Measurement Frequency (MHz)	Highest out of band level dBμV/m	Highest in band level dBμV/m	Delta	Limit (dBc)	Result
0 (903.24MHz)	902.56 MHz	76.52	107.99	-31.47	-20.00	PASS
32(927.12MHz)	928.26 MHz	53.92	106.12	-52.20	-20.00	PASS

NOTE:

EUT was tested as described in section 4.2. All measurements above were taken from section 4.2. The highest out of band measurement was maximized in a 5MHz frequency band, so the frequency may be slightly within the frequency band, but represents a worse-case scenario for all out of band measurements,

4.6 Power Spectral Density

4.6.1 Limits of PSD measurements

The maximum power spectral density allowed is 8dBm.

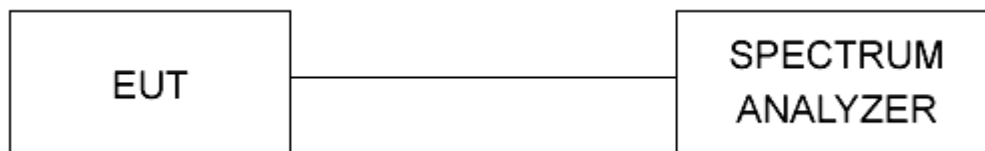
4.6.2 Test procedures

The transmitter output was connected directly to the spectrum analyzer. the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, the sweep time was 500s. The power spectral density was measured and recorded at the frequency with the highest emission. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.6.3 Deviations from test standard

No deviation.

4.6.4 Test setup



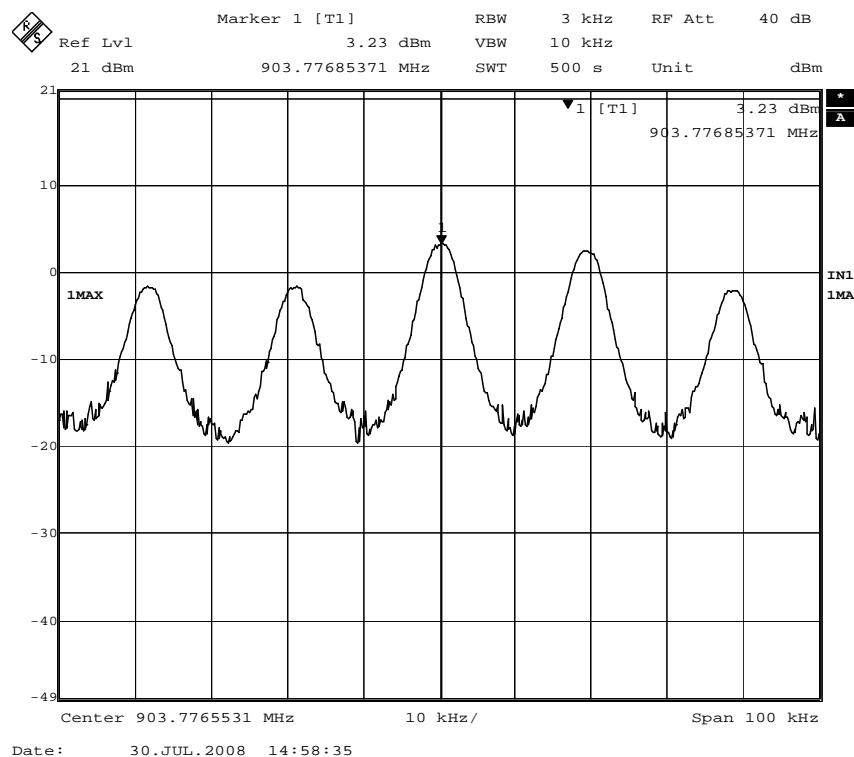
4.6.5 EUT operating conditions

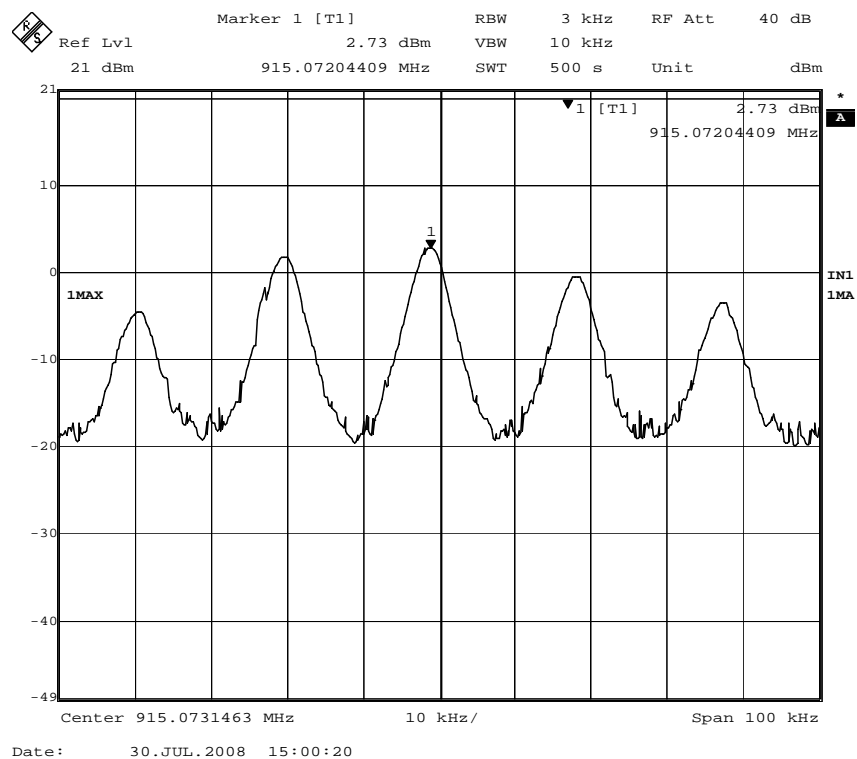
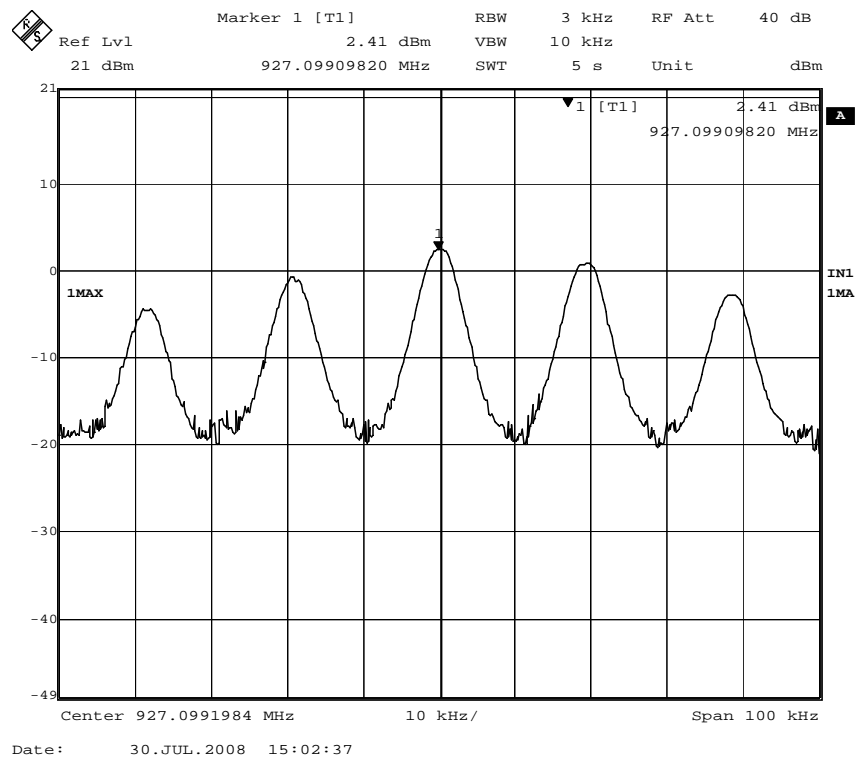
The EUT was powered by 5V_{DC} via USB from a PC and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

EUT	HEMS-TXR USB	MODE	Channel 1, 16, 32
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	902-928MHz
ENVIRONMENTAL CONDITIONS	45% \pm 5% RH 20 \pm 3°C	TECHNICIAN	NJohnson

Power Spectral Density

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN # KHz BW (dBm)	MAXIMUM POWER LIMIT (dBm)	RESULT
1	903.50	3.23	8.00	PASS
16	914.43	2.73	8.00	PASS
32	926.75	2.41	8.00	PASS

**Figure 8 - PSD, Channel 1**

**Figure 9 - PSD, Channel 16****Figure 10 - PSD, Channel 32**

4.7 Conducted AC Mains Emissions**4.7.1 Limits for conducted emissions measurements**

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.7.2 Test Procedures

- a. The EUT was tested while powered by a notebook PC and the conducted emissions from notebook PC's AC connection were measured. The EUT and notebook PC were placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with AC being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits were not be reported.
- d. A CISPR 16 compliant spectrum analyzer was used to make all measurements. The resolution bandwidth was set to 9kHz and

4.7.3 Deviation from the test standard

No deviation

4.7.4 Test setup

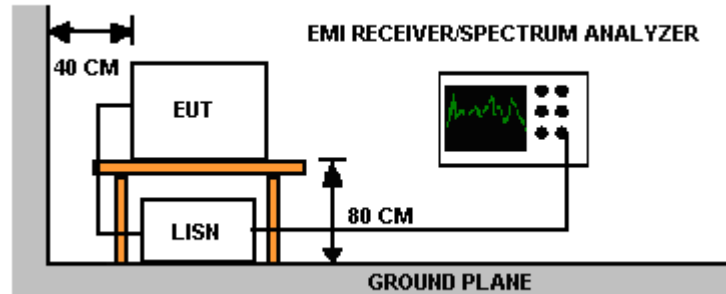


Figure 11 - Conducted Emissions Test Setup

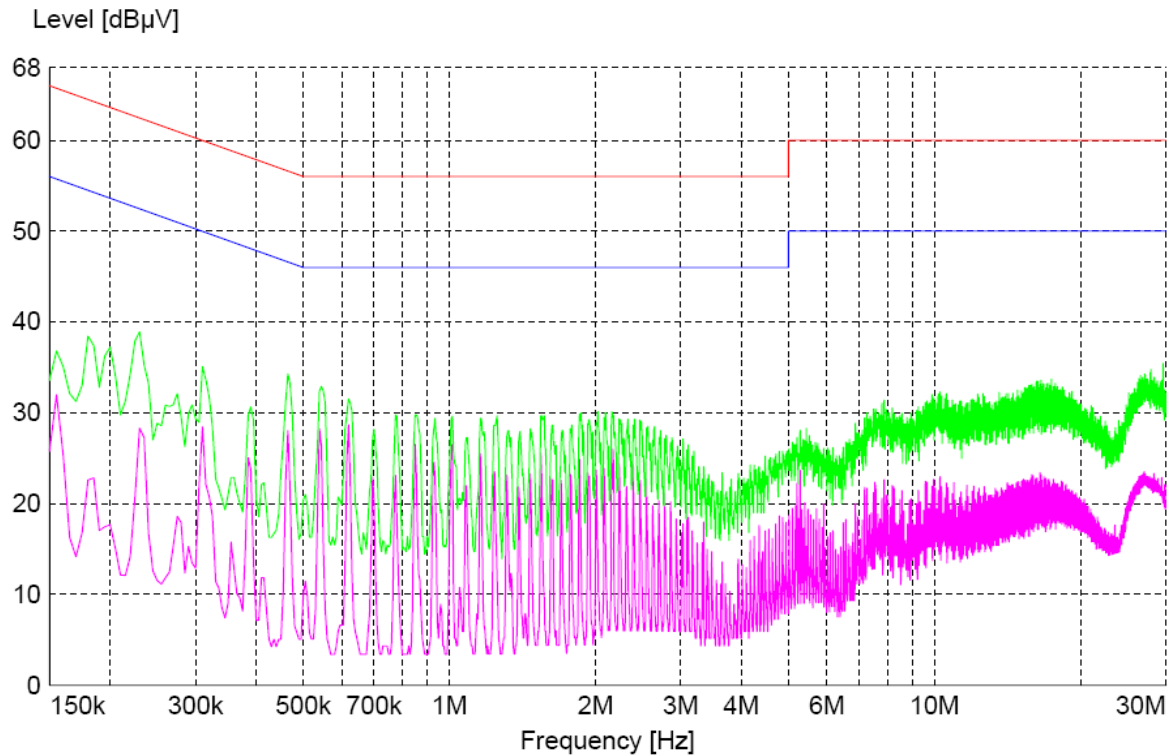
For actual test configuration, see photographs in Appendix A

4.7.5 EUT operating conditions

The EUT was powered by $5V_{DC}$ via USB from a PC and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. The conducted emissions were measured from the computer to determine if the connection of the EUT caused the emissions from the PC to become non-complaint.

4.3.6 Test Results

EUT	HEMS-TXR USB	MODE	Channel 1
INPUT POWER	5V _{DC} via USB	FREQUENCY RANGE	150kHz – 30MHz
ENVIRONMENTAL CONDITIONS	45% ± 5% RH 20 ± 3°C	TECHNICIAN	NJohnson

**Figure 12 - Conducted Emissions Plot****REMARKS:**

1. Q.P. and AV. are abbreviations for quasi-peak and average respectively.
2. All emission levels were greater than 20dB below the limit.

Appendix A: Test Photos



Figure 13 - Radiated Emissions Test Photo



Figure 14 - Conducted Emissions Test Photo

Appendix B: Sample Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{\text{on}}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

Appendix C: RF Exposure Evaluation

FCC ID: WFS-TXR-USB**RF Exposure Statement for WFS-TXR-USB:****Notice in Installation Manual:**

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 6.44cm (2.54 inches) between the radiator and your body.

RF Exposure Calculations:

The following information provides the minimum separation distances for the two major antenna types used in this system.

Directional Antenna:

The 2.4dBi antenna is the maximum gain antenna certified for use with the product. The minimum separation distance is calculated from **FCC OET 65 Appendix B, Table 1B** Guidelines for General Population/Uncontrolled Exposure. This calculation is based on the highest EIRP possible from the system, considering maximum power and antenna gain. The exposure limit for a transmitter operating at 902.5MHz is found in mW/cm² using the equations $f/1200$. Since the operating frequency for channel 0 produced the lowest limit, that limit will be used in calculation. ($902.5/1200 = 0.376 \text{ mW/cm}^2$)

$$S = (P_o * G) / (4 * \pi * r^2) \text{ or } r = \text{SQRT} [(P_o * G) / (4 * \pi * S)]$$

Where $S = 0.376 \text{ mW/cm}^2$ for 914.43 MHz

Where $P_o = 18.79 \text{ mW}$ (Peak RF, 12.74dBm)

Where $G = 1.5$ (numeric equivalent to 2.4dBi antenna gain with 0.0 dB cable loss)

Where r = Minimum Safe Distance from antenna (cm)

For $P_o = 18.79\text{mW}$, $r = 2.44\text{cm}$ (0.961 inches)

For a distance $[r]$ of 20cm from this antenna, the field density $S = 0.0056 \text{ mW/cm}^2$

Notes:

1. The minimum safe distance is based on a conservative “worst case” prediction, i.e. using the formula shown above and no duty factor. In practice the minimum distance will be much shorter. (Ref. 2)
2. The minimum safe distance has been calculated for the maximum allowed Power Density (S) limit of 0.376 mW/cm^2 for the frequency 902.5 MHz for uncontrolled environments (Ref. 2).

References:

1. FCC Part 15, sub-clause 15.247 (b) (4) (i)
2. FCC OET Bulletin 65, Edition 97-01
3. FCC Supplement C to OET Bulletin 65, edition 01-01

Appendix D: Table of Figures

Figure	Page Number
Figure 1 - Radiated Emissions Test Setup	11
Figure 2 - Radiated Emissions Plot, Channel 1	15
Figure 3 - Radiated Emissions Plot, Channel 16	15
Figure 4 - Radiated Emissions Plot, Channel 32	15
Figure 5 - 6dB Bandwidth, Channel 1	20
Figure 6 - 6dB Bandwidth, Channel 16	21
Figure 7 - 6dB Bandwidth, Channel 32	21
Figure 8 - PSD, Channel 1	27
Figure 9 - PSD, Channel 16	28
Figure 10 - PSD, Channel 32	28
Figure 11 - Conducted Emissions Test Setup	30
Figure 12 - Conducted Emissions Plot	31
Figure 13 - Radiated Emissions Test Photo	33
Figure 14 - Conducted Emissions Test Photo	33