



Test Report

Applicant: EU3C Company Limited

Address of Applicant: Unit 8, 17/F Tower 1, China Hong Kong City, 33 Canton Road,
Tsimshatsui, Kowloon, Hong Kong, P. R. China

Equipment Under Test (EUT):

EUT Name: FilmScan35 II 35mm flim scanner

Model No.: SCND502H1231

Serial No.: Not supplied by client

Standards: FCC PART15 SUBPART B: 2007

Date of Receipt: Jan. 20, 2009

Date of Test: Jan. 20, 2008-Feb. 24, 2009

Date of Issue: Mar. 1, 2009

Test Result : **PASS***

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Henly.xie / Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

All test results in this report can be traceable to National or International Standards.

The test report prepare by:

Guangzhou Huesent Testing Service Co.,Ltd.

No.91, Dongguanzhuang Road,Guangzhou,China.

Tel: 86-20-28263298 Fax: 86-20-28263237 <http://www.hst.org.cn> E-mail:hst@hst.org.cn



2. Test Summary

| Test | Test Requirement | Test Method | Class / Severity | Result |
|---|---------------------------------|--------------------|-------------------------|---------------|
| Radiated Emission (30MHz to 1GHz) | FCC PART 15, SUBPART B: 2007 | ANSI C63.4:2003 | Class B | PASS |
| Conducted Emission (150KHz to 30MHz) | FCC PART 15, SUBPART B: 2007 | ANSI C63.4:2003 | Class B | PASS |



3. Contents

TITLE PAGE

| | |
|--|-----------|
| 1. COVER PAGE..... | 1 |
| 2. TEST SUMMARY..... | 2 |
| 3. CONTENTS..... | 3 |
| 4. GENERAL INFORMATION..... | 4 |
| 4.1 CLIENT INFORMATION..... | 4 |
| 4.2 GENERAL DESCRIPTION OF E.U.T..... | 4 |
| 4.3 DETAILS OF E.U.T..... | 4 |
| 4.4 DESCRIPTION OF SUPPORT UNITS..... | 4 |
| 4.5 STANDARDS APPLICABLE FOR TESTING..... | 4 |
| 4.6 TEST LOCATION..... | 4 |
| 4.8 DEVIATION FROM STANDARDS..... | 4 |
| 4.9 ABNORMALITIES FROM STANDARD CONDITIONS..... | 4 |
| 5. EQUIPMENTS USED DURING TEST..... | 5 |
| 6. TEST RESULTS..... | 6 |
| 6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150 KHZ TO 30MHZ..... | 6 |
| 6.1.1 E.U.T. Operation..... | 6 |
| 6.1.2 Plan View of Test Setup..... | 6 |
| 6.1.3 Measurement Data..... | 6 |
| 6.2 RADIATED EMISSIONS, 30MHZ TO 1GHZ..... | 11 |
| 6.2.1 E.U.T. Operation..... | 11 |
| 6.2.2 Test Setup..... | 11 |
| 6.2.3 Measurement Data..... | 11 |
| 7. PHOTOGRAPHS..... | 16 |
| 7.1 CONDUCTED EMISSION TEST SETUP..... | 16 |
| 7.2 RADIATED EMISSION TEST SETUP..... | 18 |
| 7.3 EUT CONSTRUCTIONAL DETAILS..... | 20 |

4. General Information

4.1 Client Information

Applicant: EU3C Company Limited
Address of Applicant: Unit 8, 17/F Tower 1, China Hong Kong City, 33 Canton Road, Tsimshatsui, Kowloon, Hong Kong, P. R. China

4.2 General Description of E.U.T.

EUT Name: FilmScan35 II 35mm flim scanner
Trade Name: None
Item No.: See the model number shown on cover page.
Serial No.: Not supplied by client

4.3 Details of E.U.T.

Power Supply: AC/DC adapter, manufactory: Huoniu; model: HNB050100U; input: 100-240VAC, 50-60Hz, 0.15A Max LPS; output: 5.0VDC/1.0A.
Power Cord: 1.10m USB cable with a core.

4.4 Description of Support Units

The EUT has been tested with a Fangzheng's PC host (model: Wenxiang E630) and HP's LCD monitor (model: L1506)

4.5 Standards Applicable for Testing

The standard used was FCC PART 15, SUBPART B, CLASS B 2007

4.6 Test Location

Huesent Testing Service Ltd.
No. 91, Dongguan Zhuang Road, Guangzhou City, Guangdong Province, P.R. China
Tel: 86-20-28263298 Fax: 86-20-28263237

All tests were subcontract to the laboratory following:

CEPREI (headquarters) lab.
No.110, Dongguan Zhuang Road, Tianhe District, Guangzhou city, Guangdong Province, P.R. China
Tel: 86-20-87237178 Fax: 86-20-87236171 Email: emc@ceprei.biz
FCC- Registration No: 258518 on Mar 25, 2005

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.



5. Equipments Used during Test

| No. | Test item. | Name of Equipment's | Model/Type | Last Calibrated Date |
|------------|------------|---------------------|--------------------|----------------------|
| 1 | CE | EMI receiver | R&S ESCS 30 | 2008-6-8 |
| 2 | CE | LISN | R&S ESH2-Z5 | 2008-6-8 |
| 3 | CE | Shielded room | Lindgren 8*5*3 | 2008-6-8 |
| 4 | RE | EMI RECEIVER | R&S ESU | 2008-6-8 |
| 5 | RE | Anechoic chamber | Lindgren FACT-4 | 2008-6-8 |
| 6 | RE | Antenna | ETS-Lindgren 3142B | 2008-6-8 |
| Note: / | | | | |

6. Test Results

6.1 Conducted Emissions Mains Terminals, 150 kHz to 30MHz

Test Requirement: FCC Part 15 B
Test Method: ANSI C63.4
Class / Severity: Class B
Detector: Peak for pre-scan (9kHz Resolution Bandwidth)
Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit
Test Date: Jan. 21, 2009

6.1.1 E.U.T. Operation


Operating Environment:
Temperature: 22.0°C Humidity: 45% RH Atmospheric Pressure: 1020mBar
EUT Operation:

1. Connect the EUT via an USB cable to an AC/DC adapter or PC host in 120VAC/60Hz.
2. Pre-test the EUT work normally in three modes: previewing/ scanning/ transmit data, then select the worst case: scanning mode to measure during the whole test.


6.1.2 Plan View of Test Setup

6.1.3 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized emission were detected when Peak measurement level is over Average Limit.

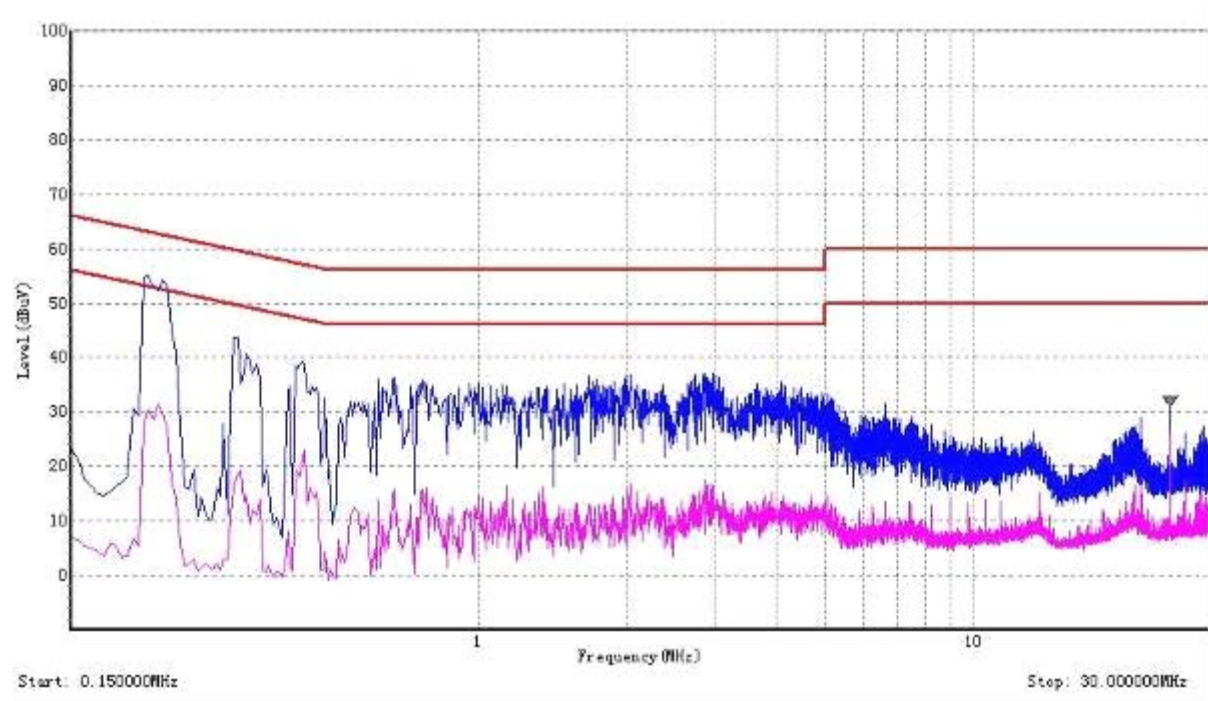Live Line, Mode: Scanning With Adapter Power Supplied
Peak Scan

Quasi-peak and Average measurement

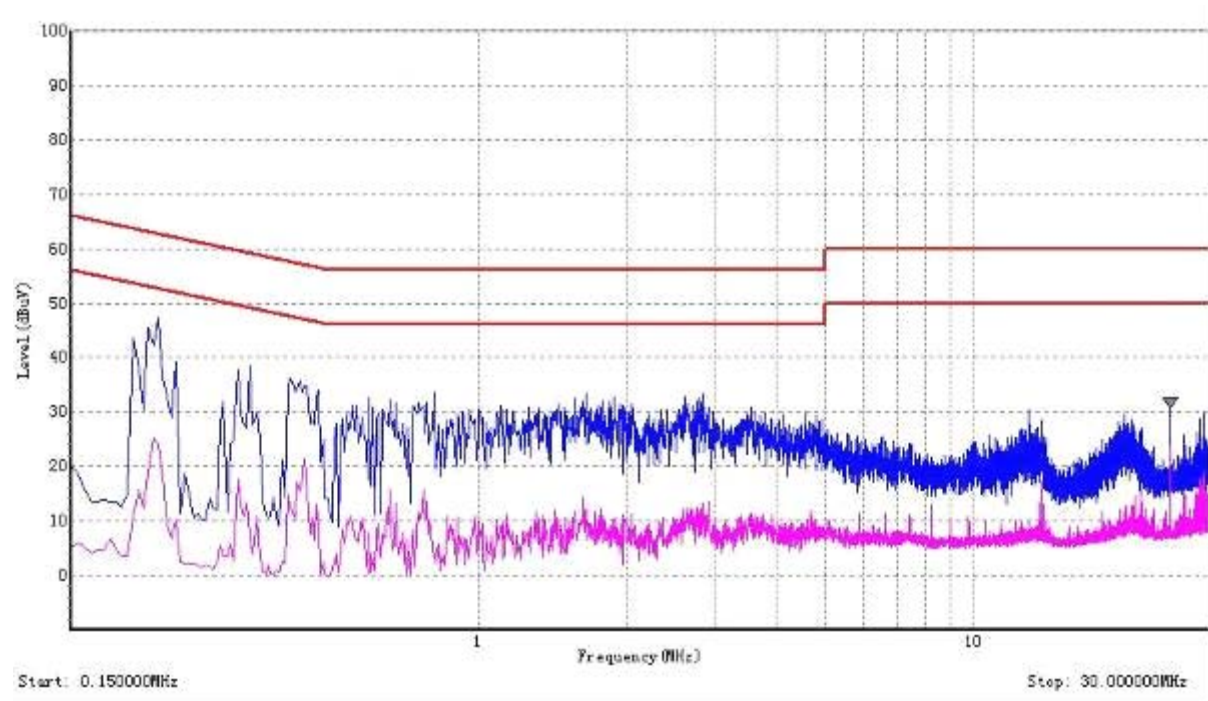
| Freq. (MHz) | Line | QP (dBμV) | Transd ucer (dB) | QP limit (dBμV) | Margin (dB) | AV (dBμV) | Transd ucer (dB) | AV limit (dBμV) | Margin (dB) |
|----------------|------|--------------|------------------------|-----------------------|----------------|--------------|------------------------|-----------------------|----------------|
| 0.215 | Live | 8.69 | 8.69 | 63.03 | -8.05 | 8.69 | 8.69 | 53.03 | -22.62 |
| 0.320 | Live | 7.04 | 7.04 | 59.73 | -16.01 | 7.04 | 7.04 | 49.73 | -33.63 |
| 0.675 | Live | 5.69 | 5.69 | 56.00 | -19.77 | 5.69 | 5.69 | 46.00 | -30.27 |
| 2.860 | Live | 6.49 | 6.49 | 56.00 | -18.96 | 6.49 | 6.49 | 46.00 | -28.29 |
| 5.125 | Live | 7.52 | 7.52 | 60.00 | -27.35 | 7.52 | 7.52 | 50.00 | -36.95 |
| 24.99 | Live | 11.46 | 11.46 | 60.00 | -28.05 | 11.46 | 11.46 | 50.00 | -24.14 |

Neutral Line, Mode: Scanning With Adapter Power Supplied
Peak Scan

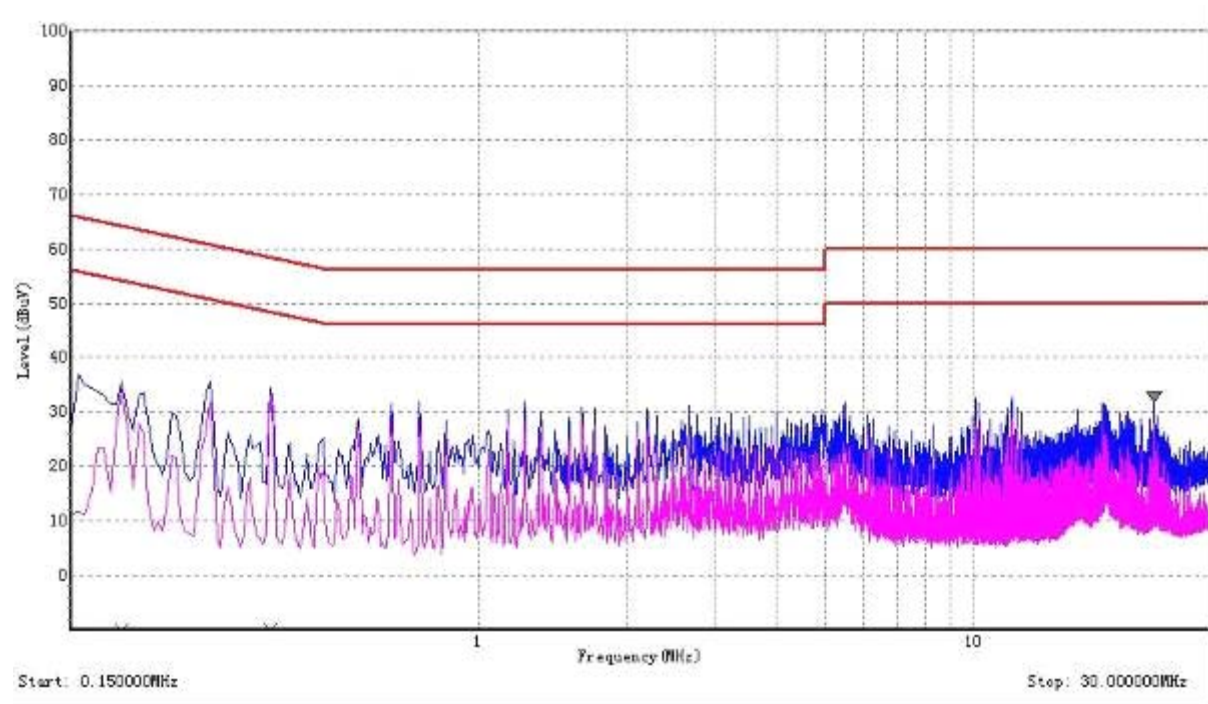Quasi-peak and Average measurement

| Freq. (MHz) | Line | QP (dBμV) | Transd ucer (dB) | QP limit (dBμV) | Margin (dB) | AV (dBμV) | Transd ucer (dB) | AV limit (dBμV) | Margin (dB) |
|----------------|---------|--------------|------------------------|-----------------------|----------------|--------------|------------------------|-----------------------|----------------|
| 0.225 | Neutral | 8.48 | 8.48 | 62.70 | -15.48 | 8.48 | 8.48 | 52.70 | -28.69 |
| 0.345 | Neutral | 6.84 | 6.84 | 59.18 | -20.68 | 6.84 | 6.84 | 49.18 | -41.77 |
| 0.785 | Neutral | 5.61 | 5.61 | 56.00 | -24.38 | 5.61 | 5.61 | 46.00 | -32.51 |
| 2.830 | Neutral | 6.47 | 6.47 | 56.00 | -22.71 | 6.47 | 6.47 | 46.00 | -35.89 |
| 12.86 | Neutral | 9.65 | 9.65 | 60.00 | -29.64 | 9.65 | 9.65 | 50.00 | -42.12 |
| 24.99 | Neutral | 11.46 | 11.46 | 60.00 | -28.39 | 11.46 | 11.46 | 50.00 | -26.27 |

Live Line, Mode: Transmitting Data with PC Host
Peak Scan

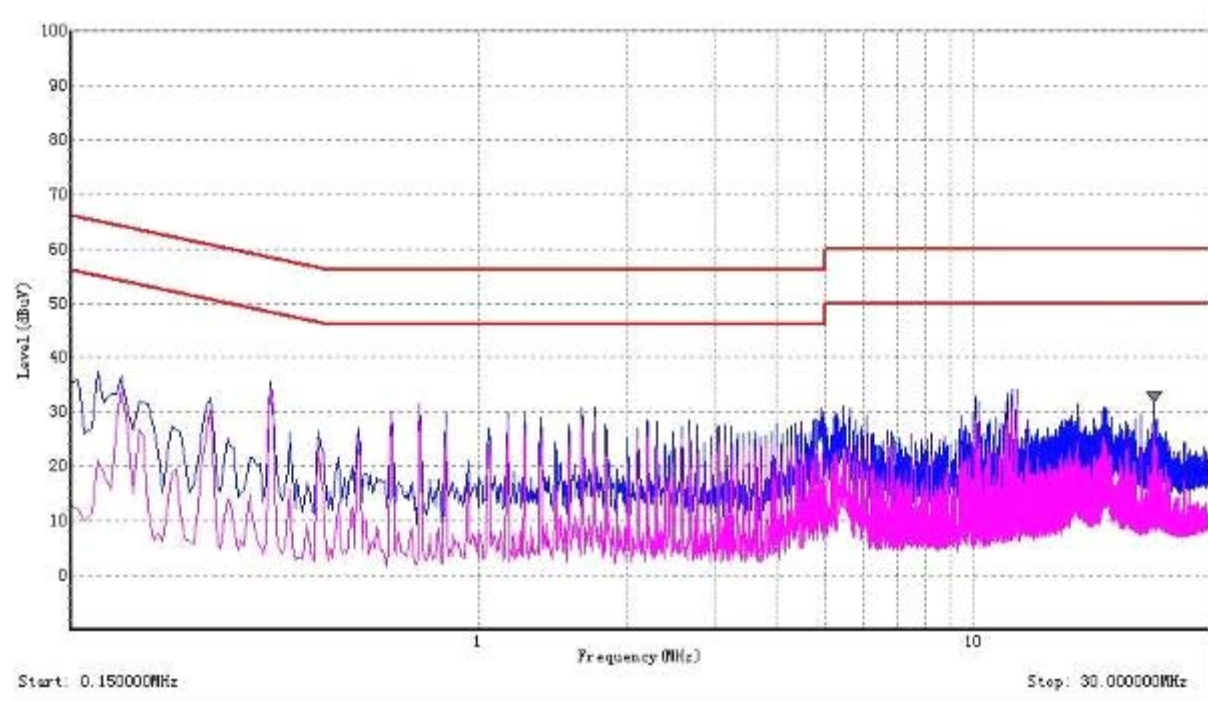Quasi-peak and Average measurement

| Freq. (MHz) | Line | QP (dBμV) | Transducer (dB) | QP limit (dBμV) | Margin (dB) | AV (dBμV) | Transducer (dB) | AV limit (dBμV) | Margin (dB) |
|----------------|------|--------------|--------------------|-----------------------|----------------|--------------|--------------------|-----------------------|----------------|
| 0.190 | Live | 9.44 | 9.44 | 64.13 | -28.57 | 9.44 | 9.44 | 54.13 | -19.97 |
| 0.380 | Live | 6.56 | 6.56 | 58.30 | -23.88 | 6.56 | 6.56 | 48.30 | -15.16 |
| 0.760 | Live | 5.62 | 5.62 | 56.00 | -24.04 | 5.62 | 5.62 | 46.00 | -16.75 |
| 1.235 | Live | 5.63 | 5.63 | 56.00 | -24.04 | 5.63 | 5.63 | 46.00 | -17.77 |
| 10.06 | Live | 9.02 | 9.02 | 60.00 | -27.58 | 9.02 | 9.02 | 50.00 | -22.27 |
| 23.13 | Live | 11.22 | 11.22 | 60.00 | -27.12 | 11.22 | 11.22 | 50.00 | -21.95 |

Neutral Line, Mode: Transmitting Data with PC Host
Peak Scan

Quasi-peak and Average measurement

| Freq. (MHz) | Line | QP (dBμV) | Transd ucer (dB) | QP limit (dBμV) | Margin (dB) | AV (dBμV) | Transd ucer (dB) | AV limit (dBμV) | Margin (dB) |
|----------------|---------|--------------|------------------------|-----------------------|----------------|--------------|------------------------|-----------------------|----------------|
| 0.190 | Neutral | 9.44 | 9.44 | 64.13 | -27.42 | 9.44 | 9.44 | 54.13 | -19.80 |
| 0.380 | Neutral | 6.56 | 6.56 | 58.30 | -22.81 | 6.56 | 6.56 | 48.30 | -13.94 |
| 0.760 | Neutral | 5.62 | 5.62 | 56.00 | -24.47 | 5.62 | 5.62 | 46.00 | -15.36 |
| 1.615 | Neutral | 5.81 | 5.81 | 56.00 | -25.04 | 5.81 | 5.81 | 46.00 | -17.62 |
| 11.96 | Neutral | 9.45 | 9.45 | 60.00 | -25.86 | 9.45 | 9.45 | 50.00 | -19.38 |
| 23.13 | Neutral | 11.22 | 11.22 | 60.00 | -27.08 | 11.22 | 11.22 | 50.00 | -22.47 |

6.2 Radiated Emissions, 30MHz to 1GHz

Test Requirement: FCC Part15 B
Test Method: ANSI C63.4
Class: Class B
Detector: Peak for pre-scan (120kHz resolution bandwidth)
Quasi-Peak if maximised peak within 6dB of limit
Test Date: Feb. 23, 2009

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22°C


Humidity: 45% RH

Atmospheric Pressure: 1020mBar

EUT Operation:

1. Connect the EUT via an USB cable to an AC/DC adapter or PC host in 120VAC/60Hz.
2. Pre-test the EUT work normally in three modes: previewing/ scanning/ transmit data, then select the worst cases: scanning mode and transmit data with PC host for final measurement during the whole test.

6.2.2 Test Setup

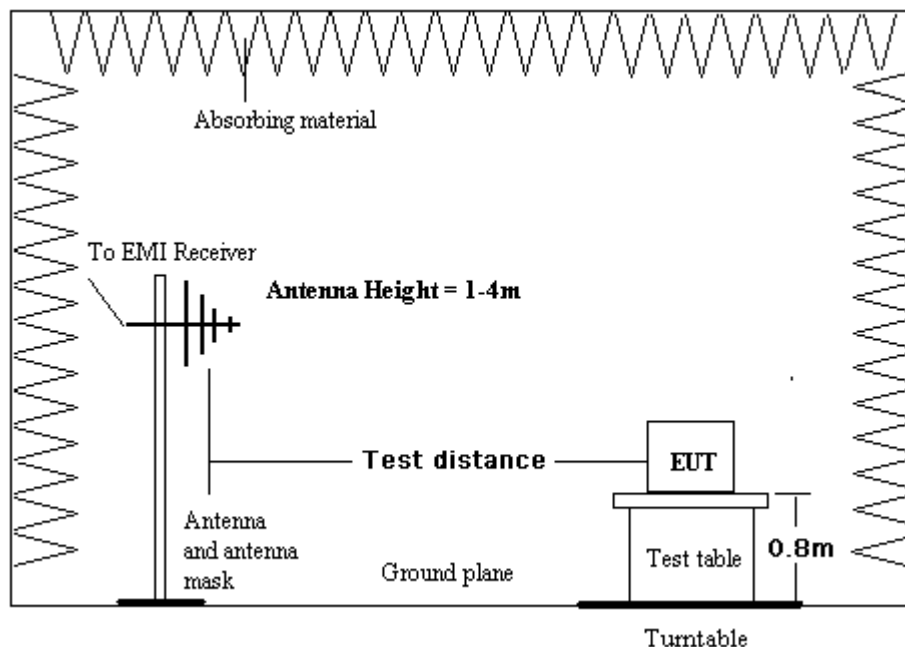


6.2.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities

Horizontal, Mode: Scanning With Adapter Power Supplied

Peak Scan

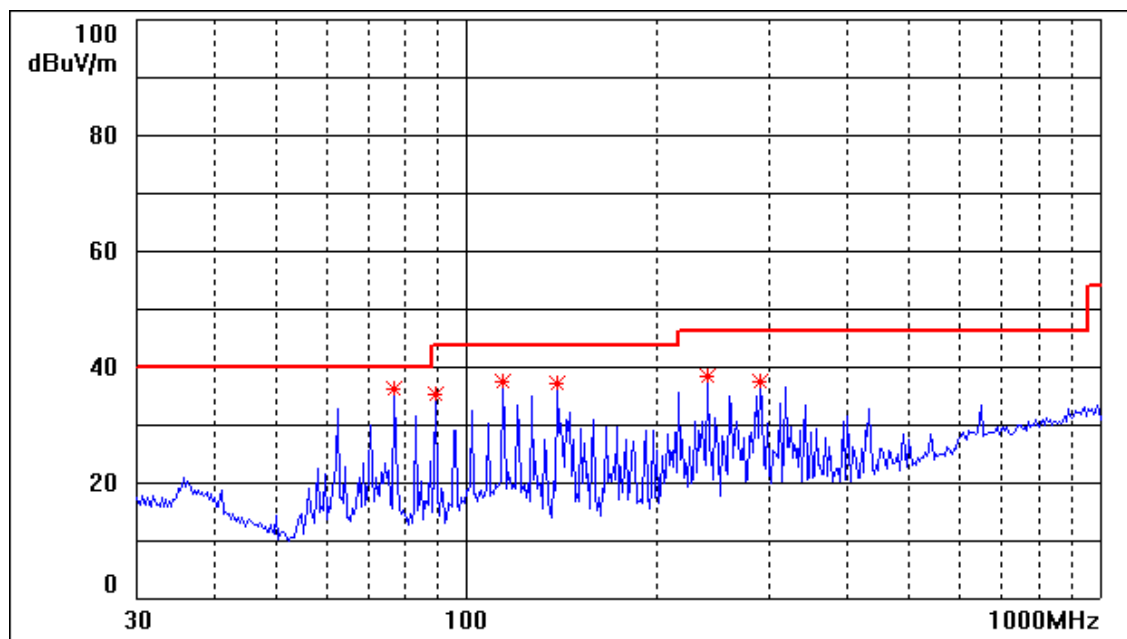

Quasi-peak measurement


| Frequency | Level | Transducer | Limit | Margin |
|-----------|--------|------------|--------|--------|
| MHz | dBuV/m | dB | dBuV/m | dB |
| 76.8 | 36.2 | 7.9 | 40 | -3.8 |
| 89.3 | 35.3 | 9.1 | 43.5 | -8.2 |
| 114.3 | 37.3 | 9.0 | 43.5 | -6.2 |
| 139.3 | 36.9 | 8.8 | 43.5 | -6.6 |
| 240.0 | 38.4 | 13.0 | 46 | -7.6 |
| 290.8 | 37.5 | 15.1 | 46 | -8.5 |

Note:

The transducer factor includes antenna factor and cable loss.

Vertical, Mode: Scanning With Adapter Power Supplied

Peak Scan

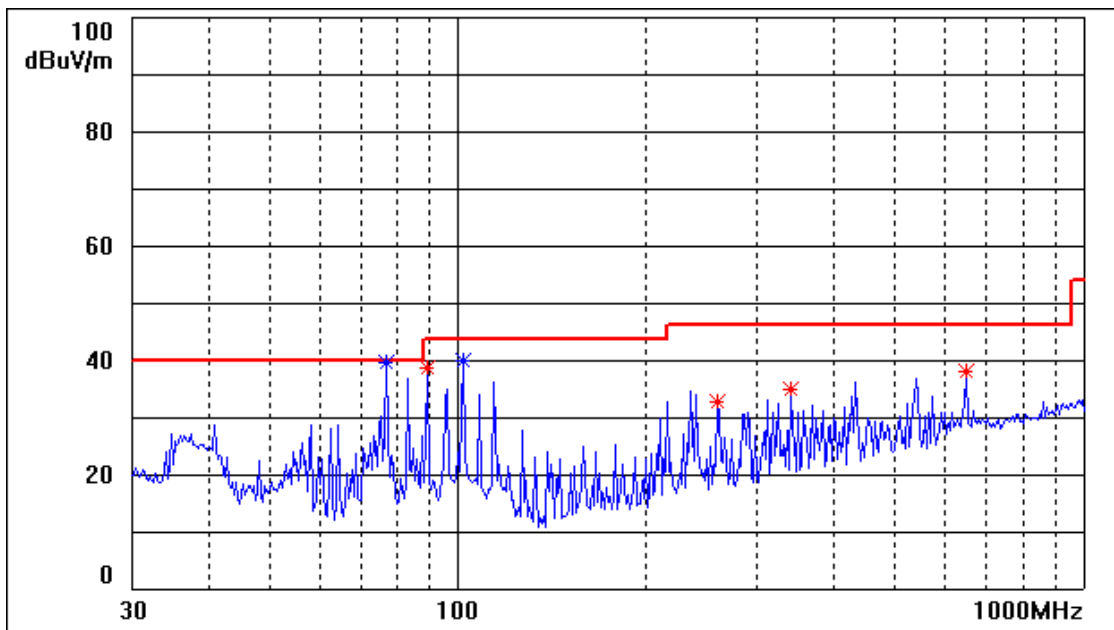

Quasi-peak measurement


| Frequency MHz | Level dBuV/m | Transducer dB | Limit dBuV/m | Margin dB |
|------------------|-----------------|------------------|-----------------|--------------|
| 76.8 | 39.4 | 7.9 | 40 | -0.6 |
| 89.3 | 38.7 | 9.1 | 43.5 | -4.8 |
| 101.8 | 40.0 | 9.6 | 43.5 | -3.5 |
| 259.8 | 32.8 | 13.7 | 46 | -13.2 |
| 340.7 | 34.9 | 16.3 | 46 | -11.1 |
| 648.1 | 38.0 | 22.6 | 46 | -8.0 |

Note:

The transducer factor includes antenna factor and cable loss.

Horizontal, Mode: Transmitting Data with PC Host

Peak Scan

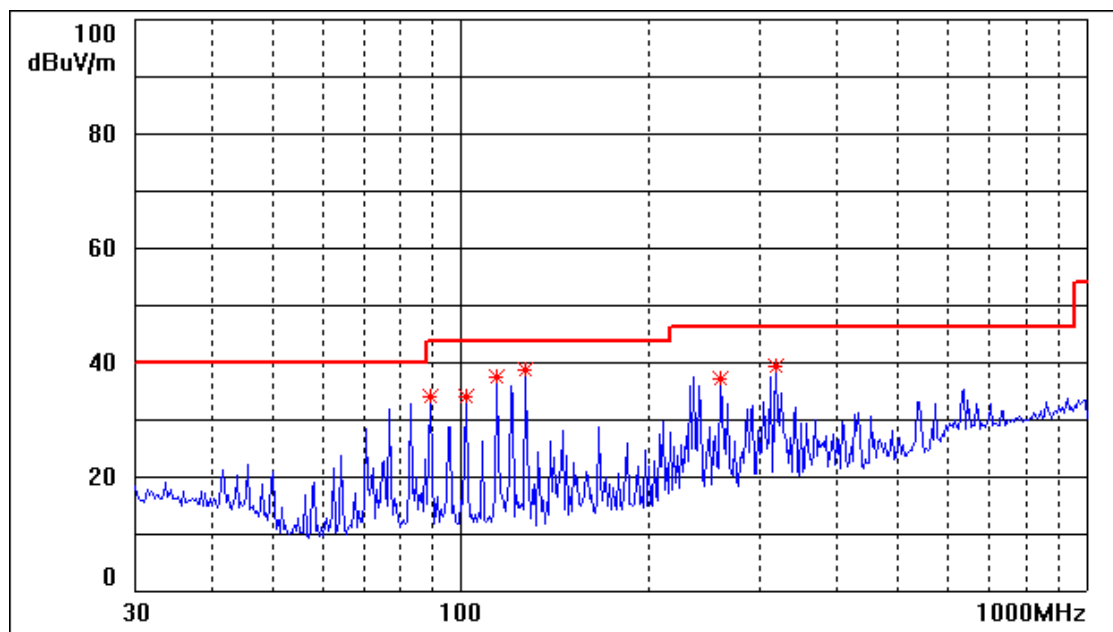

Quasi-peak measurement


| Frequency | Level | Transducer | Limit | Margin |
|-----------|--------|------------|--------|--------|
| MHz | dBuV/m | dB | dBuV/m | dB |
| 89.3 | 33.8 | 9.1 | 43.5 | -9.7 |
| 101.8 | 33.8 | 9.6 | 43.5 | -9.7 |
| 114.3 | 37.4 | 9.0 | 43.5 | -6.1 |
| 126.8 | 38.5 | 8.5 | 43.5 | -5.0 |
| 259.8 | 37.0 | 13.7 | 46 | -9.0 |
| 317.8 | 39.2 | 15.8 | 46 | -6.8 |

Note:

The transducer factor includes antenna factor and cable loss.

Vertical, Mode: Transmitting Data with PC Host

Peak Scan

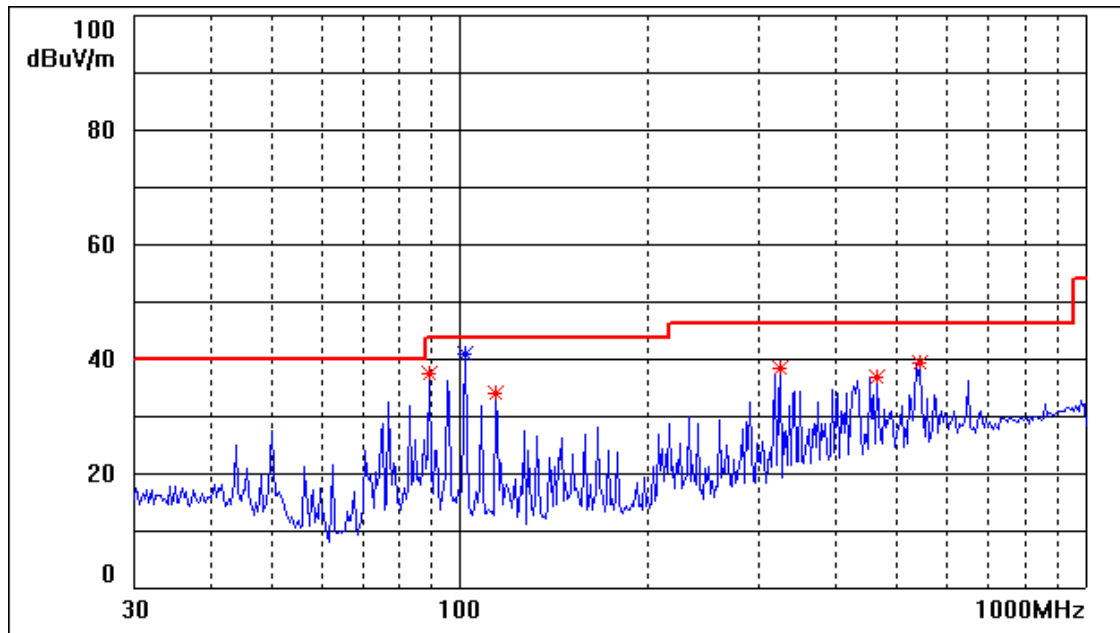

Quasi-peak measurement

| Frequency MHz | Level dBuV/m | Transducer dB | Limit dBuV/m | Margin dB |
|------------------|-----------------|------------------|-----------------|--------------|
| 89.2 | 37.5 | 9.1 | 43.5 | -6.0 |
| 101.8 | 40.9 | 9.6 | 43.5 | -2.6 |
| 114.3 | 33.8 | 9.0 | 43.5 | -9.7 |
| 324.0 | 38.2 | 15.9 | 46 | -7.8 |
| 465.3 | 36.8 | 18.9 | 46 | -9.2 |
| 542.9 | 39.3 | 20.3 | 46 | -6.7 |

Note:

The transducer factor includes antenna factor and cable loss.

7. Photographs

7.1 Conducted Emission Test Setup






7.2 Radiated Emission Test Setup





7.3 EUT Constructional Details




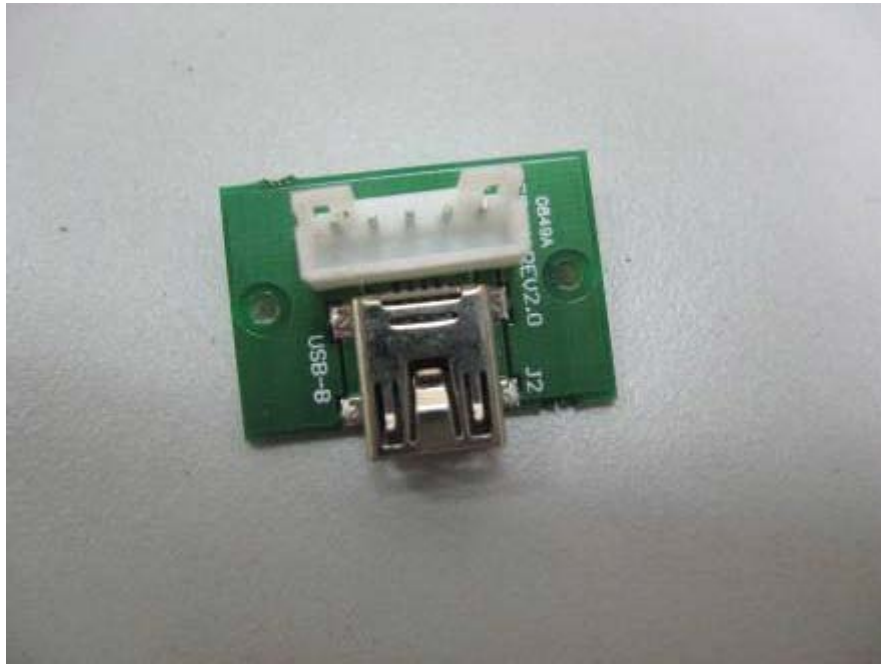










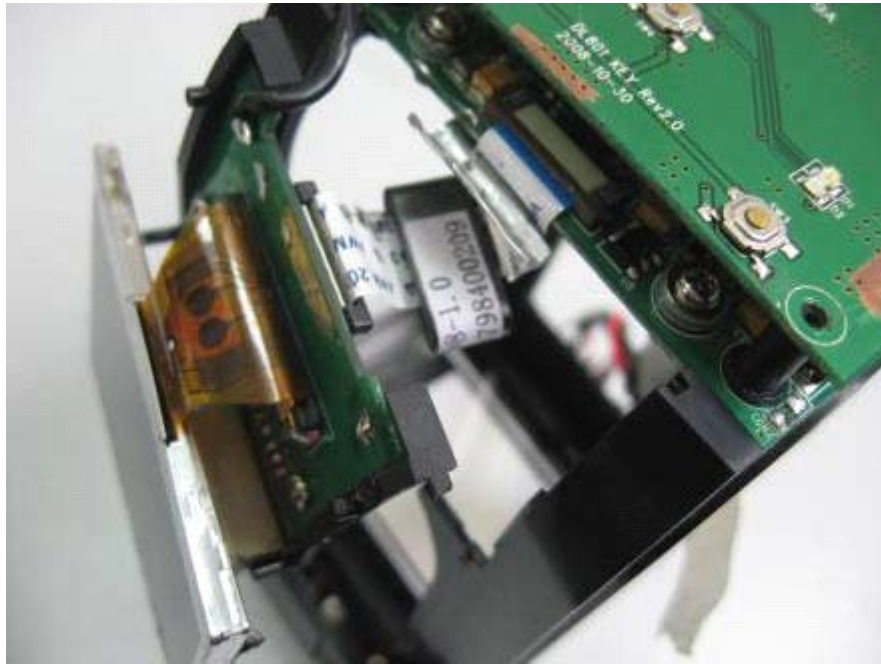

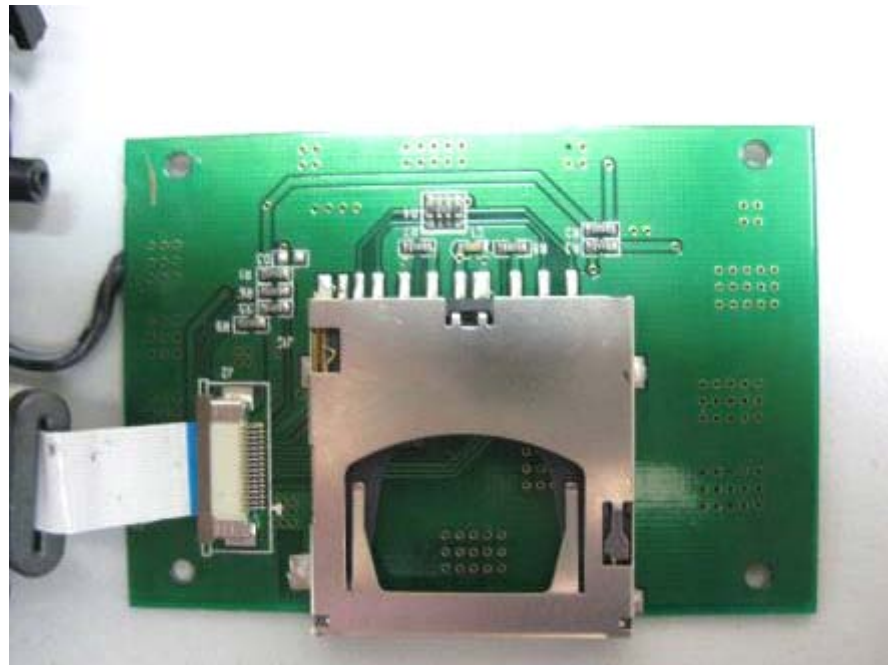


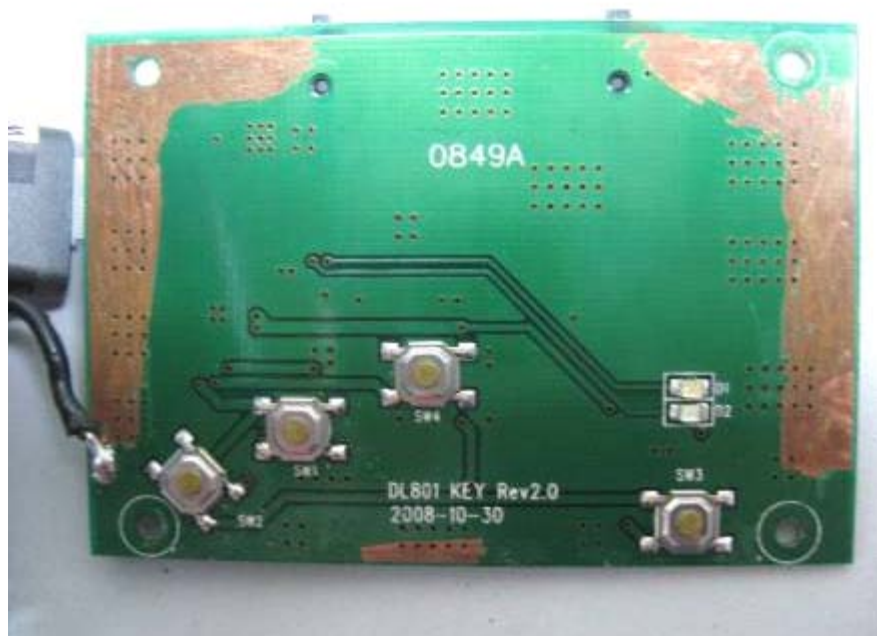




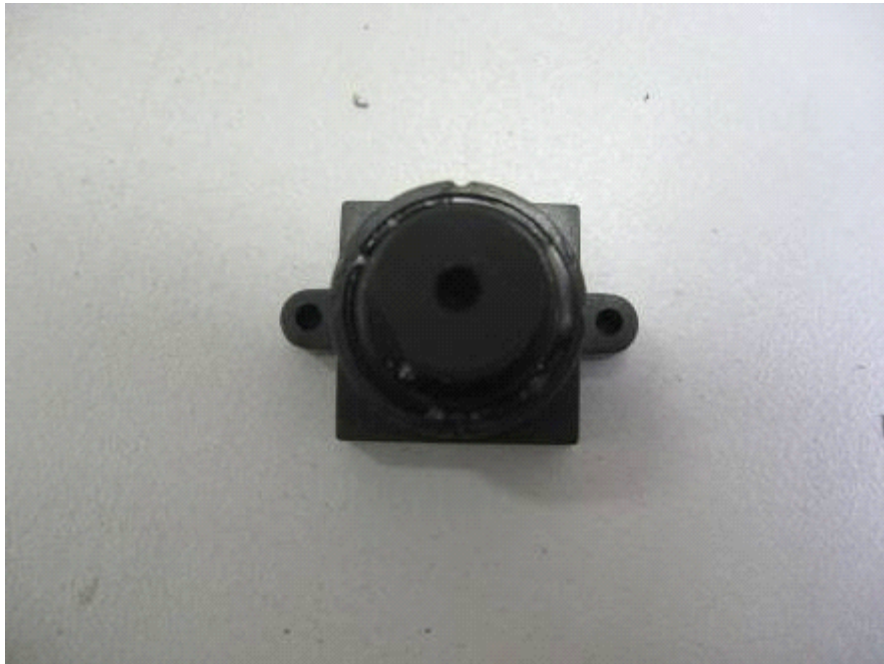




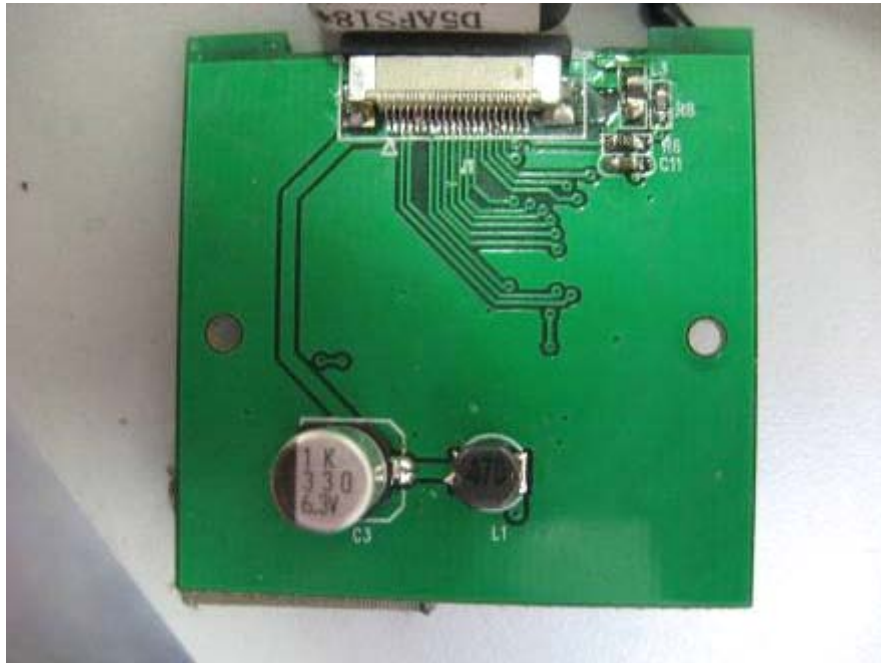



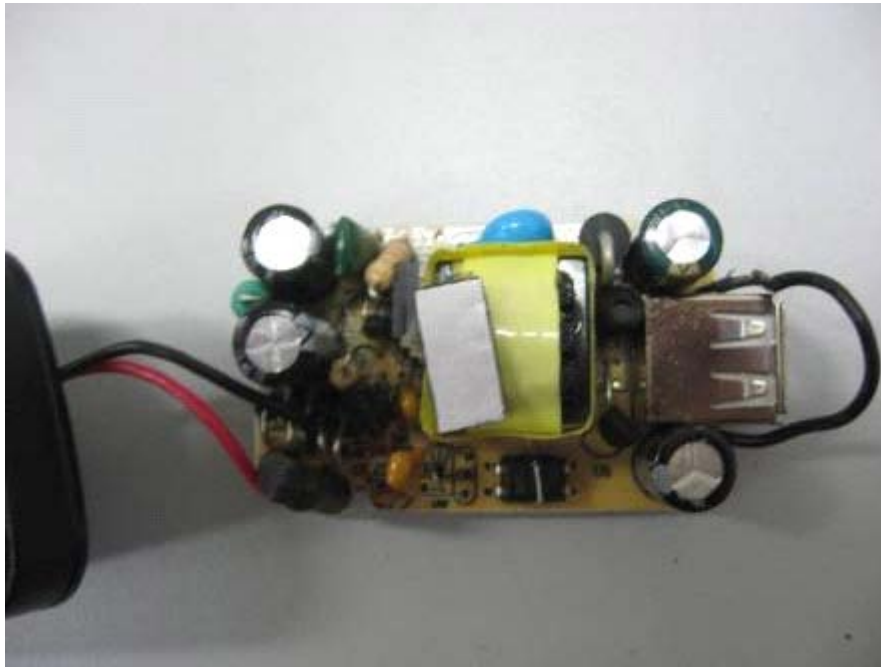

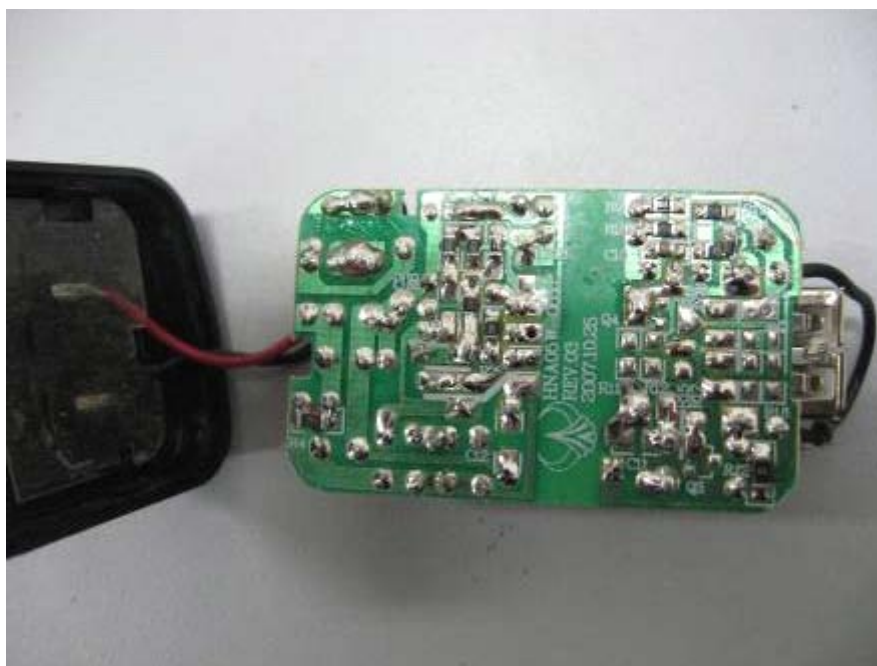

End of Report