




# RF TEST REPORT



Report No.: 14021236-FCC-R1

Supersede Report No.: N/A

Applicant	Shandong Bittel Electronics Co.,Ltd.	
Product Name	Wireless Access Point	
Main Model	Lim-AP	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	January 17 to January 22, 2015	
Issue Date	January 29, 2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Herith Shi Test Engineer	Alex Liu Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:  
SIEMIC (Nanjing-China) Laboratories  
2-1 Longcang Avenue Yuhua Economic and  
Technology Development Park, Nanjing, China  
Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	14021236-FCC-R1
Page	3 of 56

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	8
6.1 RF EXPOSURE.....	8
6.2 ANTENNA REQUIREMENT .....	9
6.3 DTS (6 DB&20 DB) CHANNEL BANDWIDTH .....	10
6.4 MAXIMUM OUTPUT POWER .....	21
6.5 POWER SPECTRAL DENSITY .....	27
6.6 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS .....	33
6.7 AC POWER LINE CONDUCTED EMISSIONS.....	37
6.8 RADIATED SPURIOUS EMISSIONS.....	40
ANNEX A. TEST INSTRUMENT .....	43
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....	44
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	52
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	55
ANNEX E. DECLARATION OF SIMILARITY .....	56

Test Report No.	14021236-FCC-R1
Page	5 of 56

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
14021236-FCC-R1	NONE	Original	January 29, 2015

## 2. Customer information

Applicant Name	Shandong Bittel Electronics Co.,Ltd.
Applicant Add	No.1 N. Rizhao Rd., Rizhao,Shandong,China
Manufacturer	Shandong Bittel Electronics Co.,Ltd.
Manufacturer Add	No.1 N. Rizhao Rd., Rizhao,Shandong,China

## 3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

#### 4. Equipment under Test (EUT) Information

Description of EUT:	Wireless Access Point
Main Model:	Lim-AP
Serial Model:	N/A
Date EUT received:	December 31, 2014
Test Date(s):	January 17 to January 22, 2015
Conducted AV Power (dBm)	802.11b:17.54 dBm(ANT2#) 802.11g:15.02 dBm(ANT2#) 802.11n(20M):15.04 dBm(ANT2#) 802.11n(40M):15.31 dBm(ANT2#) 802.11n(20M):16.55 dBm(MIMO) 802.11n(40M):16.95 dBm(MIMO)
Antenna Gain:	WIFI ANT1#: 3 dBi WIFI ANT2#: 3 dBi
Type of Modulation:	802.11b/g/n: DSSS/OFDM
RF Operating Frequency (ies):	802.11b/g/n(20M): 2412-2462 MHz(TX/RX) 802.11n(40M): 2422-2452 MHz (TX/RX)
Number of Channels:	802.11b/g/n(20M): 11CH 802.11n(40M): 7CH
Port:	RJ45 Port *2
Input Power:	Power Supply By 48V 500mA POE
Trade Name :	Limark
FCC ID:	WI6LIM-AP

## 5. Test Summary

The product was tested in accordance with the following specifications.  
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 15.247 (i), §2.1091	RF Exposure	Compliance
§ 15.203	Antenna Requirement	Compliance
§ 15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§ 15.247(b)(3)	Conducted Maximum Output Power	Compliance
§ 15.247(e)	Power Spectral Density	Compliance
§ 15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§ 15.207 (a),	AC Power Line Conducted Emissions	Compliance
§ 15.205, §15.209, § 15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

## 6. Measurements, Examination And Derived Results

### 6.1 RF Exposure

The EUT is a mobile device, thus requires thus requires RF exposure evaluation;  
please refer to RF EXPOSURE REPORT: 14021236-FCC-H1.



## 6.2 Antenna Requirement

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules.

§15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### Antenna Connector Construction

The antenna is up to ANTENNA REQUIREMENT.

Result: Compliance.

### 6.3 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 22, 2015
Tested By :	Herith Shi

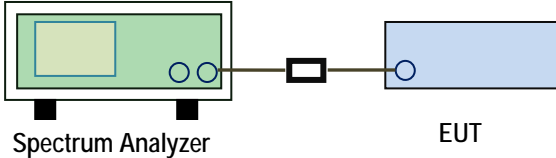Spec	Item	Requirement	Applicable
§ 15.247(a)(2) RSS Gen (4.6.1)	a)	6dB BW≥500kHz;	<input checked="" type="checkbox"/>
	b)	20dB BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r02, 8.1 DTS bandwidth</p> <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set RBW = 100 kHz.</li> <li>- Set the video bandwidth (VBW) ≥ 3 x RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> </ul> <p>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p> <p><u>20dB bandwidth</u></p> <p>C63.10 Occupied Bandwidth (OBW=20dB bandwidth)</p> <ul style="list-style-type: none"> <li>- Set RBW = 1%-5% OBW.</li> <li>- Set the video bandwidth (VBW) ≥ 3 x RBW.</li> <li>- Set the span range between 2 times and 5 times of the OBW.</li> <li>- Sweep time=Auto, Detector=PK, Trace=Max hold.</li> <li>- Once reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB level with respect to the reference level.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A		
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A		

### 6dB Bandwidth (ANT1#) measurement result

Type	Test mode	CH	Freq (MHz)	Result (MHz)	Limit (MHz)	Result
6dB BW	802.11b	Low	2412	10.20	$\geq 0.5$	Pass
		Mid	2437	10.20	$\geq 0.5$	Pass
		High	2462	10.20	$\geq 0.5$	Pass
	802.11g	Low	2412	16.62	$\geq 0.5$	Pass
		Mid	2437	16.68	$\geq 0.5$	Pass
		High	2462	16.62	$\geq 0.5$	Pass
	802.11n(20M)	Low	2412	17.88	$\geq 0.5$	Pass
		Mid	2437	17.88	$\geq 0.5$	Pass
		High	2462	17.88	$\geq 0.5$	Pass
	802.11n(40M)	Low	2422	36.72	$\geq 0.5$	Pass
		Mid	2437	36.72	$\geq 0.5$	Pass
		High	2452	36.72	$\geq 0.5$	Pass

### 6dB Bandwidth (ANT2#) measurement result

Type	Test mode	CH	Freq (MHz)	Result (MHz)	Limit (MHz)	Result
6dB BW	802.11b	Low	2412	10.20	$\geq 0.5$	Pass
		Mid	2437	10.20	$\geq 0.5$	Pass
		High	2462	10.20	$\geq 0.5$	Pass
	802.11g	Low	2412	16.56	$\geq 0.5$	Pass
		Mid	2437	16.62	$\geq 0.5$	Pass
		High	2462	16.62	$\geq 0.5$	Pass
	802.11n(20M)	Low	2412	17.88	$\geq 0.5$	Pass
		Mid	2437	17.88	$\geq 0.5$	Pass
		High	2462	17.82	$\geq 0.5$	Pass
	802.11n(40M)	Low	2422	36.72	$\geq 0.5$	Pass
		Mid	2437	36.72	$\geq 0.5$	Pass
		High	2452	36.72	$\geq 0.5$	Pass

### 20 dB Bandwidth (ANT1#) measurement result


Type	Test mode	CH	Freq (MHz)	Result (MHz)	Limit (MHz)	Result
20dB BW	802.11b	Low	2412	16.32	$\geq 0.5$	Pass
		Mid	2437	16.26	$\geq 0.5$	Pass
		High	2462	16.26	$\geq 0.5$	Pass
	802.11g	Low	2412	20.34	$\geq 0.5$	Pass
		Mid	2437	19.98	$\geq 0.5$	Pass
		High	2462	20.34	$\geq 0.5$	Pass
	802.11n(20M)	Low	2412	21.60	$\geq 0.5$	Pass
		Mid	2437	21.28	$\geq 0.5$	Pass
		High	2462	21.36	$\geq 0.5$	Pass
	802.11n(40M)	Low	2422	42.00	$\geq 0.5$	Pass
		Mid	2437	41.88	$\geq 0.5$	Pass
		High	2452	41.88	$\geq 0.5$	Pass

### 20 dB Bandwidth (ANT2#) measurement result

Type	Test mode	CH	Freq (MHz)	Result (MHz)	Limit (MHz)	Result
20dB BW	802.11b	Low	2412	16.40	$\geq 0.5$	Pass
		Mid	2437	16.40	$\geq 0.5$	Pass
		High	2462	16.40	$\geq 0.5$	Pass
	802.11g	Low	2412	19.76	$\geq 0.5$	Pass
		Mid	2437	20.16	$\geq 0.5$	Pass
		High	2462	20.00	$\geq 0.5$	Pass
	802.11n(20M)	Low	2412	21.36	$\geq 0.5$	Pass
		Mid	2437	20.88	$\geq 0.5$	Pass
		High	2462	21.36	$\geq 0.5$	Pass
	802.11n(40M)	Low	2422	42.36	$\geq 0.5$	Pass
		Mid	2437	41.52	$\geq 0.5$	Pass
		High	2452	41.40	$\geq 0.5$	Pass


## Test Plots

### 6dB Bandwidth (ANT1#) measurement result

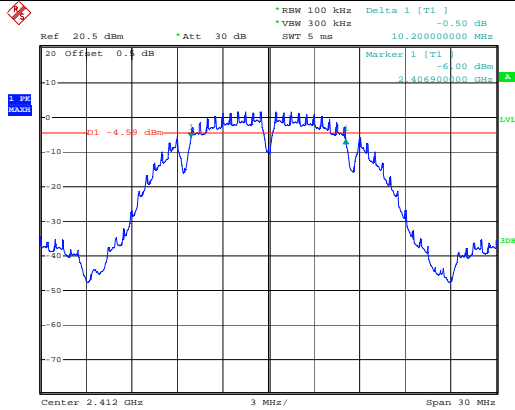


Date: 22.JAN.2015 09:02:16

6dB Bandwidth - Low CH 2412 - 802.11b-(ANT1#)

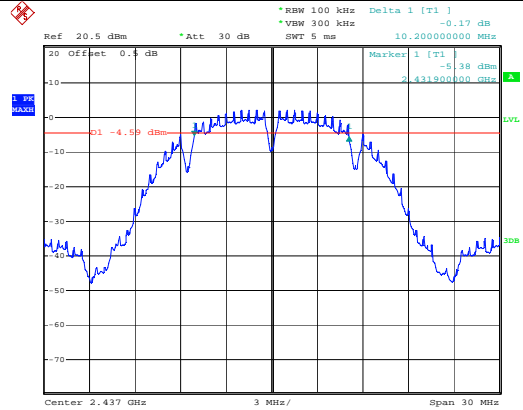


Date: 22.JAN.2015 09:04:22

6dB Bandwidth - Mid CH 2437 - 802.11b-(ANT1#)

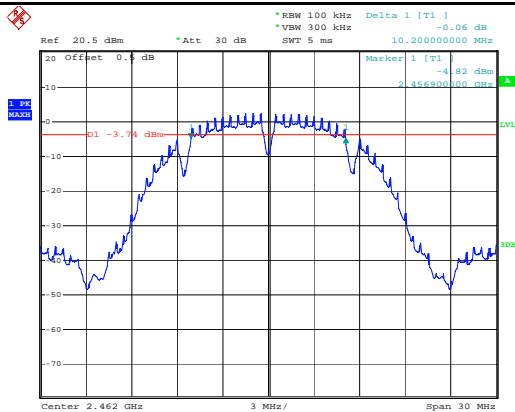


Date: 22.JAN.2015 09:08:41

6dB Bandwidth - High CH 2462 - 802.11b-(ANT1#)

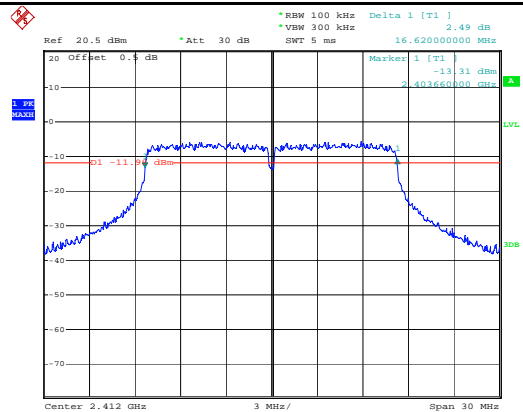


Date: 22.JAN.2015 09:11:34

6dB Bandwidth - Low CH 2412 - 802.11g-(ANT1#)

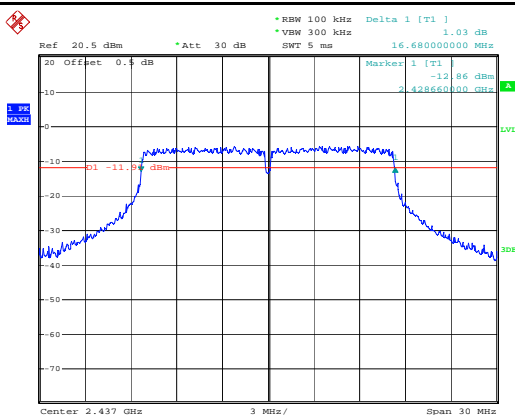


Date: 22.JAN.2015 09:13:59

6dB Bandwidth - Mid CH 2437 - 802.11g-(ANT1#)

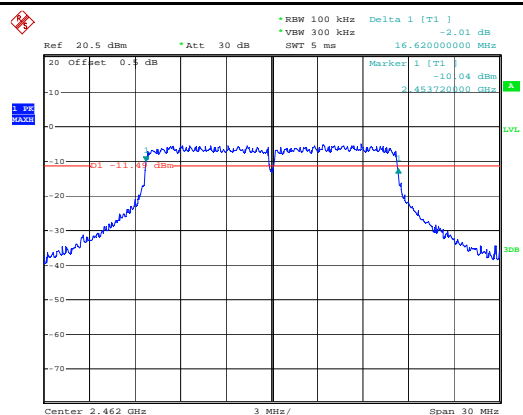


Date: 22.JAN.2015 09:15:18

6dB Bandwidth - High CH 2462 - 802.11g-(ANT1#)

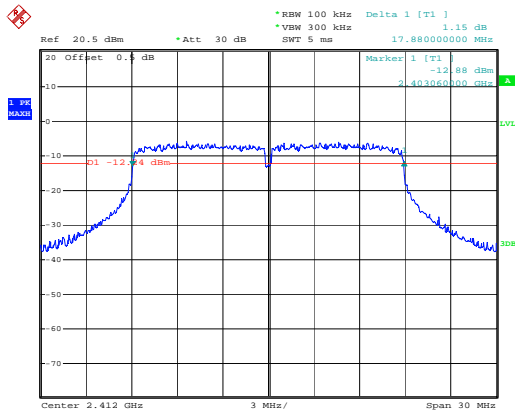


Date: 22.JAN.2015 09:18:01

6dB Bandwidth - Low CH 2412 - 802.11n(20M)-(ANT1#)

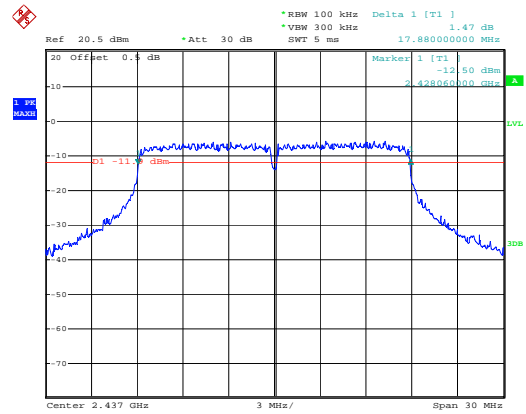


Date: 22.JAN.2015 09:19:18

6dB Bandwidth - Mid CH 2437 - 802.11n(20M)-(ANT1#)

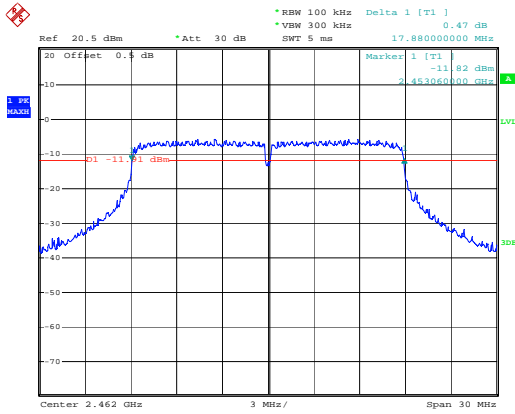


Date: 22.JAN.2015 09:20:55

6dB Bandwidth - High CH 2462 - 802.11 n(20M)-(ANT1#)

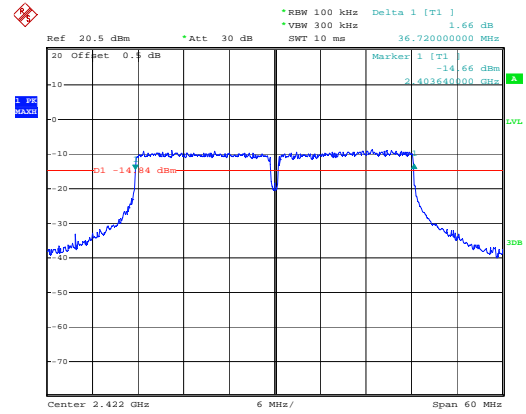


Date: 22.JAN.2015 09:26:33

6dB Bandwidth - Low CH 2422 - 802.11n(40M)-(ANT1#)

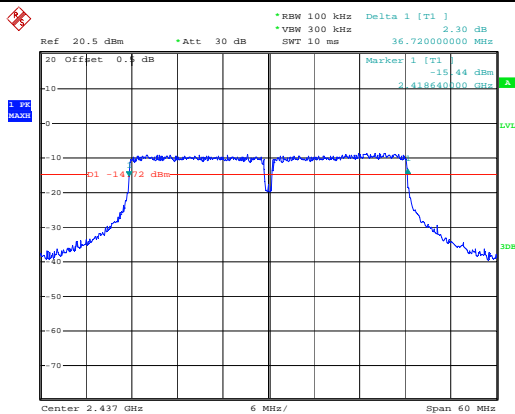

Date: 22.JAN.2015 09:30:37


6dB Bandwidth - Mid CH 2437 - 802.11n(40M)-(ANT1#)

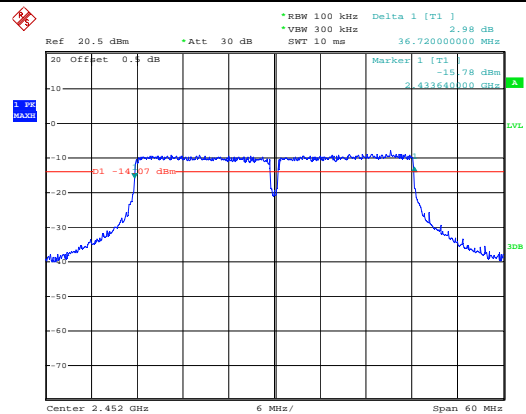

Date: 22.JAN.2015 09:33:59


6dB Bandwidth - Mid CH 2452 - 802.11n(40M)-(ANT1#)

## 6dB Bandwidth (ANT2#) measurement result

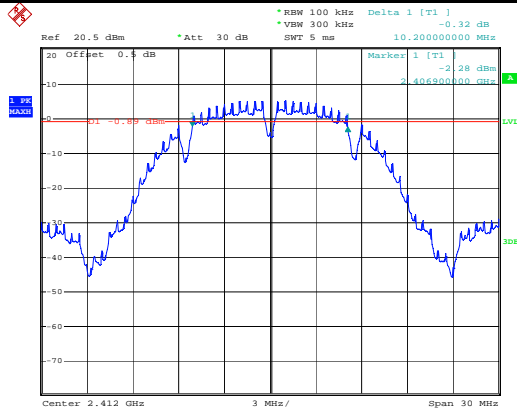


Date: 22.JAN.2015 09:37:15

6dB Bandwidth - Low CH 2412 - 802.11b-(ANT2#)

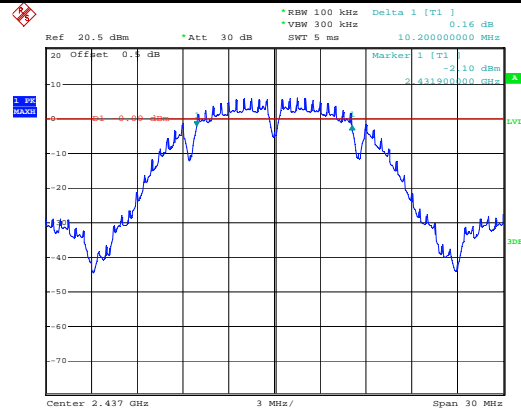


Date: 22.JAN.2015 09:39:37

6dB Bandwidth - Mid CH 2437 - 802.11b-(ANT2#)

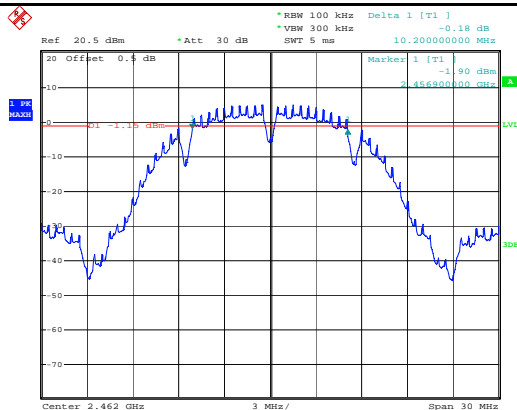


Date: 22.JAN.2015 09:41:27

6dB Bandwidth - High CH 2462 - 802.11b-(ANT2#)

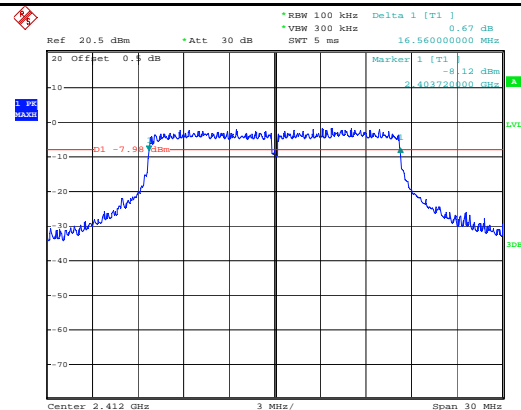


Date: 22.JAN.2015 09:46:30

6dB Bandwidth - Low CH 2412 - 802.11g-(ANT2#)

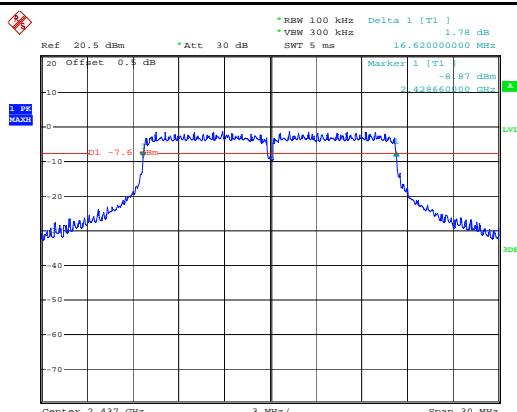


Date: 22.JAN.2015 09:45:13

6dB Bandwidth - Mid CH 2437 - 802.11g-(ANT2#)

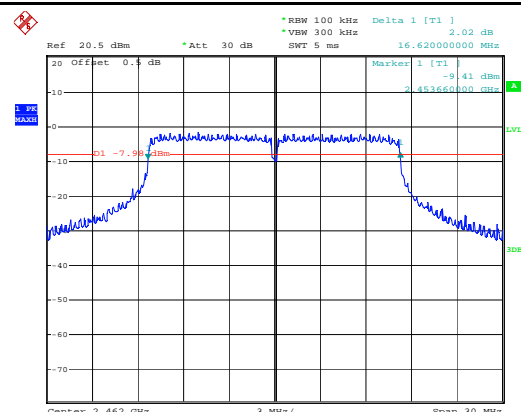


Date: 22.JAN.2015 09:48:53

6dB Bandwidth - High CH 2462 - 802.11g-(ANT2#)

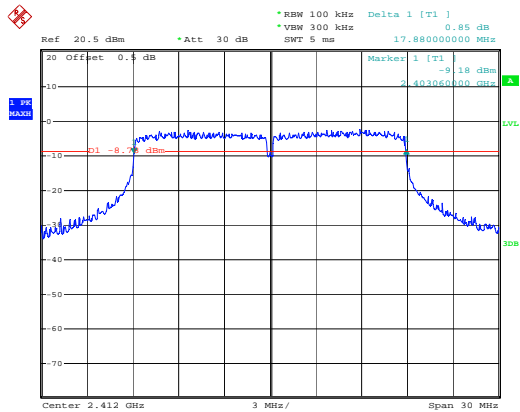


Date: 22.JAN.2015 09:54:03

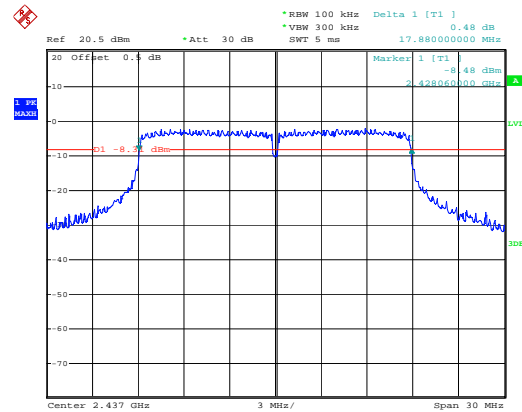


Date: 22.JAN.2015 09:56:01

### 6dB Bandwidth - Low CH 2412 - 802.11n(20M)-(ANT2#)

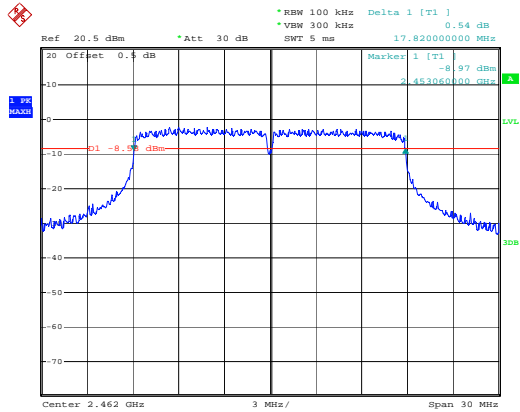


Date: 22.JAN.2015 09:57:34

### 6dB Bandwidth - Mid CH 2437- 802.11n(20M)-(ANT2#)

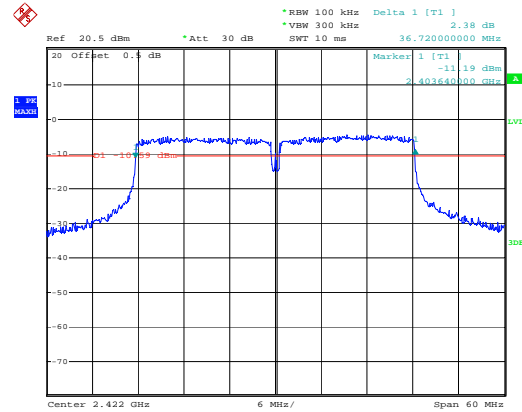


Date: 22.JAN.2015 10:05:20

### 6dB Bandwidth - High CH 2462 - 802.11 n(20M)-(ANT2#)

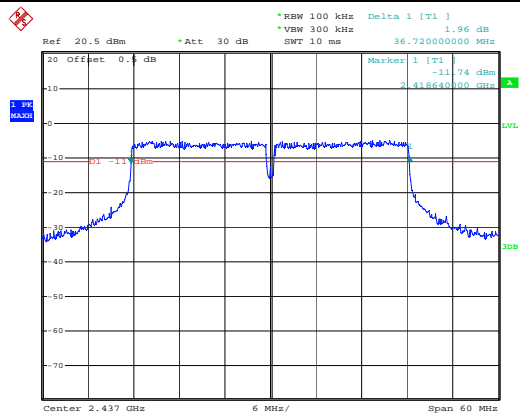

Date: 22.JAN.2015 10:07:24

### 6dB Bandwidth - Low CH 2422 - 802.11n(40M)-(ANT2#)

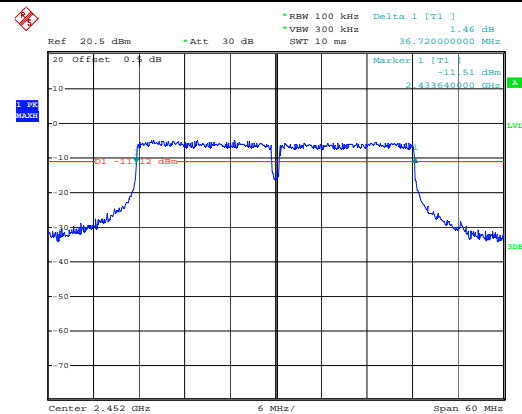


Date: 22.JAN.2015 10:10:06

### 6dB Bandwidth - Mid CH 2437- 802.11n(40M)-(ANT2#)


### 6dB Bandwidth - Mid CH 2452- 802.11n(40M)-(ANT2#)



## 20dB Bandwidth (ANT1#) measurement result

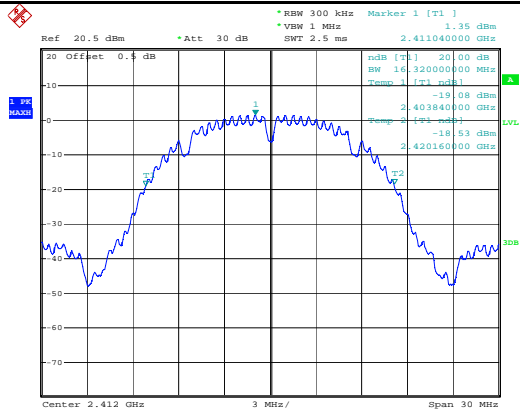


Date: 22.JAN.2015 10:32:12

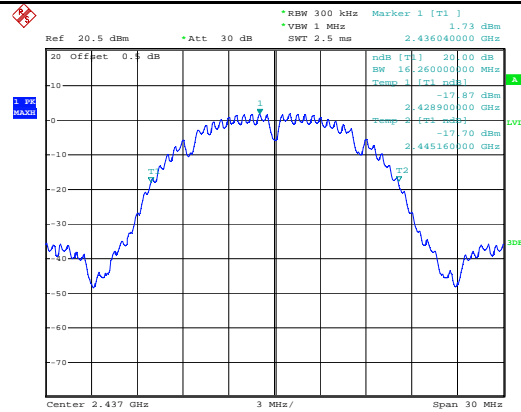


Date: 22.JAN.2015 10:34:00

### 20dB Bandwidth - Low CH 2412 - 802.11b-(ANT1#)

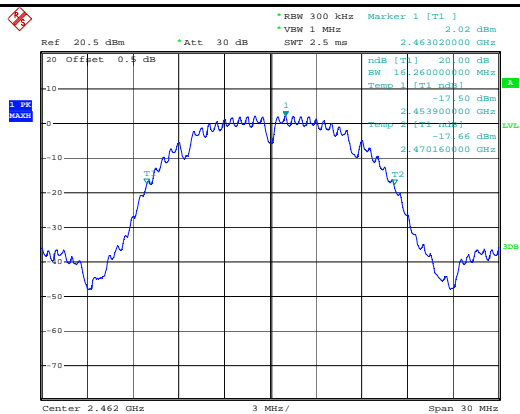


Date: 22.JAN.2015 10:34:47

### 20dB Bandwidth - Mid CH 2437 - 802.11b-(ANT1#)

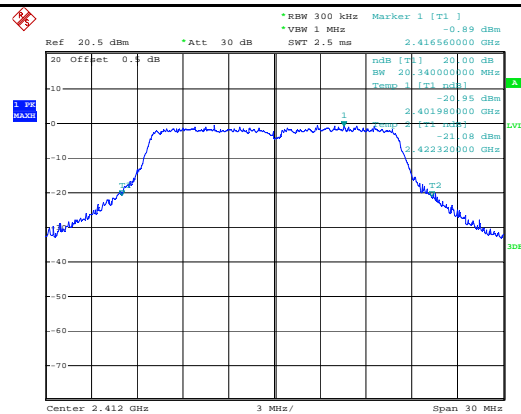


Date: 22.JAN.2015 10:35:40

### 20dB Bandwidth - High CH 2462 - 802.11b-(ANT1#)

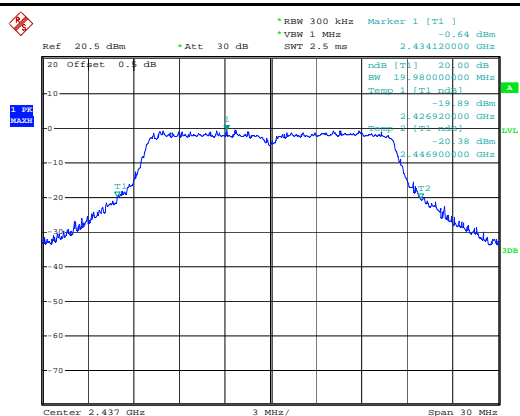

Date: 22.JAN.2015 10:36:23


### 20dB Bandwidth - Low CH 2412 - 802.11g-(ANT1#)

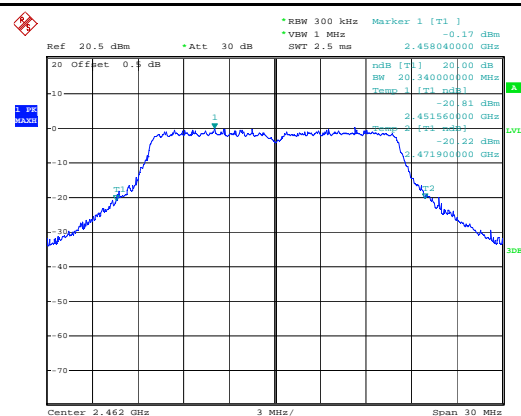

Date: 22.JAN.2015 10:37:23


### 20dB Bandwidth - Mid CH 2437 - 802.11g-(ANT1#)

### 20dB Bandwidth - High CH 2462 - 802.11g-(ANT1#)

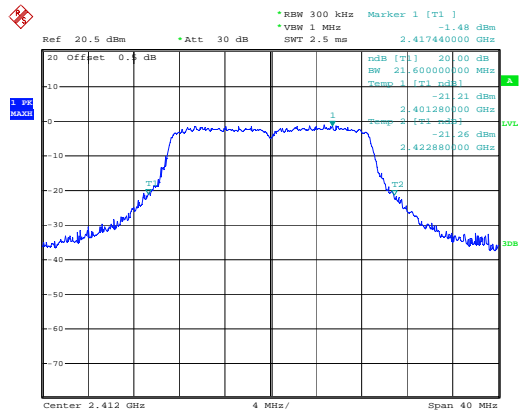


Date: 22.JAN.2015 10:38:59

20dB Bandwidth - Low CH 2412 - 802.11n(20M) -(ANT1#)

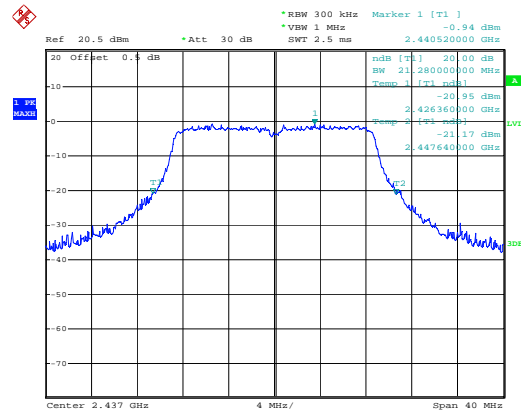


Date: 22.JAN.2015 10:39:47

20dB Bandwidth - Mid CH 2437 - 802.11n(20M) -(ANT1#)

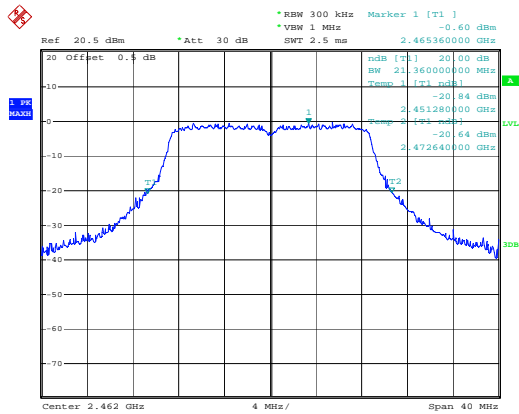


Date: 22.JAN.2015 10:40:37

20dB Bandwidth - High CH 2462 - 802.11 n(20M) -(ANT1#)

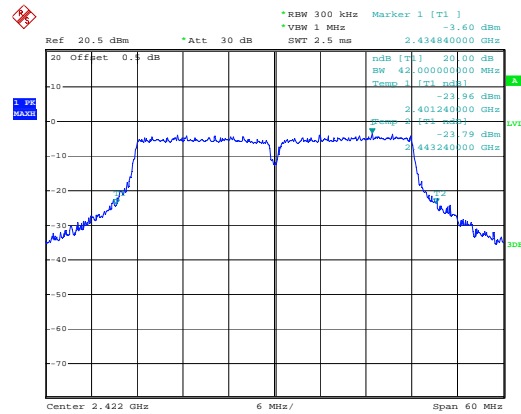


Date: 22.JAN.2015 10:41:45

20dB Bandwidth - Low CH 2422 - 802.11n(40M) -(ANT1#)

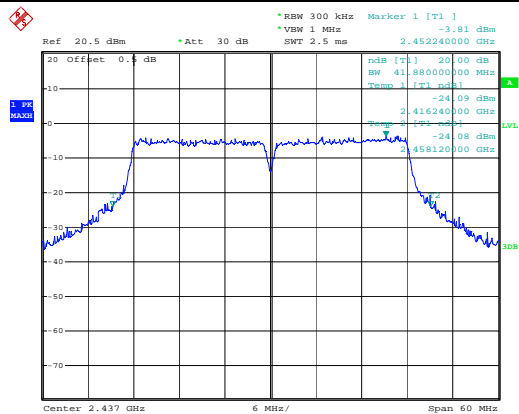

Date: 22.JAN.2015 10:43:46


20dB Bandwidth - Mid CH 2437 - 802.11n(40M) -(ANT1#)

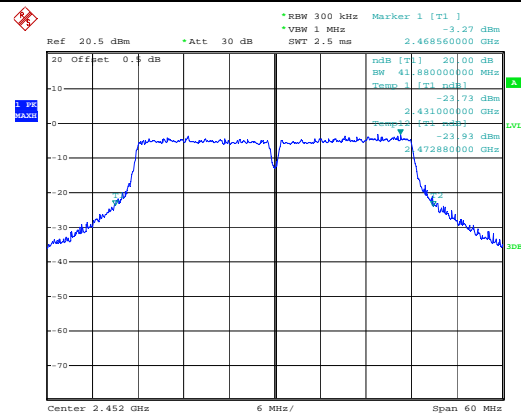


Date: 22.JAN.2015 10:45:00

20dB Bandwidth - Mid CH 2452 - 802.11n(40M) -(ANT1#)

## 20dB Bandwidth (ANT2#) measurement result

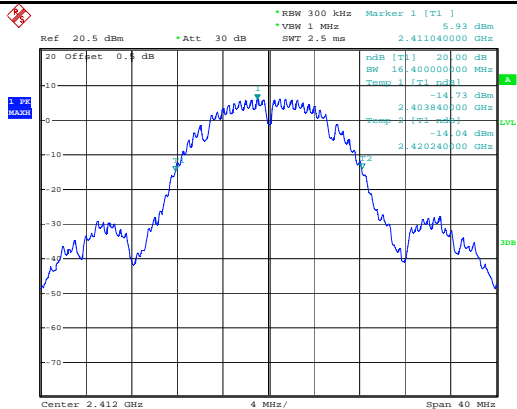


Date: 22.JAN.2015 10:14:26

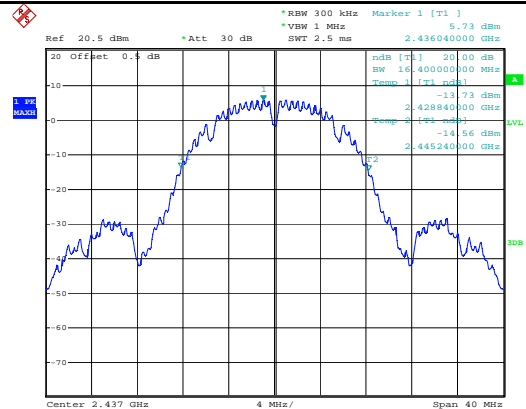


Date: 22.JAN.2015 10:17:50

### 20dB Bandwidth - Low CH 2412 - 802.11b-(ANT2#)

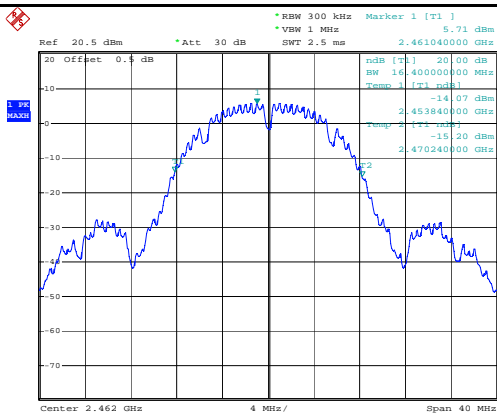


Date: 22.JAN.2015 10:18:53

### 20dB Bandwidth - Mid CH 2437 - 802.11b-(ANT2#)

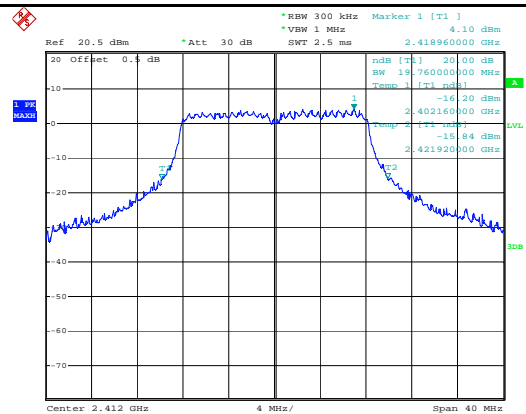


Date: 22.JAN.2015 10:19:49

### 20dB Bandwidth - High CH 2462 - 802.11b-(ANT2#)

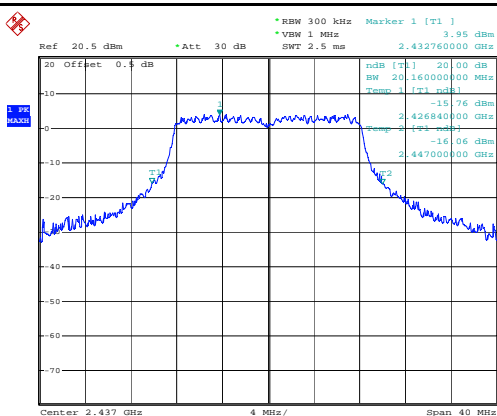

Date: 22.JAN.2015 10:20:35


### 20dB Bandwidth - Low CH 2412 - 802.11g-(ANT2#)

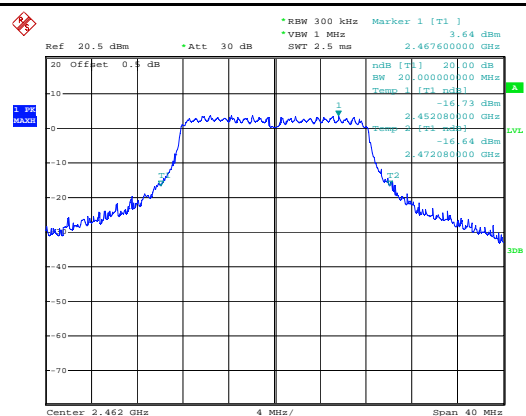


Date: 22.JAN.2015 10:21:28

### 20dB Bandwidth - Mid CH 2437 - 802.11g-(ANT2#)

### 20dB Bandwidth - High CH 2462 - 802.11g-(ANT2#)

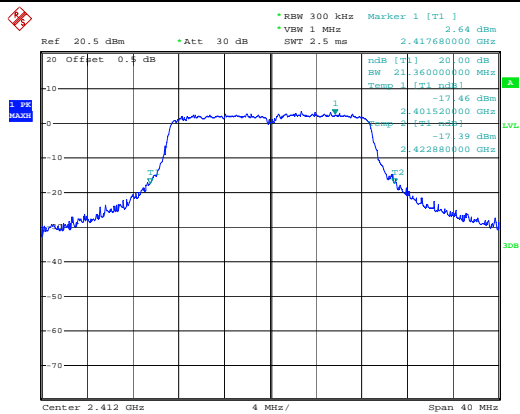


Date: 22.JAN.2015 10:22:31

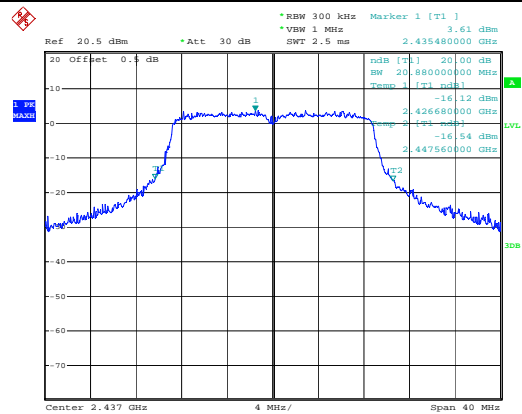


Date: 22.JAN.2015 10:23:15

20dB Bandwidth - Low CH 2412 - 802.11n(20M)-(ANT2#)

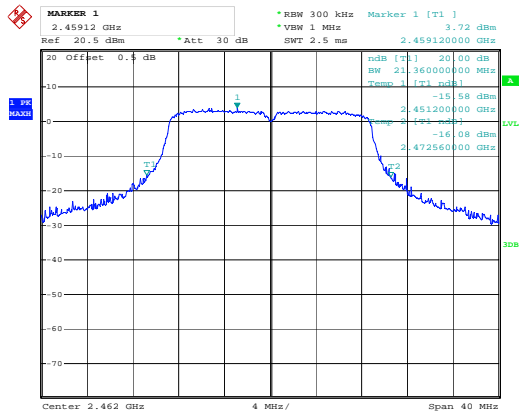


Date: 22.JAN.2015 10:25:20

20dB Bandwidth - Mid CH 2437- 802.11n(20M)-(ANT2#)

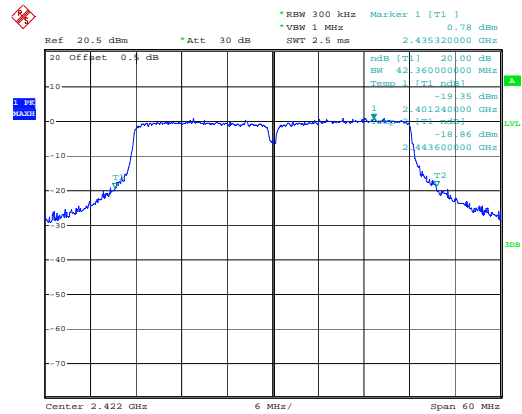


Date: 22.JAN.2015 10:27:38

20dB Bandwidth - High CH 2462 - 802.11 n(20M) -(ANT2#)

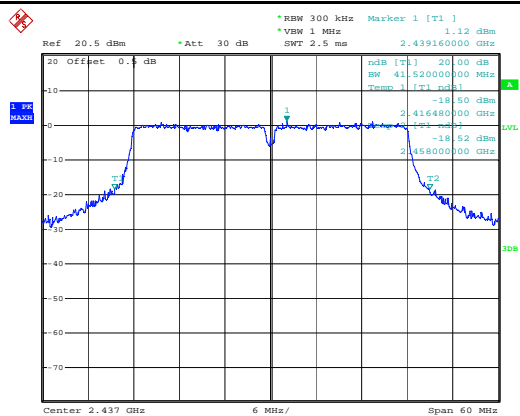

Date: 22.JAN.2015 10:28:45

20dB Bandwidth - Low CH 2422 - 802.11n(40M) -(ANT2#)

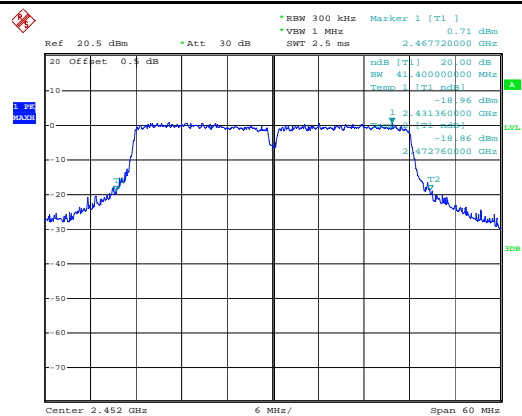

Date: 22.JAN.2015 10:30:33


20dB Bandwidth - Mid CH 2437- 802.11n(40M)-(ANT2#)

20dB Bandwidth - Mid CH 2452- 802.11n(40M)-(ANT2#)

## 6.4 Maximum Output Power

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 22, 2015
Tested By :	Herith Shi

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2),RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤1 Watt	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r02, 9.1.2 Integrated band power method Maximum output power measurement procedure</p> <ul style="list-style-type: none"> <li>- a) Set span to at least 1.5 times the OBW.</li> <li>- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.</li> <li>- c) Set VBW ≥ 3 x RBW.</li> <li>- d) Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)</li> <li>- e) Sweep time = auto.</li> <li>- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.</li> <li>- g) If transmit duty cycle &lt; 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".</li> <li>- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.</li> <li>- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A		
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A		

### Note:

Antenna Gain 1=3 dbi

Antenna Gain 2=3 dbi

Array Gain=6dbi =  $10 \cdot \log((10^{3/10}) + (10^{3/10}))$

### Output Power (ANT1#) measurement result

Type	Test mode	CH	Freq (MHz)	Conducted AV Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	14.10	30	Pass
		Mid	2437	13.79	30	Pass
		High	2462	14.39	30	Pass
	802.11g	Low	2412	10.83	30	Pass
		Mid	2437	10.71	30	Pass
		High	2462	11.37	30	Pass
	802.11n(20M)	Low	2412	11.03	30	Pass
		Mid	2437	11.09	30	Pass
		High	2462	11.49	30	Pass
	802.11n(40M)	Low	2422	11.28	30	Pass
		Mid	2437	11.28	30	Pass
		High	2452	11.93	30	Pass

### Output Power (ANT2#) measurement result


Type	Test mode	CH	Freq (MHz)	Conducted AV Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	16.98	30	Pass
		Mid	2437	17.54	30	Pass
		High	2462	17.26	30	Pass
	802.11g	Low	2412	14.65	30	Pass
		Mid	2437	15.02	30	Pass
		High	2462	14.53	30	Pass
	802.11n(20M)	Low	2412	15.00	30	Pass
		Mid	2437	15.04	30	Pass
		High	2462	14.93	30	Pass
	802.11n(40M)	Low	2422	15.18	30	Pass
		Mid	2437	15.25	30	Pass
		High	2452	15.31	30	Pass

### Output Power (MIMO) measurement result


Type	Test mode	CH	Freq (MHz)	ANT1# Conducted AV Power (dBm)	ANT2# Conducted AV Power (dBm)	MIMO Conducted AV Power (dBm)	Limit (dBm)	Result
Output power	802.11n (20M)	Low	2412	11.03	15.00	16.46	30	Pass
		Mid	2437	11.09	15.04	16.51	30	Pass
		High	2462	11.49	14.93	16.55	30	Pass
	802.11n (40M)	Low	2422	11.28	15.18	16.66	30	Pass
		Mid	2437	11.28	15.25	16.71	30	Pass
		High	2452	11.93	15.31	16.95	30	Pass

## Test Plots

### Output Power (ANT1#) measurement result

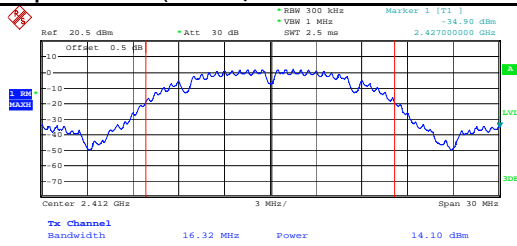


Date: 22.JAN.2015 11:08:53

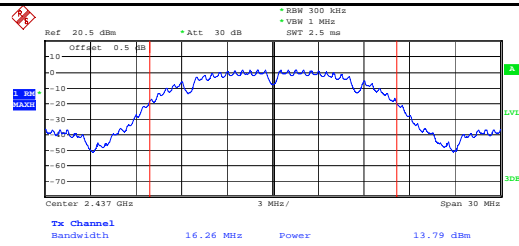


Date: 22.JAN.2015 11:11:21

### Output power - Low CH 2412 - 802.11b-ANT1#

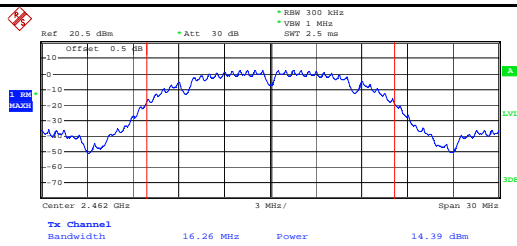


Date: 22.JAN.2015 11:12:00

### Output power - Mid CH 2437 - 802.11b-ANT1#

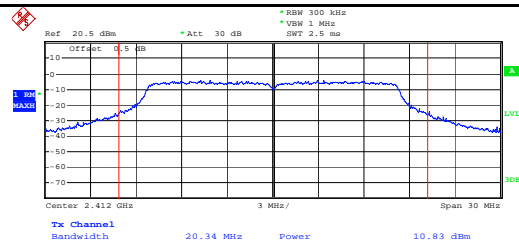


Date: 22.JAN.2015 11:27:10

### Output power - High CH 2462 - 802.11b-ANT1#

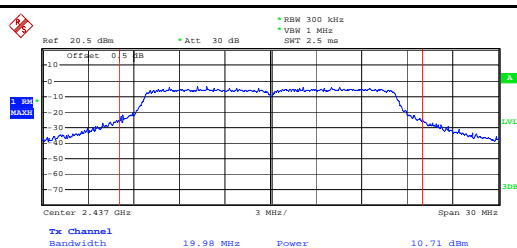

Date: 22.JAN.2015 11:15:13


### Output power - Low CH 2412 - 802.11g-ANT1#

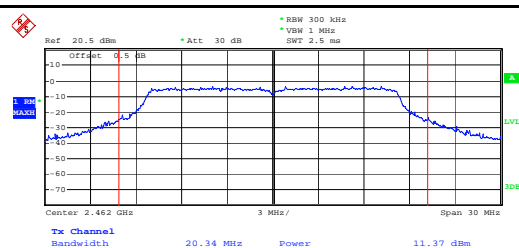

Date: 22.JAN.2015 11:16:36


### Output power - Mid CH 2437 - 802.11g-ANT1#

### Output power - High CH 2462 - 802.11g-ANT1#

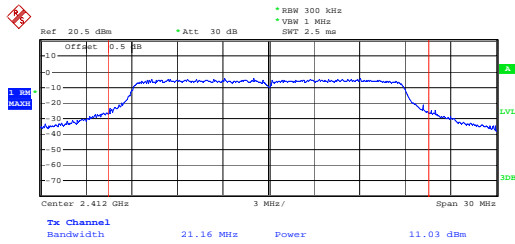


Date: 22.JAN.2015 11:17:58

Output power - Low CH 2412 - 802.11n(20M)-ANT1#

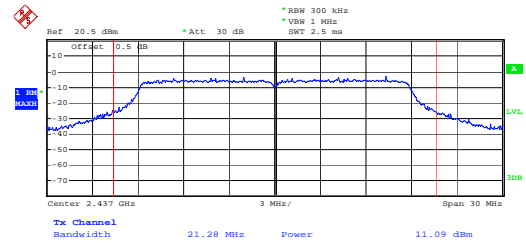


Date: 22.JAN.2015 11:19:17

Output power - Mid CH 2437 - 802.11 n(20M)-ANT1#

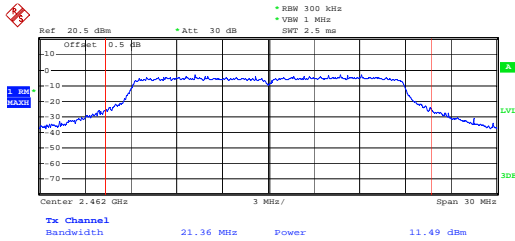


Date: 22.JAN.2015 11:20:18

Output power - High CH 2462 - 802.11 n(20M)-ANT1#

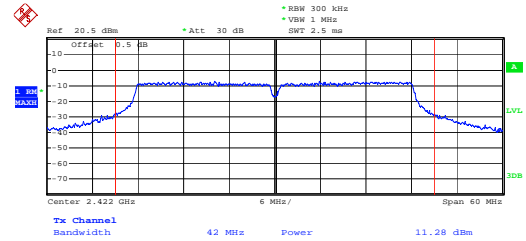


Date: 22.JAN.2015 11:22:02

Output power - Low CH 2422 - 802.11n(40M)-ANT1#

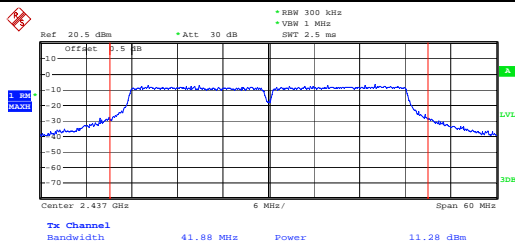

Date: 22.JAN.2015 11:23:22

Output power - Mid CH 2437 - 802.11 n(40M)-ANT1#

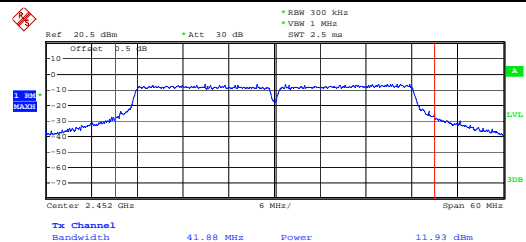


Date: 22.JAN.2015 11:24:34


Output power - High CH 2452 - 802.11 n(40M)-ANT1#



## Output Power (ANT2#) measurement result

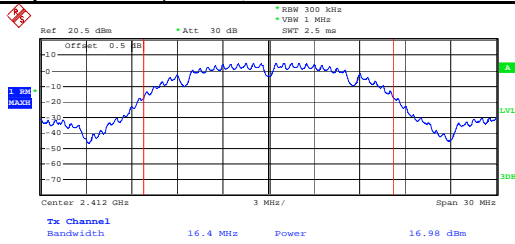


Date: 22.JAN.2015 11:29:53

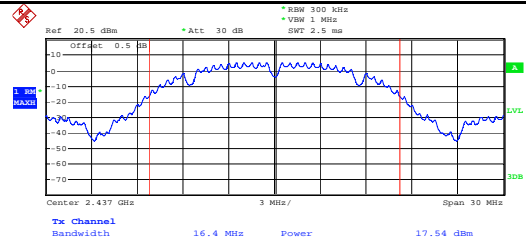


Date: 22.JAN.2015 11:30:37

### Output power - Low CH 2412 - 802.11b-ANT2#

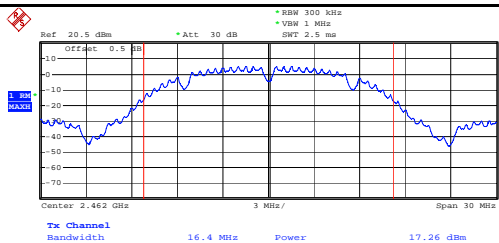


Date: 22.JAN.2015 11:31:13

### Output power - Mid CH 2437 - 802.11b-ANT2#

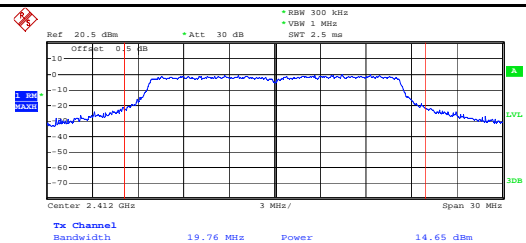


Date: 22.JAN.2015 11:32:10

### Output power - High CH 2462 - 802.11b-ANT2#

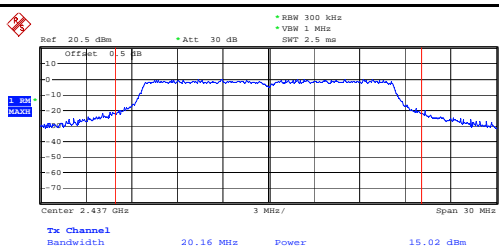

Date: 22.JAN.2015 11:33:04


### Output power - Low CH 2412 - 802.11g-ANT2#

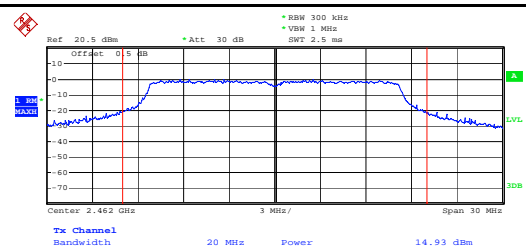

Date: 22.JAN.2015 11:44:50


### Output power - Mid CH 2437 - 802.11g-ANT2#

### Output power - High CH 2462 - 802.11g-ANT2#

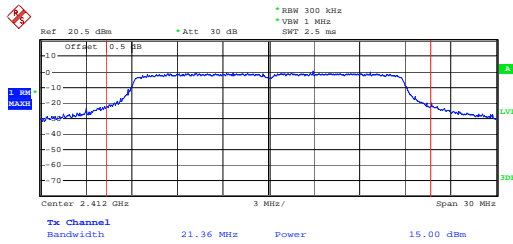


Date: 22.JAN.2015 11:35:10

Output power - Low CH 2412 - 802.11n(20M) -ANT2#

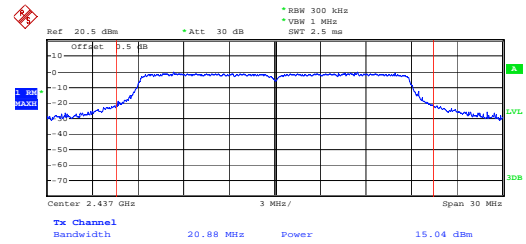


Date: 22.JAN.2015 11:36:00

Output power - Mid CH 2437 - 802.11 n(20M)-ANT2#

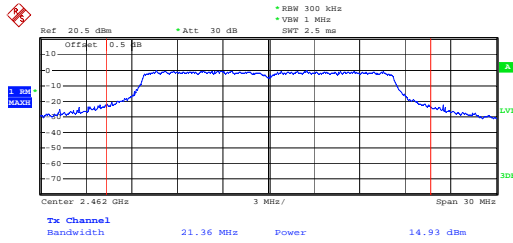


Date: 22.JAN.2015 11:43:35

Output power - High CH 2462 - 802.11 n(20M)-ANT2#

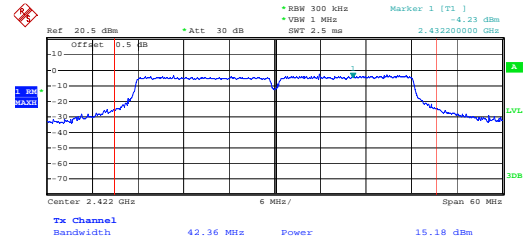


Date: 22.JAN.2015 11:38:18

Output power - Low CH 2422 - 802.11n(40M)-ANT2#

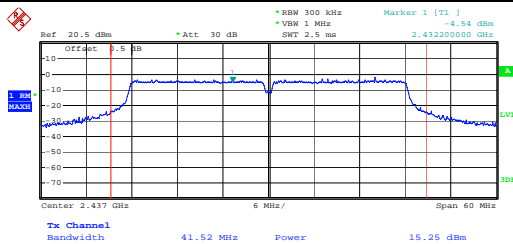

Date: 22.JAN.2015 11:39:30

Output power - Mid CH 2437 - 802.11 n(40M)-ANT2#

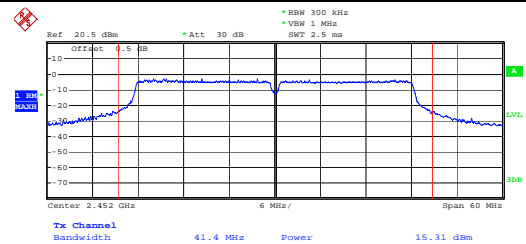


Date: 22.JAN.2015 11:40:31

Output power - High CH 2452 - 802.11 n(40M)-ANT2#

## 6.5 Power Spectral Density

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 22, 2015
Tested By :	Herith Shi

Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	558074 D01 DTS MEAS Guidance v03r02, 10.2 power spectral density method power spectral density measurement procedure <ul style="list-style-type: none"> <li>- a) Set analyzer center frequency to DTS channel center frequency.</li> <li>- b) Set the span to 1.5 times the DTS bandwidth.</li> <li>- c) Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>- d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>- e) Detector = peak.</li> <li>- f) Sweep time = auto couple.</li> <li>- g) Trace mode = max hold.</li> <li>- h) Allow trace to fully stabilize.</li> <li>- i) Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A		
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A		

#### Power Spectral Density (ANT1#) measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	-2.60	8	Pass
		Mid	2437	-3.32	8	Pass
		High	2462	-2.54	8	Pass
	802.11g	Low	2412	-9.48	8	Pass
		Mid	2437	-9.09	8	Pass
		High	2462	-9.29	8	Pass
	802.11n(20M)	Low	2412	-9.95	8	Pass
		Mid	2437	-9.49	8	Pass
		High	2462	-9.25	8	Pass
	802.11n(40M)	Low	2422	-12.52	8	Pass
		Mid	2437	-12.47	8	Pass
		High	2452	-11.94	8	Pass

#### Power Spectral Density (ANT2#) measurement result


Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	0.78	8	Pass
		Mid	2437	2.21	8	Pass
		High	2462	0.69	8	Pass
	802.11g	Low	2412	-4.22	8	Pass
		Mid	2437	-4.56	8	Pass
		High	2462	-4.60	8	Pass
	802.11n(20M)	Low	2412	-5.10	8	Pass
		Mid	2437	-4.45	8	Pass
		High	2462	-5.01	8	Pass
	802.11n(40M)	Low	2422	-7.98	8	Pass
		Mid	2437	-7.54	8	Pass
		High	2452	-7.88	8	Pass

#### Power Spectral Density (MIMO) measurement result

Type	Test mode	CH	Freq (MHz)	ANT1# PSD (dBm)	ANT2# PSD (dBm)	MIMO PSD (dBm)	Limit (dBm)	Result
Output power	802.11n (20M)	Low	2412	-9.95	-5.10	-3.87	8	Pass
		Mid	2437	-9.49	-4.45	-3.27	8	Pass
		High	2462	-9.25	-5.01	-3.62	8	Pass
	802.11n (40M)	Low	2422	-12.52	-7.98	-6.67	8	Pass
		Mid	2437	-12.47	-7.54	-6.35	8	Pass
		High	2452	-11.94	-7.88	-6.44	8	Pass


## Test Plots

### Power Spectral Density (ANT1#) measurement result

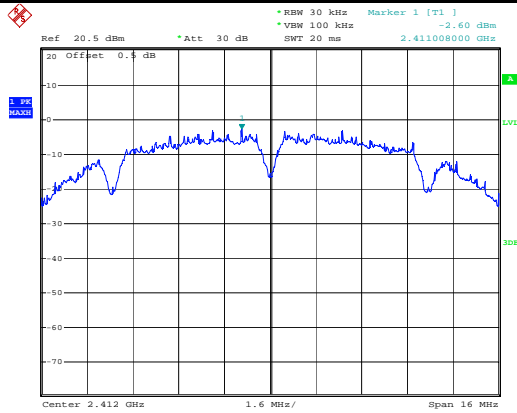


Date: 22.JAN.2015 12:35:29

PSD - Low CH 2412 - 802.11b-(ANT1#)

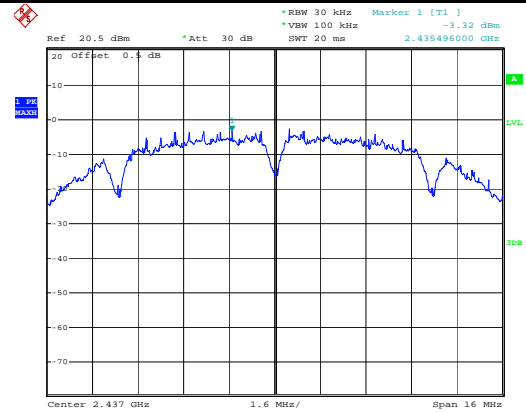


Date: 22.JAN.2015 12:36:26

PSD - Mid CH 2437 - 802.11b-(ANT1#)

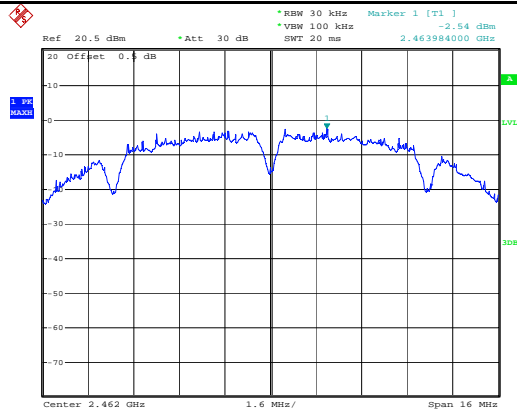


Date: 22.JAN.2015 12:37:19

PSD - High CH 2462 - 802.11b-(ANT1#)

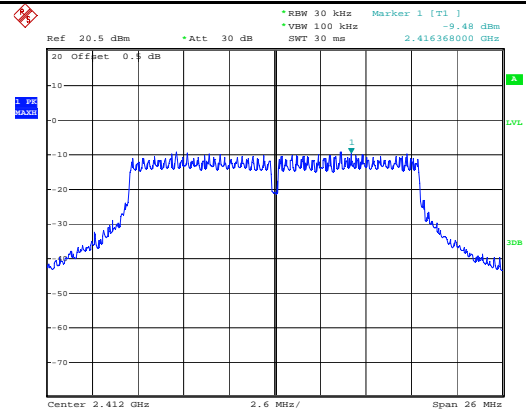


Date: 22.JAN.2015 12:38:15

PSD - Low CH 2412 - 802.11g-(ANT1#)

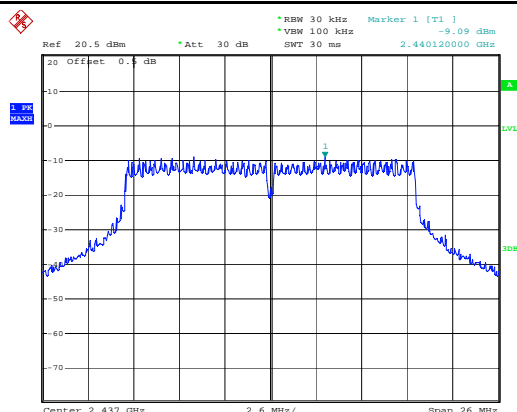


Date: 22.JAN.2015 12:38:54

PSD - Mid CH 2437 - 802.11g-(ANT1#)

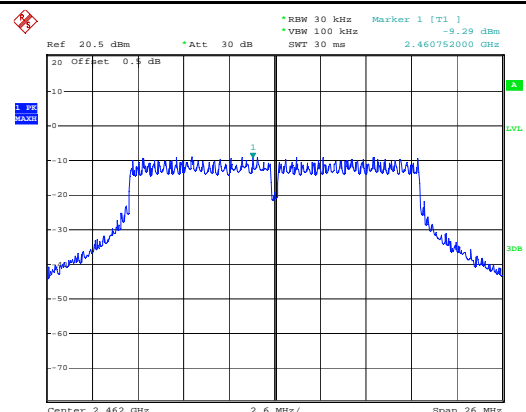


Date: 22.JAN.2015 12:39:42

PSD - High CH 2462 - 802.11g-(ANT1#)

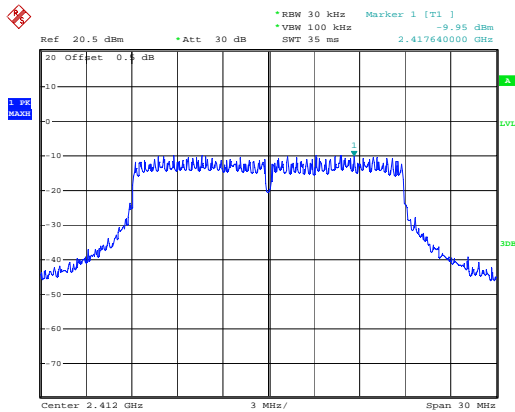


Date: 22.JAN.2015 12:40:50

PSD - Low CH 2412-802.11n(20M)-(ANT1#)

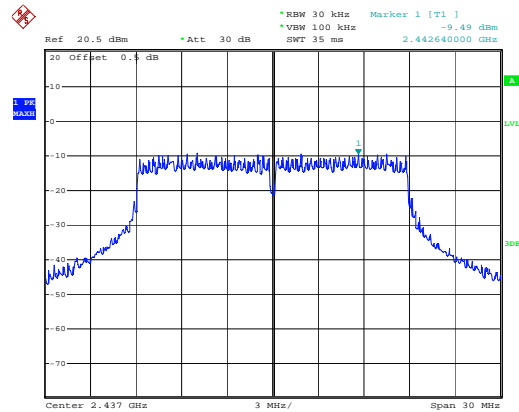


Date: 22.JAN.2015 12:41:32

PSD - Mid CH 2437-802.11 n(20M)-(ANT1#)

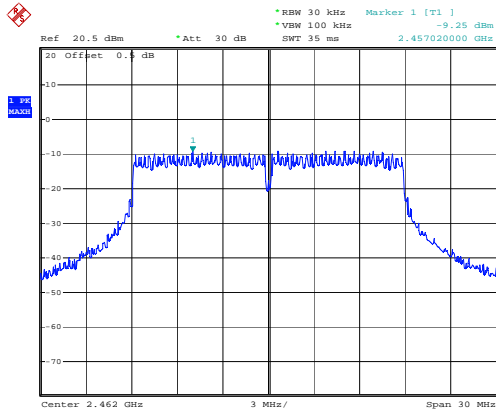


Date: 22.JAN.2015 12:42:14

PSD - High CH 2462-802.11 n(20M)-(ANT1#)

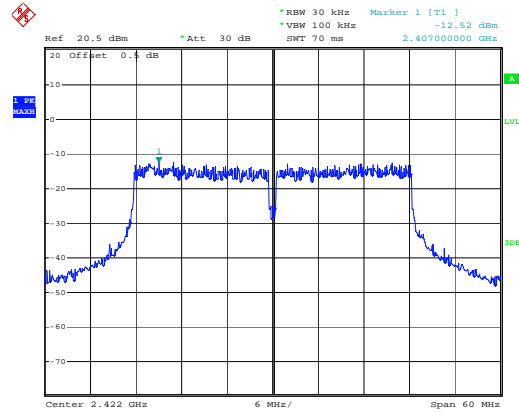


Date: 22.JAN.2015 12:42:57

PSD - Low CH 2422-802.11n(40M)-(ANT1#)

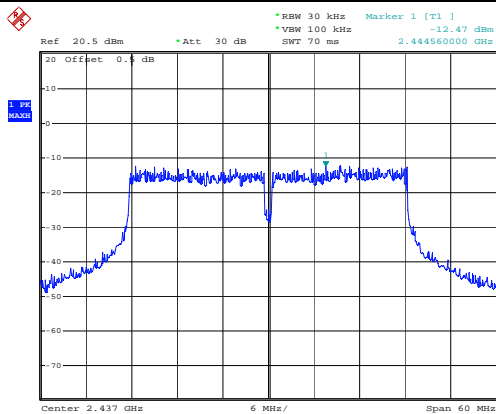

Date: 22.JAN.2015 12:43:32


PSD - Mid CH 2437-802.11 n(40M)-(ANT1#)

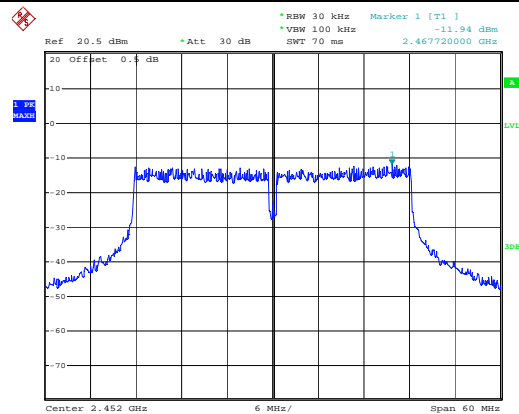

Date: 22.JAN.2015 12:44:30


PSD - High CH 2452-802.11 n(40M)-(ANT1#)

## Power Spectral Density (ANT2#) measurement result

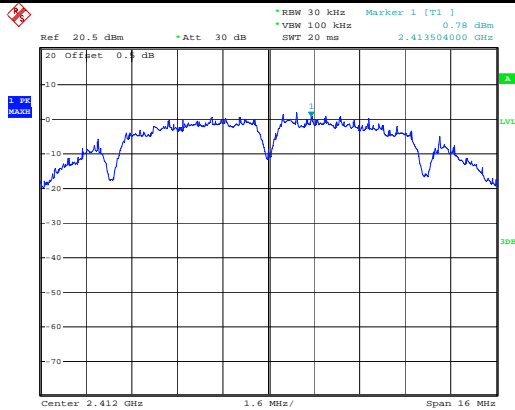


Date: 22.JAN.2015 11:49:18

PSD - Low CH 2412-802.11b-(ANT2#)

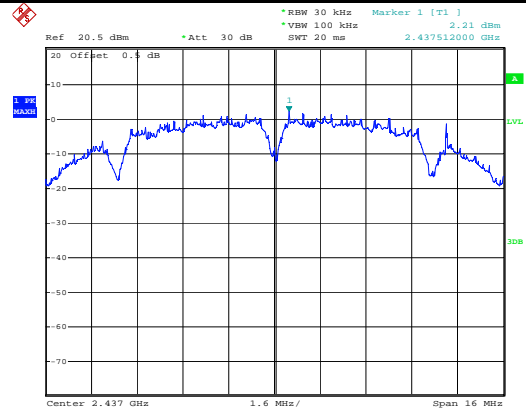


Date: 22.JAN.2015 11:50:20

PSD - Mid CH 2437-802.11b-(ANT2#)

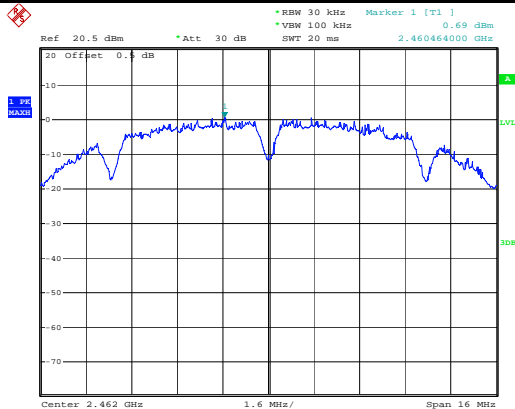


Date: 22.JAN.2015 11:51:14

PSD - High CH 2462-802.11b-(ANT2#)

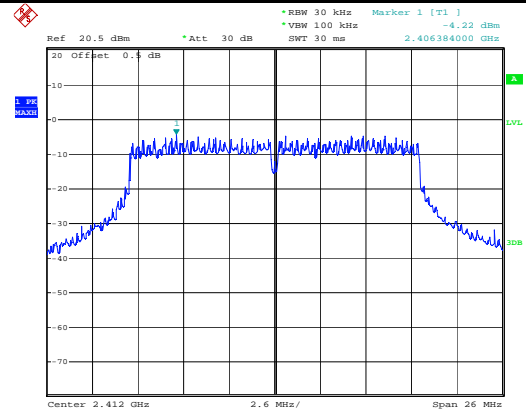


Date: 22.JAN.2015 11:52:03

PSD - Low CH 2412-802.11g-(ANT2#)

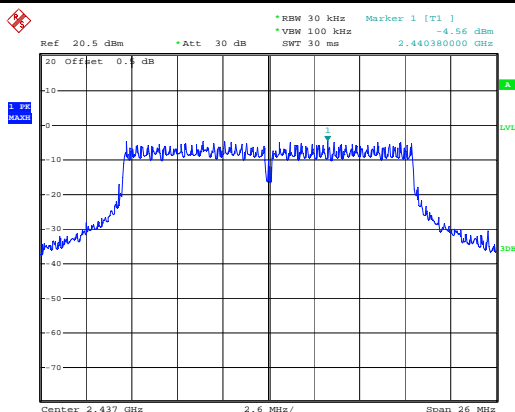


Date: 22.JAN.2015 11:52:40

PSD - Mid CH 2437-802.11g-(ANT2#)

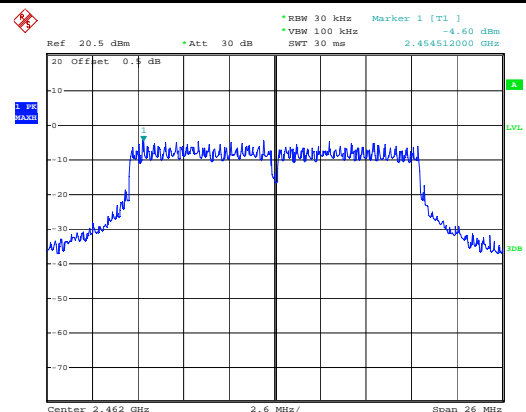


Date: 22.JAN.2015 11:53:19

PSD - High CH 2462-802.11g-(ANT2#)

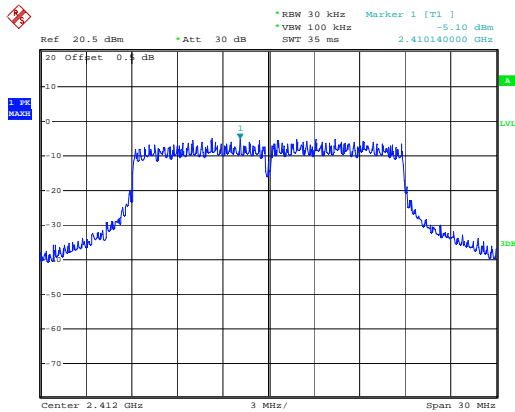


Date: 22.JAN.2015 11:54:15

PSD - Low CH 2412-802.11n(20M)-(ANT2#)

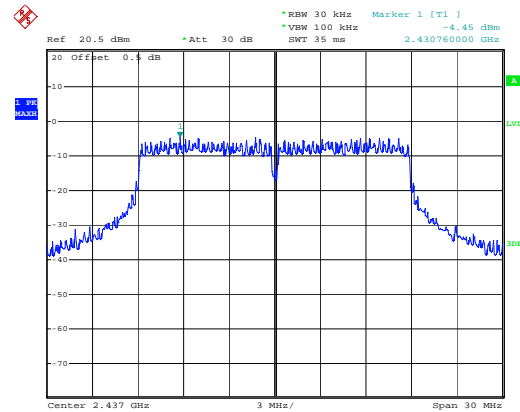


Date: 22.JAN.2015 11:54:54

PSD - Mid CH 2437-802.11 n(20M)-(ANT2#)

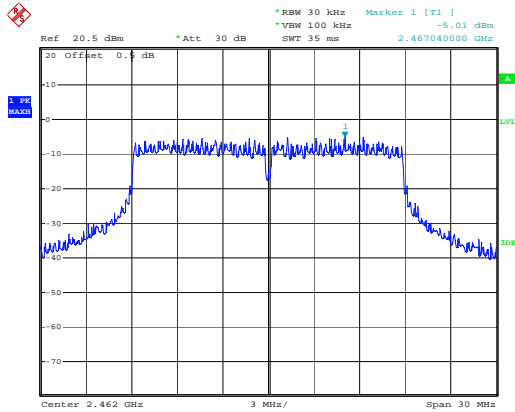


Date: 22.JAN.2015 11:55:31

PSD - High CH 2462-802.11 n(20M)-(ANT2#)

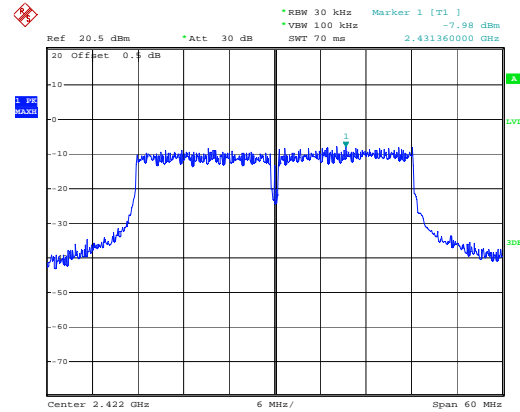


Date: 22.JAN.2015 12:00:41

PSD - Low CH 2422-802.11n(40M)-(ANT2#)

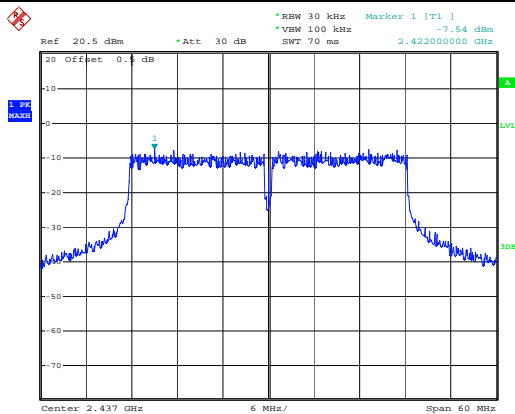

Date: 22.JAN.2015 11:57:19

PSD - Mid CH 2437-802.11 n(40M)-(ANT2#)

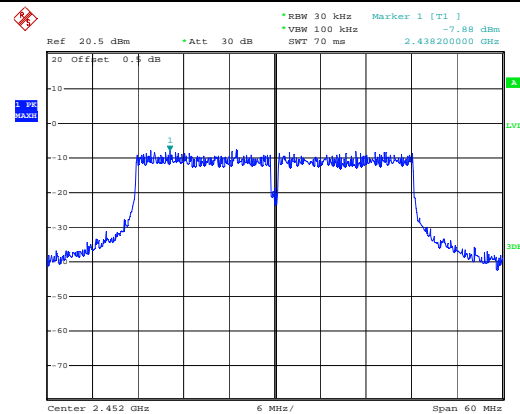

Date: 22.JAN.2015 11:58:23

PSD - High CH 2452-802.11 n(40M)-(ANT2#)



## 6.6 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 18 to January 22, 2015
Tested By :	Herith Shi

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>


Test Setup	
------------	--

Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> <li>1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> <li>3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz. <ul style="list-style-type: none"> <li>■ 1/T kHz (Duty cycle &lt; 98%) □ 10 Hz (Duty cycle &gt; 98%)</li> </ul> </li> </ul> </li> <li>4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
----------------	---


Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A

## Test Plots

### Band Edge measurement result

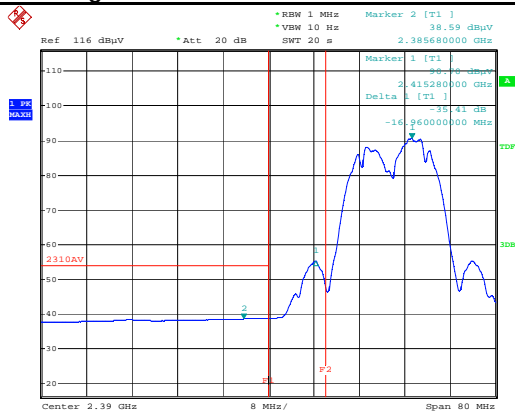


Date: 18.JAN.2015 16:53:25

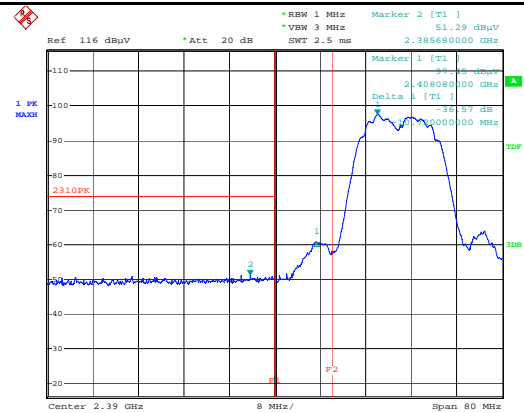


Date: 18.JAN.2015 16:51:16

Band Edge, Left Side (Average) - 802.11b

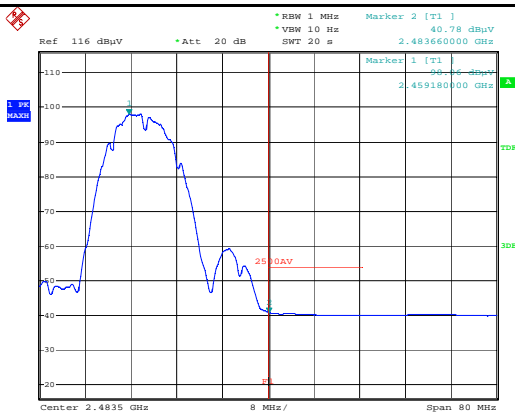


Date: 18.JAN.2015 17:30:39

Band Edge, Left Side (Peak) - 802.11b

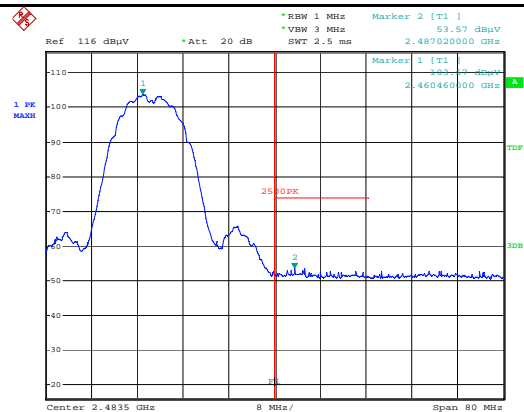


Date: 18.JAN.2015 17:28:53

Band Edge, Right Side (Average) - 802.11b

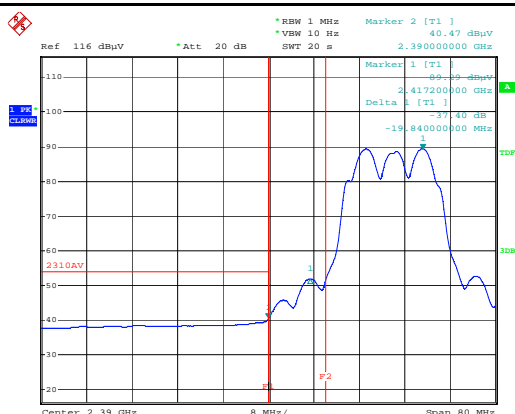

Date: 18.JAN.2015 17:06:26


Band Edge, Right Side (Peak) - 802.11b

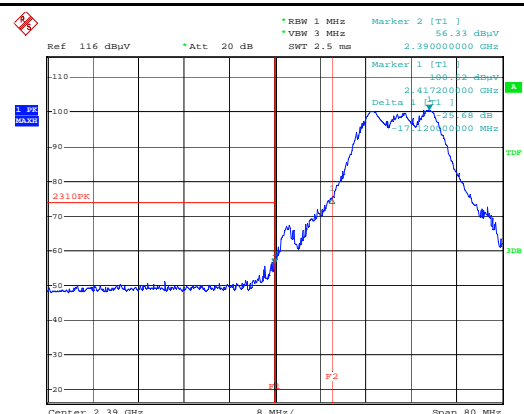


Date: 18.JAN.2015 18:19:51

Band Edge, Left Side (Average) - 802.11g

Band Edge, Left Side (Peak)-802.11g

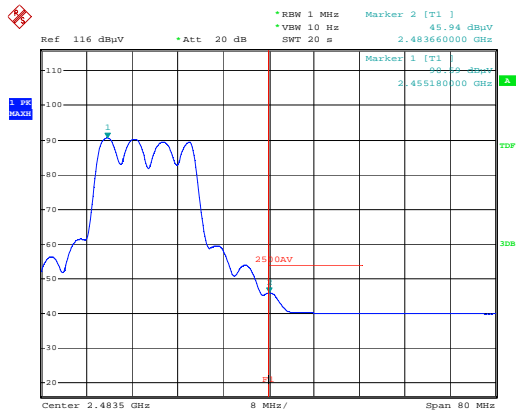


Date: 18.JAN.2015 18:06:12

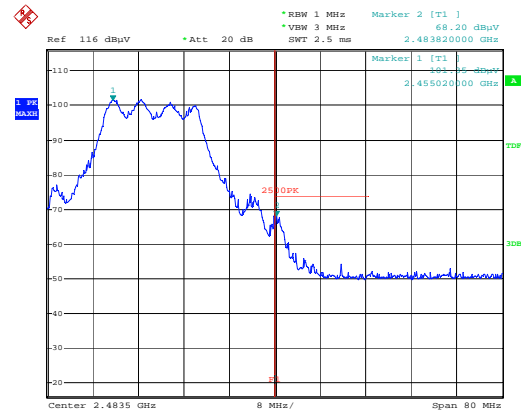


Date: 18.JAN.2015 18:05:19

### Band Edge, Right Side (Average) - 802.11g

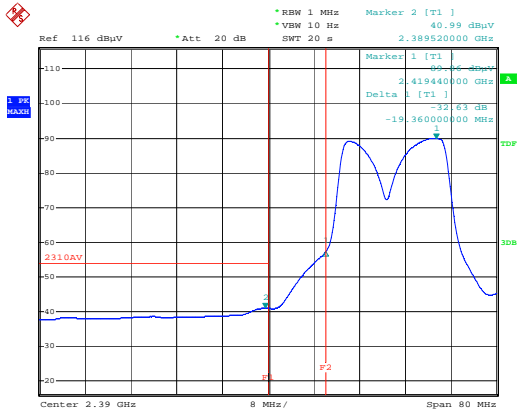


Date: 18.JAN.2015 17:13:59

### Band Edge, Right Side (Peak) - 802.11g

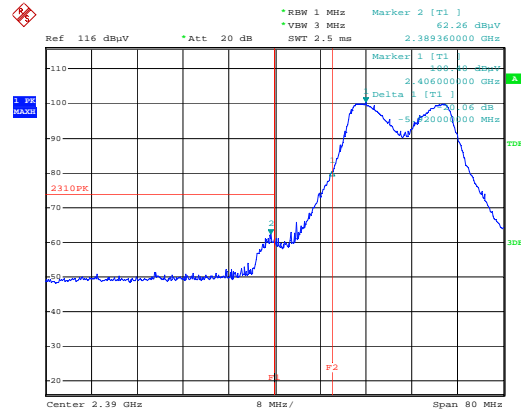


Date: 18.JAN.2015 18:22:42

### Band Edge, Left Side (Average) - 802.11n(20M)

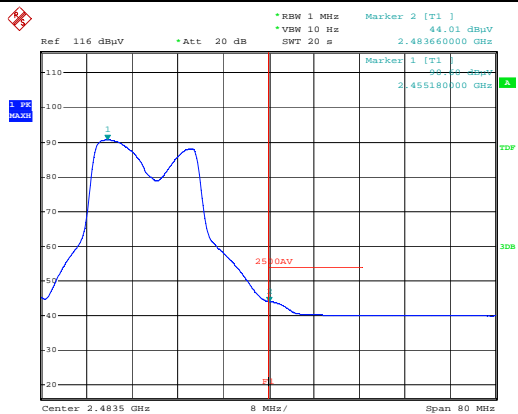

Date: 18.JAN.2015 17:40:05


### Band Edge, Left Side (Peak) - 802.11n(20M)

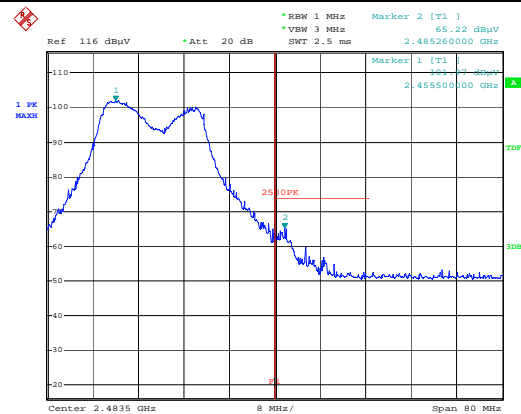


Date: 18.JAN.2015 17:38:57

### Band Edge, Right Side (Average) - 802.11n(20M)

### Band Edge, Right Side (Peak) - 802.11n(20M)

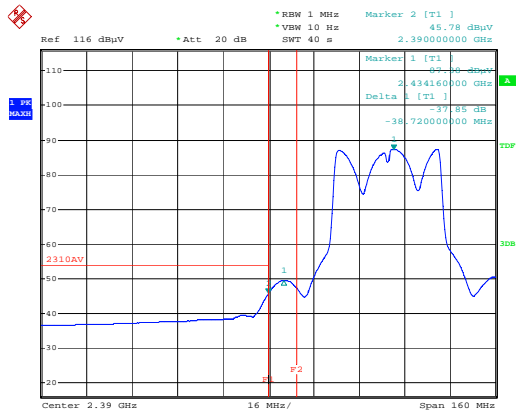


Date: 18.JAN.2015 18:17:34

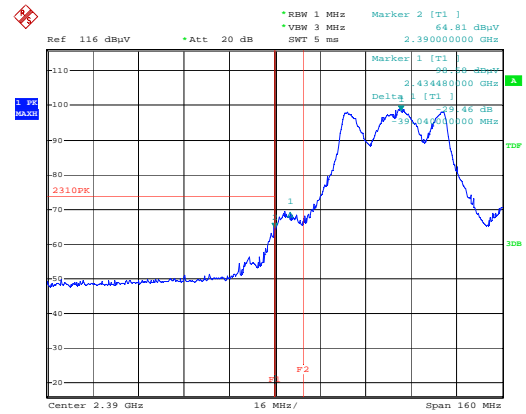


Date: 18.JAN.2015 18:14:58

Band Edge, Left Side (Average) - 802.11n(40M)

Band Edge, Left Side (Peak) - 802.11n(40M)

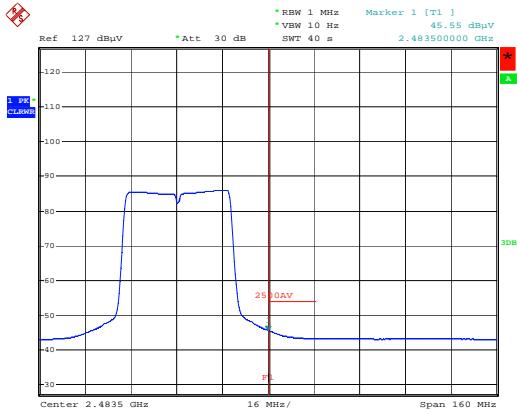

Date: 22.JAN.2015 12:54:34

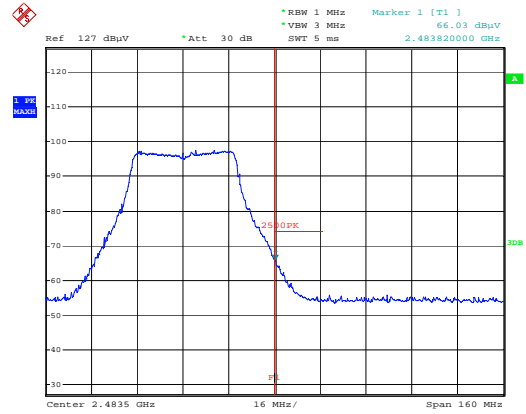

Date: 22.JAN.2015 12:52:23


Band Edge, Right Side (Average) - 802.11n(40M)

Band Edge, Right Side (Peak) - 802.11n(40M)


## 6.7 AC Power Line Conducted Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 18, 2015
Tested By :	Herith Shi

### Requirement(s):

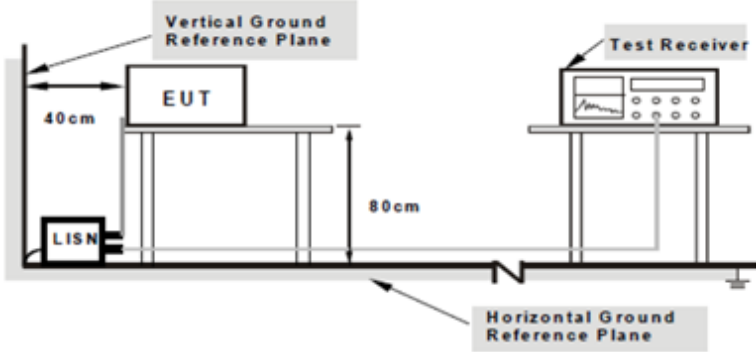Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<div><input checked="" type="checkbox"/></div>														
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	<div><p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p></div>																
		Procedure	<div><ul style="list-style-type: none"><li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li><li>- The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li><li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li><li>- All other supporting equipment were powered separately from another main supply.</li><li>- The EUT was switched on and allowed to warm up to its normal operating condition.</li><li>- A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li><li>- High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li><li>- Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li></ul></div>														
			Remark	Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n(20M)-2437MHz mode.													
Result	<div><input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail</div>																
Test Data	<div><input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A</div>																
Test Plot	<div><input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A</div>																

Test Mode: Transmitting Mode

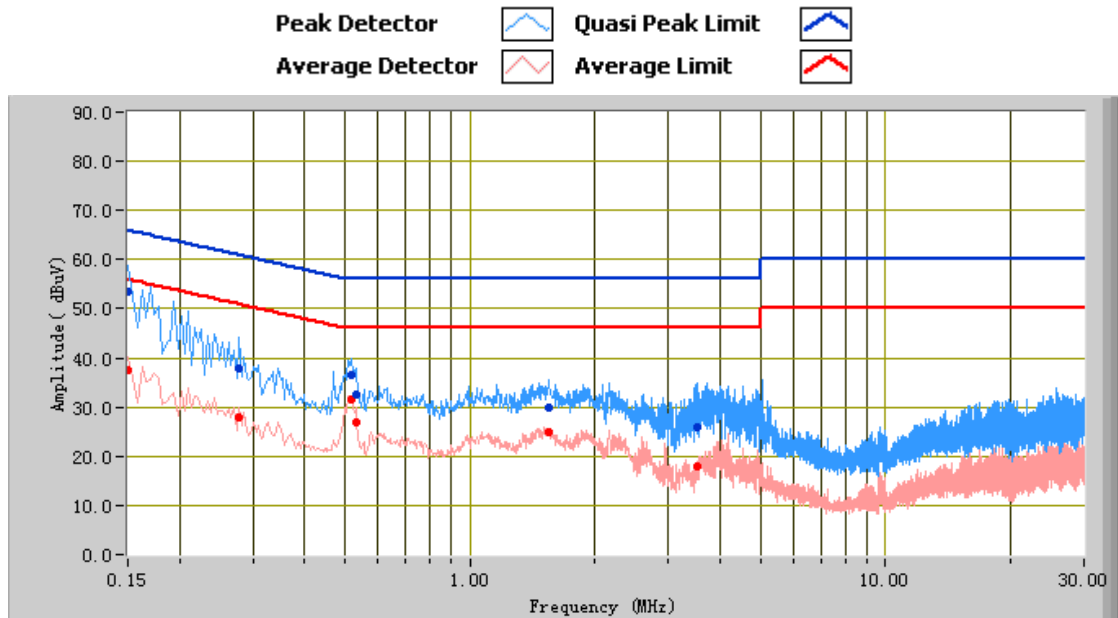


### Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.15	53.35	66.00	-12.65	37.52	56.00	-18.48	12.22
0.52	36.60	56.00	-19.40	31.61	46.00	-14.39	11.07
0.28	37.81	60.87	-23.06	27.79	50.87	-23.09	11.41
0.53	32.57	56.00	-23.43	26.96	46.00	-19.04	11.06
1.55	29.75	56.00	-26.25	24.87	46.00	-21.13	10.79
3.52	26.04	56.00	-29.96	17.99	46.00	-28.01	10.88

**Test Mode:** Transmitting Mode

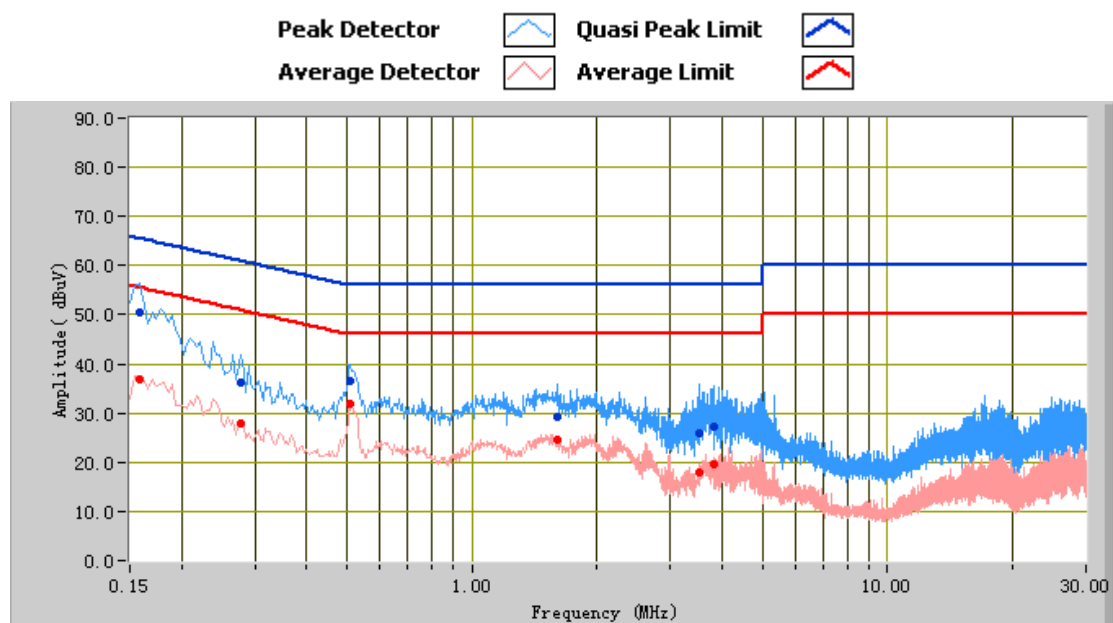

### Test Data

Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.16	50.48	65.57	-15.09	36.84	55.57	-18.73	12.10
0.51	36.57	56.00	-19.43	31.83	46.00	-14.17	11.05
0.28	36.21	60.87	-24.67	27.83	50.87	-23.04	11.41
1.60	29.35	56.00	-26.65	24.45	46.00	-21.55	10.83
3.53	25.94	56.00	-30.06	17.99	46.00	-28.01	10.94
3.83	27.14	56.00	-28.86	19.49	46.00	-26.51	10.94

## 6.8 Radiated Spurious Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 17, 2015
Tested By :	Herith Shi

### Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.247(d) , RSS210 (A8.5)	a)	<div>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</div> <table><thead><tr><th>Frequency range (MHz)</th><th>Field Strength (μV/m)</th></tr></thead><tbody><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></tbody></table>	Frequency range (MHz)	Field Strength (μV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<div><input checked="" type="checkbox"/></div>
	Frequency range (MHz)	Field Strength (μV/m)											
	30 – 88	100											
88 – 216	150												
216 960	200												
Above 960	500												
b)	<div>For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required</div> <div><input checked="" type="checkbox"/> 20 dB down      <input type="checkbox"/> 30 dB down</div>	<div><input checked="" type="checkbox"/></div>											
c)	<div>or restricted band, emission must also comply with the radiated emission limits specified in 15.209</div>	<div><input checked="" type="checkbox"/></div>											

Test Setup	
------------	--

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with</li> </ol>
-----------	--




Test Report No.	14021236-FCC-R1
Page	41 of 56

	<p>Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n(20M)-2437MHz mode.
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A

Test Mode: Transmitting Mode

(Below 1GHz)

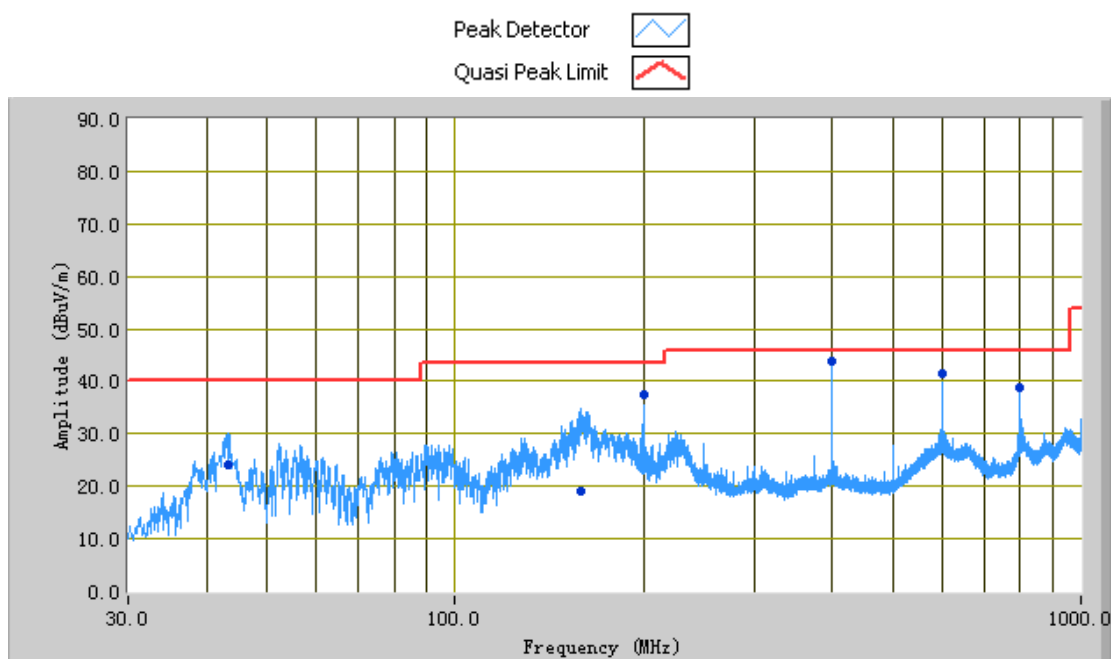

### Test Data

#### Horizontal & Vertical Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
400.00	43.74	302.00	H	104.00	-27.84	46.00	-2.26
599.99	41.48	147.00	V	101.00	-20.73	46.00	-4.52
799.98	38.67	216.00	H	101.00	-19.27	46.00	-7.33
200.01	37.57	191.00	V	100.00	-31.54	43.50	-5.93
158.59	19.17	358.00	V	99.00	-31.47	43.50	-24.33
43.22	24.04	0.00	H	99.00	-35.42	40.00	-15.96

Test Mode:	Transmitting Mode
------------	-------------------

Note: Other modes were verified, only the result of worst case basic rate mode was presented.

Mode: 802.11(20M)

#### Low Channel (2412 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4824	39.56	AV	V	33.83	3.3	24	52.69	54	-1.31
4824	39.21	AV	H	33.83	3.3	24	52.34	54	-1.66
4824	58.95	PK	V	33.83	3.3	24	72.08	74	-1.92
4824	59.14	PK	H	33.83	3.3	24	72.27	74	-1.73

#### Middle Channel (2437 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4874	39.02	AV	V	33.83	3.3	24	52.15	54	-1.85
4874	39.71	AV	H	33.83	3.3	24	52.84	54	-1.16
4874	58.24	PK	V	33.83	3.3	24	71.37	74	-2.63
4874	58.53	PK	H	33.83	3.3	24	71.66	74	-2.34

#### High Channel (2462 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4924	39.15	AV	V	33.83	3.3	24	52.28	54	-1.72
4924	39.23	AV	H	33.83	3.3	24	52.36	54	-1.64
4924	58.11	PK	V	33.83	3.3	24	71.24	74	-2.76
4924	58.18	PK	H	33.83	3.3	24	71.31	74	-2.69

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted Emissions</b>					
R&S EMI Test Receiver	ESPI3	101216	11/04/2014	11/03/2015	<input checked="" type="checkbox"/>
V-LISN	ESH3-Z5	838979/005	11/04/2014	11/03/2015	<input checked="" type="checkbox"/>
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	<input checked="" type="checkbox"/>
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
R&S EMI Receiver	ESPI3	101216	11/04/2014	11/03/2015	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	02/02/2014	02/01/2015	<input checked="" type="checkbox"/>
Hp Spectrum Analyzer	8563E	3821A09023	10/09/2014	10/08/2015	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	1007H	N/A	01/07/2015	01/06/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
Hp Spectrum Analyzer	8563E	3821A09023	10/09/2014	10/08/2015	<input checked="" type="checkbox"/>
R&S EMI Receiver	ESPI3	101216	11/04/2014	11/03/2015	<input checked="" type="checkbox"/>
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2014	04/14/2015	<input checked="" type="checkbox"/>
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2014	11/14/2015	<input checked="" type="checkbox"/>
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	<input checked="" type="checkbox"/>
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2014	04/22/2015	<input checked="" type="checkbox"/>
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2014	05/28/2015	<input checked="" type="checkbox"/>
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2014	10/26/2015	<input checked="" type="checkbox"/>
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D- 00101800-30- 10P	1451709	10/27/2014	10/26/2015	<input checked="" type="checkbox"/>
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	<input checked="" type="checkbox"/>

Test Report No.	14021236-FCC-R1
Page	44 of 56

## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo




EUT – Front View




EUT – Rear View


Test Report No.	14021236-FCC-R1
Page	45 of 56

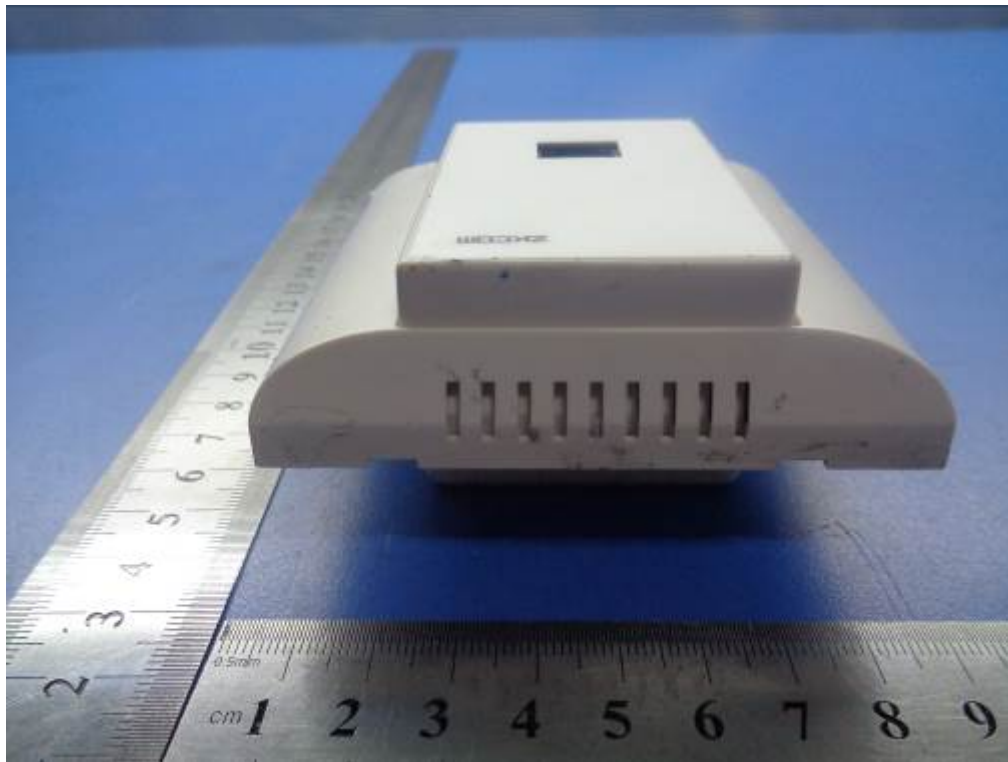


EUT – Top View

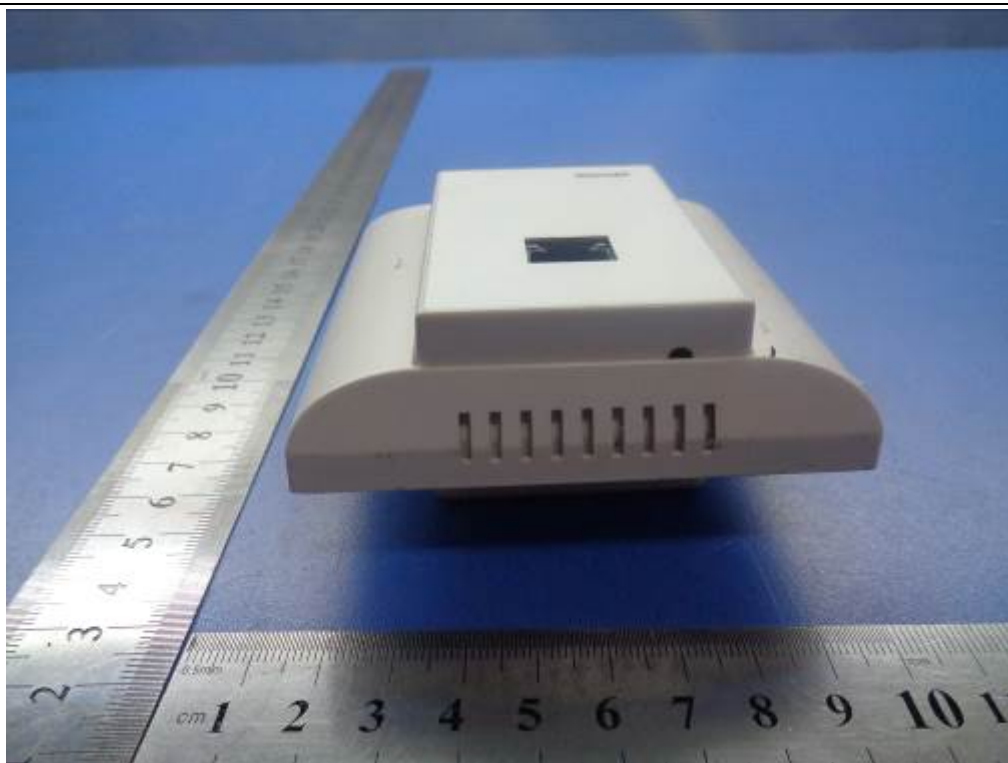

EUT – Bottom View

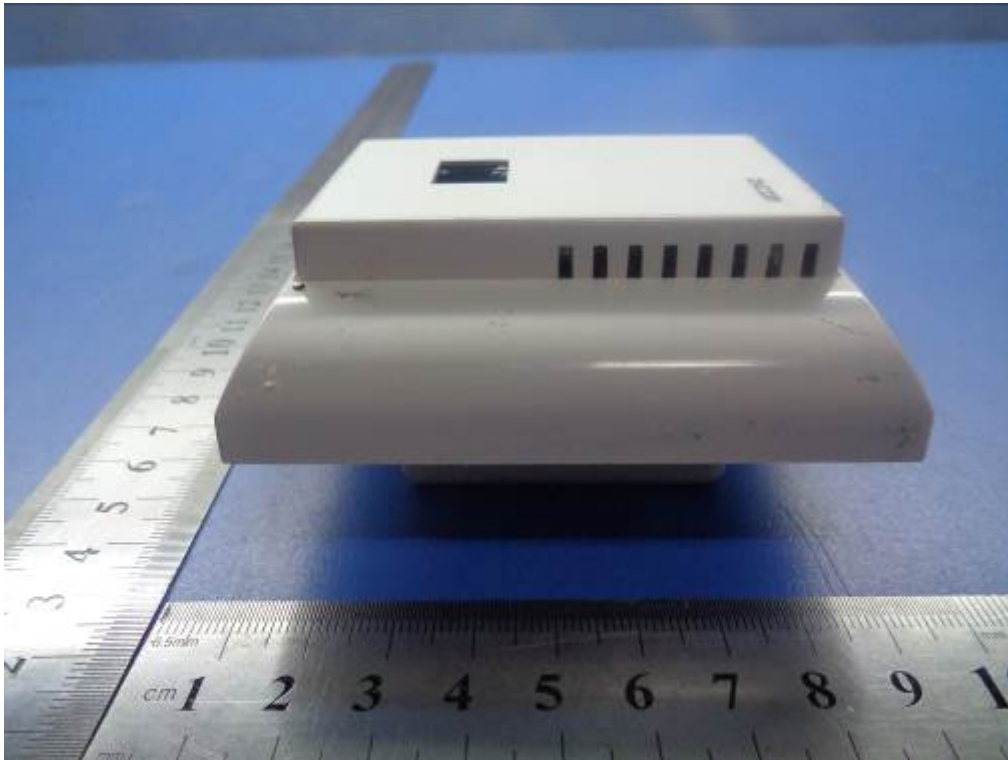


EUT – Left View

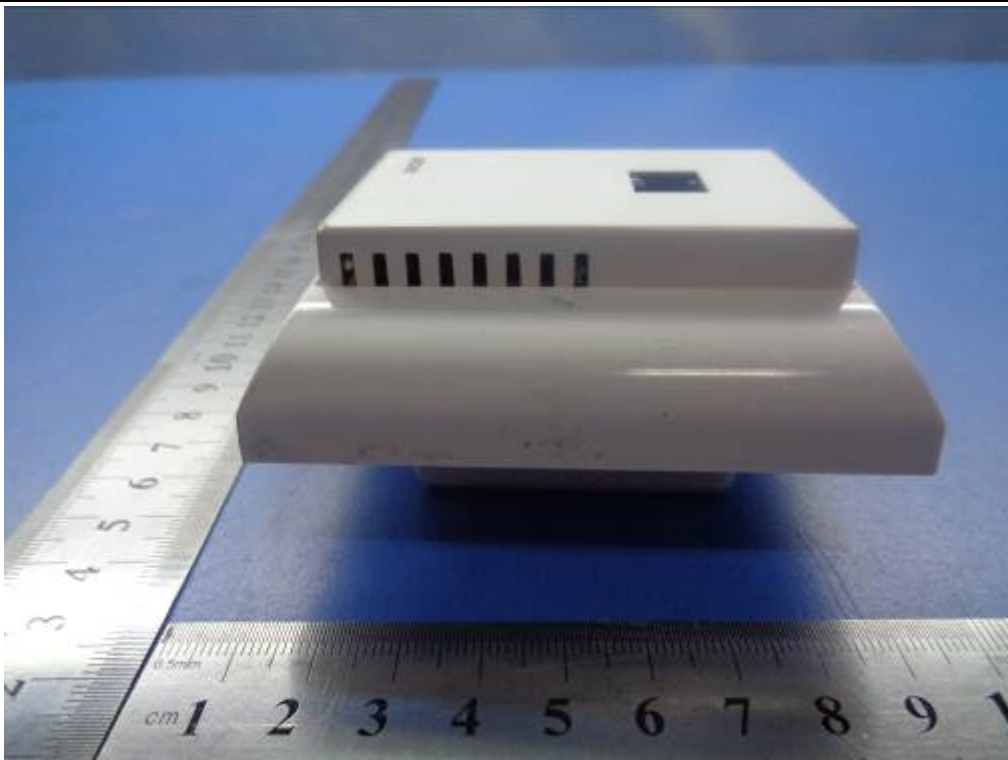


EUT – Right View



Annex B.ii. Photograph: EUT Internal Photo

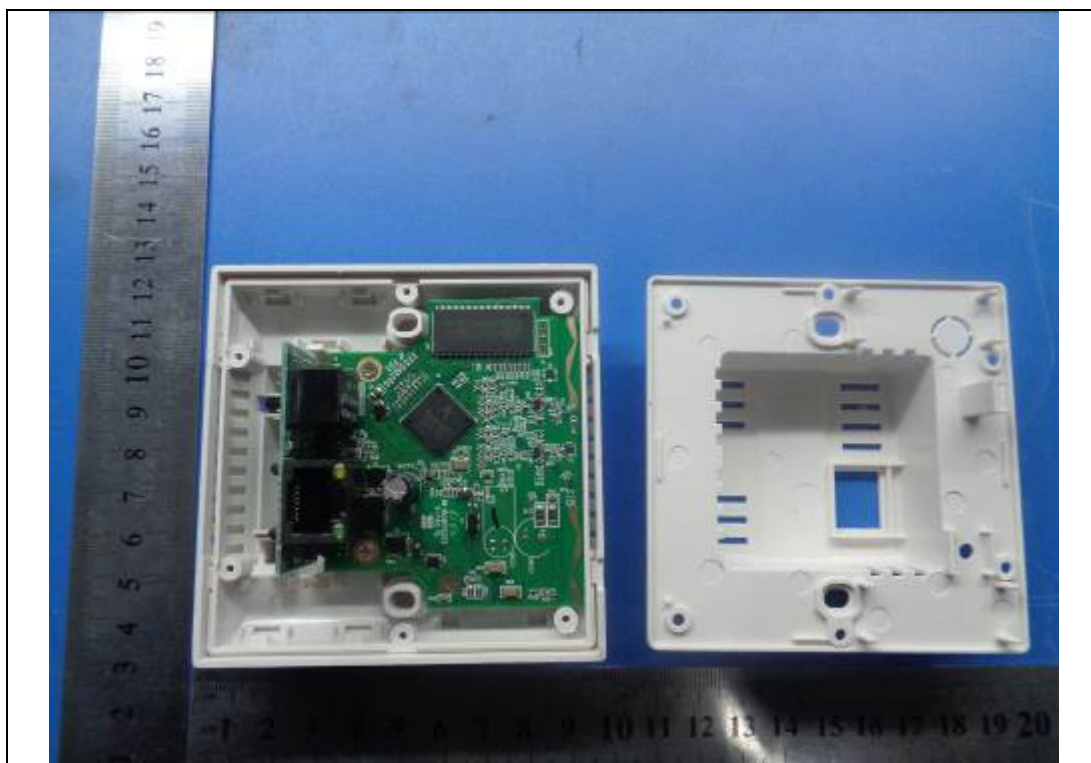


EUT – Uncover Front View 1

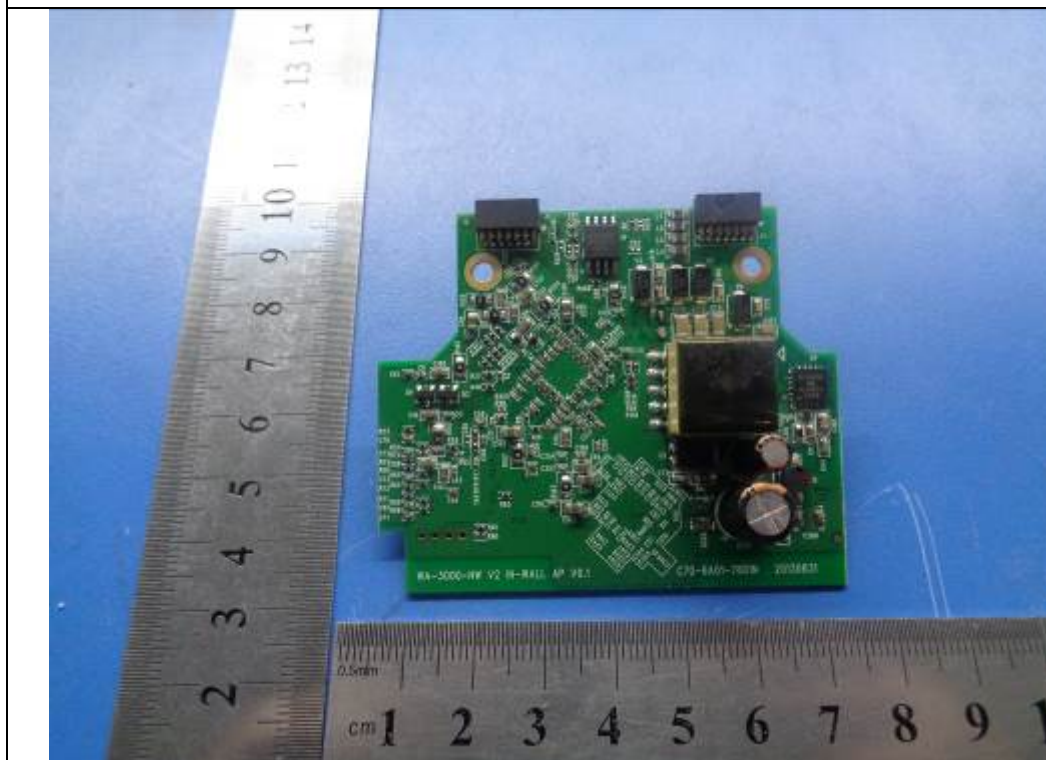


EUT – PCBA 1 Front View

Test Report No.	14021236-FCC-R1
Page	48 of 56

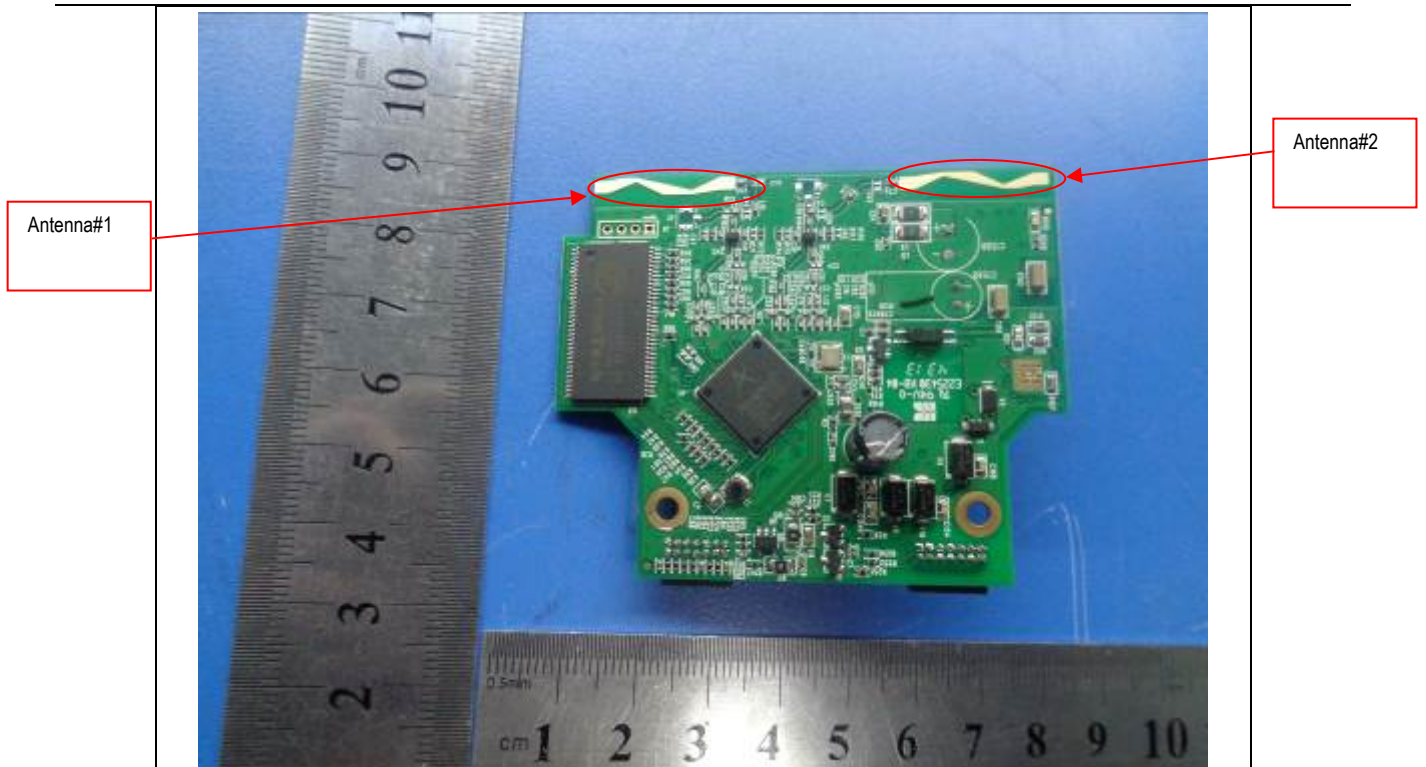


EUT – PCBA 1 Rear View

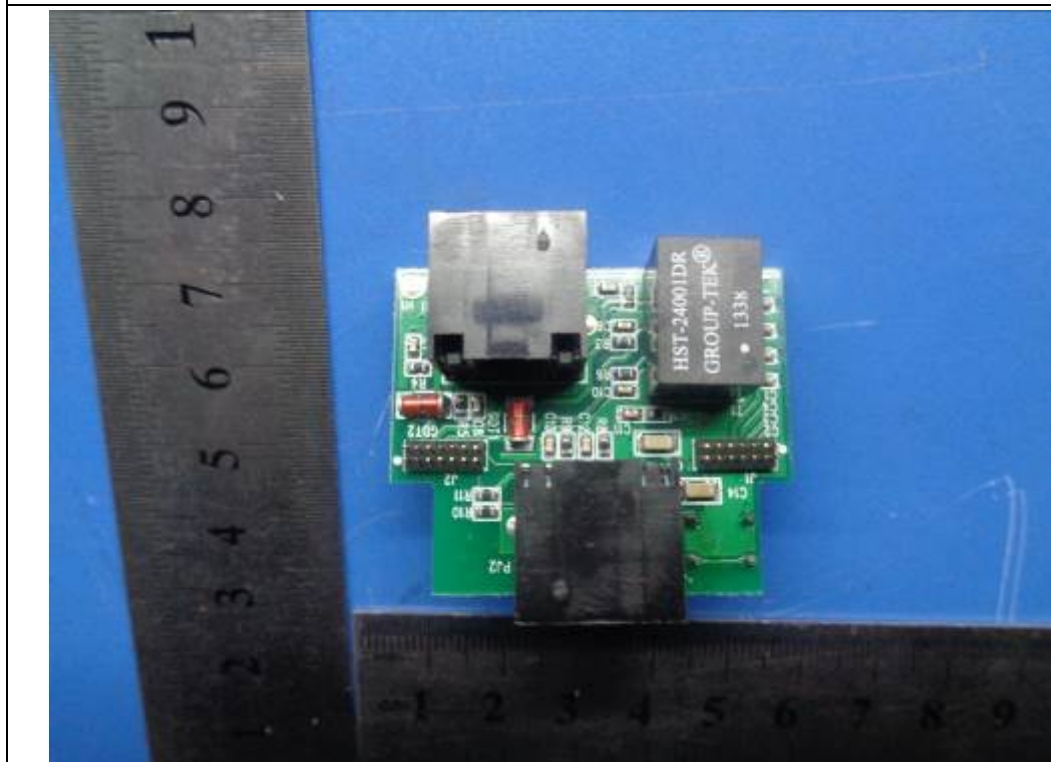

EUT – PCBA 2 Front View



Test Report No.	14021236-FCC-R1
Page	49 of 56

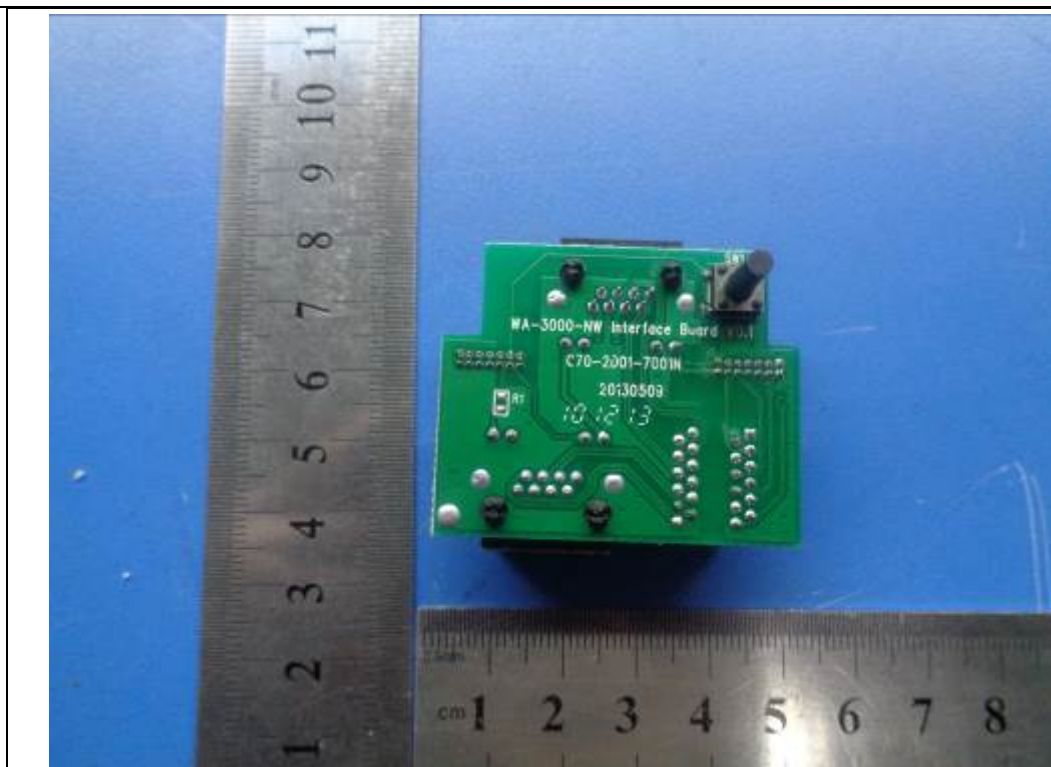


EUT - PCBA 2 Rear View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View

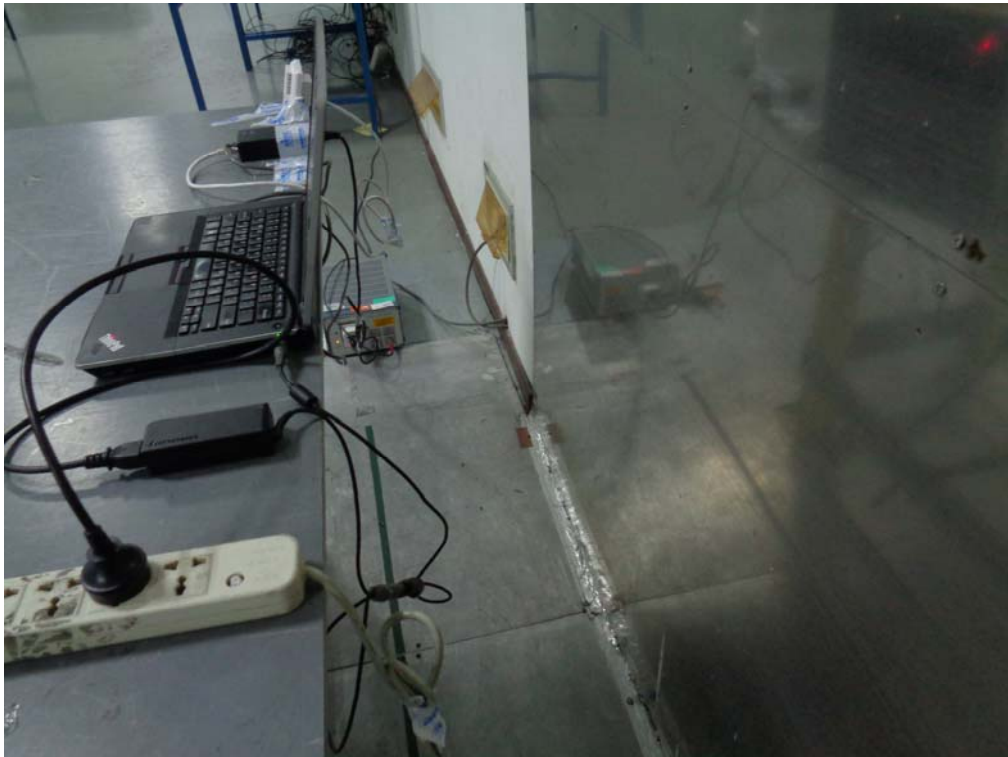

Conducted Emissions Test Setup – Side View

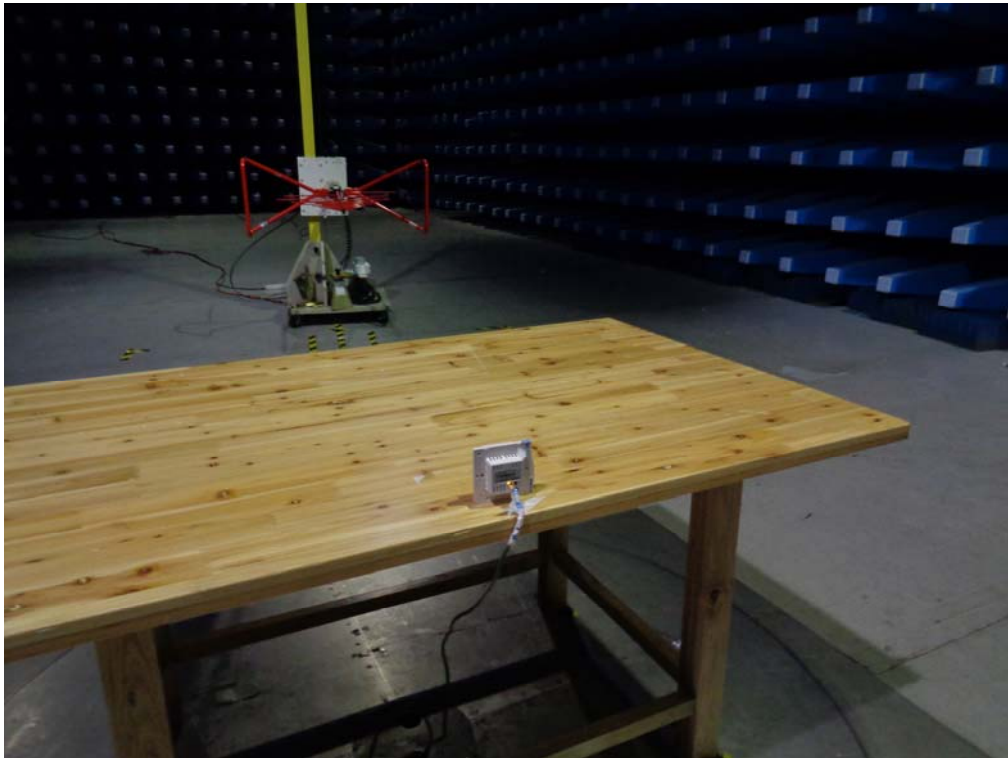

Radiated Spurious Emissions Test Setup Below 1GHz

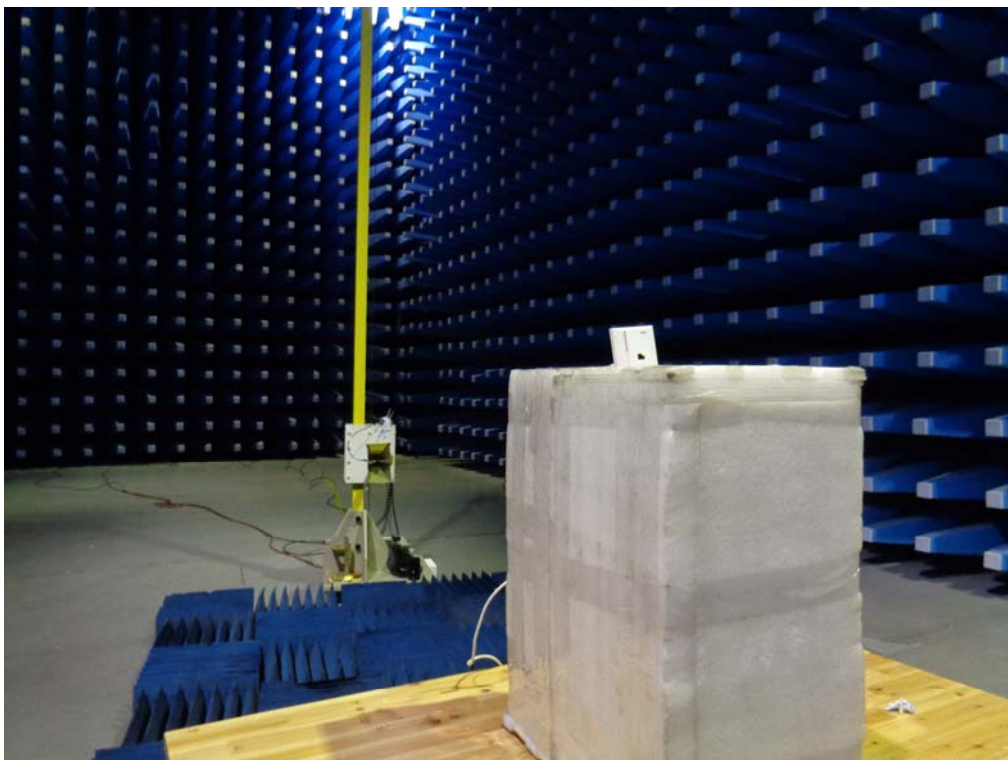


Radiated Spurious Emissions Test Setup Below 1GHz


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.i. TEST SET UP BLOCK

#### Block Configuration Diagram for AC Line Conducted Emissions

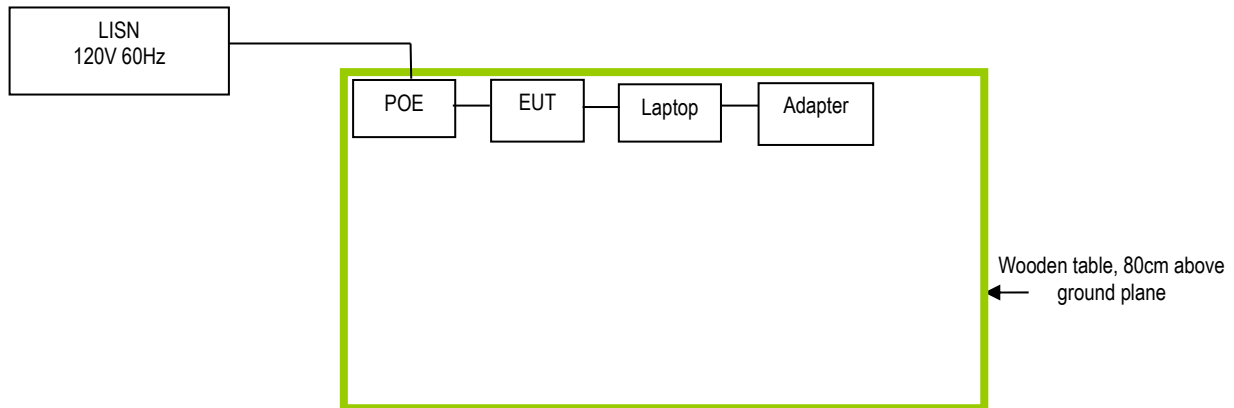

## Block Configuration Diagram for Radiated Emissions

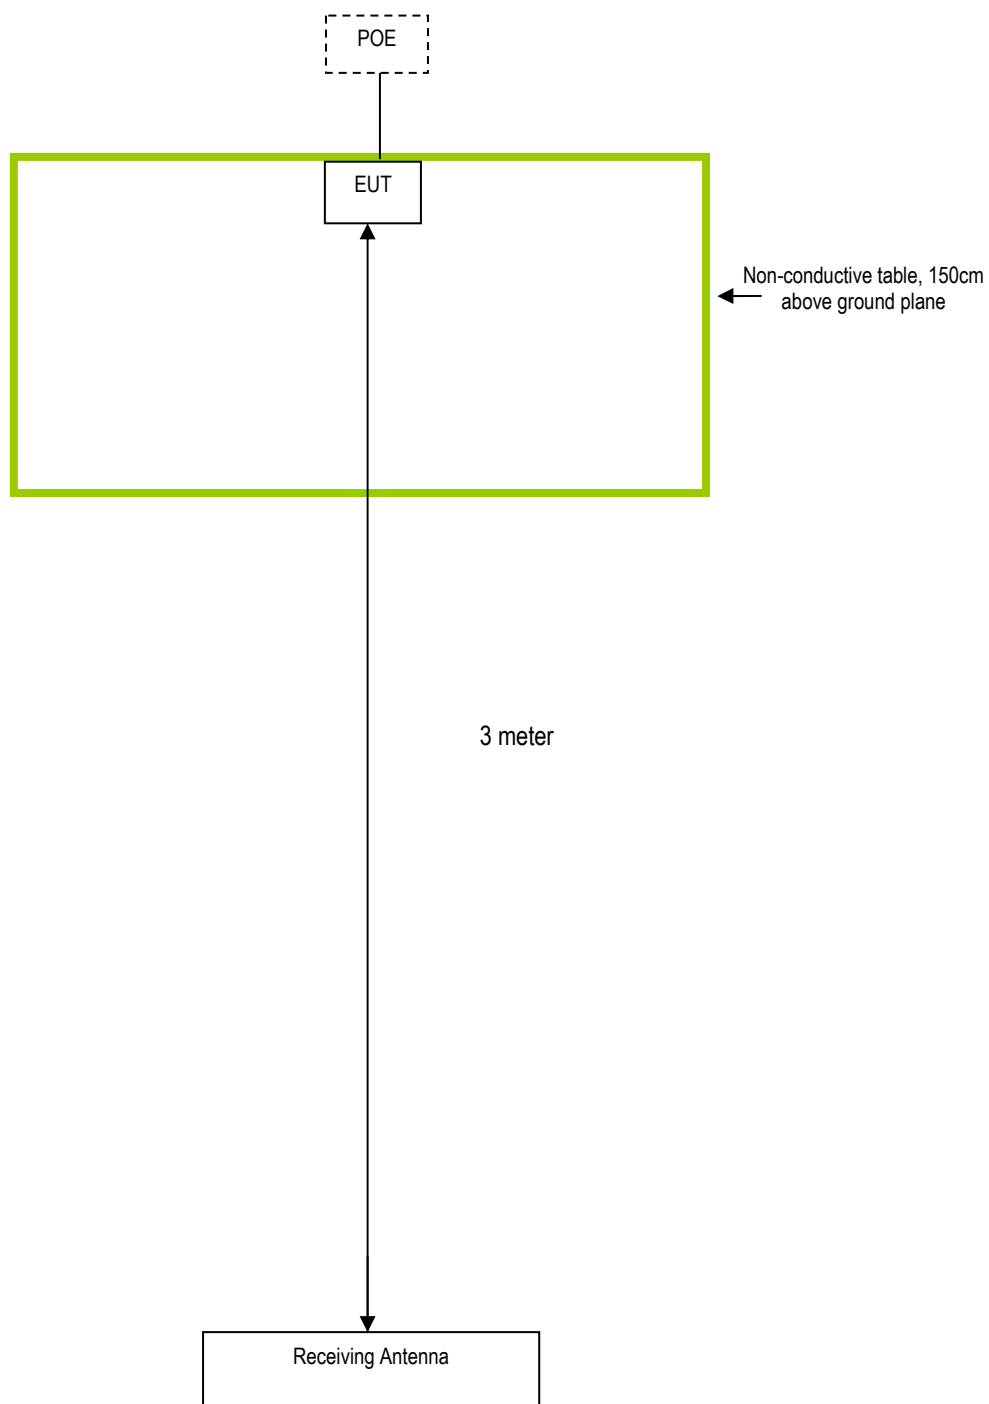

Test Report No.	14021236-FCC-R1
Page	54 of 56

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date
Gateway	Gateway Laptop	MS2288 & LXWHF02013951C3CA92200	N/A

Test Report No.	14021236-FCC-R1
Page	55 of 56

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	14021236-FCC-R1
Page	56 of 56

## Annex E. DECLARATION OF SIMILARITY

N/A