## #01 WCDMA V RMC 12.2Kbps Top Side 1cm Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_140820 Medium parameters used: f = 826.4 MHz;  $\sigma = 0.946$  S/m;  $\epsilon_r = 52.774$ ;  $\rho = 0.946$  S/m;  $\epsilon_r = 52.774$ ;  $\epsilon_r = 52.7$ 

Date: 2014/8/20

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.4 °C; Liquid Temperature: 22.4 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3925; ConvF(9.83, 9.83, 9.83); Calibrated: 2014/5/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2014/5/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)


**Configuration/Ch4132/Area Scan (141x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 0.445 W/kg

**Configuration/Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.017 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.207 W/kgMaximum value of SAR (measured) = 0.439 W/kg

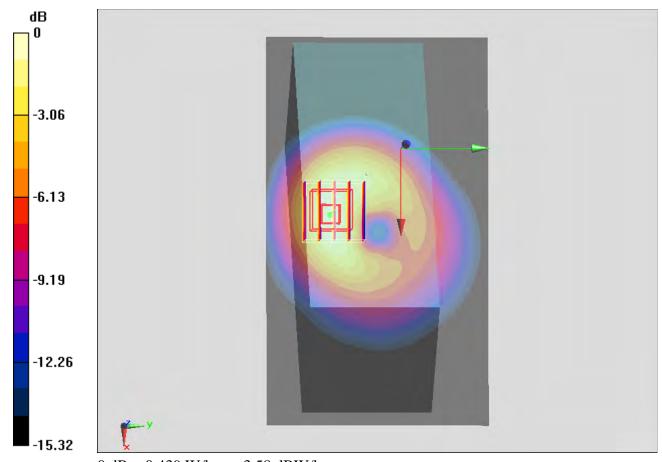

0 dB = 0.439 W/kg = -3.58 dBW/kg

## #02\_WCDMA II\_RMC 12.2Kbps\_Top Side\_1cm\_Ch9400

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_140820 Medium parameters used: f = 1880 MHz;  $\sigma$  = 1.528 S/m;  $\epsilon_r$  = 52.037;  $\rho$ 

Date: 2014/8/20

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.3 °C

## DASY5 Configuration:

- Probe: EX3DV4 SN3925; ConvF(7.87, 7.87, 7.87); Calibrated: 2014/5/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2014/5/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)


**Configuration/Ch9400/Area Scan (141x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 0.365 W/kg

**Configuration/Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.914 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.167 W/kgMaximum value of SAR (measured) = 0.372 W/kg

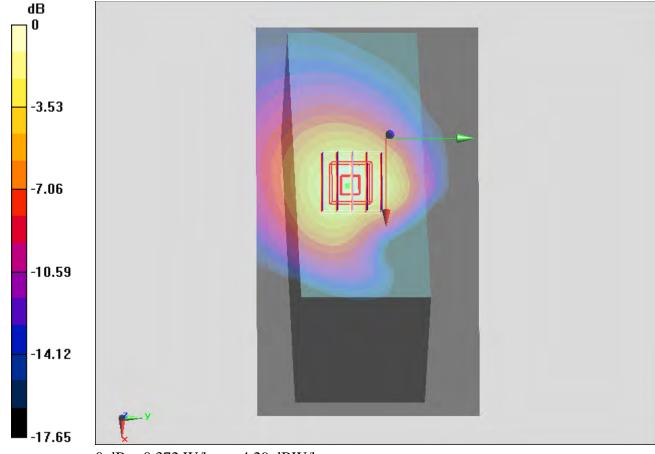

0 dB = 0.372 W/kg = -4.29 dBW/kg