

FCC PART 15.247 TEST REPORT

For

Avantronics Limited

The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, China

FCC ID: WJ5-BTRC-300

Report Type: Original Report	Product Type: Avantree Roxa
Test Engineer: Mick Yin	<i>Mick Yin</i>
Report Number: RSZ121203008-00A	
Report Date: 2012-12-18	
Reviewed By: Sula Huang RF Engineer	<i>Sula Huang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING	27

APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52
FCC §15.247(d) - BAND EDGES TESTING	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Avantronics Limited*'s product, model number: *BTRC-300 (FCC ID: WJ5-BTRC-300)* or the "EUT" in this report was a *Avantree Roxa*, which was measured approximately: 45.5 mm (L) x 55.5 mm (W) x 33.5 mm (H), rated input voltage: AC100-240V 50/60 Hz. Test voltage: AC120V/60 Hz.

** All measurement and test data in this report was gathered from production sample serial number: 1212009 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2012-12-03.*

Objective

This test report is prepared on behalf of *Avantronics Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submission with FCC ID: WJ5-BTRC-300.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The software (CSR BlueSuite 2.5) provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

EUT Exercise Software

CSR BlueSuite 2.5

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Gajah	Loudspeaker	GD71BT	N/A
Meizu	Mobile Phone	MX	N/A

External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded Detachable USB Cable	0.6	EUT	Loudspeaker
Unshielded Detachable Audio cable	0.2	EUT	Loudspeaker
Unshielded Detachable AC Cable	1.0	Receptacle	LISN

Block Diagram of Test Setup

For AC Line Conducted Emissions Test

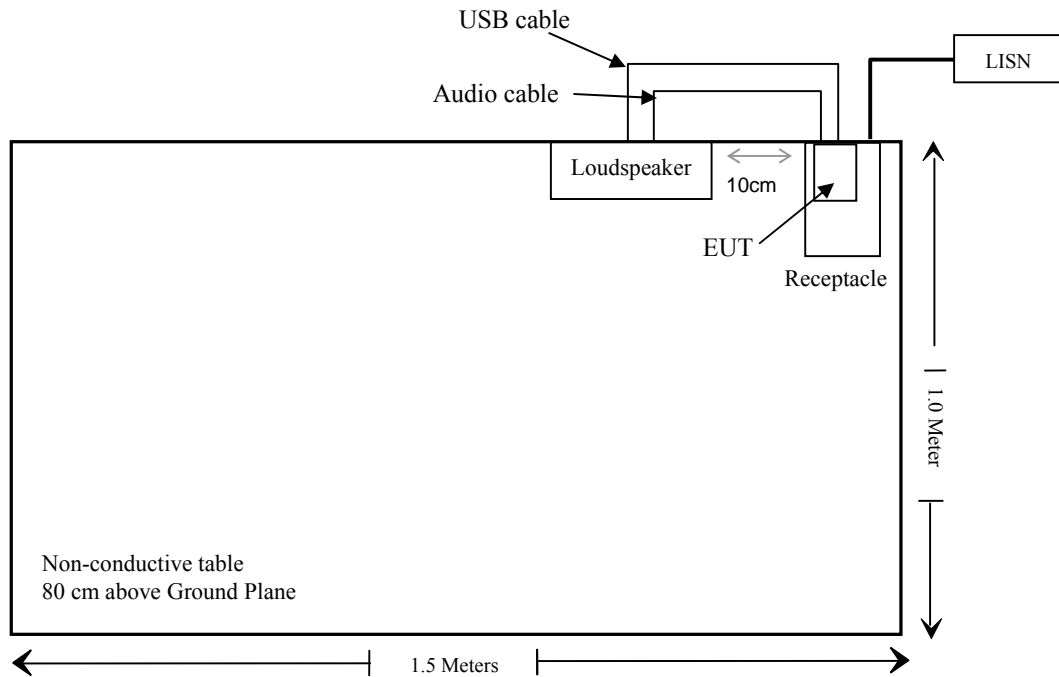

For Radiated Emission Test

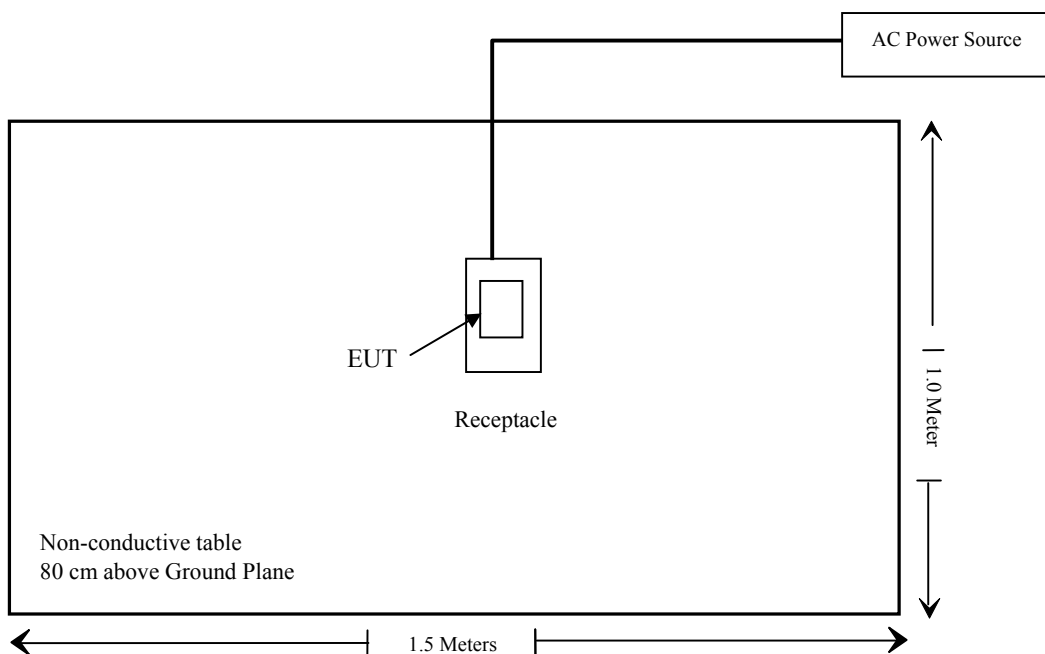

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Calculation

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally *numeric* gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BDR (GFSK)	2441	0	1.0	5.68	3.698	20	0.000736	1.0
EDR (π/4-DQPSK)	2441	0	1.0	3.83	2.415	20	0.000480	1.0
EDR (8DPSK)	2480	0	1.0	3.96	2.489	20	0.000495	1.0

Note: To comply with FCC RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an integrated antenna arrangement, which was permanently attached and the gain was 0 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

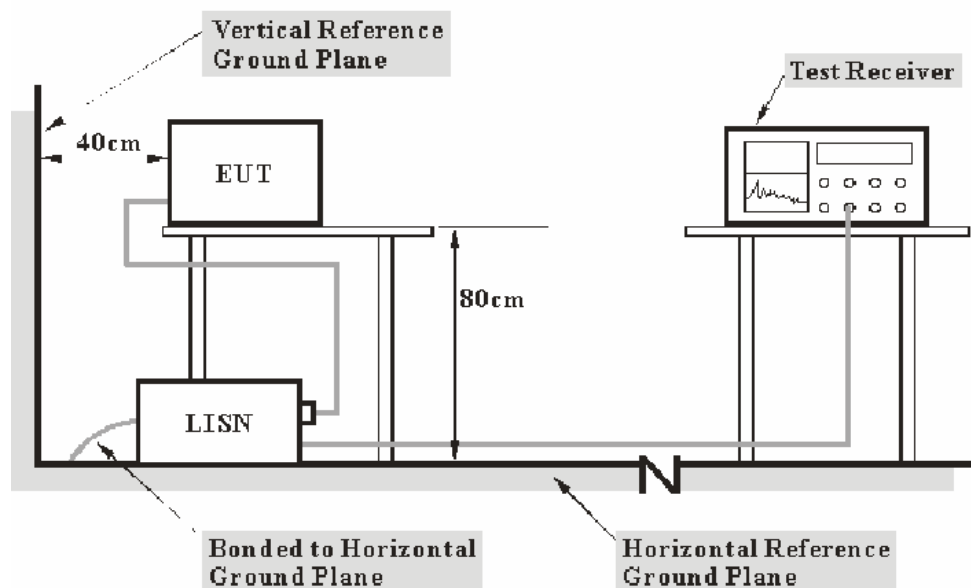

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm

The EUT was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2012-11-24	2013-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Pulse Limiter Attenuation

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.30 dB at 0.395 MHz in the **Neutral** conducted mode


Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	100.0 kPa


The testing was performed by Mick Yin on 2012-12-05.

Test Mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

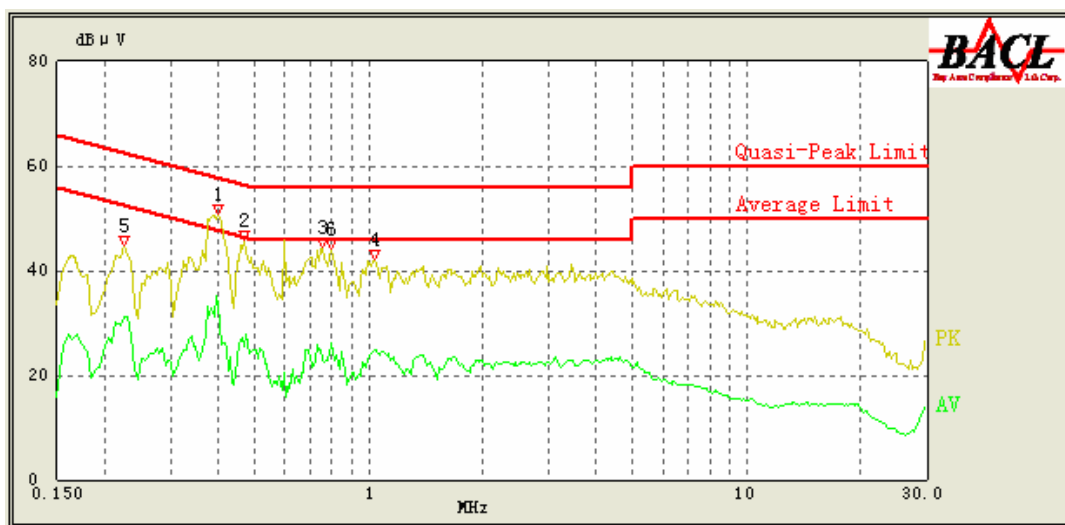

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.400	44.05	10.26	58.86	14.81	QP
0.400	33.85	10.26	48.86	15.01	Ave.
0.795	39.34	10.20	56.00	16.66	QP
0.470	39.56	10.26	56.86	17.30	QP
0.755	38.20	10.21	56.00	17.80	QP
0.795	25.49	10.20	46.00	20.51	Ave.
1.035	35.17	10.17	56.00	20.83	QP
1.035	24.76	10.17	46.00	21.24	Ave.
0.470	25.49	10.26	46.86	21.37	Ave.
0.225	31.22	10.27	53.86	22.64	Ave.
0.755	23.12	10.21	46.00	22.88	Ave.
0.225	38.81	10.27	63.86	25.05	QP

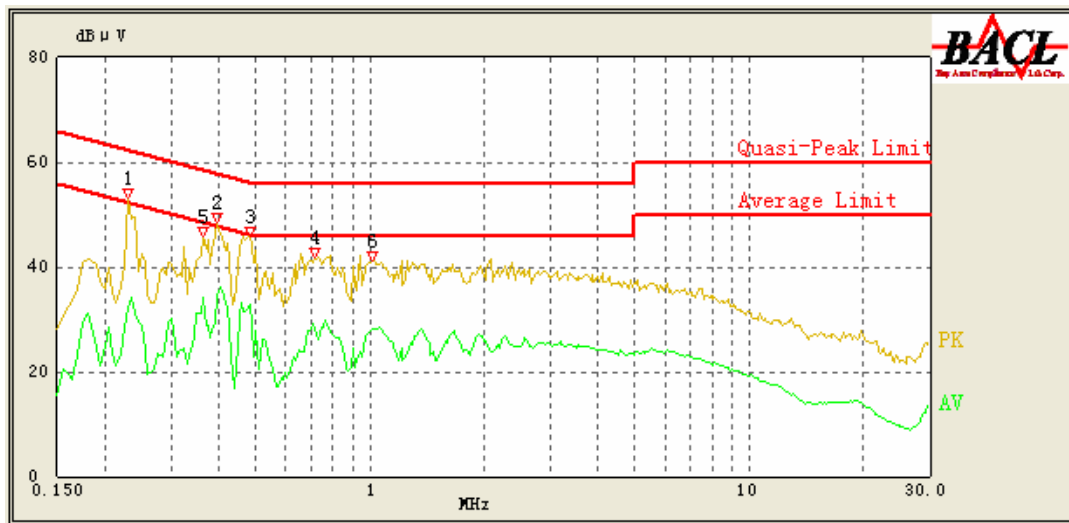AC 120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.395	45.70	10.25	59.00	13.30	QP
0.485	32.84	10.24	46.43	13.59	Ave.
0.395	34.35	10.25	49.00	14.65	Ave.
0.485	41.76	10.24	56.43	14.67	QP
0.365	34.23	10.25	49.86	15.63	Ave.
0.230	47.53	10.25	63.71	16.18	QP
0.710	29.03	10.21	46.00	16.97	Ave.
1.020	28.32	10.17	46.00	17.68	Ave.
0.715	37.24	10.21	56.00	18.76	QP
0.365	39.70	10.25	59.86	20.16	QP
0.230	32.23	10.25	53.71	21.48	Ave.
1.015	34.28	10.17	56.00	21.72	QP

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF + Cable Loss + Pulse Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. ($k=2$, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

Below 1 GHz:

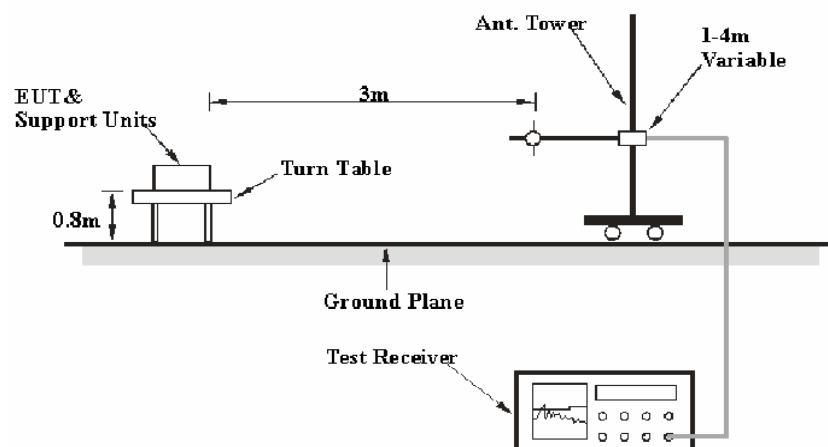

Above 1 GHz:

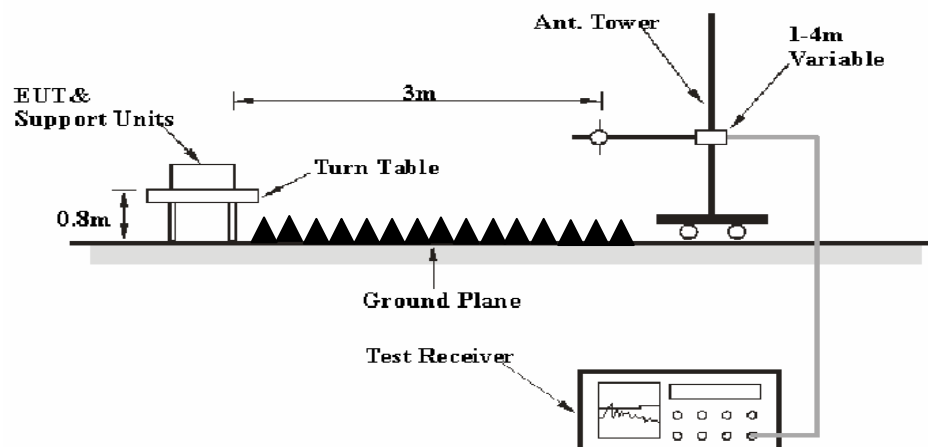

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
1 GHz – 25 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01057	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13
R&S	Auto test Software	EMC32	V6.30	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

9.83 dB at 4882.0 MHz in the Horizontal polarization

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

The testing was performed by Mick Yin on 2012-12-13.

Test mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is BDR Mode (GFSK))

30 MHz ~25 GHz:

Frequency	Receiver		Turn table Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC PART 15.247	
(MHz)	Reading (dBμV/m)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2402 MHz)									
2402.0	91.36	PK	27	1.2	H	6.13	97.49	/	/
2402.0	80.67	Ave.	27	1.2	H	6.13	86.80	/	/
2402.0	86.55	PK	31	1.1	V	6.13	92.68	/	/
2402.0	76.39	Ave.	31	1.1	V	6.13	82.52	/	/
4804.0	27.52	Ave.	115	1.2	H	12.40	39.92	54	14.08
4804.0	47.15	PK	115	1.2	H	12.40	59.55	74	14.45
9608.0	17.52	Ave.	71	1.2	V	19.28	36.80	54	17.20
260.32	43.53	QP	87	1.2	H	-15.4	28.13	46.0	17.87
7206.0	17.93	Ave.	82	1.1	V	17.06	34.99	54	19.01
9608.0	32.20	PK	71	1.2	V	19.28	51.48	74	22.52
7206.0	32.66	PK	82	1.1	V	17.06	49.72	74	24.28
2493.8	20.48	Ave.	35	1.0	V	7.21	27.69	54	26.31
2390.0	21.34	Ave.	11	1.3	V	6.13	27.47	54	26.53
2326.6	21.23	Ave.	58	1.2	H	5.48	26.71	54	27.29
2390.0	37.52	PK	11	1.3	V	6.13	43.65	74	30.35
2493.8	35.41	PK	35	1.0	V	7.21	42.62	74	31.38
2323.6	35.52	PK	58	1.2	H	5.48	41.00	74	33.00
Middle Channel(2441 MHz)									
2441.0	89.55	PK	35	1.2	H	7.21	96.76	/	/
2441.0	79.56	Ave.	35	1.2	H	7.21	86.77	/	/
2441.0	87.08	PK	125	1.1	V	7.21	94.29	/	/
2441.0	76.24	Ave.	125	1.1	V	7.21	83.45	/	/
4882.0	51.71	PK	85	1.2	H	12.46	64.17	74	9.83
4882.0	29.23	Ave.	85	1.2	H	12.46	41.69	54	12.31
9764.0	18.02	Ave.	158	1.1	H	19.40	37.42	54	16.58
260.32	43.64	QP	201	1.2	H	-15.4	28.24	46.0	17.76
7323.0	18.94	Ave.	36	1.1	V	16.49	35.43	54	18.57
7323.0	34.92	PK	36	1.1	V	16.49	51.41	74	22.59
9764.0	31.18	PK	158	1.1	H	19.40	50.58	74	23.42
2496.2	20.53	Ave.	224	1.3	H	7.21	27.74	54	26.26
2371.2	21.06	Ave.	36	1.1	V	6.13	27.19	54	26.81
2324.6	21.49	Ave.	87	1.2	V	5.48	26.97	54	27.03
2496.2	34.88	PK	224	1.3	H	7.21	42.09	74	31.91
2324.6	35.99	PK	87	1.2	V	5.48	41.47	74	32.53
2371.2	35.13	PK	36	1.1	V	6.13	41.26	74	32.74

Frequency	Receiver		Turn table Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m) (MHz)	FCC PART 15.247	
(MHz)	Reading (dBμV/m)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Reading (dBμV/m)	Detector (PK/QP/Ave.)
High Channel(2480 MHz)									
2480.0	87.28	PK	85	1.2	H	7.21	94.49	/	/
2480.0	76.79	Ave.	85	1.2	H	7.21	84.00	/	/
2480.0	84.33	PK	22	1.1	V	7.21	91.54	/	/
2480.0	73.87	Ave.	22	1.1	V	7.21	81.08	/	/
4960.0	49.46	PK	234	1.3	H	12.50	61.96	74	12.04
4960.0	27.77	Ave.	234	1.3	H	12.50	40.27	54	13.73
9920.0	18.73	Ave.	155	1.2	H	19.38	38.11	54	15.89
260.32	43.47	QP	120	1.1	H	-15.4	28.07	46.0	17.93
7440.0	20.03	Ave.	93	1.1	H	15.90	35.93	54	18.07
2483.5	24.47	Ave.	32	1.1	V	7.21	31.68	54	22.32
9920.0	31.46	PK	155	1.2	H	19.38	50.84	74	23.16
7440.0	34.49	PK	93	1.1	H	15.90	50.39	74	23.61
2483.5	42.22	PK	32	1.1	V	7.21	49.43	74	24.57
2376.1	22.76	Ave.	77	1.2	V	6.13	28.89	54	25.11
2344.5	21.53	Ave.	132	1.2	V	5.48	27.01	54	26.99
2376.1	37.48	PK	77	1.2	V	6.13	43.61	74	30.39
2344.5	36.13	PK	132	1.2	V	5.48	41.61	74	32.39

Note:

- 1) Corrected Amplitude = Corrected Factor + Reading
- 2) Corrected Factor=Antenna factor (RX) + cable loss – amplifier factor
- 3) Margin = Limit - Corrected Amplitude

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, RBW of spectrum was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

* The testing was performed by Mick Yin on 2012-12-12 and 2012-12-13.


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	\geq Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.002	0.615	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.615	Pass
	Adjacent	2440			
	High	2480	1.002	0.615	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.002	0.812	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.812	Pass
	Adjacent	2440			
	High	2480	1.002	0.812	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.002	0.809	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.809	Pass
	Adjacent	2440			
	High	2480	1.002	0.809	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

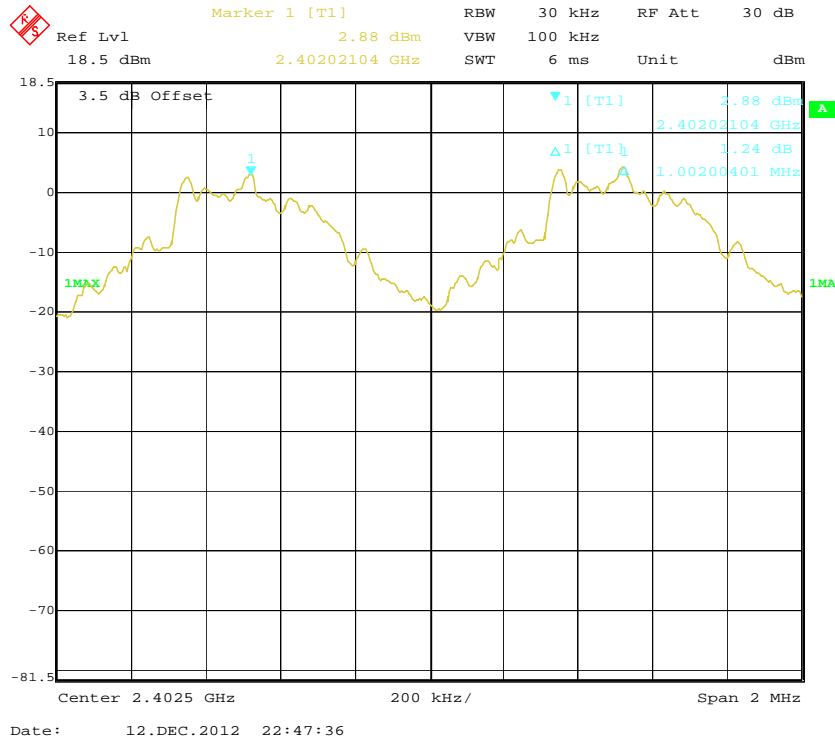


BDR (GFSK): Middle Channel

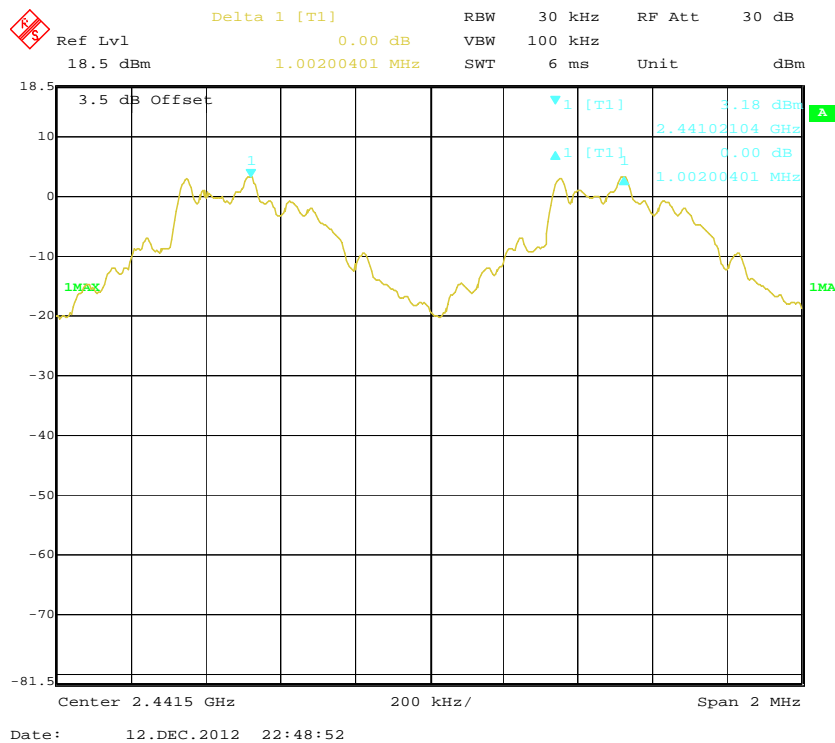


BDR (GFSK): High Channel

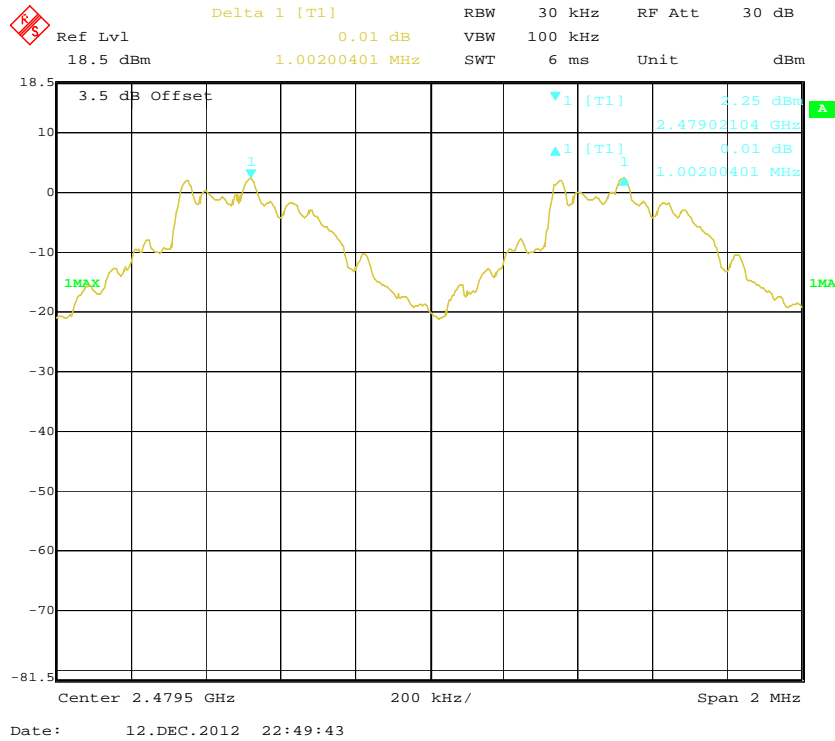


EDR ($\pi/4$ -DQPSK): Low Channel

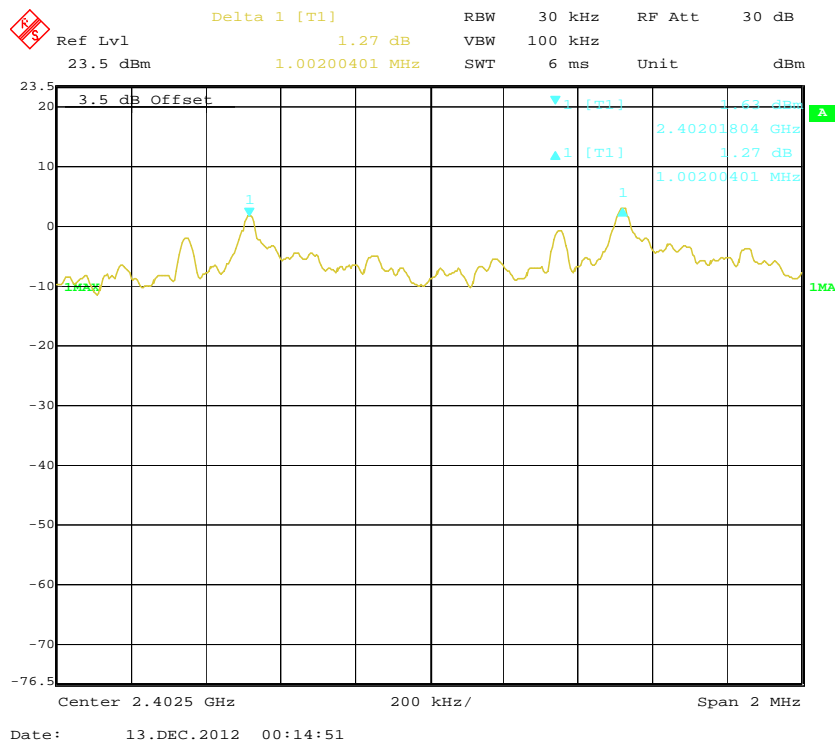


EDR ($\pi/4$ -DQPSK): Middle Channel

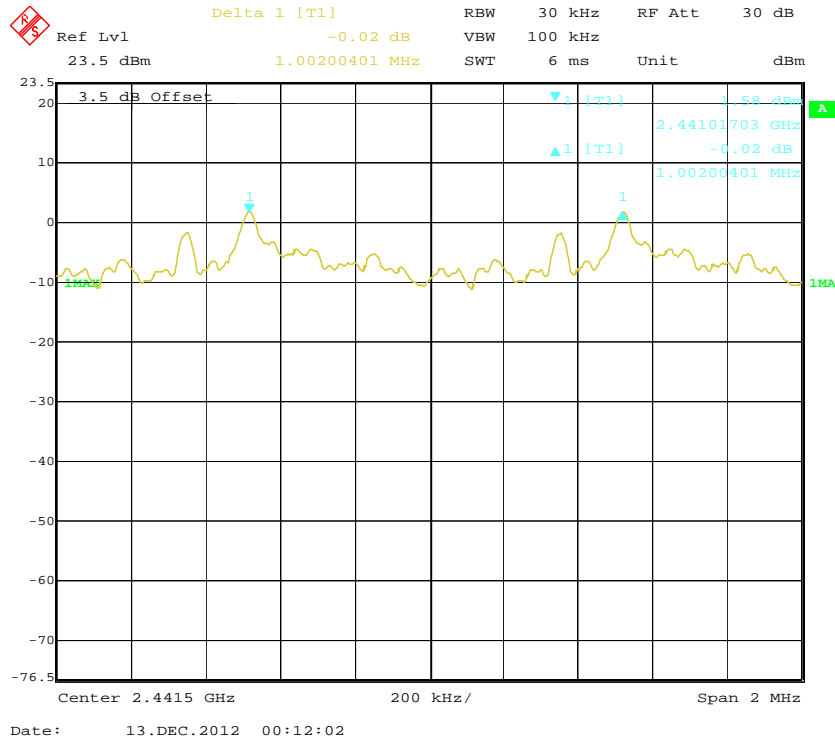


EDR ($\pi/4$ -DQPSK): High Channel

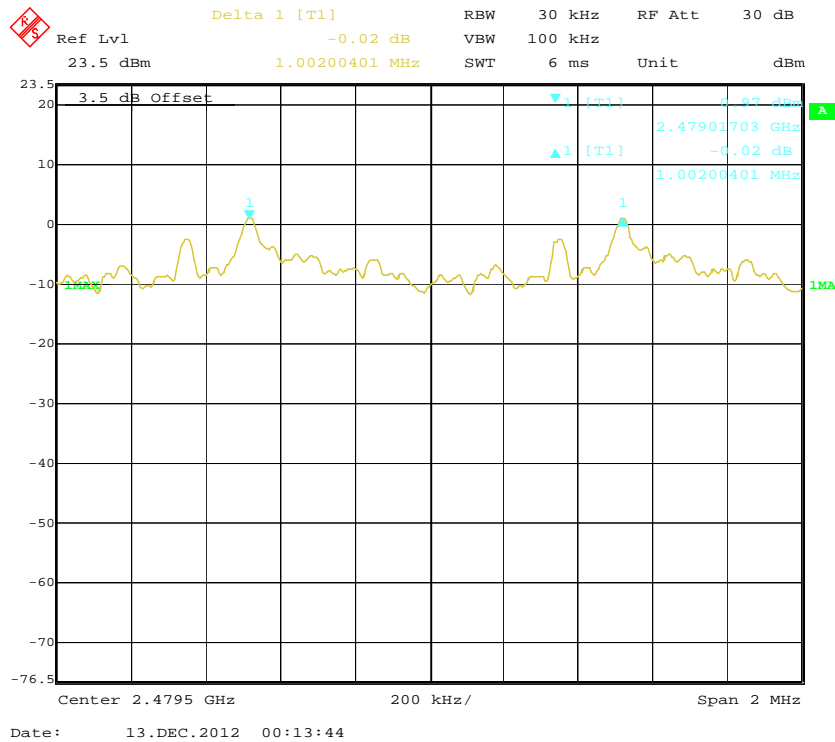


EDR (8DPSK): Low Channel

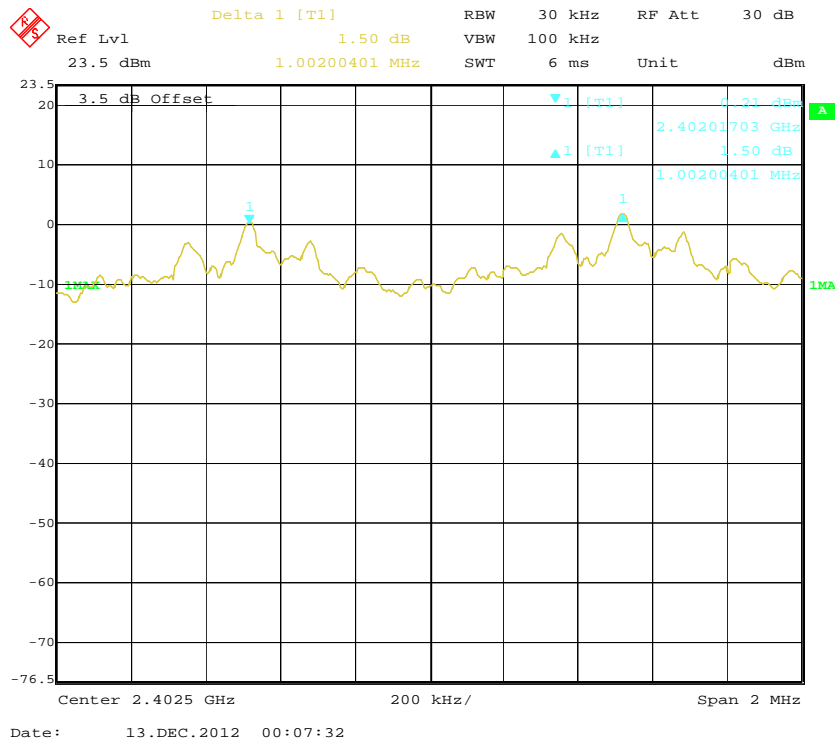

EDR (8DPSK): Middle Channel

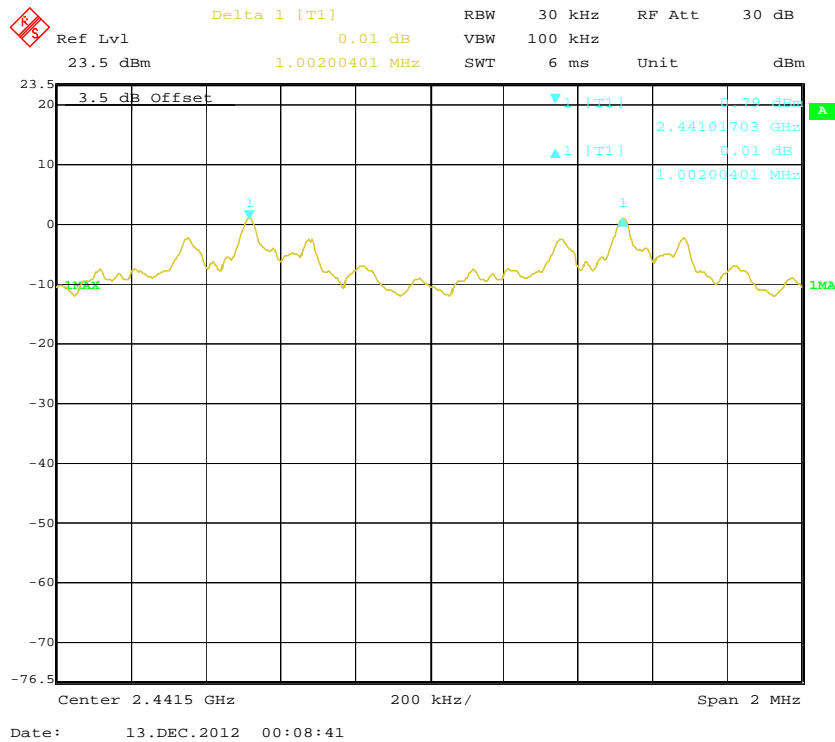

EDR (8DPSK): High Channel

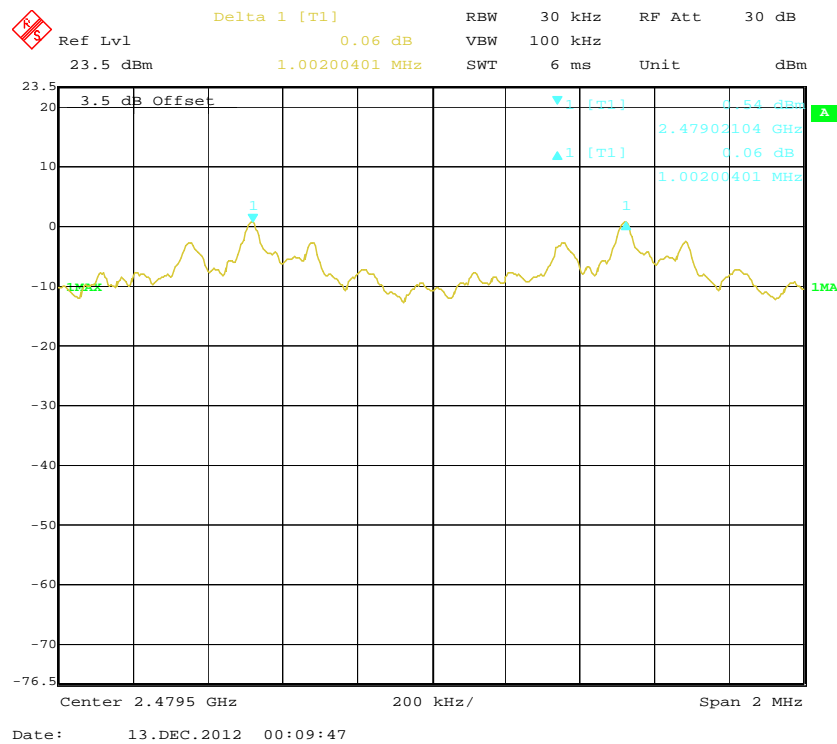

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

* The testing was performed by Mick Yin on 2012-12-12 and 2012-12-13.


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.922
	Middle	2441	0.922
	High	2480	0.922
EDR ($\pi/4$-DQPSK)	Low	2402	1.218
	Middle	2441	1.218
	High	2480	1.218
EDR (8DPSK)	Low	2402	1.214
	Middle	2441	1.214
	High	2480	1.214

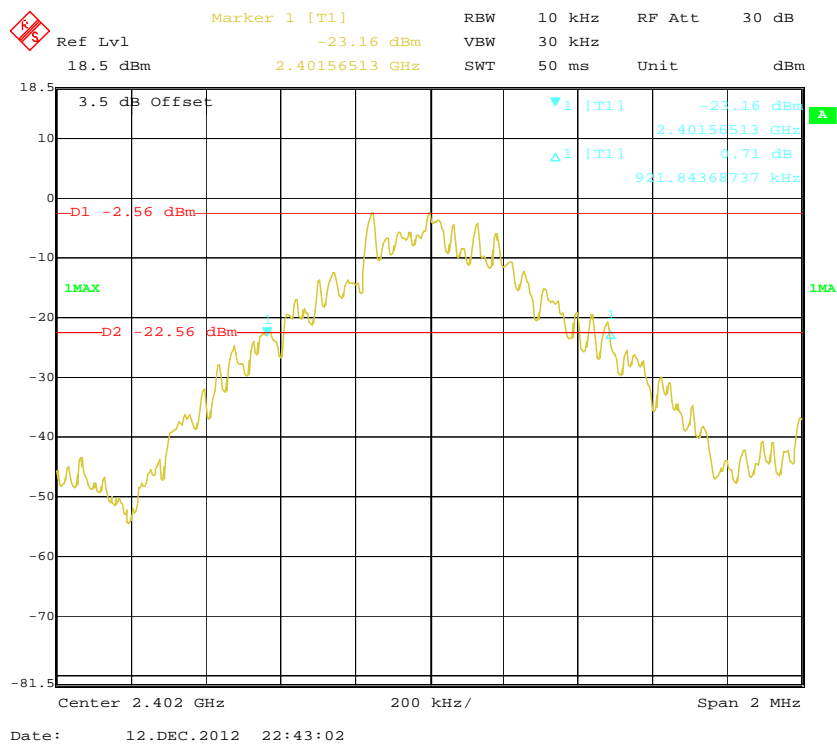BDR (GFSK): Low Channel


BDR (GFSK): Middle Channel

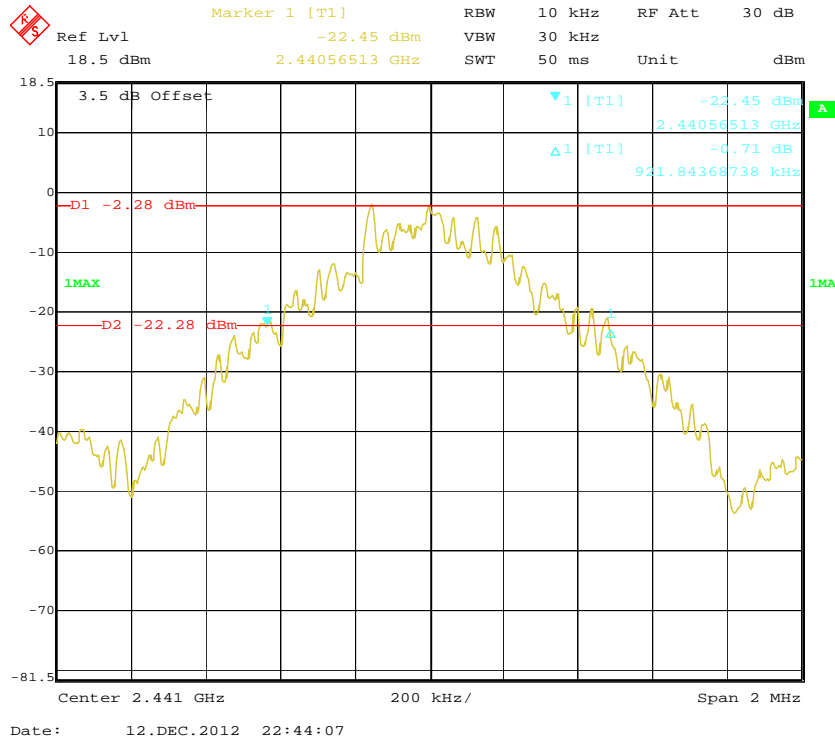


BDR (GFSK): High Channel

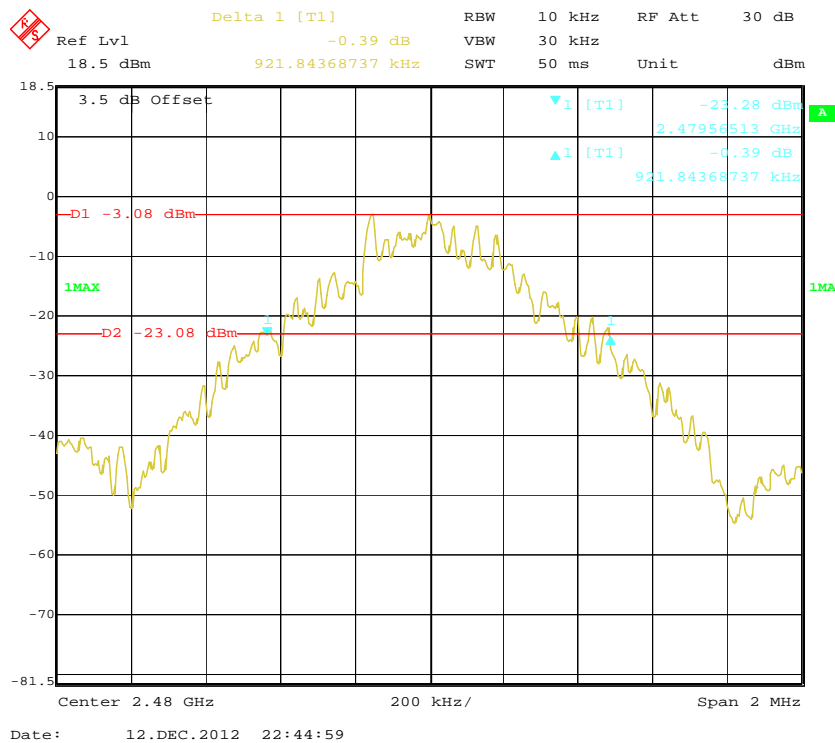

EDR ($\pi/4$ -DQPSK): Low Channel

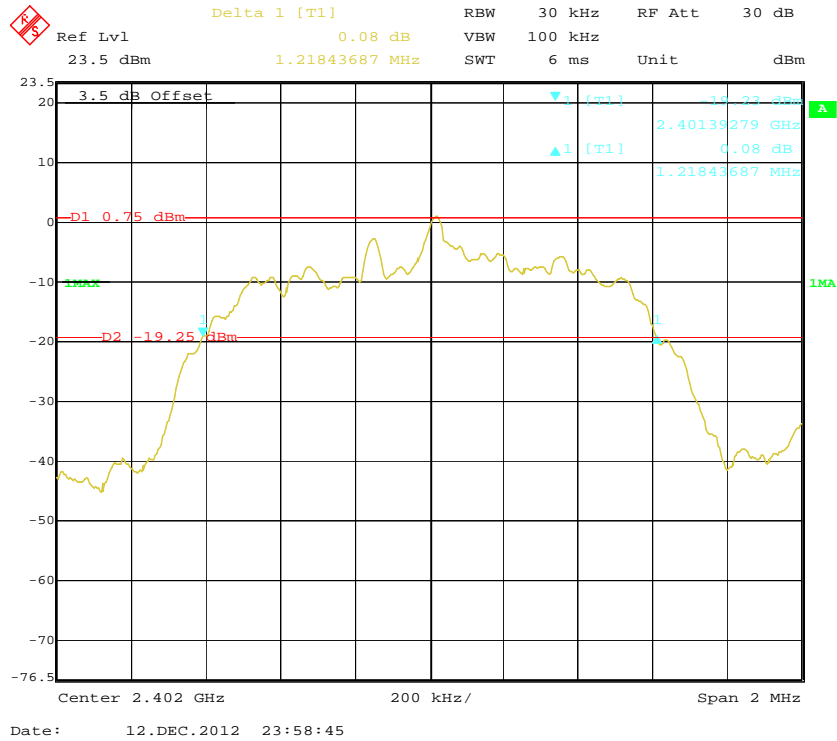

EDR ($\pi/4$ -DQPSK): Middle Channel

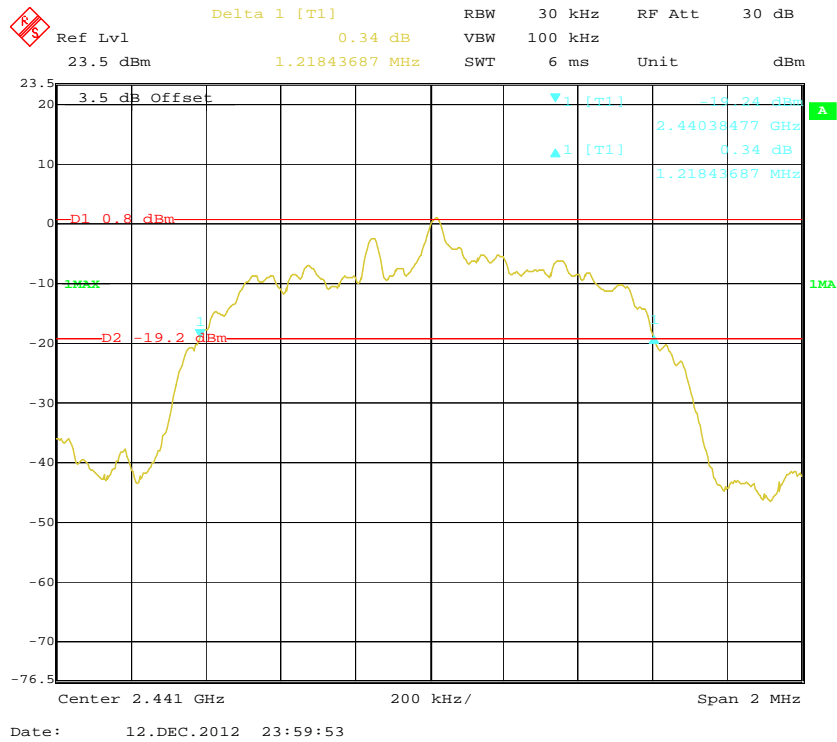

Ref Lvl 23.5 dBm Delta 1 [T1] 0.64 dB RBW 30 kHz RF Att 30 dB

23.5 dBm 1.21843687 MHz SWT 6 ms Unit dBm

3.5 dB Offset

1 [T1] 1.21843687 MHz

1 [T1] 2.47938477 GHz

1 [T1] 0.64 dB

D1 0.56 dBm


D2 -19.44 dBm

Center 2.48 GHz 200 kHz/ Span 2 MHz


Date: 13.DEC.2012 00:01:01

[illegible]

EDR (8DPSK): Middle Channel

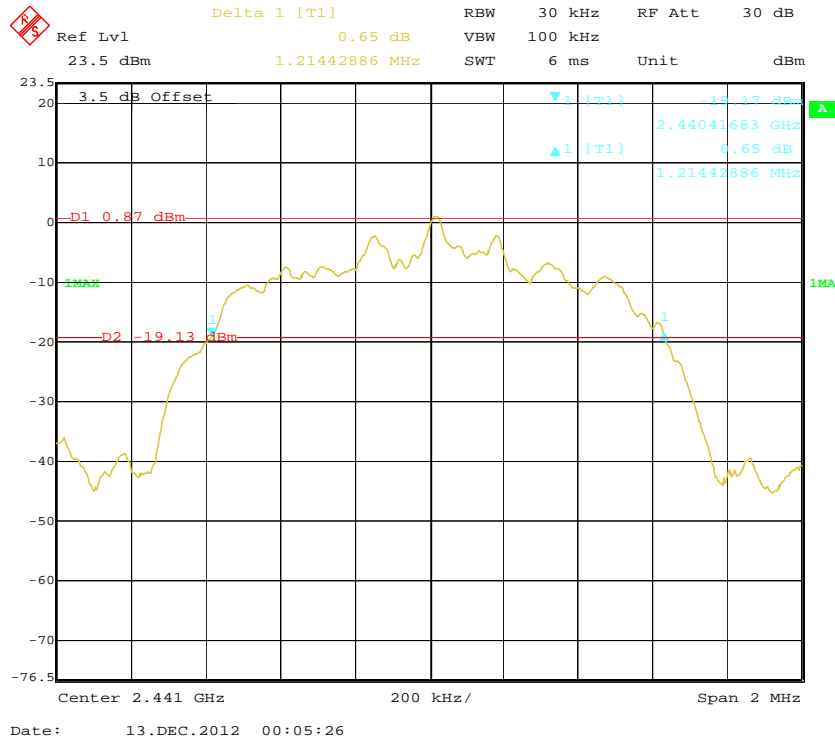

EDR (8DPSK): High Channel

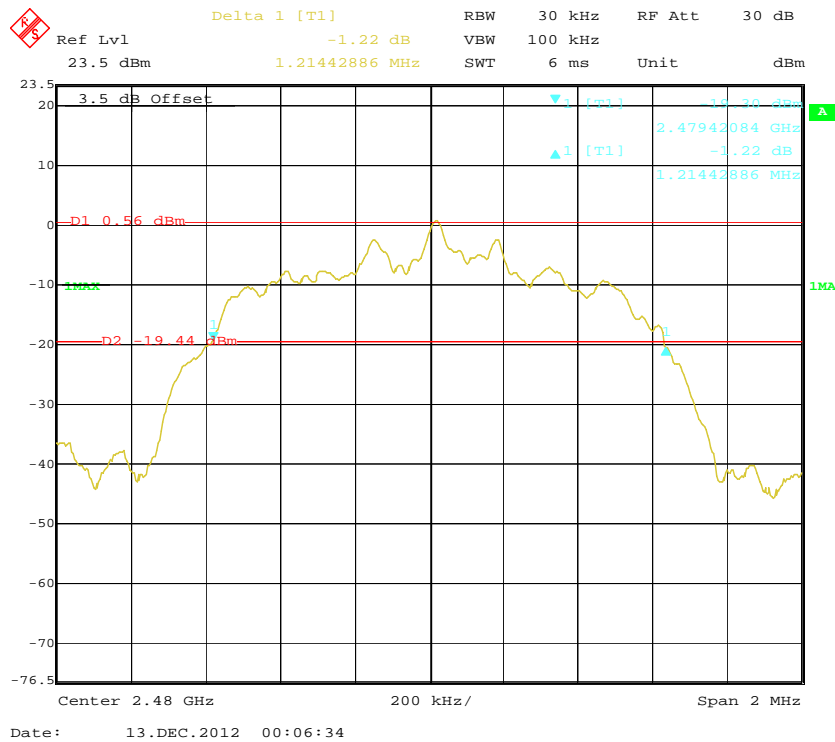

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100 kPa


The testing was performed by Mick Yin on 2012-12-13.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2402-2480	79	≥15
EDR (π/4-DQPSK)	2402-2480	79	≥15
EDR (8DPSK)	2402-2480	79	≥15

BDR (GFSK): Number of Hopping Channels

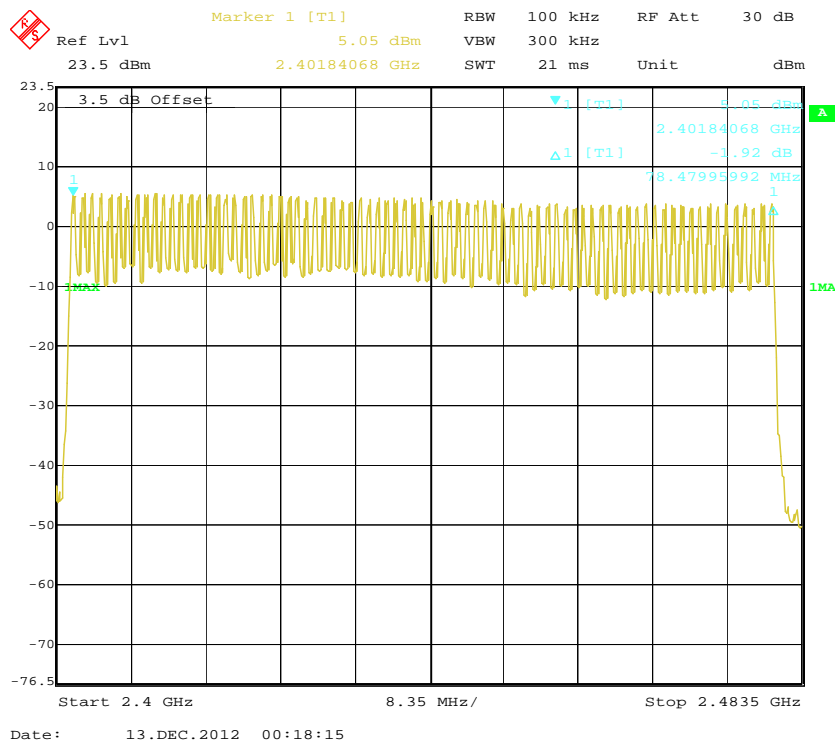

Delta 1 [T1] -0.46 dB RBW 100 kHz RF Att 30 dB

Ref Lvl 23.5 dBm 78.14529058 MHz SWT 21 ms Unit dBm

3.5 dB Offset

2.40200802 GHz -0.46 dB

78.14529058 MHz

Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz

Date: 13.DEC.2012 00:25:55

[illegible]

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWEELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hope rate/number of hopping channels*31.6S

Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

The testing was performed by Mick Yin on 2012-12-12.


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.430	0.138	0.4	Pass
		Middle	0.430	0.138	0.4	Pass
		High	0.430	0.138	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.692	0.271	0.4	Pass
		Middle	1.692	0.271	0.4	Pass
		High	1.692	0.271	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.945	0.314	0.4	Pass
		Middle	2.945	0.314	0.4	Pass
		High	2.945	0.314	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$-DQPSK)	DH 1	Low	0.434	0.139	0.4	Pass
		Middle	0.434	0.139	0.4	Pass
		High	0.434	0.139	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.694	0.271	0.4	Pass
		Middle	1.694	0.271	0.4	Pass
		High	1.694	0.271	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.955	0.315	0.4	Pass
		Middle	2.955	0.315	0.4	Pass
		High	2.955	0.315	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	DH 1	Low	0.436	0.140	0.4	Pass
		Middle	0.436	0.140	0.4	Pass
		High	0.436	0.140	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.694	0.271	0.4	Pass
		Middle	1.694	0.271	0.4	Pass
		High	1.694	0.271	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.965	0.316	0.4	Pass
		Middle	2.965	0.316	0.4	Pass
		High	2.965	0.316	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK):


Pulse time, Low Channel, DH1

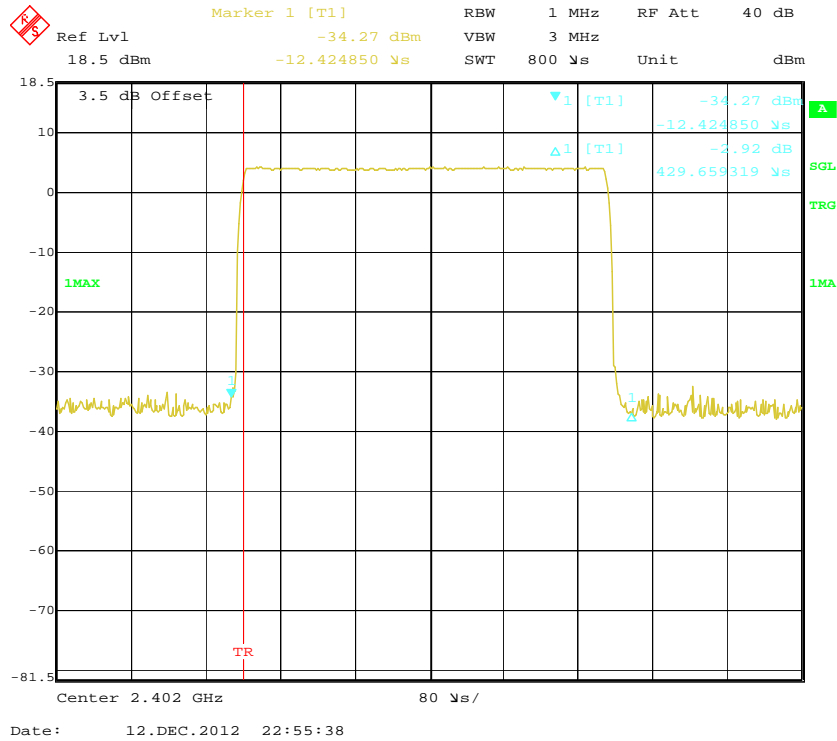


Pulse time, Middle Channel, DH1

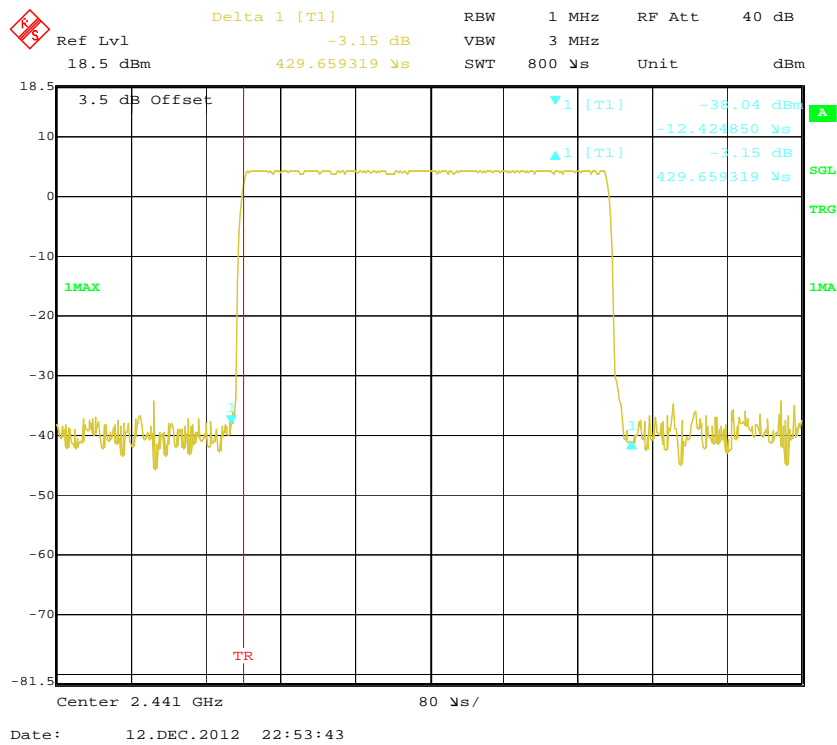


Pulse time, High Channel, DH1

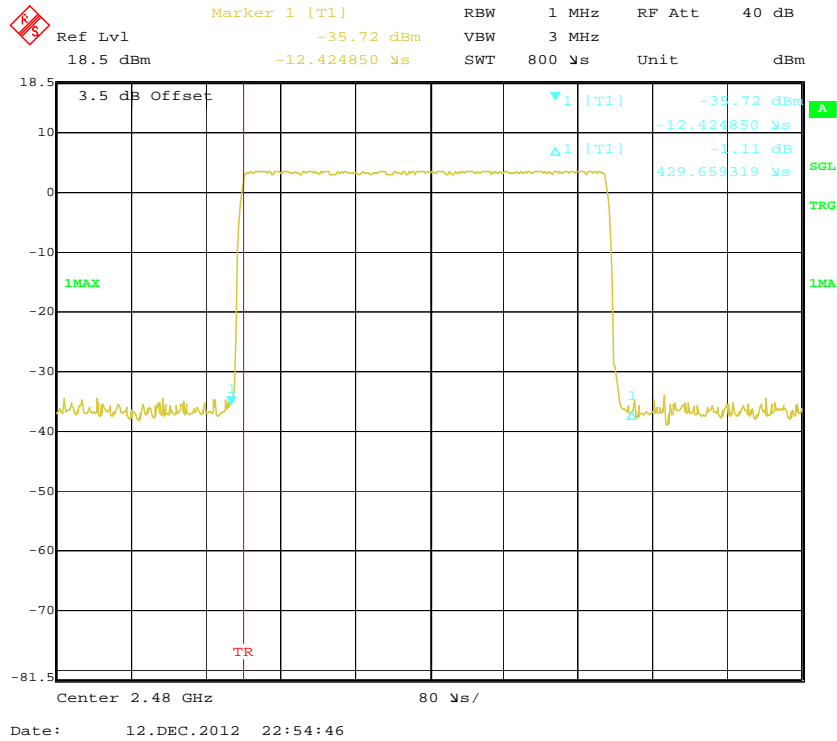


Pulse time, Low Channel, DH3

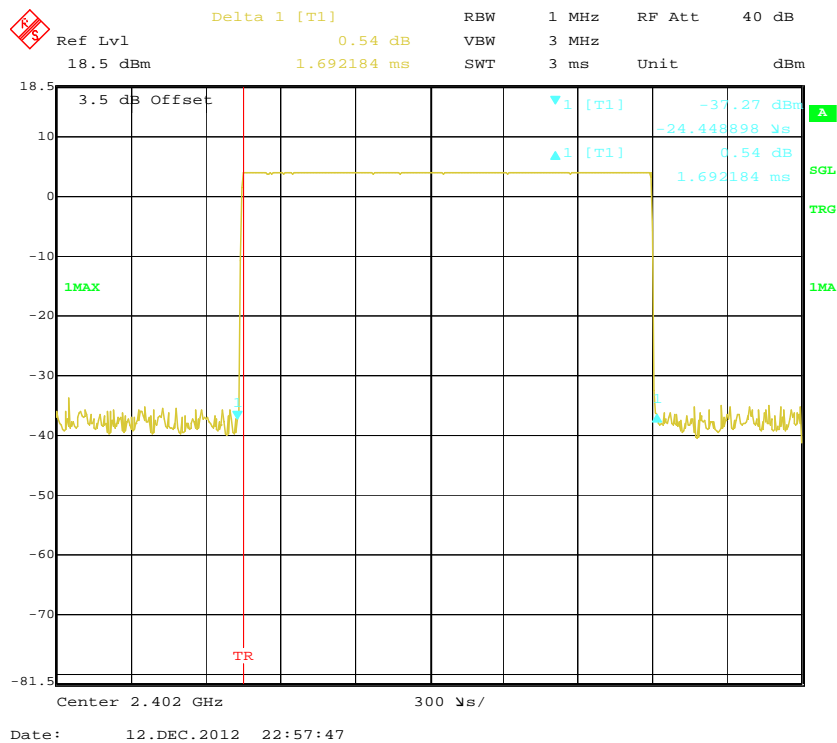


Pulse time, Middle Channel, DH3

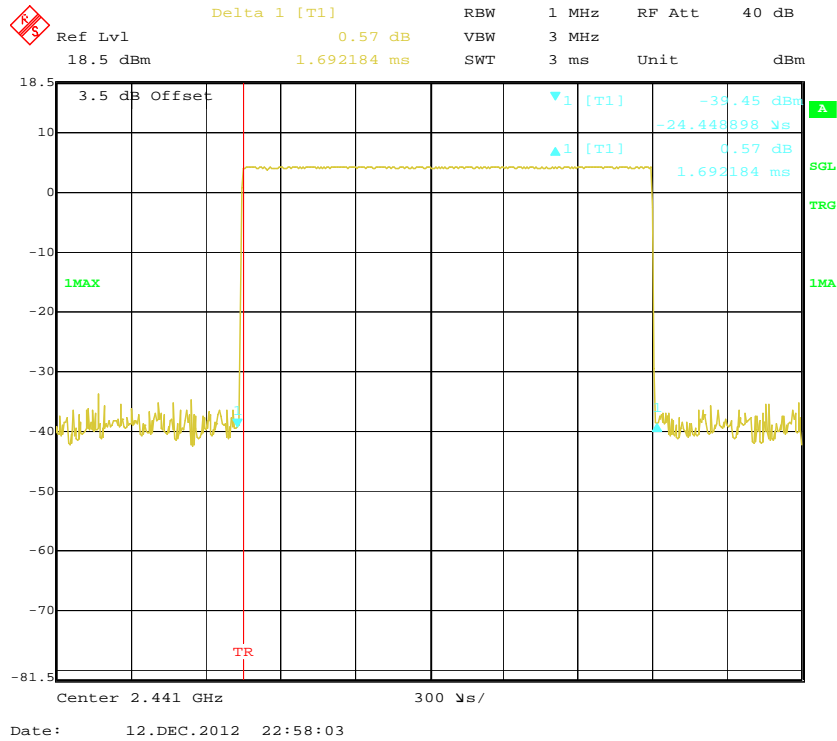


Pulse time, High Channel, DH3

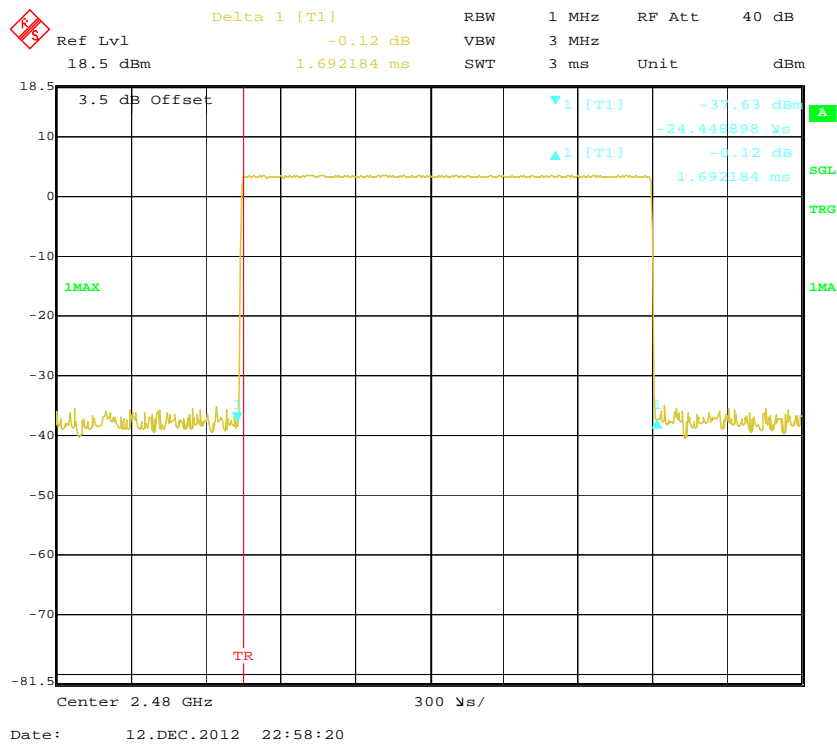


Pulse time, Low Channel, DH5

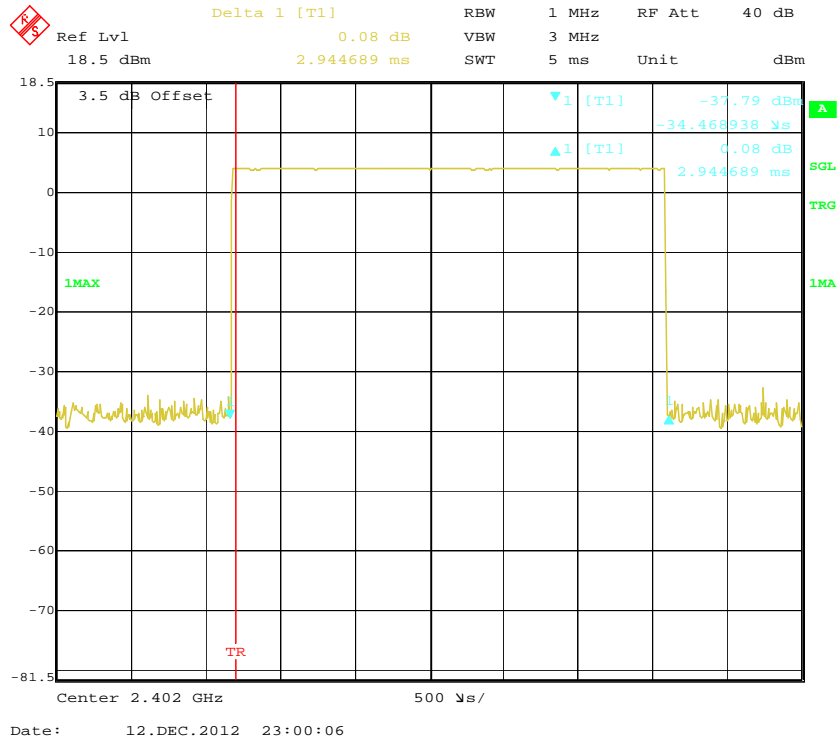

Pulse time, Middle Channel, DH5

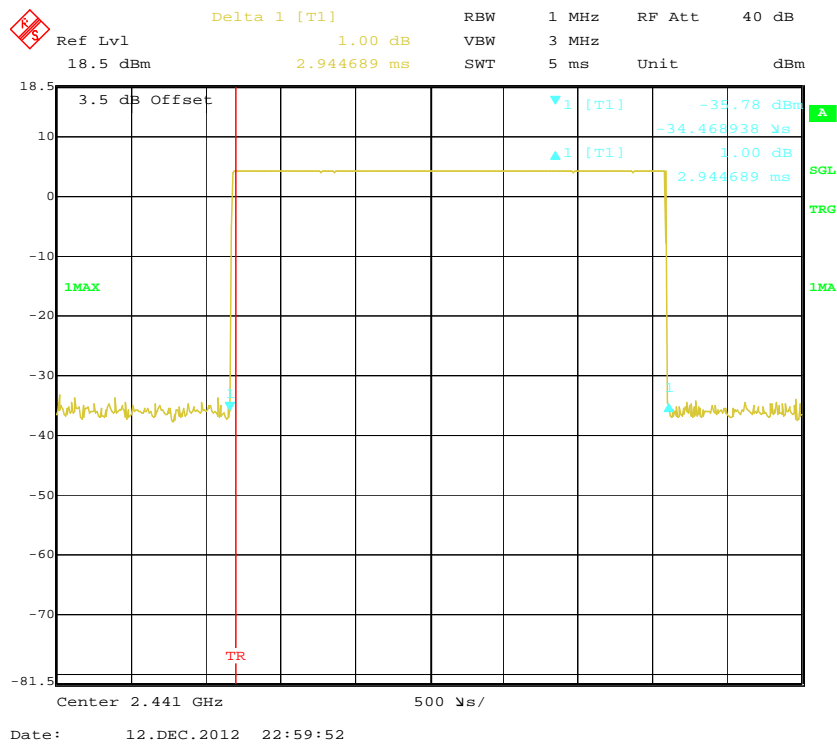


Pulse time, High Channel, DH5

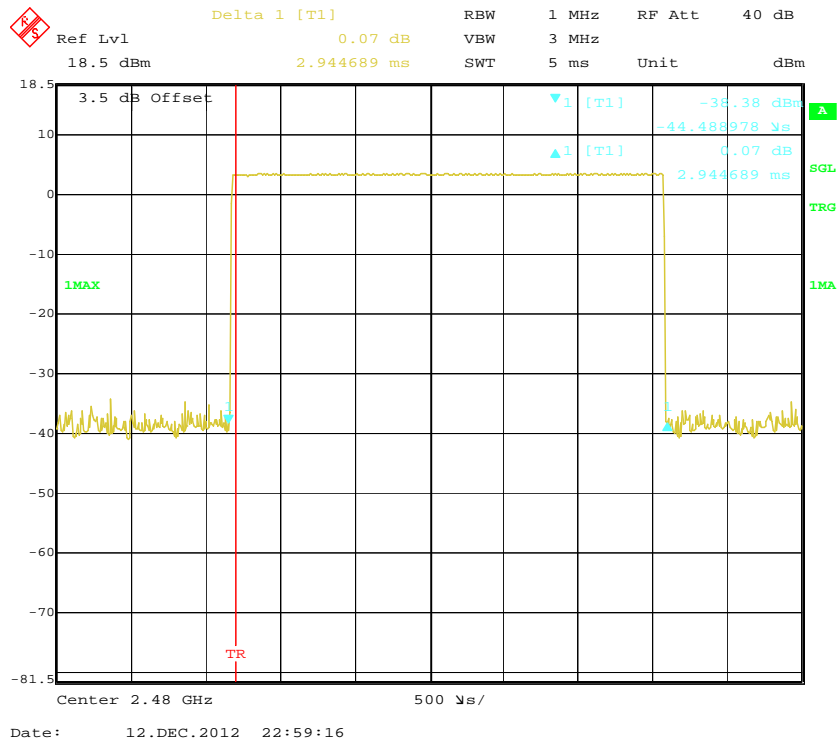


EDR ($\pi/4$ -DQPSK):


Pulse time, Low Channel, DH1

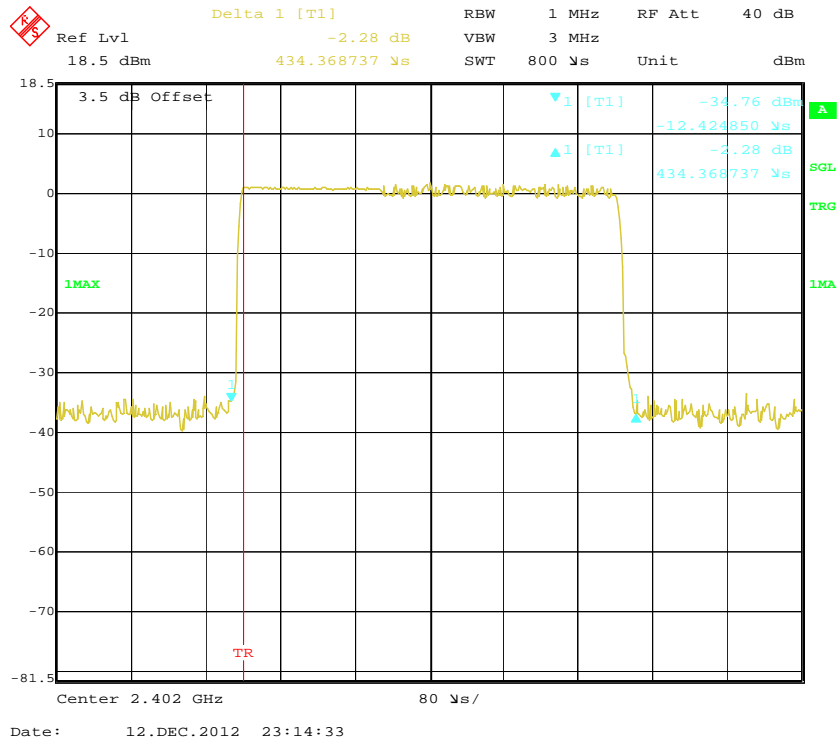


Pulse time, Middle Channel, DH1

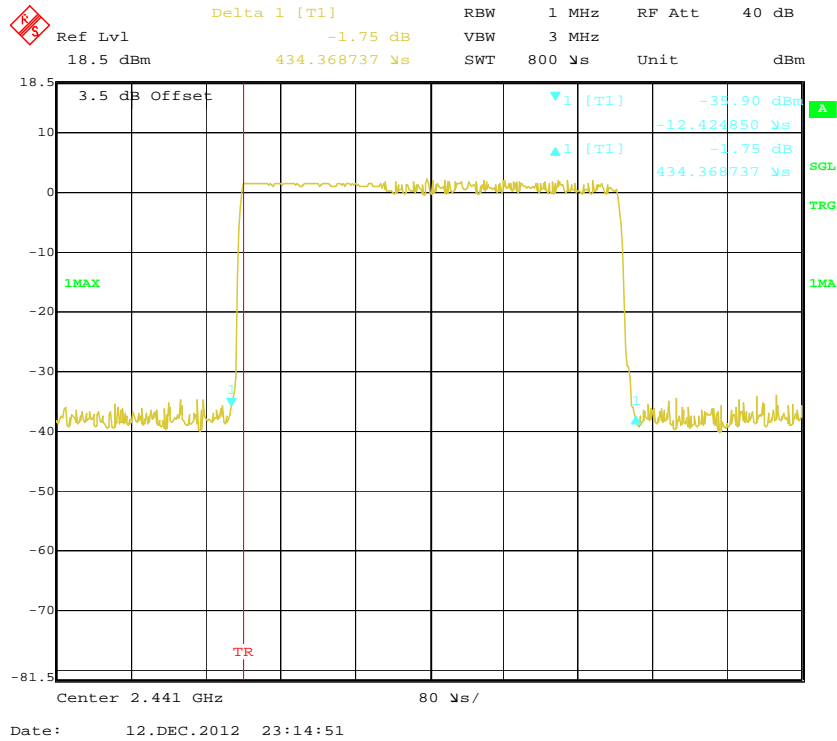


Pulse time, High Channel, DH1

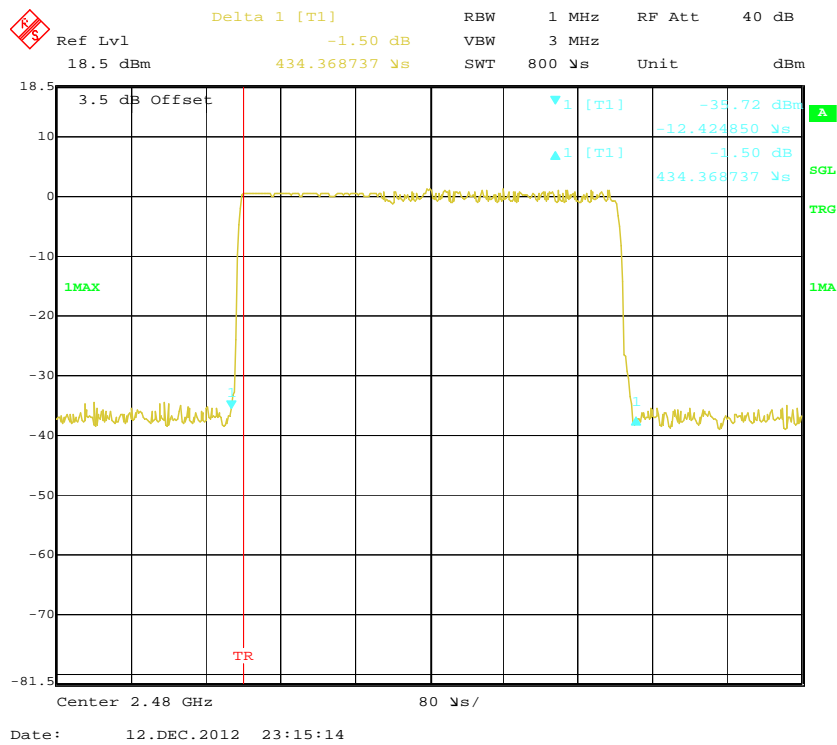


Pulse time, Low Channel, DH3

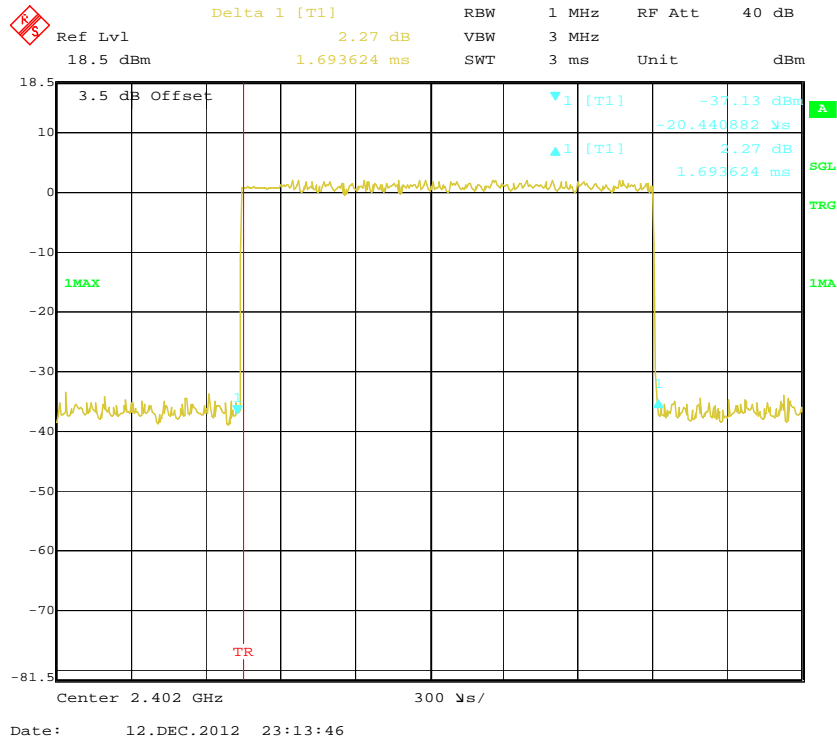


Pulse time, Middle Channel, DH3

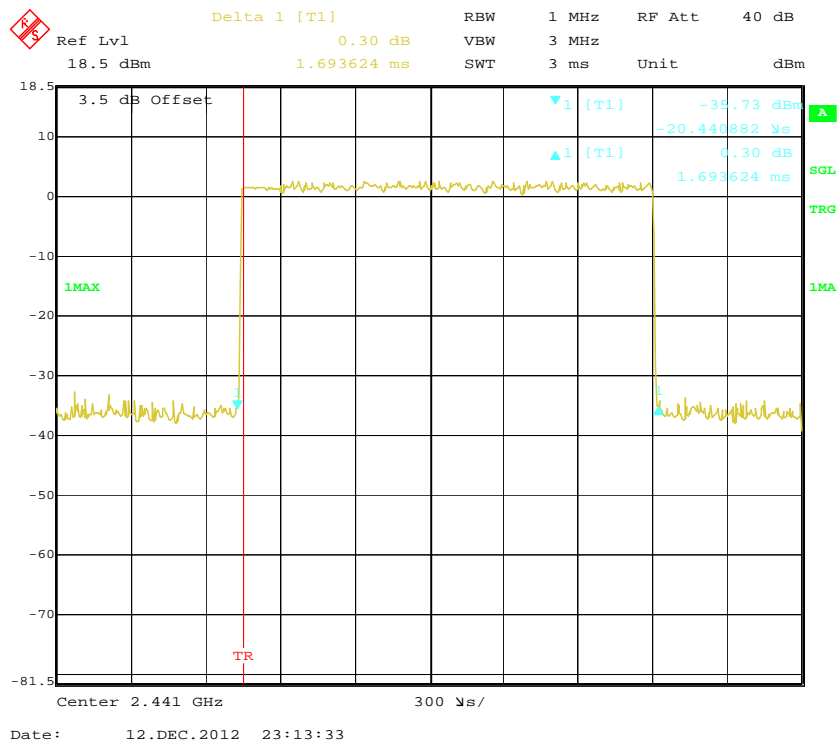


Pulse time, High Channel, DH3

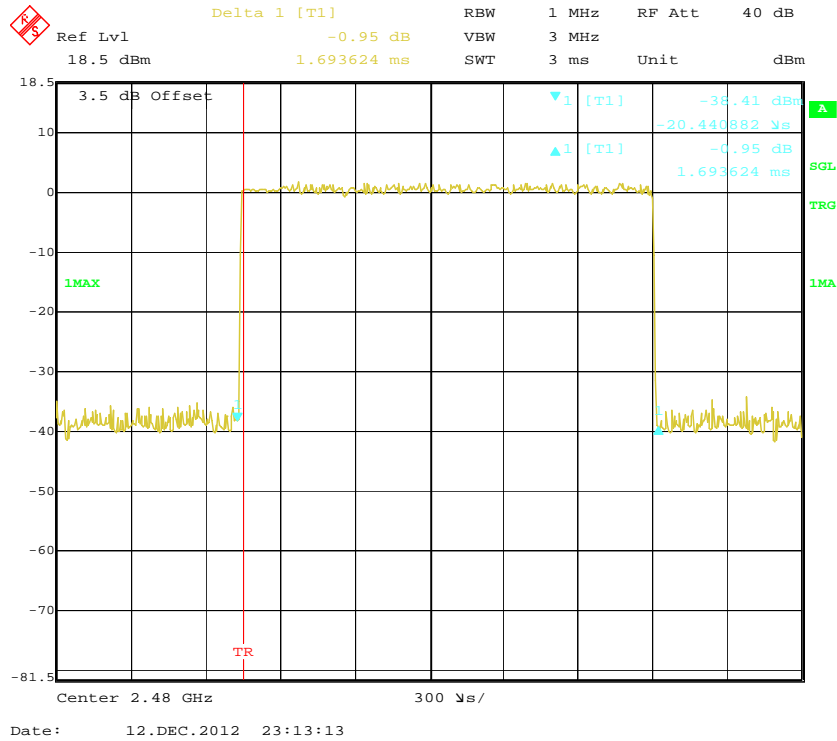


Pulse time, Low Channel, DH5

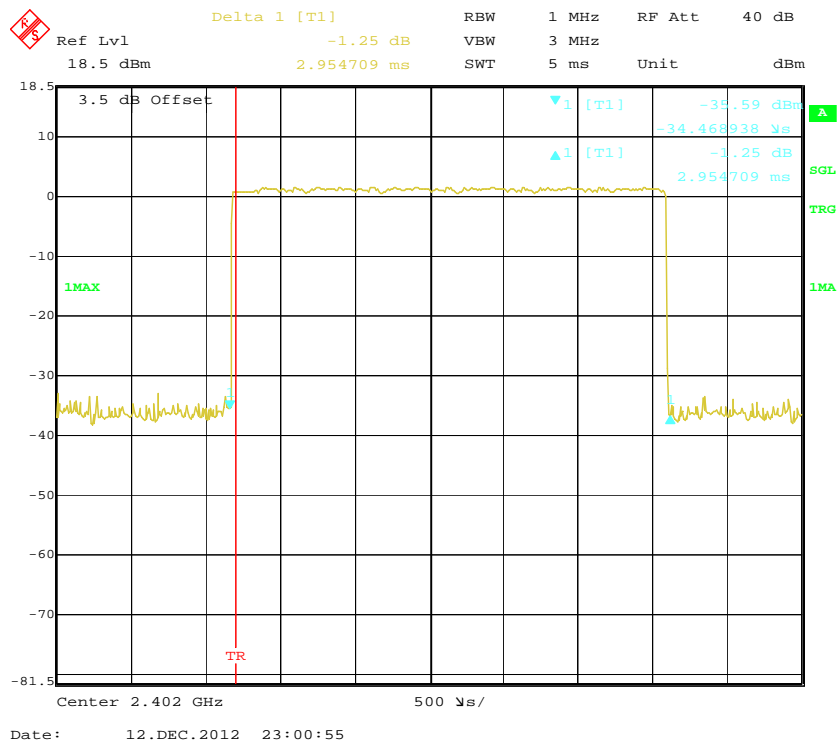

Pulse time, Middle Channel, DH5

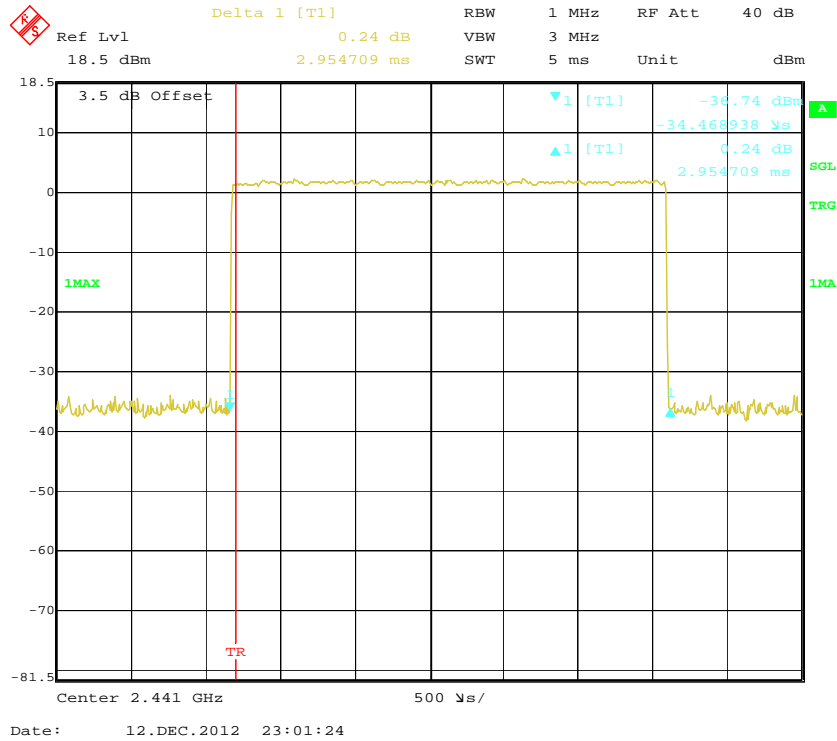


Pulse time, High Channel, DH5

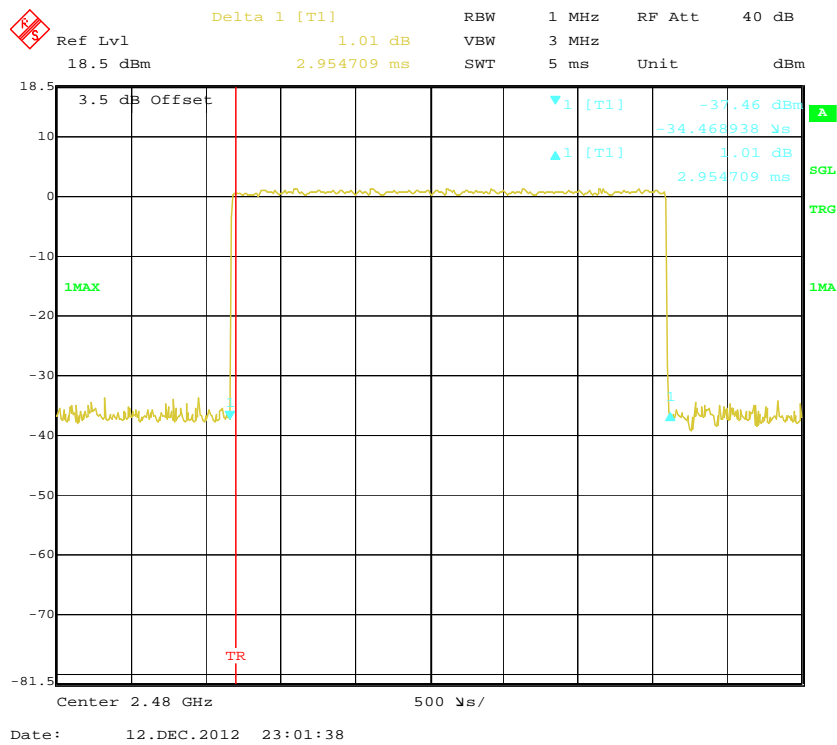


EDR (8DPSK):


Pulse time, Low Channel, DH1

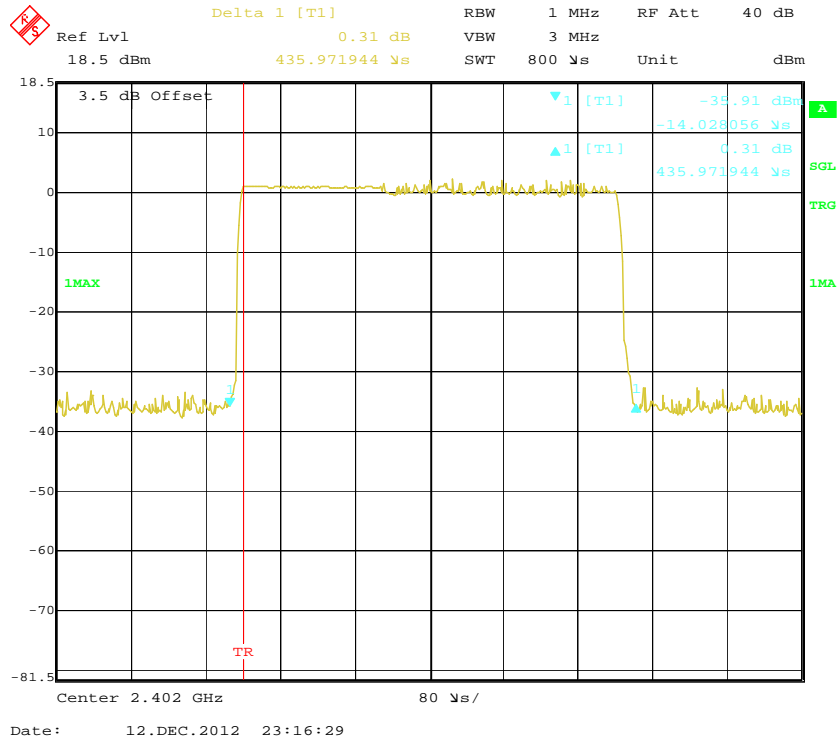


Pulse time, Middle Channel, DH1

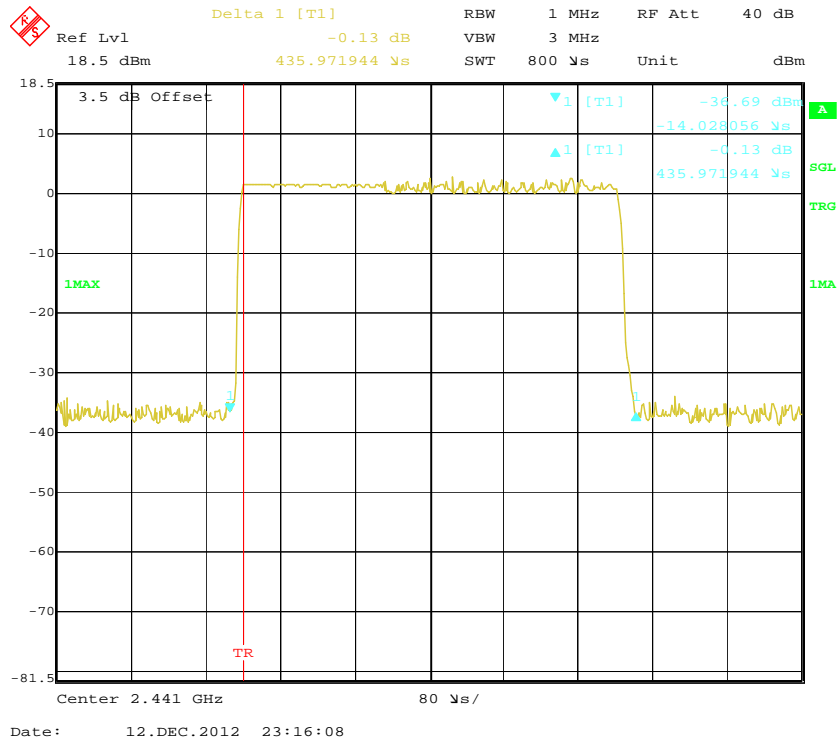


Pulse time, High Channel, DH1

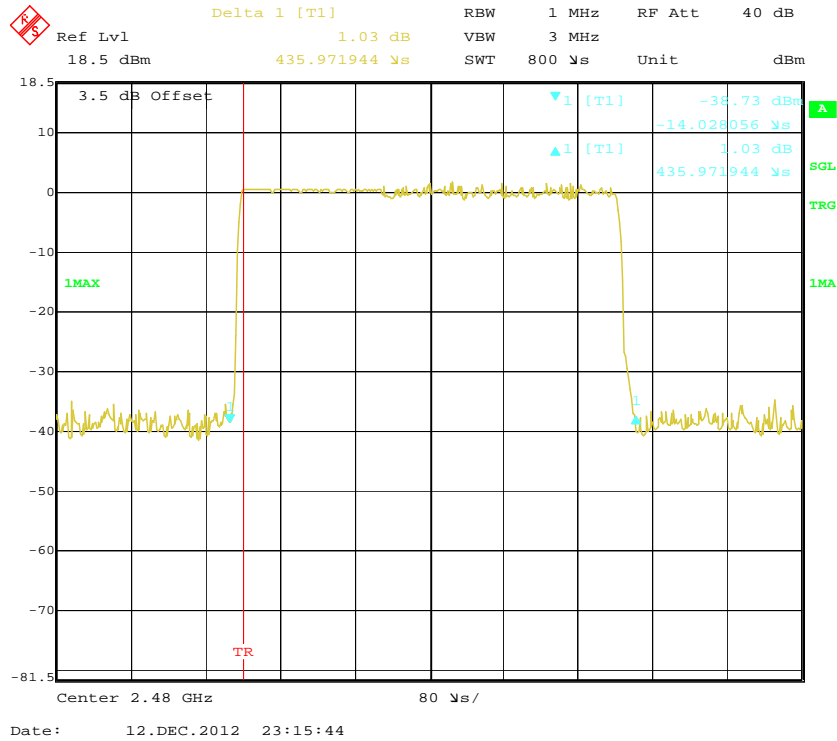


Pulse time, Low Channel, DH3

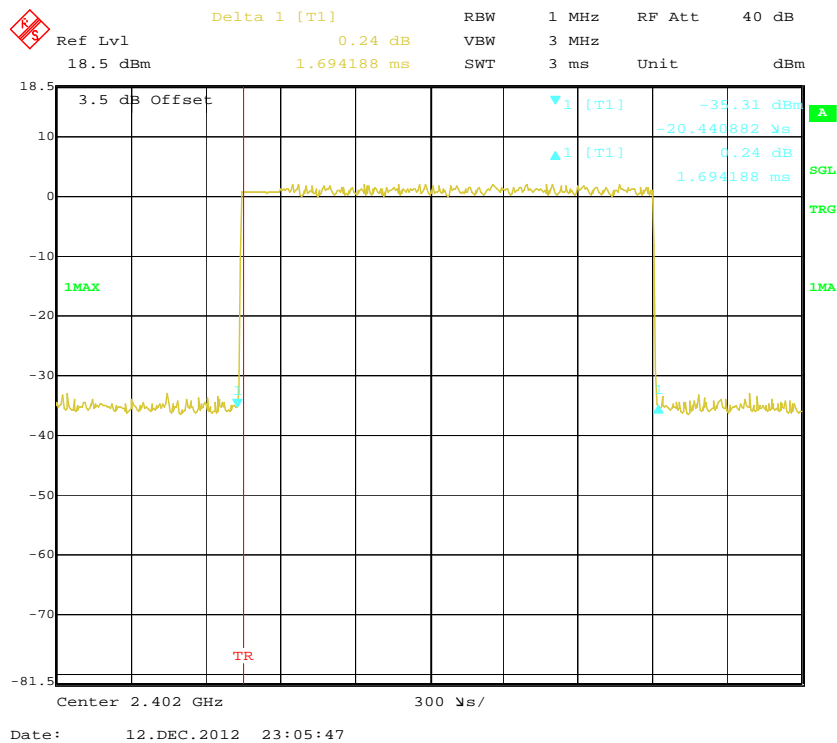


Pulse time, Middle Channel, DH3

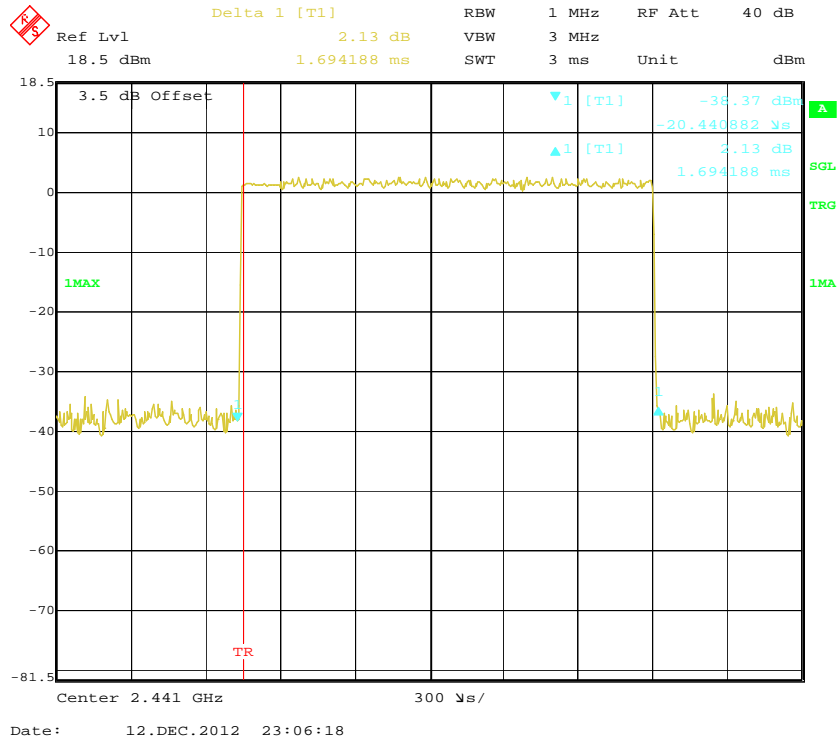


Pulse time, High Channel, DH3

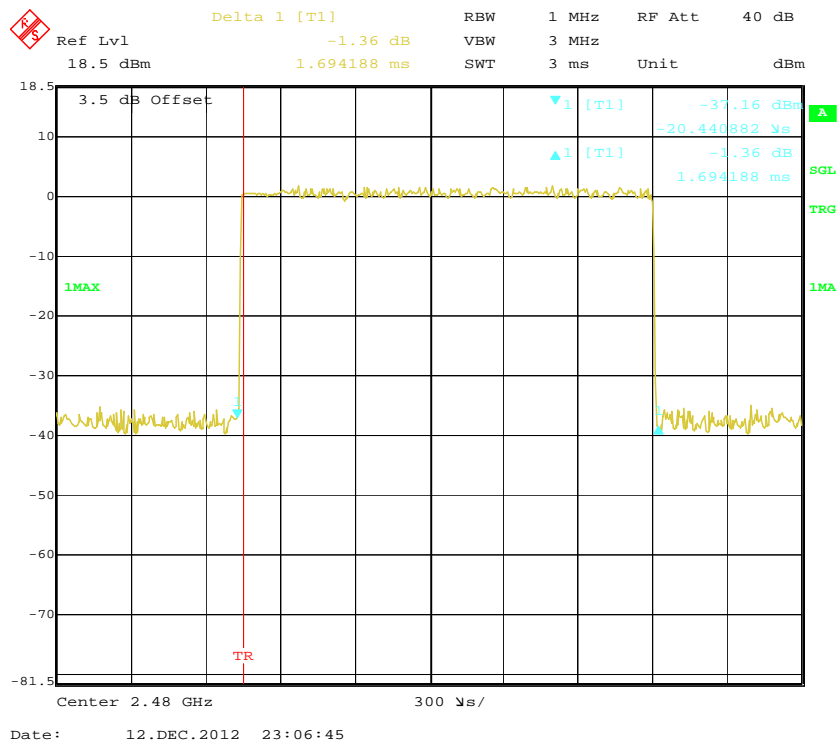


Pulse time, Low Channel, DH5

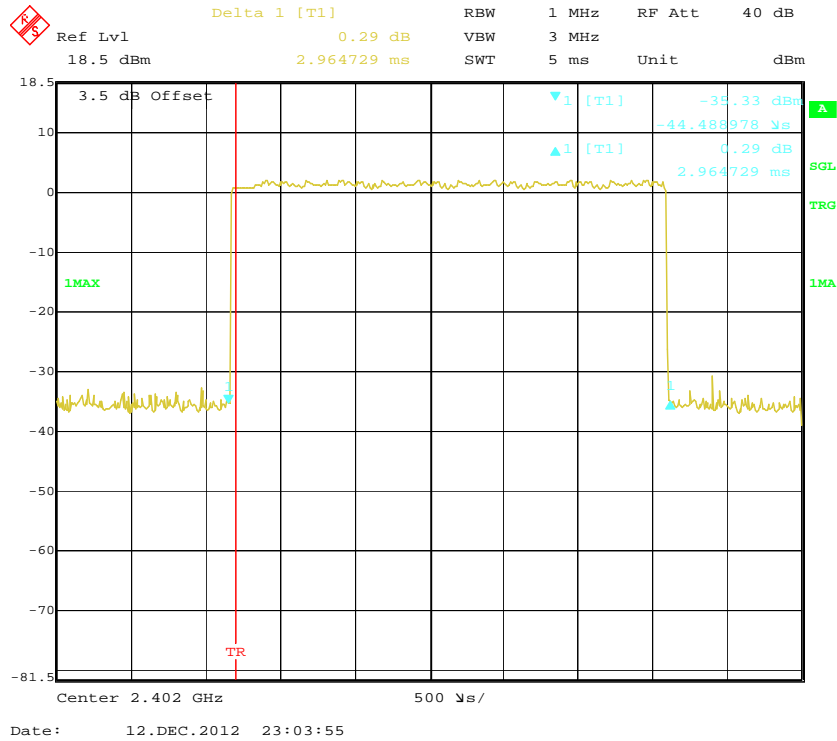

Pulse time, Middle Channel, DH5

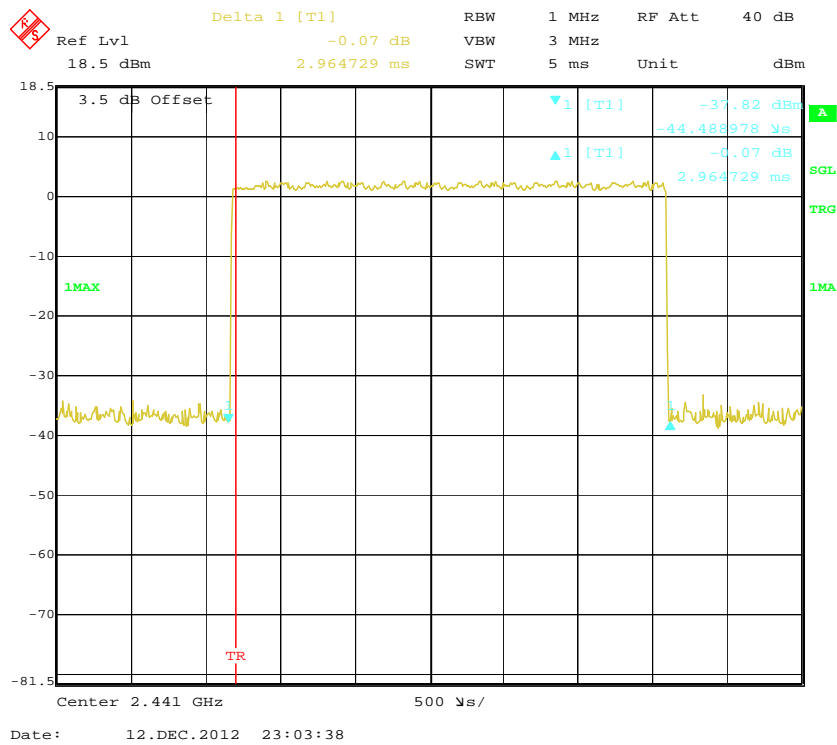

Pulse time, High Channel, DH5

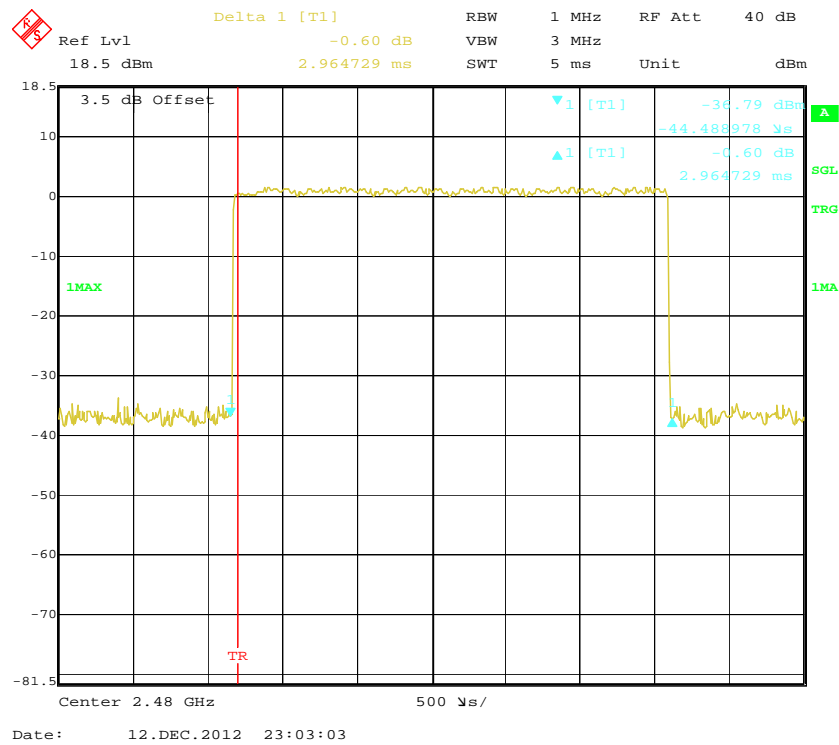


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

The testing was performed by Mick Yin on 2012-12-13.


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	5.51	3.556	1000
	Middle	2441	5.68	3.698	1000
	High	2480	5.17	3.289	1000
EDR ($\pi/4$ -DQPSK)	Low	2402	3.77	2.382	1000
	Middle	2441	3.83	2.415	1000
	High	2480	3.49	2.234	1000
EDR (8DPSK)	Low	2402	3.81	2.404	1000
	Middle	2441	3.84	2.421	1000
	High	2480	3.96	2.489	1000

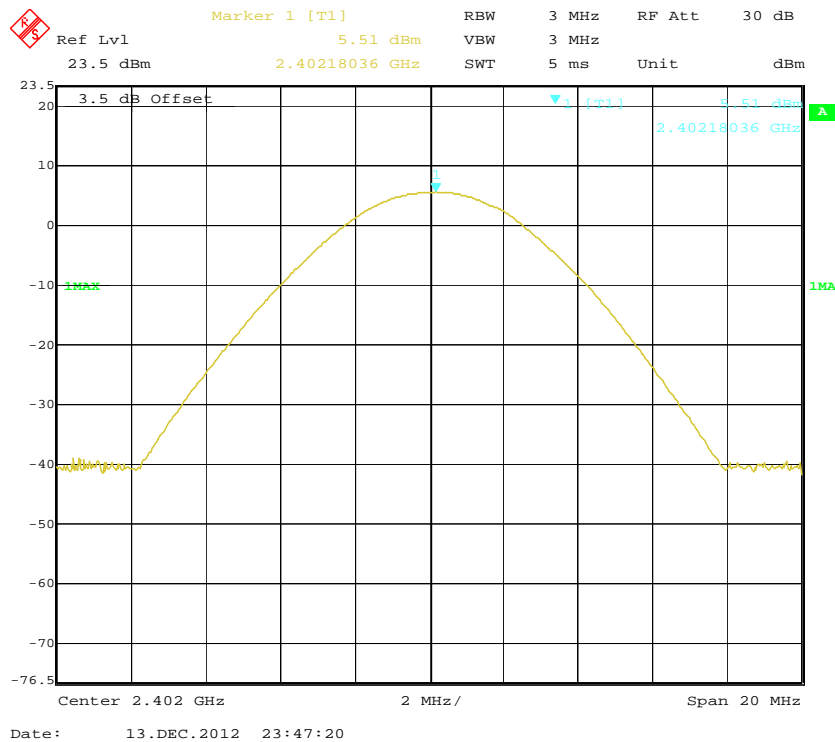BDR (GFSK): Low Channel


BDR (GFSK): Middle Channel

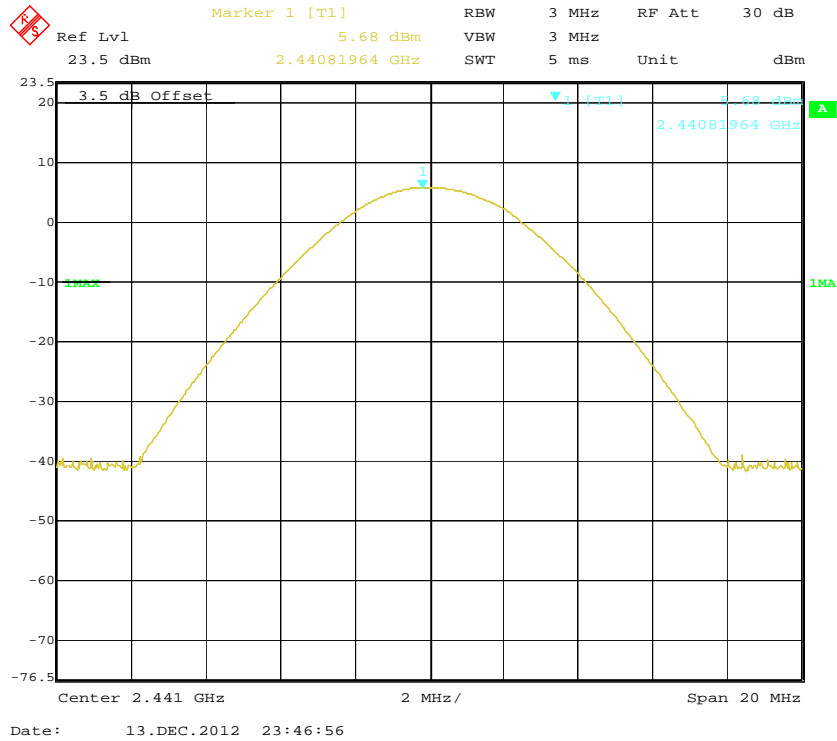


BDR (GFSK): High Channel

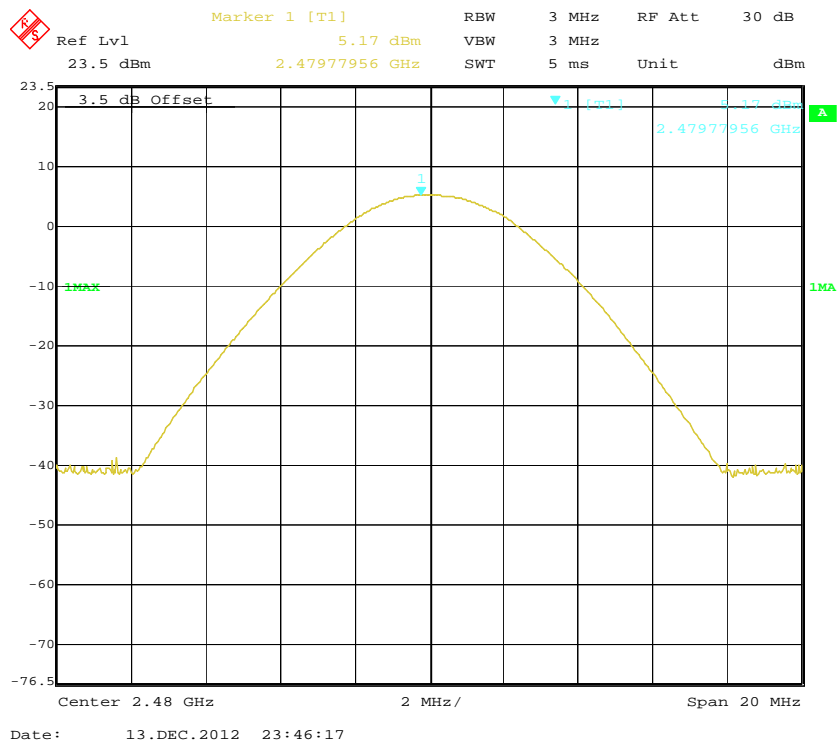


EDR($\pi/4$ -DQPSK): Low Channel

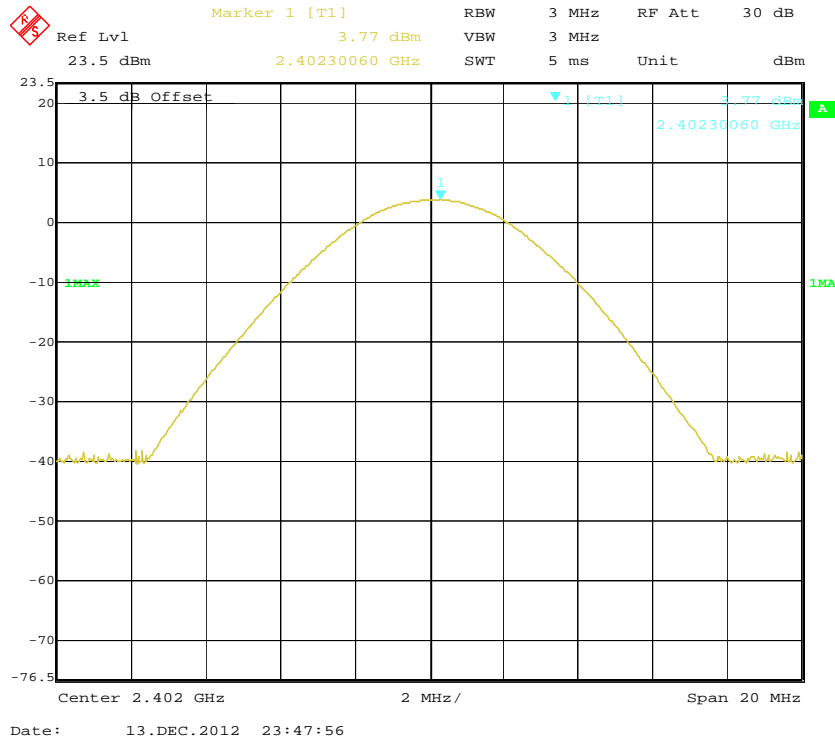


EDR($\pi/4$ -DQPSK): Middle Channel

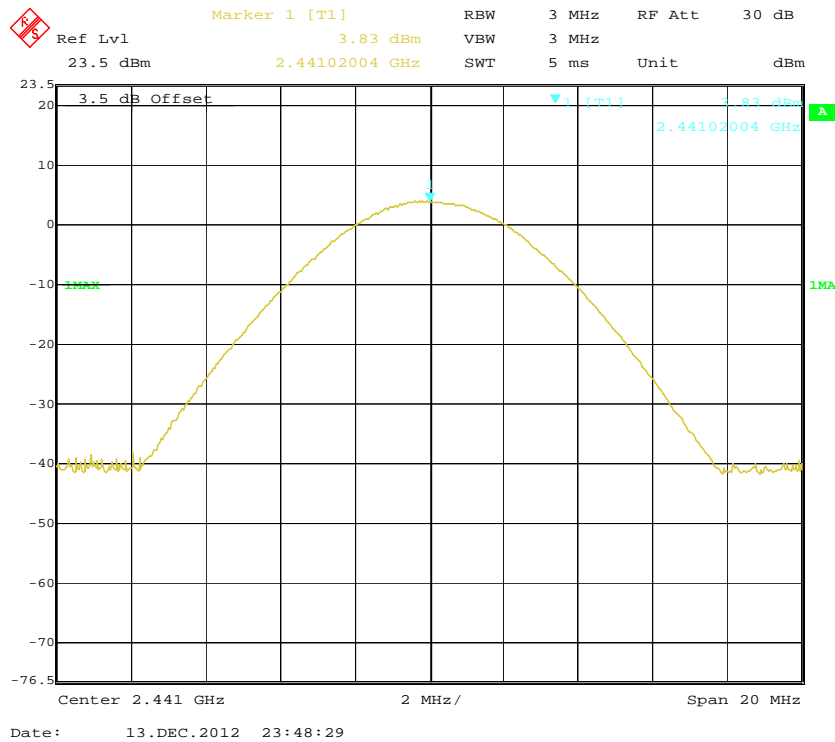


EDR($\pi/4$ -DQPSK): High Chanel

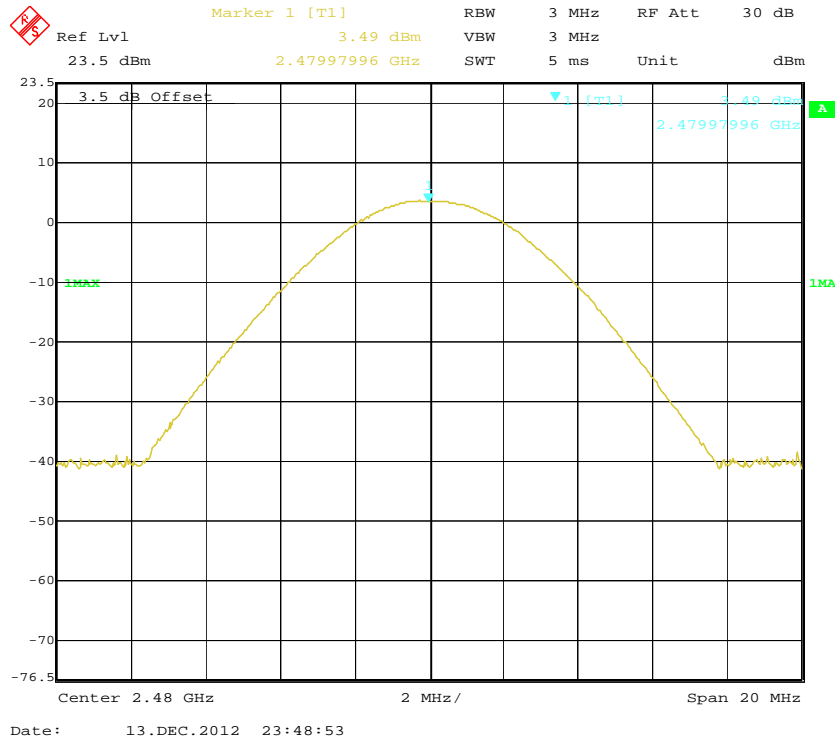


EDR(8DPSK): Low Channel

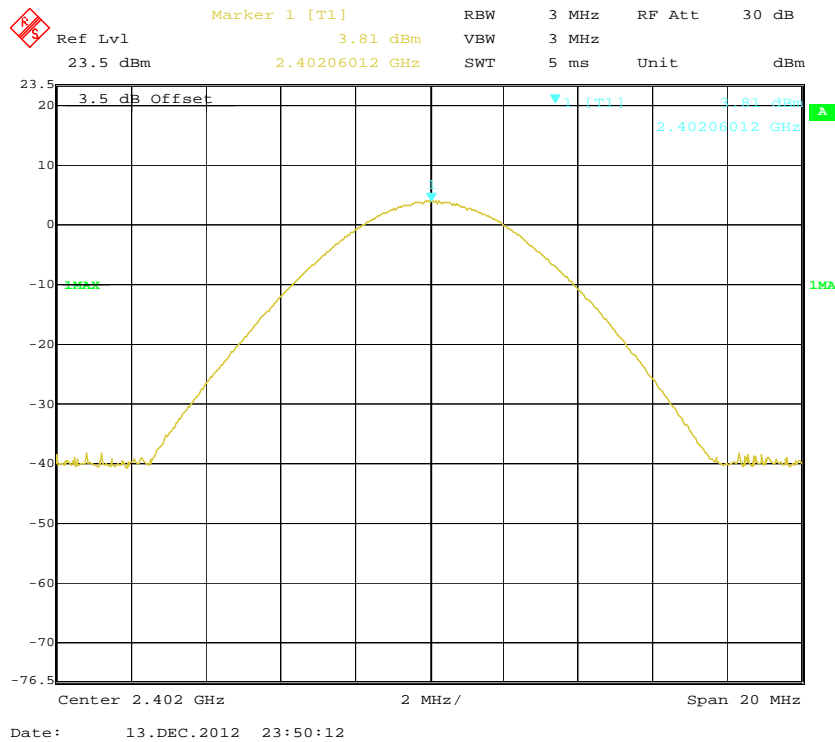

EDR(8DPSK): Middle Channel

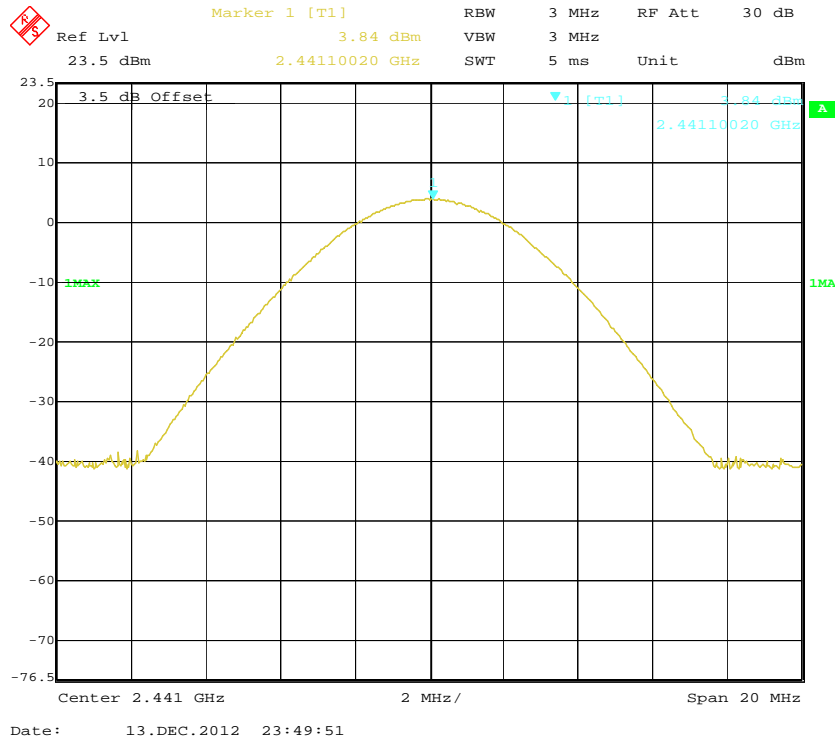

EDR(8DPSK): High Channel

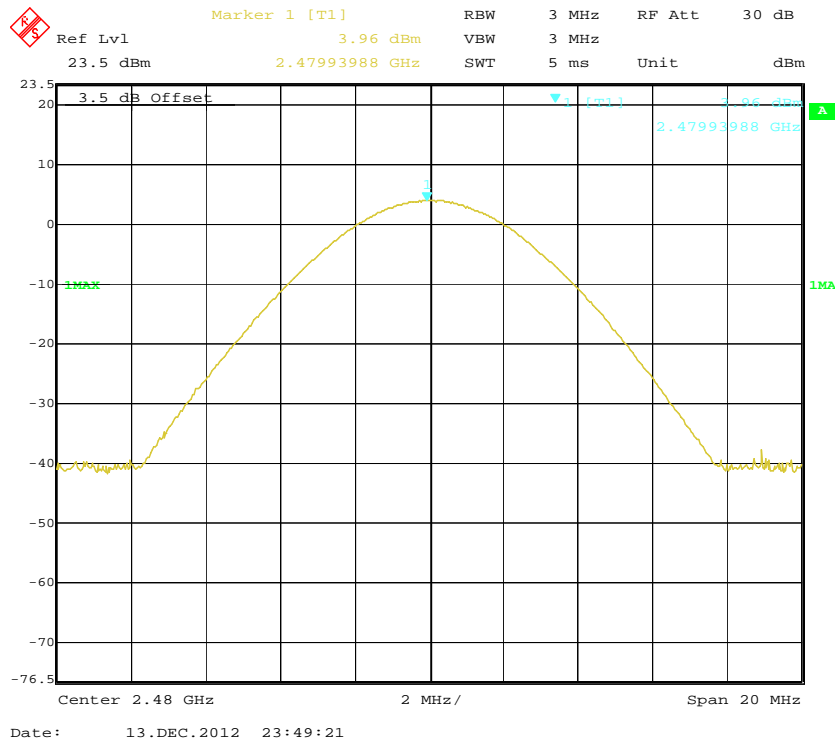

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=100 kHz, VBW=300 kHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100 kPa



The testing was performed by Mick Yin on 2012-12-13.


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following plots


BDR (GFSK): Band Edge-Left Side

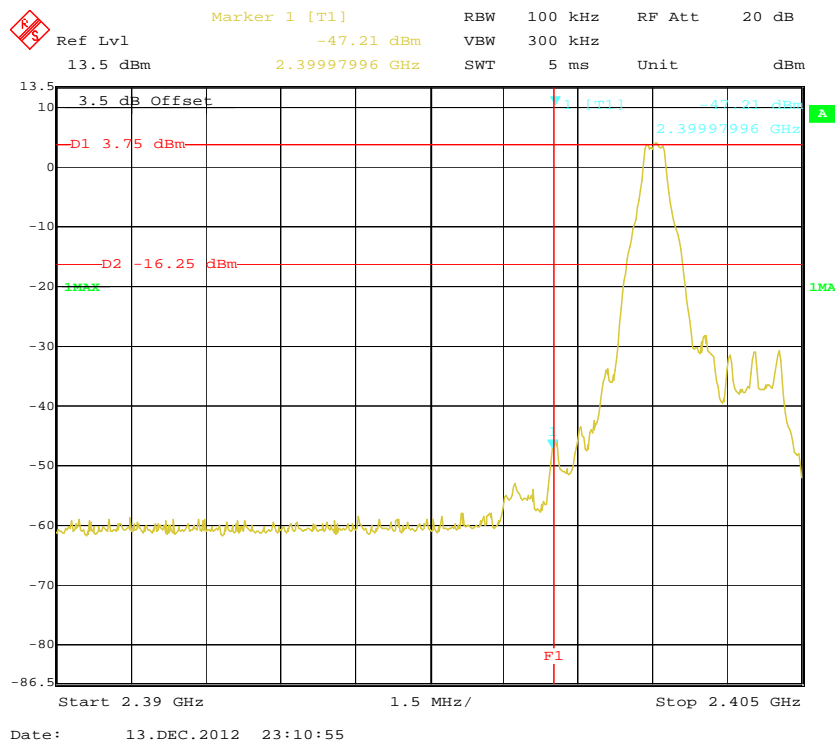

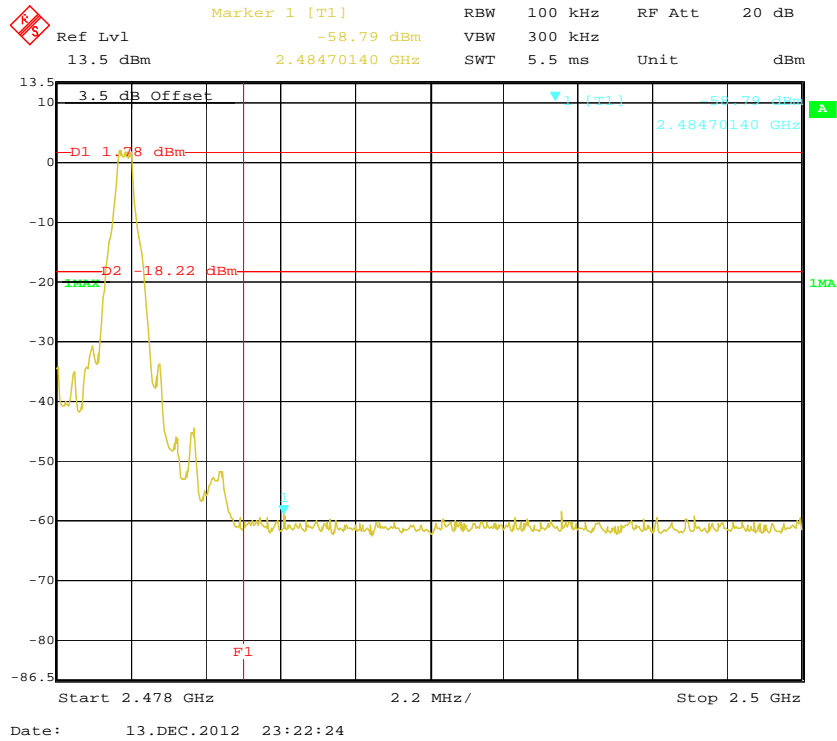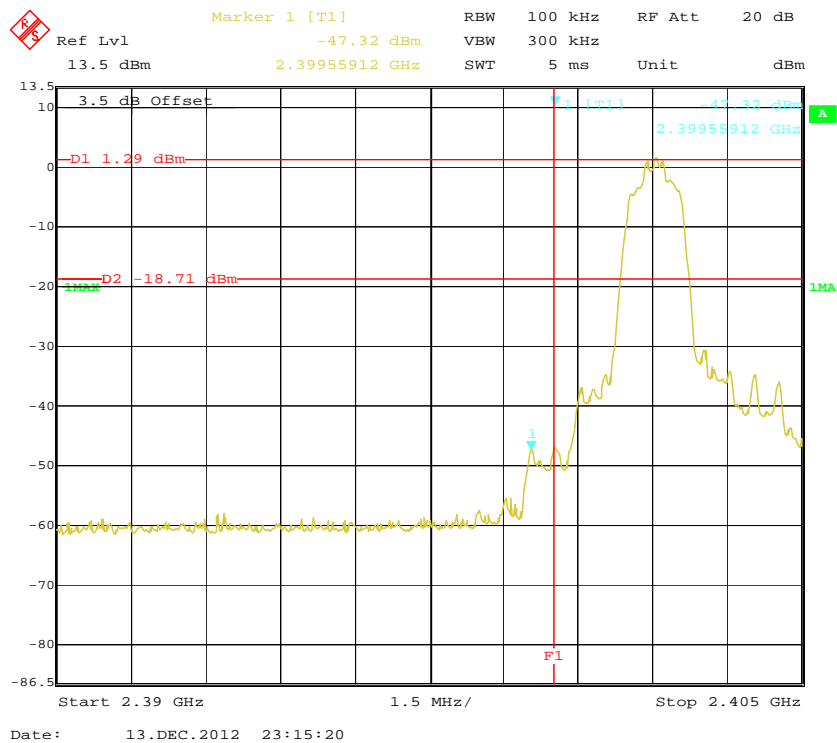
BDR (GFSK): Band Edge-Right Side**EDR ($\pi/4$ -DQPSK): Band Edge-Left Side**

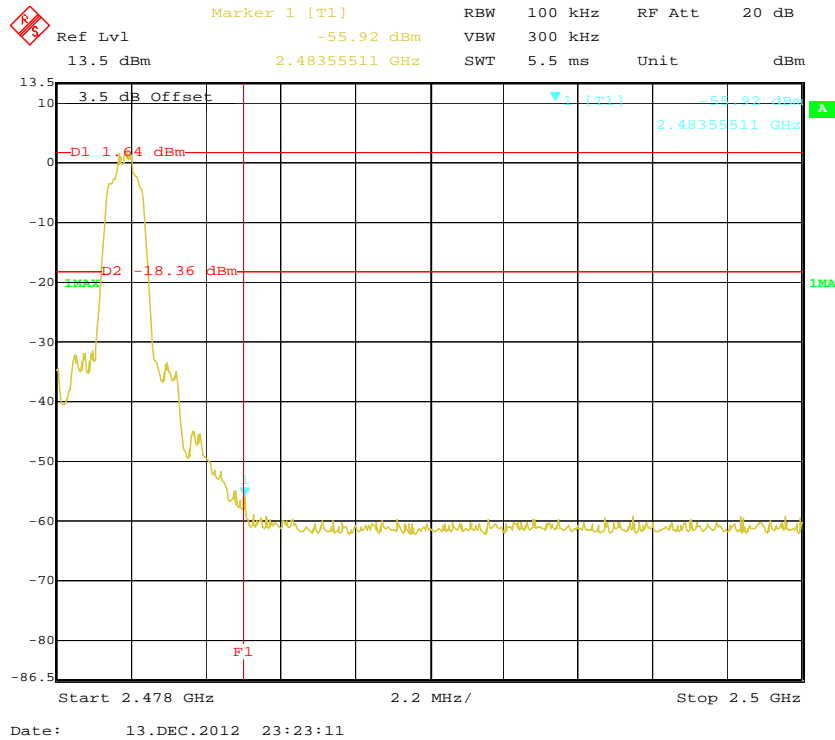EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

EDR (8DPSK): Band Edge-Left Side

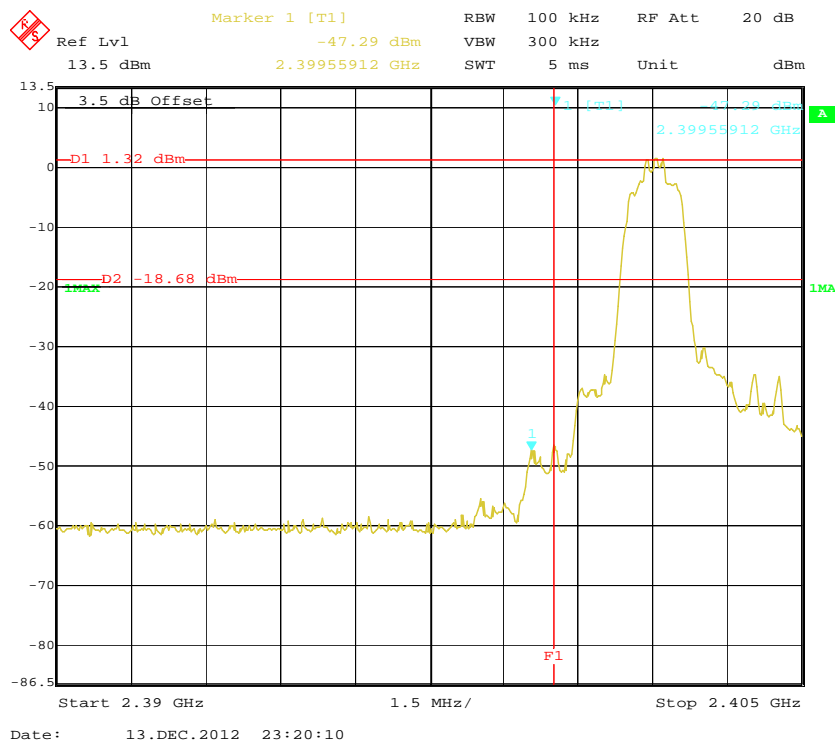

EDR (8DPSK): Band Edge-Right Side

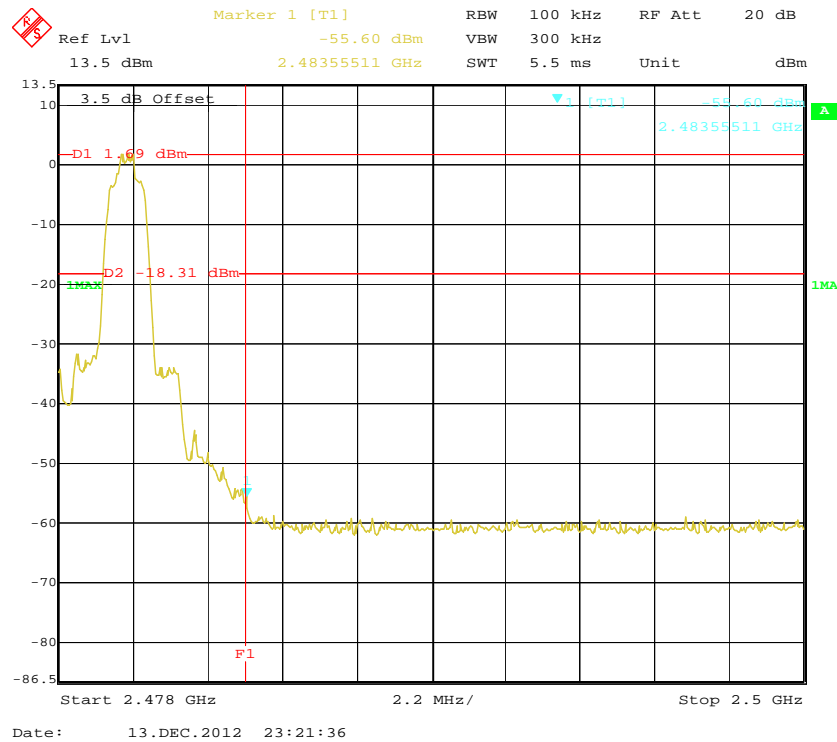

***** END OF REPORT *****