

FCC Part 22 Compliance Test Report

Test Report no.:	EMC_BO_001740	Date of Report:	06-Aug-2012
Number of pages:	32	Project support engineer:	Robert Müller

Customer:	novero GmbH, Meesmannstrasse 103, 44807 Bochum, Germany		
Customers contact:	Jürgen Hindersmann		
Manufacturer	novero GmbH		
EUT ident.:	Hands-Free Unit with Bluetooth, WLAN and GSM/WCDMA, HT-5		
FCC ID	WJLHT-5	IC:	7847A-HT5

Referred documents:	CFR 47, FCC rules Part 22, TIA-603-C-2004 and IC standards RSS-GEN (Issue 3). Deviations or clarifications to these standards are noted in the related test result under "test reference and limit".
----------------------------	--

Testing Laboratory:	novero Test Center, Meesmannstr.103, 44807 Bochum, Germany			
	Tel.:	+49 234/51668-0	Fax.:	+49 234 51668 4880
	FCC listing no.:	881111	IC recognition no.:	7847A-1
	Laboratory manager:	Jürgen Mitterer		

Test result	The EUT complies with the requirements made in the referred test documents.
--------------------	---

Date and signature:

This test report may not be reproduced, except in full, without written permission of testing laboratory. The test results in this test report relates only to the tested sample, which is mentioned in this test report. Novero GmbH cannot be made responsible for any generalisations or conclusions drawn from this test report. Modification of the tested sample is prohibited and leads to invalidity of this test report.

1. Summary for FCC Part 22 Compliance Test Report

Date of receipt	11-May-2012
Testing completed	13-Jun-2012
The customer's contact person	Jürgen Hindersmann
Notes	none

1.1. EUT and Accessory Information

The EUT is a DC powered GSM850/900/1800/1900/FDDI/FDDV with WLAN and Bluetooth device for automotive applications. EUT is tested with maximum rated TX power. EUT has separate BT and WLAN antennas and fixed GSM/FDD antenna connector. No dedicated external antenna specified.

Product	Type	SN	HW	MV	SW	DUT
UHV Premium	HT-5	A09737413	X21		X907	GEM010
UHV Premium	HT-5	A09738048	X21		X907	GEM013

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
2.1046(a), 22.913(a)	4.4	Conducted RF output power	PASSED
22.913(a)	4.4	Radiated RF output power	NA
2.1049(h)	4.6.1	99% occupied bandwidth	PASSED
22.917(a)	4.5	Band edge compliance	PASSED
22.917(a), 2.1051	4.5	Spurious emissions at antenna terminals	PASSED
22.917(a), 2.1053	4.5	Spurious radiated emissions	PASSED
2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
2.1055(d)	4.3	Frequency stability, voltage variation	PASSED

WCDMA850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
2.1046(a), 22.913(a)	4.4	Conducted RF output power	PASSED
22.913(a)	4.4	Radiated RF output power	NA
2.1049(h)	4.6.1	99% occupied bandwidth	PASSED
22.917(a)	4.5	Band edge compliance	PASSED
22.917(a), 2.1051	4.5	Spurious emissions at antenna terminals	PASSED
22.917(a), 2.1053	4.5	Spurious radiated emissions	PASSED
2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
2.1055(d)	4.3	Frequency stability, voltage variation	PASSED


PASSED: The EUT complies with the essential requirements in the standard.
 FAILED: The EUT does not comply with the essential requirements in the standard.
 NP: The test was not performed.
 NA: The test was not applicable

CONTENTS


1. SUMMARY FOR FCC PART 22 COMPLIANCE TEST REPORT	2
1.1. EUT AND ACCESSORY INFORMATION	2
1.2. SUMMARY OF TEST RESULTS	2
2. TEST SETUPS.....	4
2.1. CONDUCTED TEST SETUP	4
2.2. CONDUCTED AC POWER LINE CONDUCTED EMISSIONS TEST SETUP	4
2.3. RADIATED TEST SETUP	4
3. CONDUCTED RF OUTPUT POWER (FCC §22.913(A)(2), §2.1046(A), RSS-132 4.4).....	5
3.1. TEST REFERENCE AND LIMIT	5
3.2. GSM850 TEST RESULTS	6
3.3. WCDMA850 TEST RESULTS	9
4. 99% OCCUPIED BANDWIDTH (FCC §2.1049(H), RSS-132 4.6.1).....	11
4.1. TEST REFERENCE AND LIMIT	11
4.2. GSM850 TEST RESULTS	12
4.3. WCDMA850 TEST RESULTS	13
5. BAND EDGE COMPLIANCE (FCC §22.917(B), RSS-132 4.5).....	14
5.1. TEST REFERENCE AND LIMIT	14
5.2. GSM850 TEST RESULTS	15
5.3. WCDMA850 TEST RESULTS	17
6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS (FCC §22.917(A),§2.1051 RSS-132 4.5)	18
6.1. TEST REFERENCE AND LIMIT	18
6.2. GSM850 TEST RESULTS	19
6.3. WCDMA850 TEST RESULTS	22
8. SPURIOUS RADIATED EMISSIONS (FCC §22.917(A), §2.1053, RSS-132 4.5).....	24
8.1. TEST REFERENCE AND LIMIT	24
8.2. GSM850 TEST RESULTS	26
8.3. WCDMA850 TEST RESULTS	27
9. FREQUENCY STABILITY, TEMPERATURE VARIATION (FCC §2.1055(A), RSS-132 4.3 ..	28
9.1. TEST REFERENCE AND LIMIT	28
9.2. GSM850 TEST RESULTS	29
10. FREQUENCY STABILITY, VOLTAGE VARIATION (FCC §2.1055(D), RSS-132 4.3.....	30
10.1. TEST REFERENCE AND LIMIT	30
10.2. GSM850 TEST RESULTS	31
11. TEST EQUIPMENT	32
11.1. CONDUCTED MEASUREMENTS.....	32
11.2. RADIATED MEASUREMENTS.....	32

2. Test setups


2.1. Conducted test setup

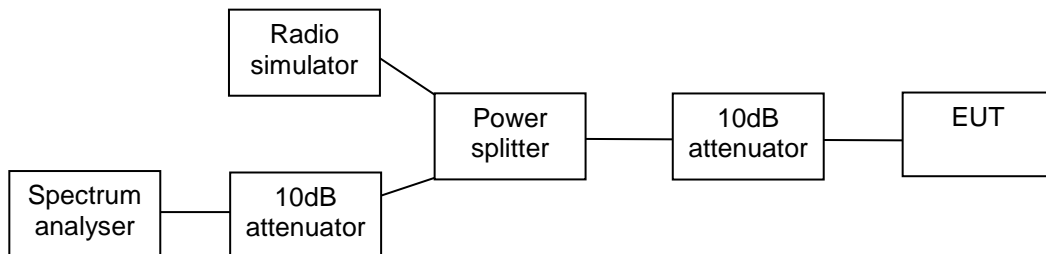

2.2. Conducted AC power line conducted emissions test setup



2.3. Radiated test setup

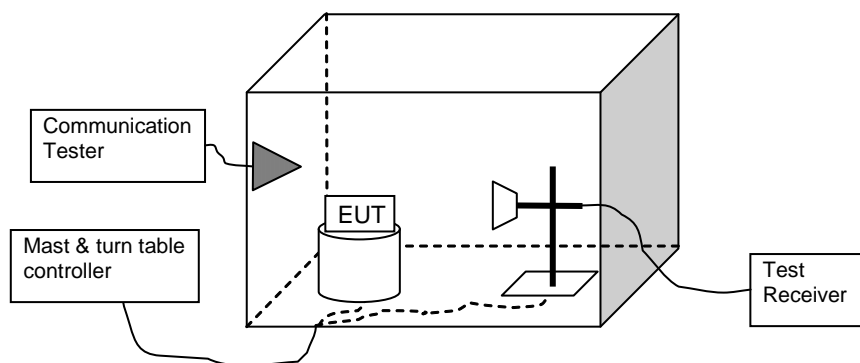

3. Conducted RF output power (FCC §22.913(a)(2), §2.1046(a), RSS-132 4.4)

EUT with DUT number	GEM013
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	13.2 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	25 / 50
Date of measurements	11-May-2012
Measured by	Robert Müller

3.1. Test reference and limit

The measurement is made according to FCC rules parts 22, IC standard RSS-132 and TIA-603-C.

Limits for conducted RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.45


3.2. GSM850 Test results

3.2.1 GSM mode


Channel / f_c [MHz]	P [dBm]	P [mW]	Max. Antenna gain [dBi]	Result
128 / 824.2	33.04	2013.72	7.56	PASSED
190 / 836.6	32.94	1967.89	7.66	PASSED
251 / 848.8	33.02	2004.47	7.58	PASSED

No external antenna gain is specified by the manufacturer. The result is passed for external antenna gains equal or less than specified above. Max. Antenna gain [dBi] = 38.45 dBm – Conducted Output Power [dBm]. Conversion from dBd to dBi 2.15dB has to be added.


Channel 128 / 824.2 MHz

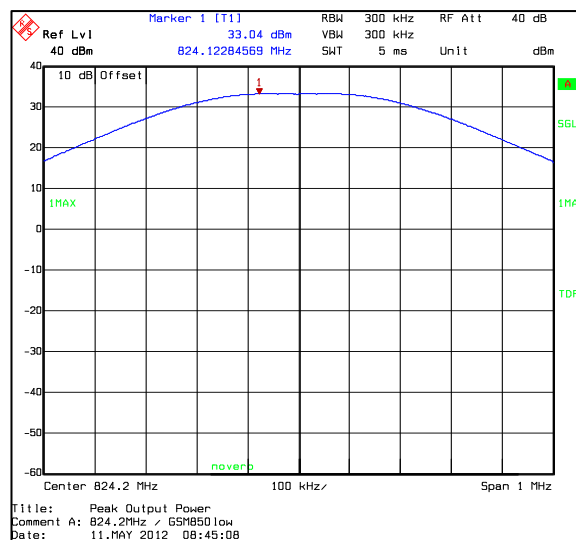

Channel 190 / 836.6 MHz

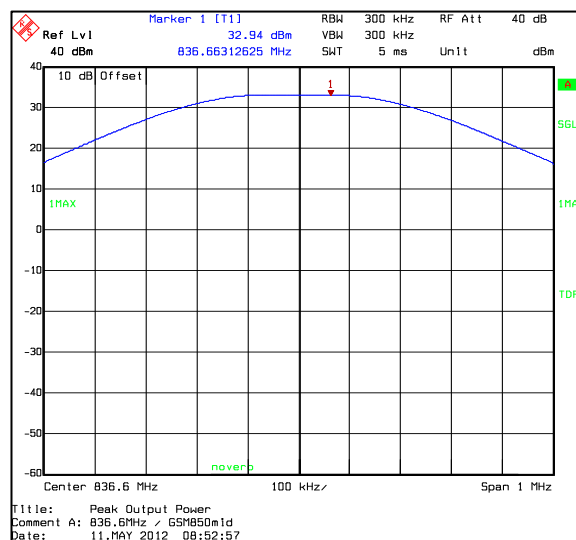

Channel 251 / 848.8 MHz

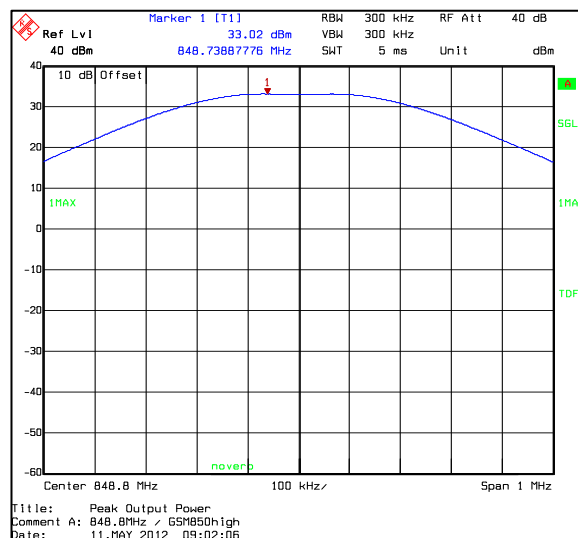


3.2.2 EGPRS mode


Channel / f_c [MHz]	P [dBm]	P [mW]	Max. Antenna gain [dBi]	Result
128 / 824.2	30.34	1081.43	10.26	PASSED
190 / 836.6	30.34	1081.43	10.26	PASSED
251 / 848.8	30.47	1114.29	10.13	PASSED

No external antenna gain is specified by the manufacturer. The result is passed for external antenna gains equal or less than specified above. Max. Antenna gain [dBi] = 38.45 dBm – Conducted Outout Power [dBm]. Conversion from dBd to dBi 2.15dB has to be added.


Channel 128 / 824.2 MHz

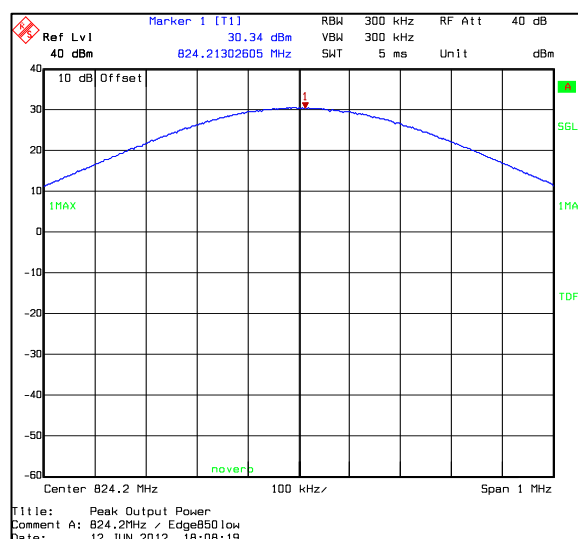

Channel 190 / 836.6 MHz

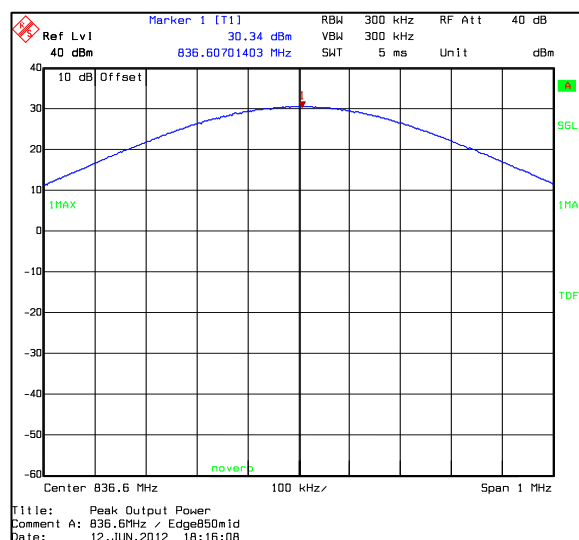

Channel 251 / 848.8 MHz

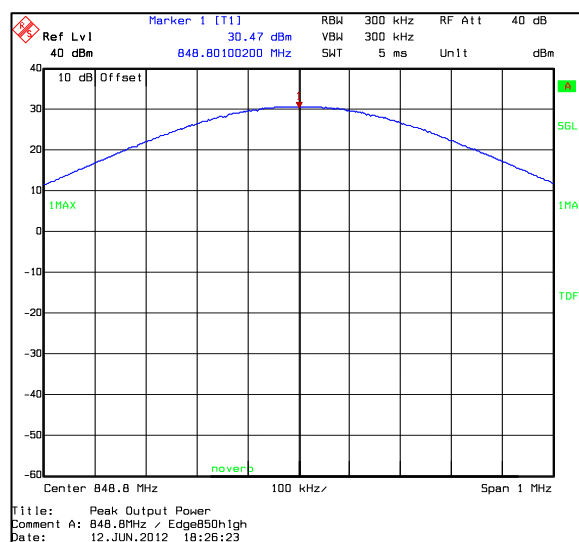


3.3. WCDMA850 Test results

3.3.1 FDD5 mode, RMC


Channel / f_c [MHz]	P [dBm]	P [mW]	Max. Antenna gain [dBi]	Result
4132 / 826.4	29.29	849.18	11.31	PASSED
4183 / 835	28.49	706.32	12.11	PASSED
4233 / 846.6	29.42	874.98	11.18	PASSED

No external antenna gain is specified by the manufacturer. The result is passed for external antenna gains equal or less than specified above. Max. Antenna gain [dBi] = 38.45 dBm – Conducted Output Power [dBm]. Conversion from dBd to dBi 2.15dB has to be added.


Channel 4132 / 826.4 MHz

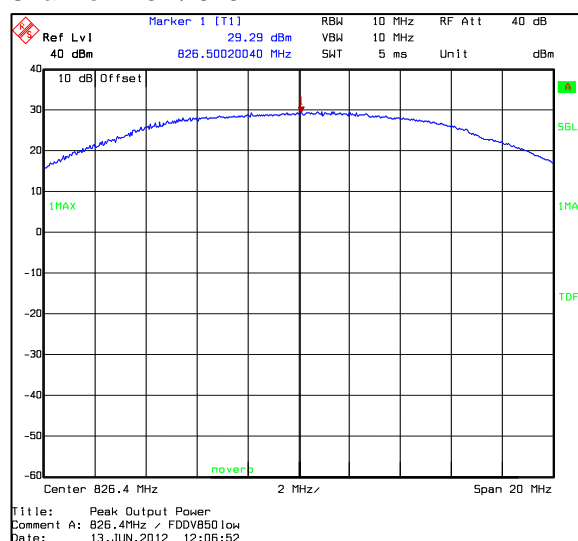

Channel 4175 / 835 MHz

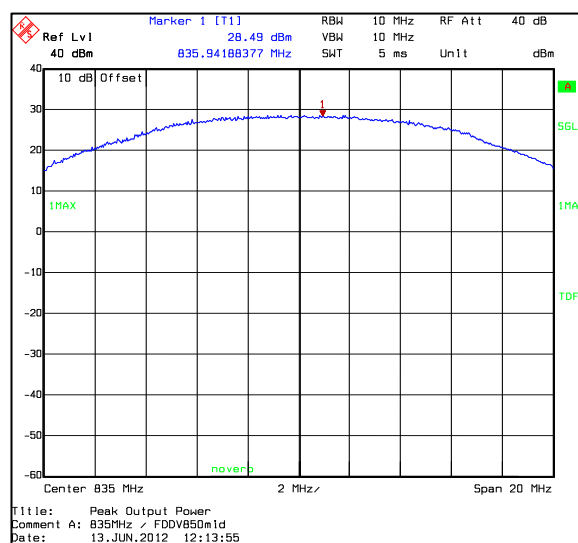

Channel 4233 / 846.6 MHz

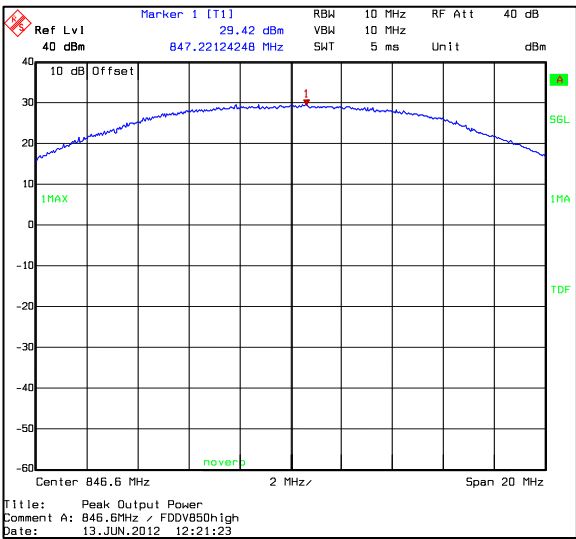

4. 99% occupied bandwidth (FCC §2.1049(h), RSS-132 4.6.1)

EUT with DUT number	GEM013
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	13.2 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	25 / 50
Date of measurements	11-May-2012
Measured by	Robert Müller

4.1. Test reference and limit


The measurement is made according to FCC rules parts 22, IC standard RSS-GEN, RSS-132 and TIA-603-C.

4.2. GSM850 Test results

4.2.1 GSM mode

Channel / f_c [MHz]	99% occupied bandwidth [kHz]	Result
190 / 836.6	244.49	PASSED


Channel 190 / 836.6 MHz

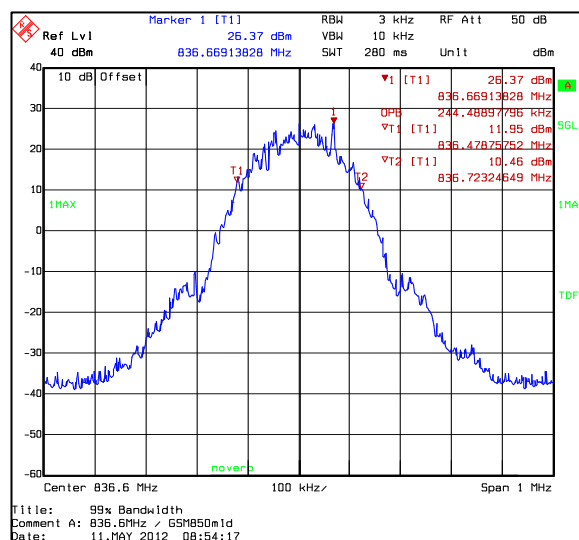


4.2.2 EGPRS mode

Channel / f_c [MHz]	99% occupied bandwidth [kHz]	Result
190 / 836.6	248.50	PASSED

Channel 190 / 836.6 MHz

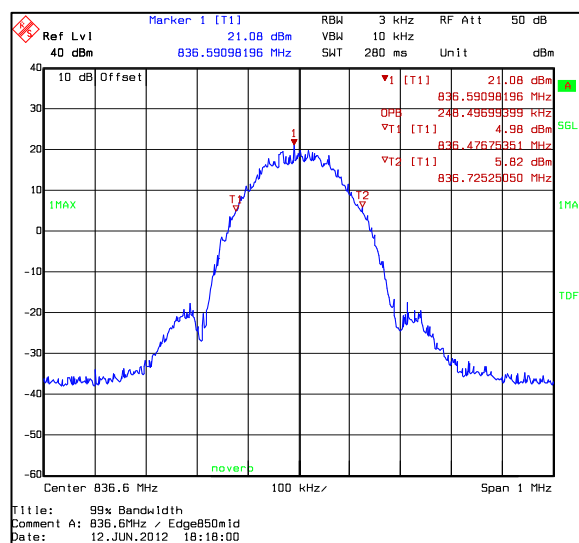

4.3.1 FDD mode, RMC

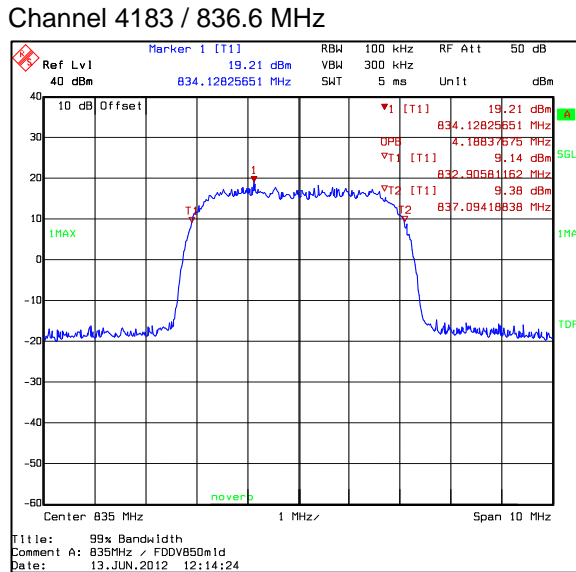

5. Band edge compliance

(FCC §22.917(b), RSS-132 4.5)

EUT with DUT number	GEM013
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	13.2 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	25 / 50
Date of measurements	12-Jun-2012
Measured by	Robert Müller

5.1. Test reference and limit

The measurement is made according to FCC rules parts 22 and IC standard RSS-132.

Limits for band edge compliance measurements


Frequency range [MHz]	Limit [dBm]
Below 824 and above 849	-13

5.2. GSM850 Test results


5.2.1 GSM mode

Channel / f_c [MHz]	Level [dBm]	Result
128 / 824.2	-13.92	PASSED
251 / 848.8	-13.28	PASSED

Channel 128 / 824.2 MHz

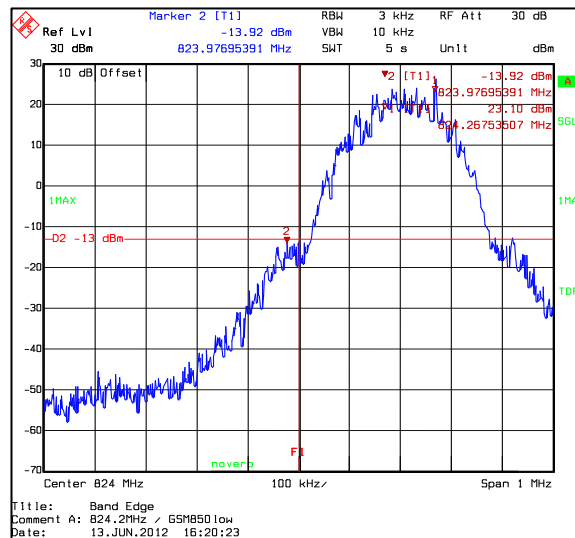


Channel 251 / 848.8 MHz

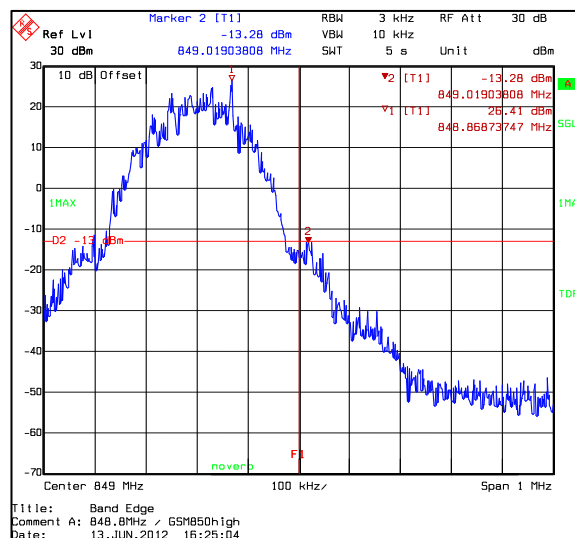


5.2.2 EGPRS mode

Channel / f _c [MHz]	Level [dBm]	Result
128 / 824.2	-19.28	PASSED
251 / 848.8	-19.61	PASSED

Channel 128 / 824.2 MHz

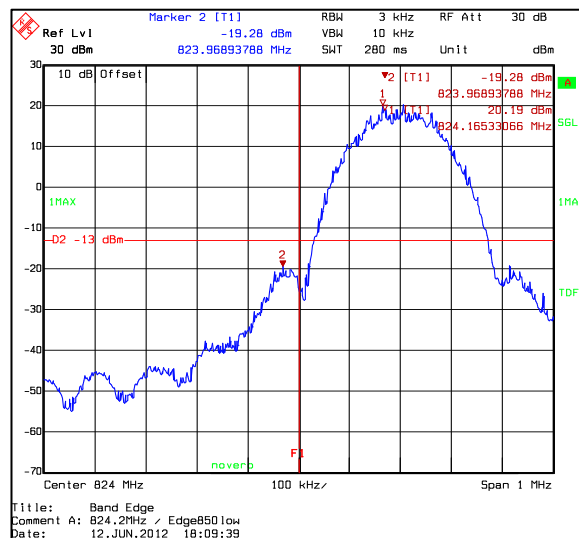

Channel 251 / 848.8 MHz

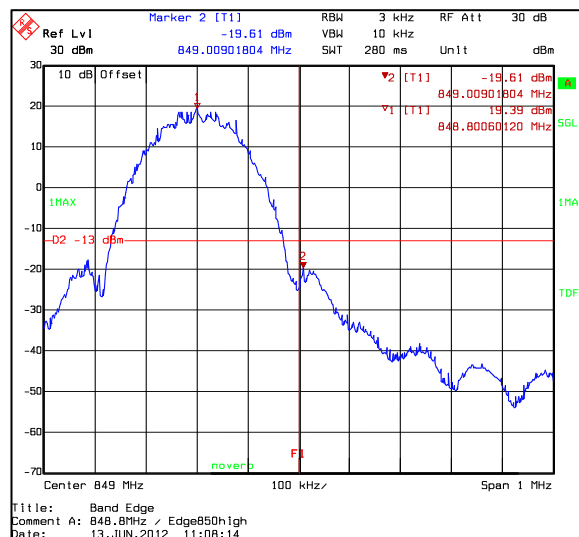


5.3. WCDMA850 Test results


5.3.1 FDD5 mode, RMC

Channel / f_c [MHz]	Level [dBm]	Result
4132 / 826.4	-23.24	PASSED
4233 / 846.6	-21.20	PASSED

Channel 4132 / 826.4 MHz

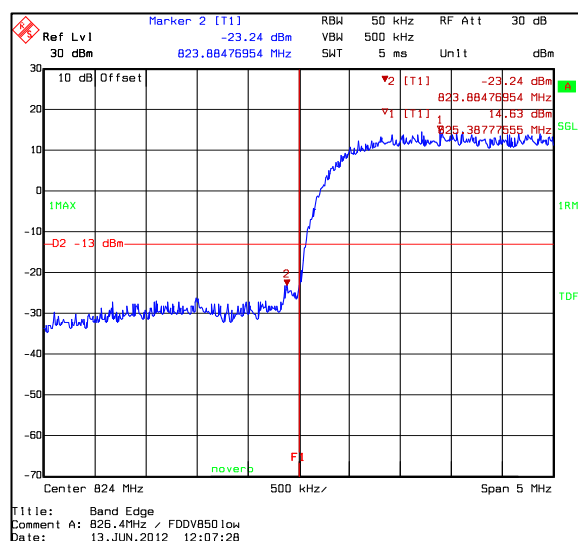

Channel 4233 / 846.6 MHz

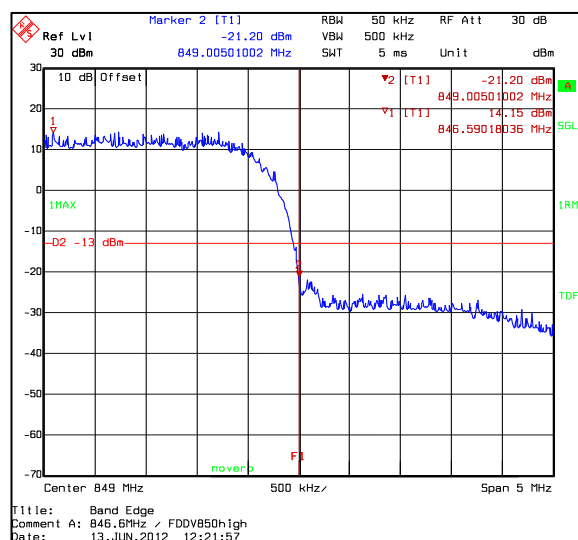

6. Spurious emissions at antenna terminals (FCC §22.917(a), §2.1051 RSS-132 4.5)

EUT with DUT number	GEM013
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	13.2 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	25 / 50
Date of measurements	11-May-2012
Measured by	Robert Müller

6.1. Test reference and limit

The measurement is made according to TIA-603-C

Limits for spurious emissions at antenna terminals measurements


Frequency range [MHz]	Limit [dBm]
1 – 8500	-13

6.2. GSM850 Test results

6.2.1 GSM mode


Channel 128 / 824.2 MHz

Frequency [MHz]	P [dBm]	Result
6609.19	-21.27	PASSED

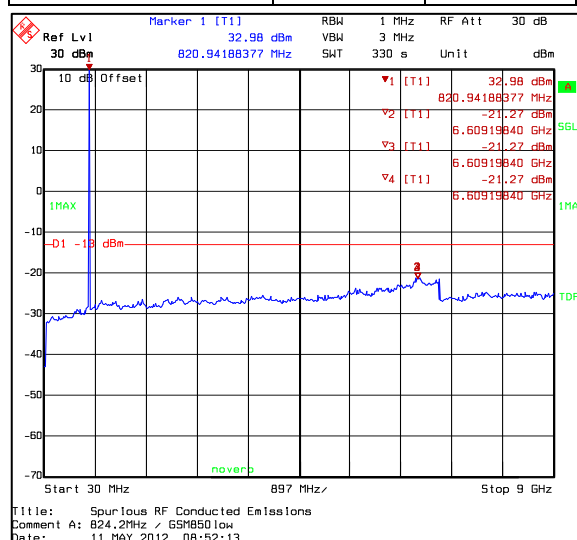


Channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	Result
6591.22	-20.56	PASSED
7867.52	-24.37	PASSED

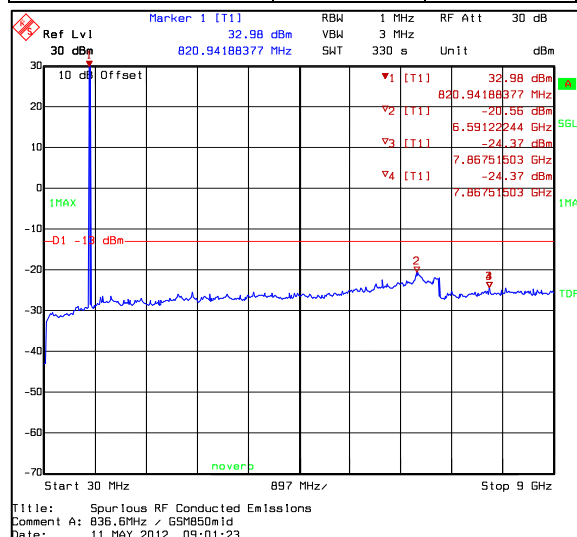


Frequency [MHz]	P [dBm]	Result
6673.33	-21.17	PASSED
16038.02	-19.88	PASSED
18239.12	-20.16	PASSED

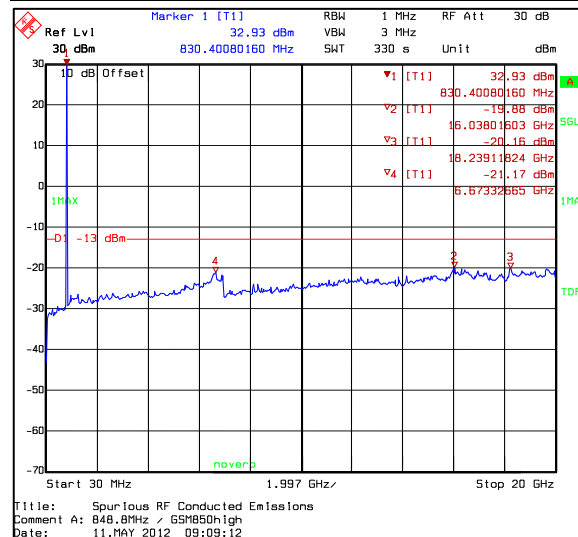


6.2.2 EGPRS mode

Frequency [MHz]	P [dBm]	Result
6609.20	-20.67	PASSED

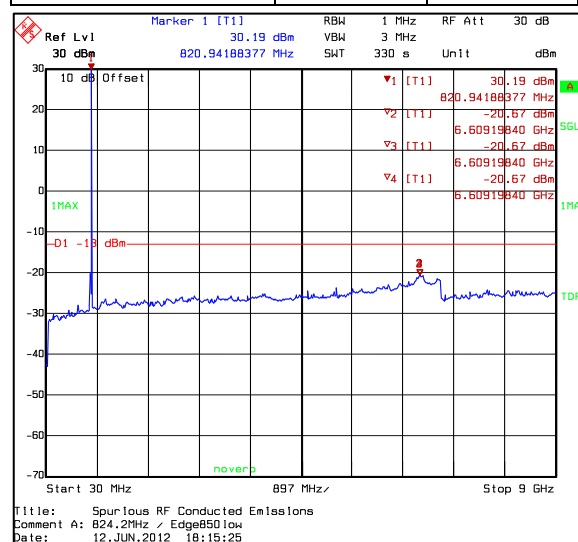


Channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	Result
6627.17	-20.57	PASSED

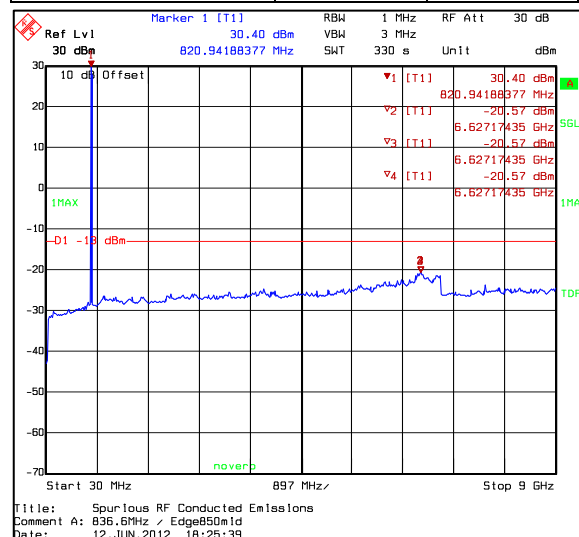

Channel 251 / 848.8 MHz

Frequency [MHz]	P [dBm]	Result
6663.12	-20.25	PASSED

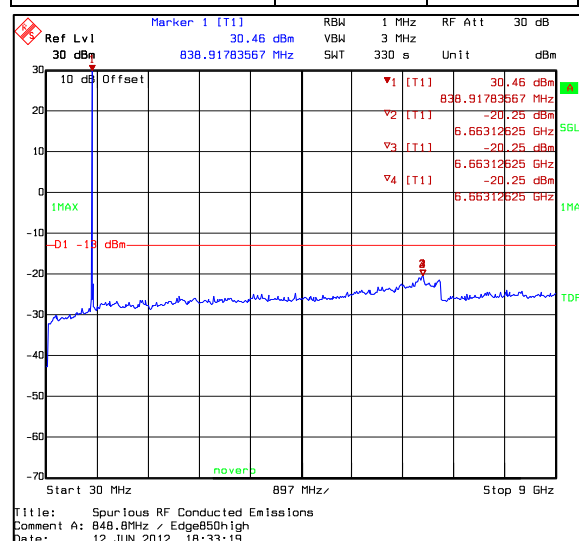


6.3. WCDMA850 Test results

6.3.1 FDD5 mode, RMC


Channel 4132 / 826.4 MHz

Frequency [MHz]	P [dBm]	Result
6627.17	-20.42	PASSED
6932.77	-21.03	PASSED
6968.72	-21.00	PASSED

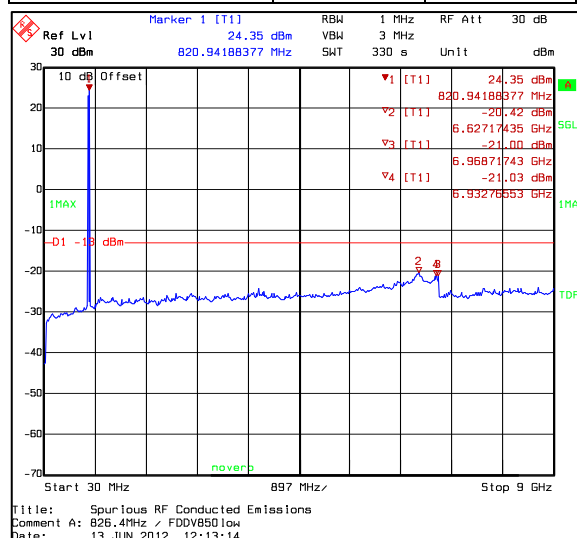


Channel 4175 / 835 MHz

Frequency [MHz]	P [dBm]	Result
6321.58	-22.79	PASSED
6627.17	-20.27	PASSED
6950.74	-21.36	PASSED

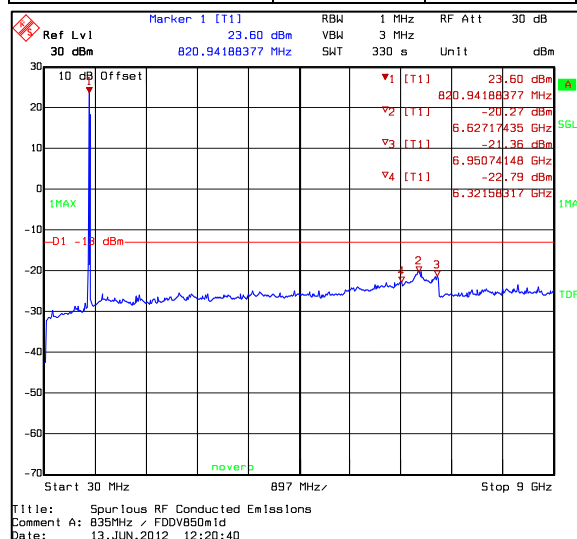

Channel 4233 / 846.6 MHz

Frequency [MHz]	P [dBm]	Result
6321.58	-22.61	PASSED
6663.13	-20.34	PASSED
6968.72	-21.19	PASSED

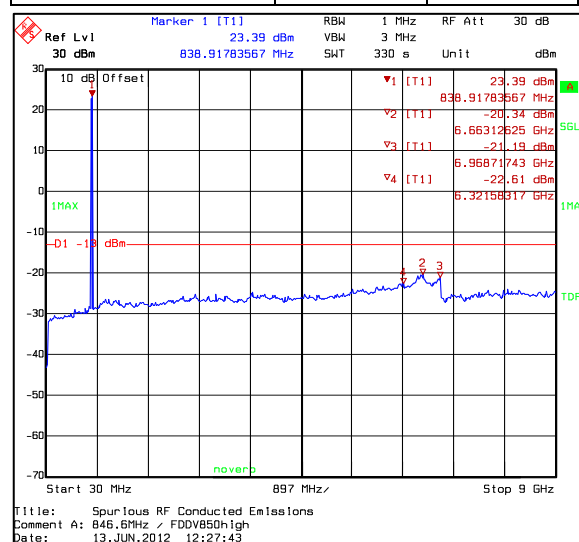

8. Spurious radiated emissions (FCC §22.917(a), §2.1053, RSS-132 4.5)

EUT with DUT number	GEM010
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	13.2 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	25 / 50
Date of measurements	30-Mar-2012
Measured by	Robert Müller

8.1. Test reference and limit

The measurement is made according to TIA-603-C as follows:

Below 3GHz:

The Preliminary Measurement and the Final Measurement is performed in 3m distance by rotating the turntable of 360 degrees at fixed height.

The Preliminary Measurement and the Final Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed, if the Preliminary Measurement results are closer than 20 dB to the permissible limit.

Above 3GHz:

The Preliminary Measurement and the Final Measurement is performed in 1.5m distance by rotating the turntable of 360 degrees at fixed height.

The Preliminary Measurement and the Final Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed, if the Preliminary Measurement results are closer than 20 dB to the permissible limit.

General:

Regarding RSS-GEN I3 Section 4.3 (i), the transmitter spurious emissions have been measured in 3 channels, see section 6 "Spurious emissions at antenna terminals" of this test report. The spurious radiated emission test shows emissions radiated from the enclosure of the EUT in one TX channel.

The measurement is divided into the Preliminary Measurement and the Final Measurement. The EUT is placed at nonconductive plate at the turntable center.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequency are measured in beforehand and saved to the test software. The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\ TX} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. $P_{SUBST TX}$ is the signal generator level, $P_{SUBST RX}$ is receiver level, A_{SUBST} and $L_{SUBST CABLES}$ is cable losses including both TX and RX cables and $G_{SUBST TX ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P[dBm] = P_{MEAS} + A_{CF}$$

Where P_{MEAS} is the receiver reading in dBm and A_{CF} is the correction factor including cable loss and substitution correction ($A_{CF} = L_{CABLES} G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Frequency range [MHz]	Limit [dBm]
30 - 8500	-13

8.2. GSM850 Test results

8.2.1 GSM mode

Channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{CF} [dB]	Polarisation	Result
1673.14	-43.30	0.047	-42.20	-1.1	HORIZONTAL	PASSED
2509.82	-38.00	0.158	-31.90	6.1	HORIZONTAL	PASSED

Substitution method could not be utilized as no emission above noise floor were found during measurements

8.2.2 EGPRS mode

Channel 190 / 836.6 MHz, 1 TX slot

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{CF} [dB]	Polarisation	Result
1673.14	-42.10	0.062	-41.00	-1.1	HORIZONTAL	PASSED
2509.82	-39.60	0.110	-45.70	6.1	HORIZONTAL	PASSED

Substitution method could not be utilized as no emission above noise floor were found during measurements

8.3. WCDMA850 Test results

8.3.1 FDD5 mode, RMC

Channel 4175 / 835.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{CF} [dB]	Polarisation	Result
1673.64	-52.30	0.006	-51.20	-1.10	HORIZONTAL	PASSED
2511.16	-48.90	0.013	-55.10	6.20	HORIZONTAL	PASSED
3346.69	-51.20	0.008	-48.40	-2.80	VERTICAL	PASSED
4186.36	-46.30	0.023	-44.80	-1.50	VERTICAL	PASSED

Substitution method could not be utilized as no emission above noise floor were found during measurements

9. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3)

EUT with DUT number	GEM013
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	13.2 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	-30 to +50 / 50
Date of measurements	25-Jul-2012
Measured by	Robert Müller

9.1. Test reference and limit

The measurement is made according to FCC rules parts 22, IC standard RSS-132 and TIA-603-C as follows:

1. The EUT is placed in the chamber.
2. The climate chamber temperature is set to the minimum value and the temperature is allowed to stabilize.
3. The EUT is set in idle mode for 15minutes.
4. The EUT is set to transmit.
5. The maximum transmit frequency error was measured immediately over 500 bursts.
6. The steps 3-5 were repeated for each temperature changing from low to high temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
+/- 2.5

9.2. GSM850 Test results

9.2.1 GSM mode

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	824.2	10.98	0.0132	PASSED
	836.6	-9.56	-0.0114	PASSED
	848.8	-9.04	-0.0107	PASSED
40	824.2	-10.14	-0.0123	PASSED
	836.6	-11.17	-0.0134	PASSED
	848.8	14.33	0.0169	PASSED
30	824.2	-7.49	-0.0091	PASSED
	836.6	10.46	0.0125	PASSED
	848.8	-11.56	-0.0136	PASSED
20	824.2	-4.91	-0.0060	PASSED
	836.6	-9.49	-0.0113	PASSED
	848.8	10.65	0.0125	PASSED
10	824.2	11.36	0.0138	PASSED
	836.6	7.43	0.0089	PASSED
	848.8	8.65	0.0102	PASSED
0	824.2	6.91	0.0084	PASSED
	836.6	7.23	0.0086	PASSED
	848.8	8.01	0.0094	PASSED
-10	824.2	6.72	0.0082	PASSED
	836.6	-8.46	-0.0101	PASSED
	848.8	-8.39	-0.0099	PASSED
-20	824.2	-9.36	-0.0114	PASSED
	836.6	8.14	0.0097	PASSED
	848.8	7.04	0.0083	PASSED
-30	824.2	4.39	0.0053	PASSED
	836.6	11.69	0.0140	PASSED
	848.8	-8.20	-0.0097	PASSED

10. Frequency stability, voltage variation

(FCC §2.1055(d), RSS-132 4.3)

EUT with DUT number	GEM013
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	13.2 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	25 / 50
Date of measurements	25-Jul-2012
Measured by	Robert Müller

10.1. Test reference and limit

The measurement is made according to FCC rules parts 22, IC standard RSS-132 and TIA-603-C as follows:

The EUT is connected to an adjustable power supply. The frequency stability was measured at nominal voltage and at the operation end point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
+/- 2.5

10.2. GSM850 Test results

10.2.1 GSM mode

Voltage [V]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
Maximum (15.6)	824.2	-11.69	-0.0142	PASSED
	836.6	9.94	0.0119	PASSED
	848.8	11.69	0.0138	PASSED
Nominal (13.2)	824.2	-9.94	-0.0121	PASSED
	836.6	9.88	0.0118	PASSED
	848.8	-11.56	-0.0136	PASSED
Operation end point (6.7)	824.2	-10.27	-0.0125	PASSED
	836.6	-11.43	-0.0137	PASSED
	848.8	8.72	0.0103	PASSED

11. Test Equipment

11.1. Conducted measurements

Equipment	Type	Manufacturer	Calibrated	Cycle [Years]
EMI Test Receiver	ESCS 30	R&S	May 2011	1
LISN 50 μ H	ESH3-Z5	R&S	Jul 2011	1
LISN 50 μ H	ESH3-Z5	R&S	Jul 2011	1
V network	ESH3-Z6	R&S	May 2011	1
V network	ESH3-Z6	R&S	May 2011	1
T-ISN	ISN T800	Teseq	Jul 2010	2
Thermo- Hygrograph	OPUS 10	Lufft	Jun 2011	2
EM Injection clamp	F-33-1	Fischer	Apr 2012	2
Signal generator	SML01	R&S	Apr 2012	2
Digital Radio Communication Tester	CMU200	R&S	Jun 2012	1
RF Emission Software	ES-K1 v.1.71	R&S	n.a.	--
EMI Test Receiver	FSEM30	R&S	Jul 2011	1
Temperature Test system	VT4004	Vötsch	Jul 2012	2
Power Supply	E3632A	Agilent	Jul 2012	1
Signal generator	SMP02	R&S	Jun 2011	2
BT/WLAN Tester	N 4010 A	Agilent	May 2011	2
Digital Radio Communication Tester	CMU200	R&S	Jun 2012	1
RF Radio Software	RADIO	novero	n.a.	--

11.2. Radiated measurements

Equipment	Type	Manufacturer	Calibrated	Cycle [Years]
Controller	2090	ETS	n.a.	--
MAST	2075	ETS	n.a.	--
Ultra Broadband Antenna	HL562	R&S	Mar 2009	3
Digital Radio Communication Tester	CMU200	R&S	Jul 2011	2
EMI Test receiver	ESIB26	R&S	Jul 2012	1
Yaesu controller	G-1000DXC	YAESU	n.a.	--
Computer controller (Yaesu)	GS-232B	YAESU	n.a.	--
Anechoic chamber	3 meter semi/full anechoic chamber	ETS Euroshield	Mar 2012	3
Horn Antenna	3115	EMCO	Apr 2012	3
Horn Antenna	BBHA9120LF	Schwarzbeck	Aug 2011	3
Standard Horn Antenna	3160-09	EMCO	n.a.	--
Thermo- Hygrograph	OPUS 10	Lufft	Jun 2011	2
Band Reject Filter	WRCG 2400/2485 - 2375/2510 - 60/20EE	Wainwright	Mar 2012	1
Notch Filter GSM850	WRCD 800/880-0,2/40-5SSSD	Wainwright	Mar 2012	1
Band Reject Filter WCDMA850	WRCG 832/838-825/845-40/5SS	Wainwright	Mar 2012	1
Notch Filter GSM1900	WRCD 1700/2000-0,2/40-5SSSD	Wainwright	Mar 2012	1
Band Reject Filter AWS 1700	WRCGV1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	Mar 2012	1
RF Emission Software	ES-K1 v.1.71	R&S	n.a.	--