



HCT. CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8518 FAX : +82 31 639 8525 www.hct.co.kr

CERTIFICATE OF COMPLIANCE
FCC PART 27 Certification

Applicant Name:

POSDATA
276-2, Seohyeon-dong, Bundang-gu, Seongnam-city,
Kyeonggi-do, 463-775, Korea

Date of Testing: July, 23, 2007

Test Site/Location:

HCT, San 136-1 Ami-ri, Bubal-eup, Icheon-si,
Kyungki-do, Korea

Test Report No.: HCT-R08-106

FCC ID : **WKURSS6411**

APPLICANT : **POSDATA**

EUT Type : Mobile WiMax Remote SubSystem
Manufacturer : POSDATA
Model name : RSS 6411
Frequency of Operation : 2575 MHz ~ 2595 MHz
FCC Rule Part(s) : FCC Part 27.
Test Procedure(s) : ANSI C-63.4-2003, EIA/TIA 603B
Application Type : Original Equipment
Data of issue : July 23, 2008

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of FCC Part 27 of the FCC Rules under normal use and maintenance.

Chang Seok Choi

Report prepared by
: Chang Seok Choi
Test engineer of RF Part

Sang Jun Lee

Approved by
: Sang Jun Lee
Manager of RF Part

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 1 of 72

CONTENTS

1. GENERAL INFORMATION.....	4
1.1. CLIENT INFORMATION	4
1.2. PRODUCT INFORMATION	4
1.3. OPERATING DESCRIPTION OF EUT	5
2. TEST SUMMARY	6
2.1. STANDARDS	6
2.2. MODE OF OPERATION DURING THE TEST	6
3. STANDARDS ENVIRONMENTAL TEST CONDITIONS	7
4. TEST EQUIPMENT	8
5. CONDUCTED OUTPUT POWER.....	9
5.1. Applicable Standard	9
5.2. Test Equipment List and Details	9
5.3. Test Procedure.....	9
5.3.1. Environmental Conditions:	9
5.4. Test Result	9
5.4.1. Test Data at Output Port	10
5.4.2. Test Data at Output Port 1	10
5.4.3. Plot Data for Output 0	11
5.4.4. Plot Data for Output 1.	17
6. OCCUPIED BANDWIDTH	23
6.1. Applicable Standard	23
6.2. Test Equipment List and Details	23
6.3. Test Procedure.....	23
6.4. Test Result	23
6.4.1. Test Data at Output Port 0	24
6.4.2. Test Data at Output Port 1	24
6.4.3. Test Data Plot at Output Port 0	25
6.4.4. Test Data at Output Port 1	31
7. BAND EDGES	37
7.1. Applicable Standard	37
7.2. Test Equipment List and Details	37
7.3. Test Procedure.....	37

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 2 of 72

7.3.1. Test Data Environmental Conditions	37
7.4. Test Result	37
7.4.1. Test data at Output 0	38
7.4.2. Test data at Output 1	38
7.4.3. Plot Data at Output 0	39
7.4.4. Plot Data at Output 1	42
7.4.4. Plot Data at Combined Output	45
8. SPURIOUS EMISSION AT ANTENNA TERMINAL	48
8.1. Applicable Standard Requirements:	48
8.2. Test Equipment List and Details Test Procedure	48
8.3. Environmental Conditions:	48
8.4. Test Result	48
8.4.1. Plot Data at Output 0	49
8.4.2. Plot Data at Output 1	58
9. RADIATED SPURIOUS EMISSION	67
9.1 Applicable Standard:	67
9.2 Test Equipment List and Details	67
9.3 Test Procedure.....	67
9.3.1 Radiated Spurious Emissions Test Setup	68
9.3.2 Environmental Conditions:	68
9.4 Test Result	68
10. FREQUENCY STABILITY	69
10.1 Applicable Standard	69
10.2 Test Equipment List and Details	69
10.3 Test Procedure.....	69
10.3.1. Environmental conditions	69
10.4. Test Result	69
10.4.1. Frequency Stability over Temperature and Voltage variation.....	70

1. GENERAL INFORMATION

1.1. CLIENT INFORMATION

Company	POSDATA
Contact Point	276-2, Seohyeon-dong, Bundang-gu, Seongnam-city, Kyeonggi-do, 463-775, Korea
Contact person	Name: Seo Seong Won / Manager E-mail : seosw12@posdata.co.kr Tel: +82-31-779-1787 Fax: +82-31-779-2323


1.2. PRODUCT INFORMATION

EUT TYPE	Mobile WiMax Remote SubSystem
EMISSION DESIGNATOR	9M09G7W
OPERATING FREQUENCY	2575 ~ 2595 MHz
TX OUTPUT POWER	9.97 W
CHANNEL BANDWIDTH	10 MHz
MODULATION TYPE	OFDMA(QPSK, 16QAM, 64QAM)
NUMBER OF CARRIERS/SECTORS	1 Carriers / 1 Sectors
SYSTEM INPUT VOLTAGE	DC -48V

1.3. OPERATING DESCRIPTION OF EUT

The RSS 6411 provides the MIMO function and using Matrix A (STC).

Explanation of STC is below.

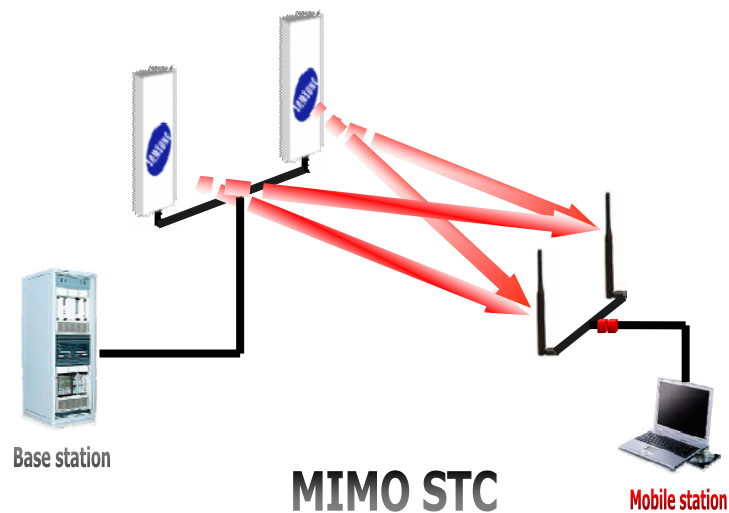

Matrix A(Space-Time Coding)

Transmission ratio of the Matrix A or Space-Time Coding(STC) is 1 and equal to that of Single Input Single Output(SISO). However The Matrix A or the STC reduces the error of the signal received from the MS by raising the stability of the signal received from the MS by means of the Tx diversity. This technology is, also, effective in Signal to Noise Ratio(SNR) and provides excellent performance even when the MS moves in high speed.

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 5 of 72

2. TEST SUMMARY

2.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With **FCC Part 27**

SECTION	TEST ITEMS	RESULTS
2.1046, 27.50(h)	Conducted Output Power	Compliant
2.1049, 27.53(l)	Occupied Bandwidth	Compliant
2.1051, 27.53(l)	Spurious Emissions at Antenna Terminals	Compliant
2.1051, 27.53(l)	Band edge	Compliant
2.1053, 27.53(l)	Spurious Radiated Emissions.	Compliant
2.1055(a)(1), 27.54	Frequency Stability over Temperature variation	Compliant
2.1055(d), 27.54	Frequency stability over Voltage variation	Compliant

2.2. MODE OF OPERATION DURING THE TEST

The EUT was operated in a manner representative of the typical usage of the equipment.

During all testing, system components were manipulated within the confines of typical usage to maximize each emission. All Modulation (QPSK, 16QAM, and 64QAM) modes and different data rates were tested, and the worst data was recorded in this test report.

The device does not supply antenna(s) with the system, so the dummy loads were connected to the RF output ports for radiated spurious emission testing.

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 6 of 72

3. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature :	+ 15 °C to + 35 °C
Relative humidity:	30 % to 60 %
Air pressure	860 mbar to 1060 mbar

4. TEST EQUIPMENT

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Schwarzbeck	BBHA 9120D /Double Ridged Horn Antenna	296	05/02/2009
Schwarzbeck	BBHA 9120D /Double Ridged Horn Antenna	147	03/30/2009
Schwarzbeck	VULB 9160/ TRILOG Antenna	9160-3150	04/20/2009
Schwarzbeck	VULB 9160/ TRILOG Antenna	3125	04/20/2009
HD	MA240/ Antenna Position Tower	556	N/A
EMCO	1050/ Turn Table	114	N/A
HD GmbH	HD 100/ Controller	13	N/A
HD GmbH	KMS 560/ SlideBar	12	N/A
Rohde & Schwarz	FSP30 / Spectrum Analyzer	839117/011	06/28/2009
MITEQ	AMF-60-0010 1800-35-20P	1200937	01/15/2009
MITEQ	AMF-60-0010 1800-35-20P	990893	02/24/2009
Schwarzbeck	BBHA9170/ SHF-EHF Horn Antenna	BBHA9170342	03/20/2009
ADVANTEST	R3273/Spectrum Analyzer	J004821	05/02/2009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	1	06/28/2009
WEINSCHL	67-30-33/Attenuator	BR0530	01/11/2009
Agilent	E4440A /PSA Spectrum Analyzer	US45303008	01/08/2009
Agilent	E4438C /Vector Signal Generator	MY42082646	12/24/2008

5. CONDUCTED OUTPUT POWER

5.1. Applicable Standard

According to FCC §2.1046&27.5(h)

5.2. Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Agilent	Spectrum Analyzer	E4440A	US45303008	01/08/2009
Agilent	Signal Generator	E4438C	MY42082646	12/24/2008

5.3. Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

5.3.1. Environmental Conditions:

Temperature:	25 °C
Relative Humidity:	57 %

5.4. Test Result

: PASS


5.4.1. Test Data at Output Port

Modulation	Channel	Frequency	Measured Output Power	
			dBm	W
QPSK	Low	2575.00	39.82	9.59
	Middle	2585.00	39.90	9.77
	High	2595.00	39.38	8.66
16QAM	Low	2575.00	39.89	9.74
	Middle	2585.00	39.92	9.81
	High	2595.00	39.47	8.85
64QAM	Low	2575.00	39.93	9.84
	Middle	2585.00	39.99	9.97
	High	2595.00	39.37	8.64


5.4.2. Test Data at Output Port 1

Modulation	Channel	Frequency	Measured Output Power	
			dBm	W
QPSK	Low	2575.00	39.80	9.54
	Middle	2585.00	39.65	9.22
	High	2595.00	39.20	8.31
16QAM	Low	2575.00	39.81	9.57
	Middle	2585.00	39.66	9.24
	High	2595.00	39.22	8.35
64QAM	Low	2575.00	39.76	9.46
	Middle	2585.00	39.65	9.22
	High	2595.00	39.07	8.07

5.4.3. Plot Data for Output 0

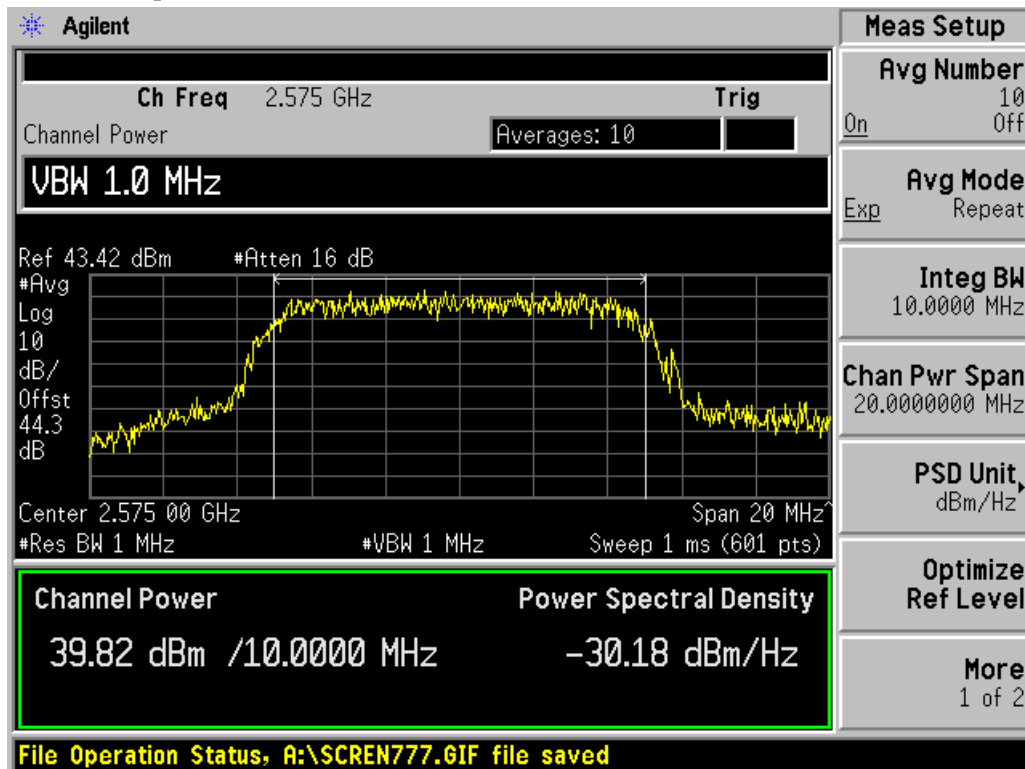


(QPSK Low Channel)

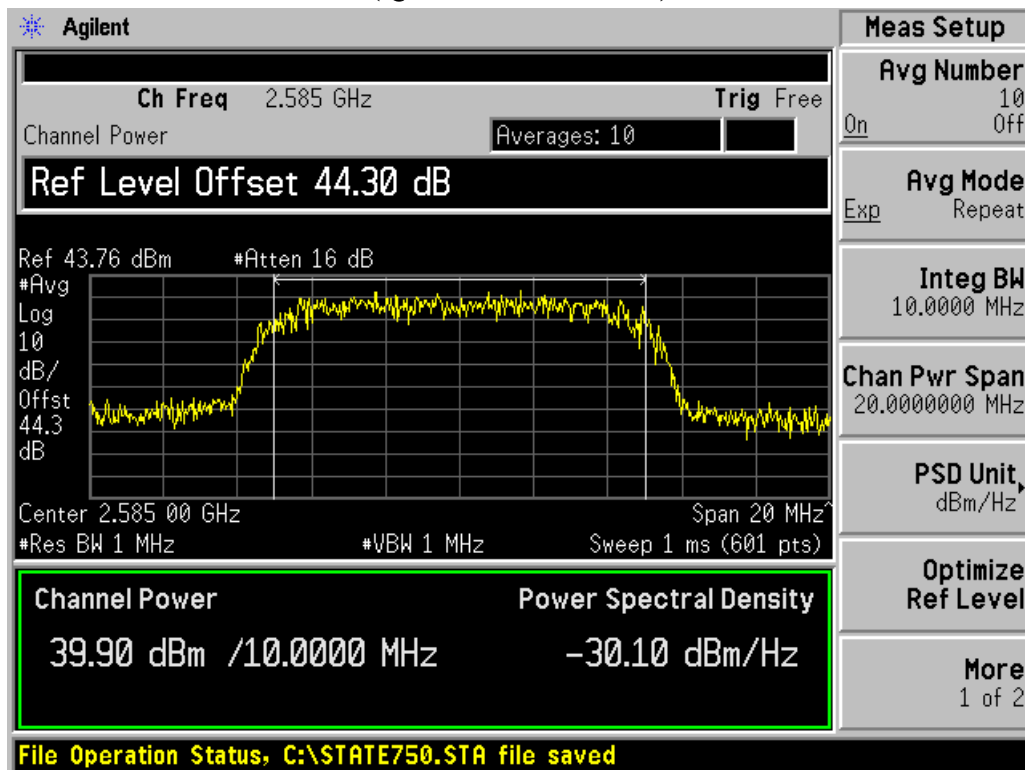


(QPSK Middle Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 11 of 72

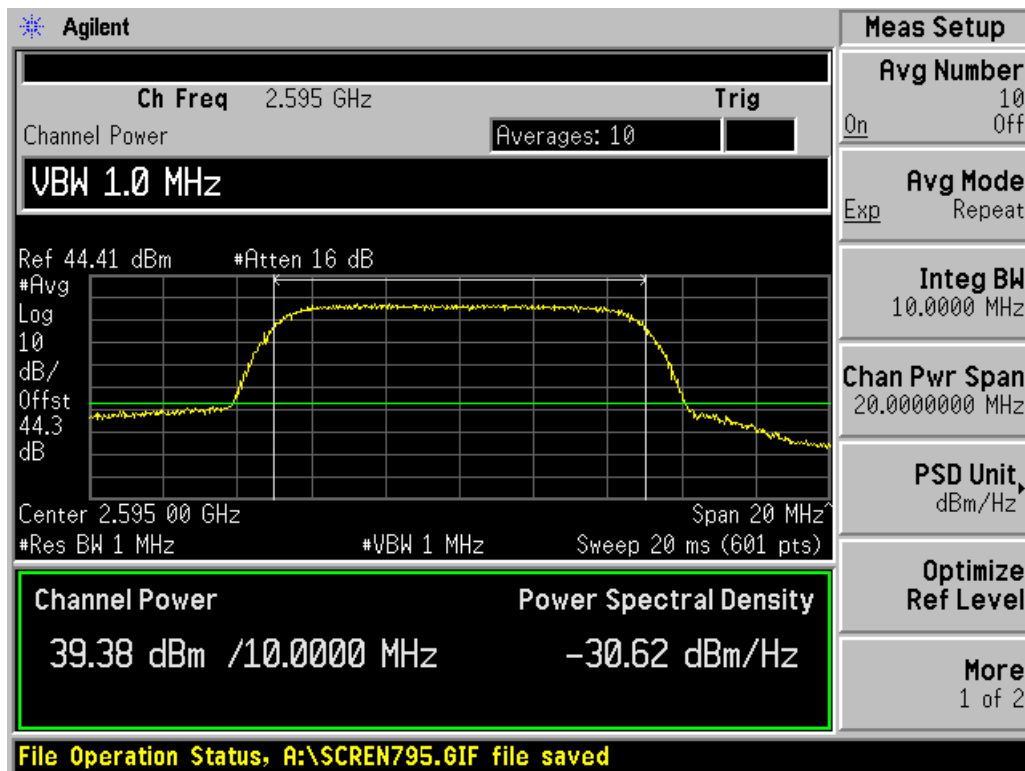


(QPSK High Channel)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 12 of 72

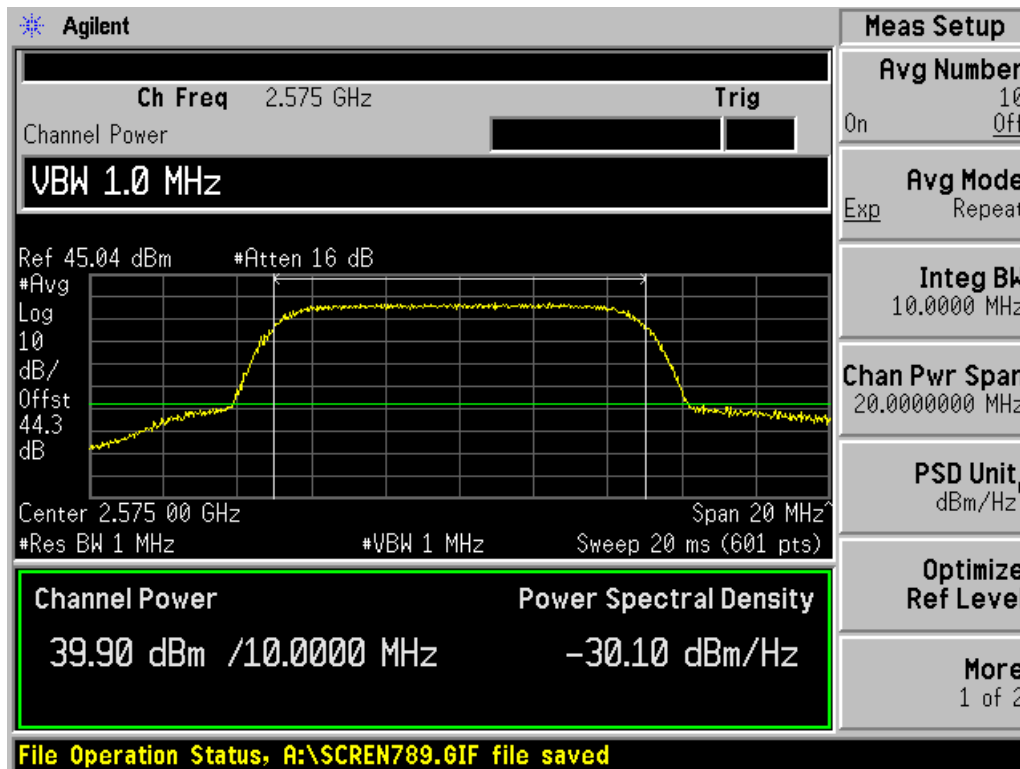

(16QAM Low Channel)

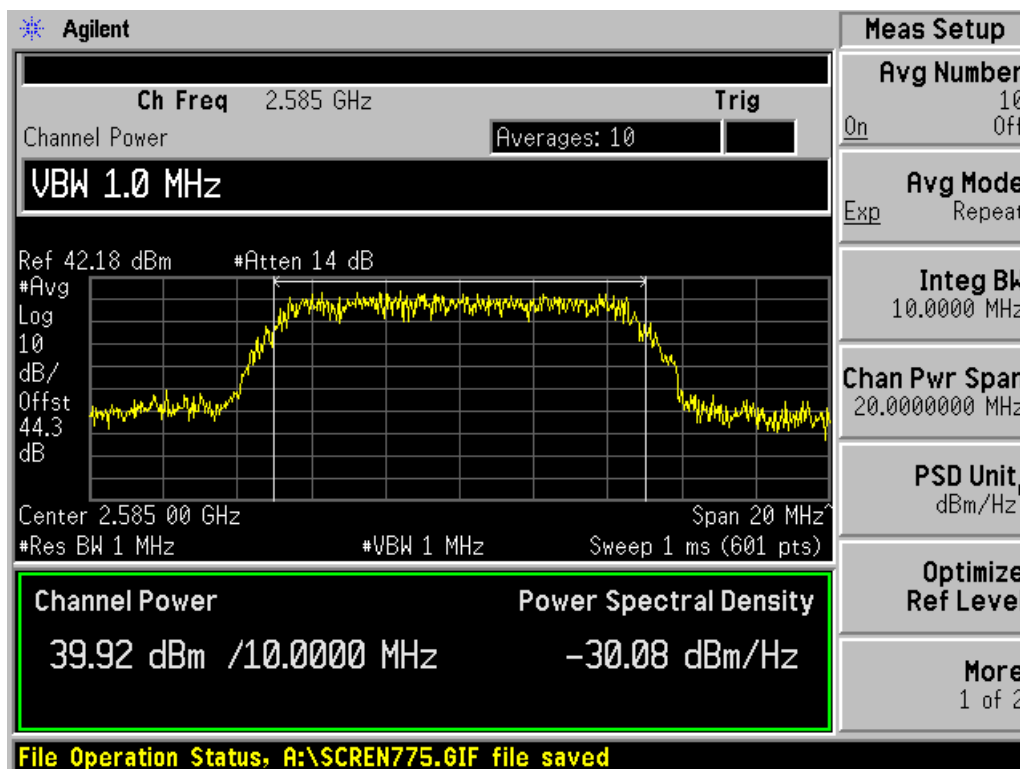


(16QAM Middle Channel)

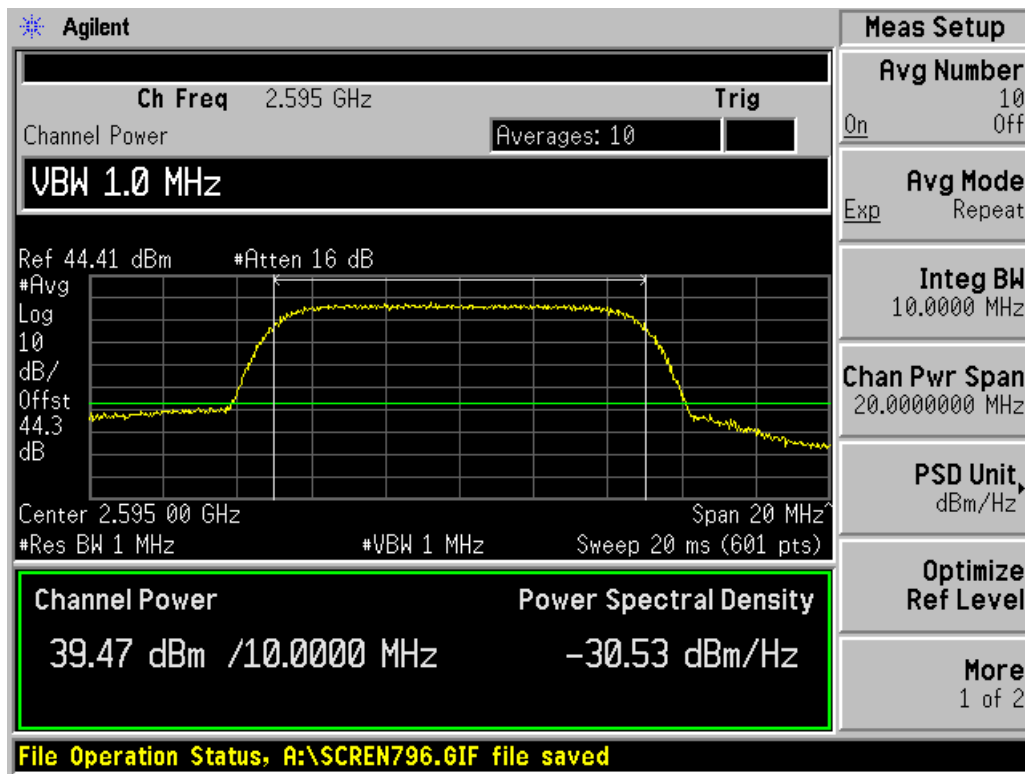


(16QAM High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 14 of 72

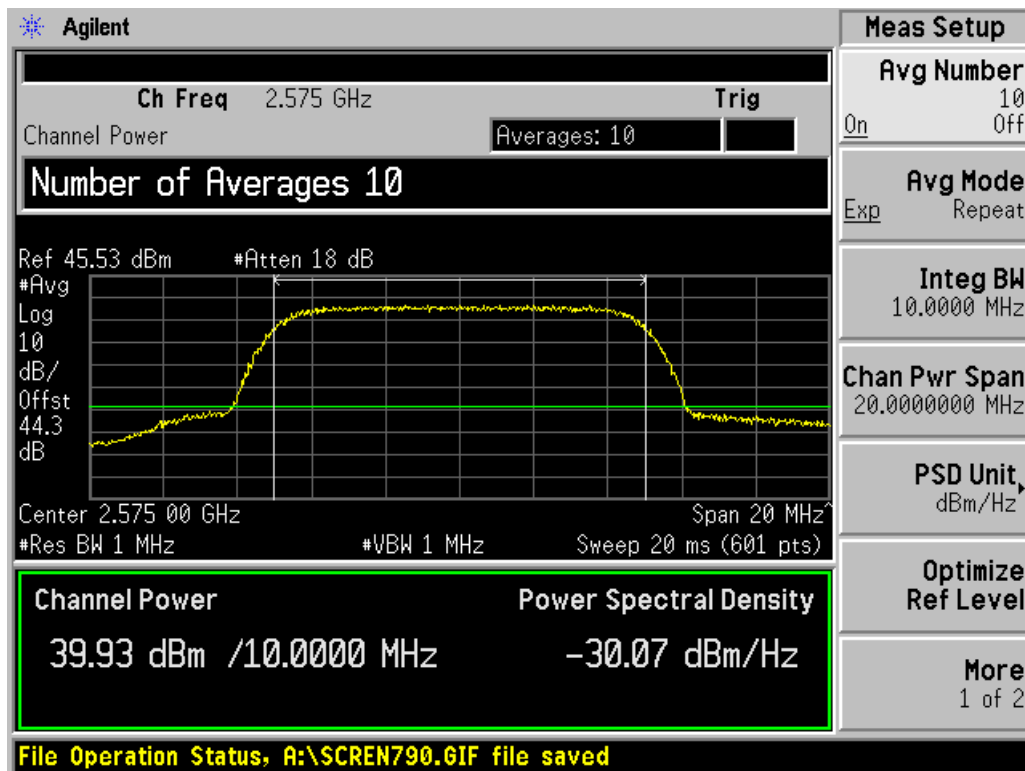


(64QAM Low Channel)

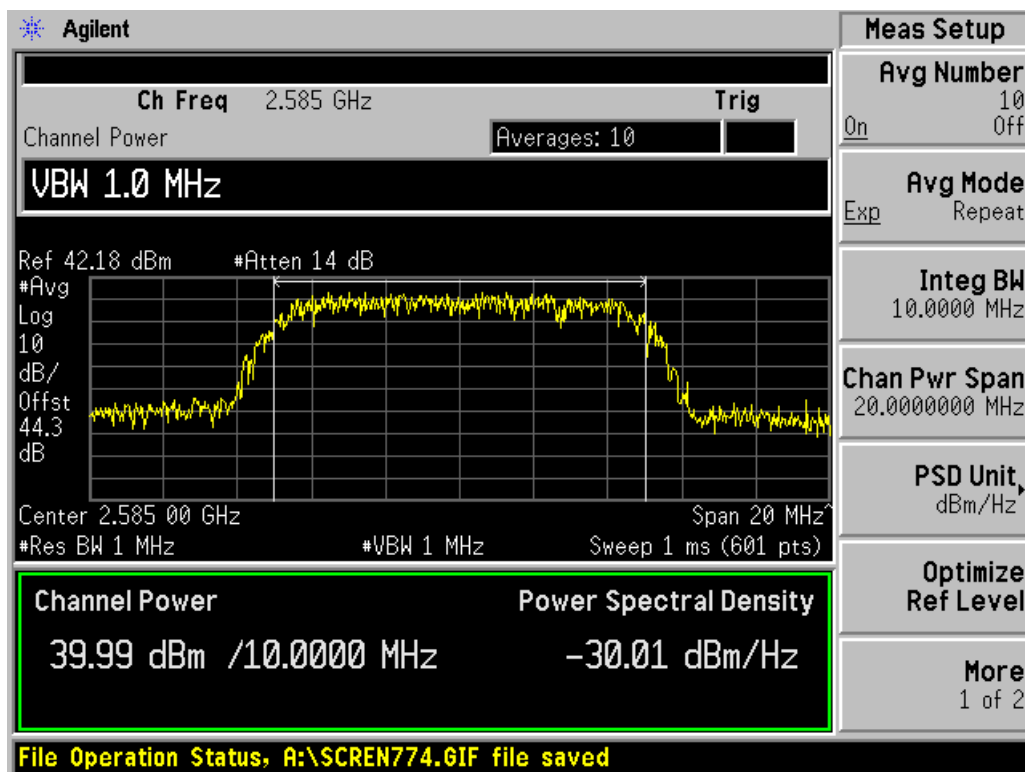

(16QAM Middle Channel)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 15 of 72

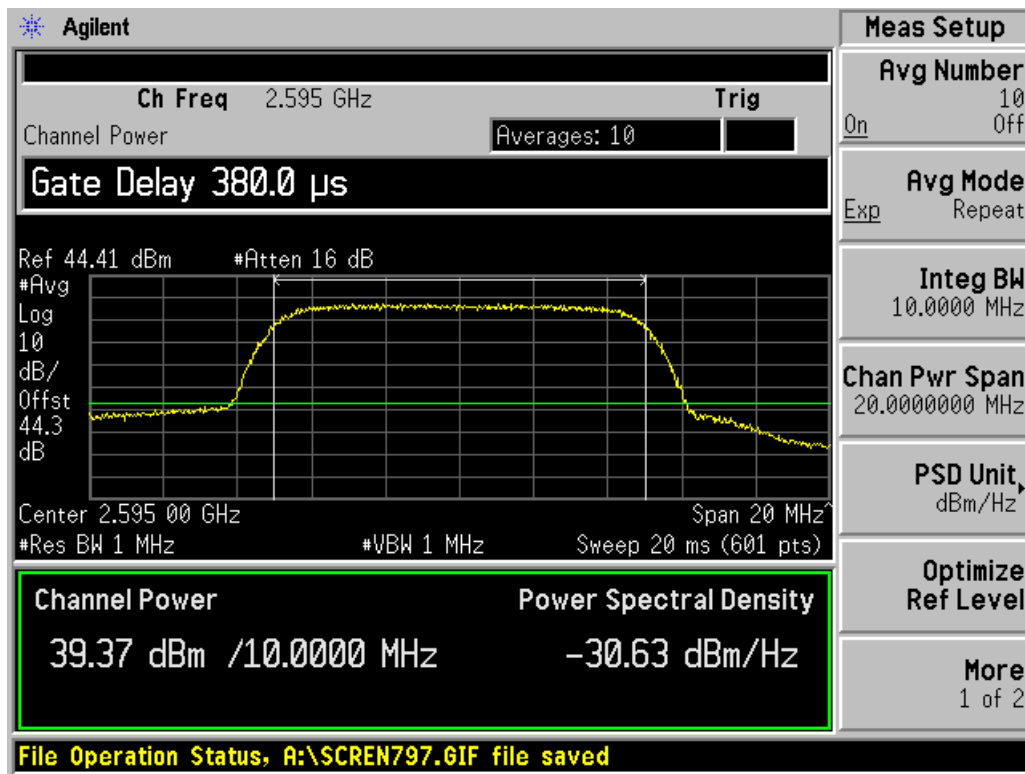


(64QAM High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 16 of 72


5.4.4. Plot Data for Output 1.

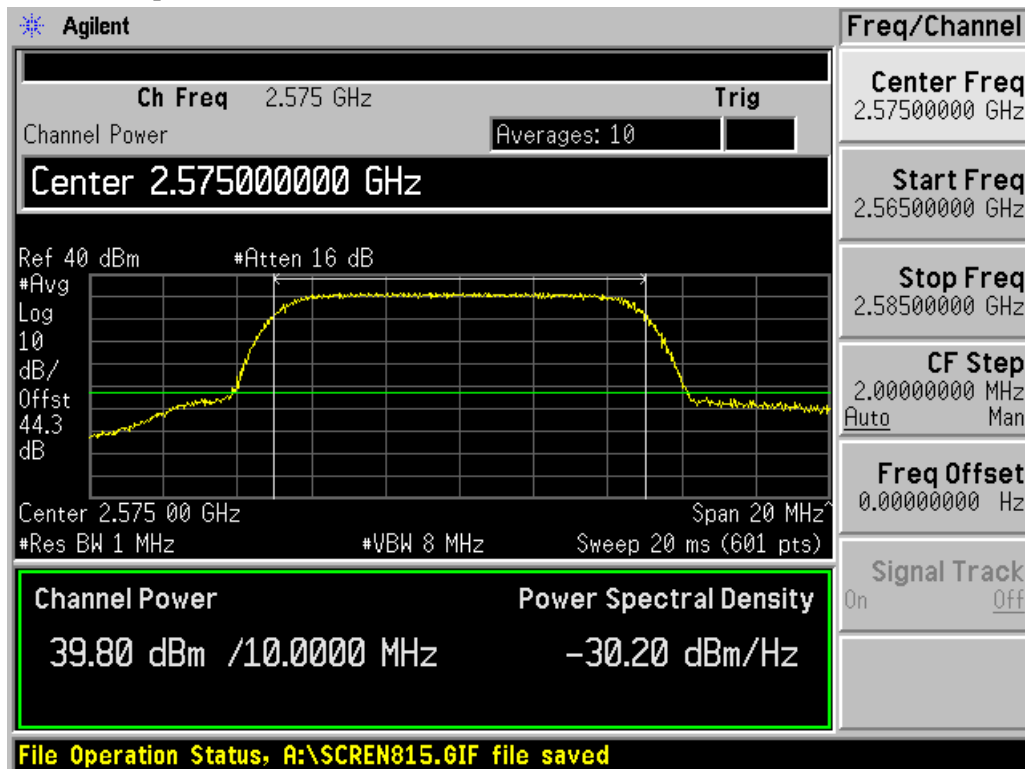

(QPSK Low Channel)

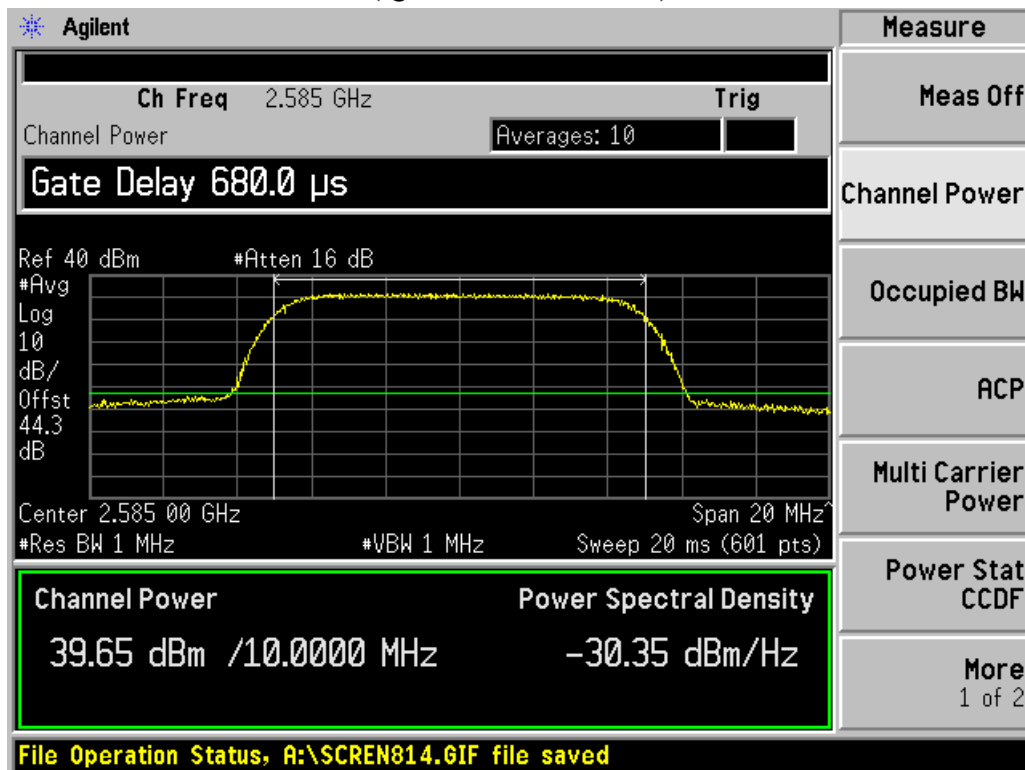


(QPSK Middle Channel)

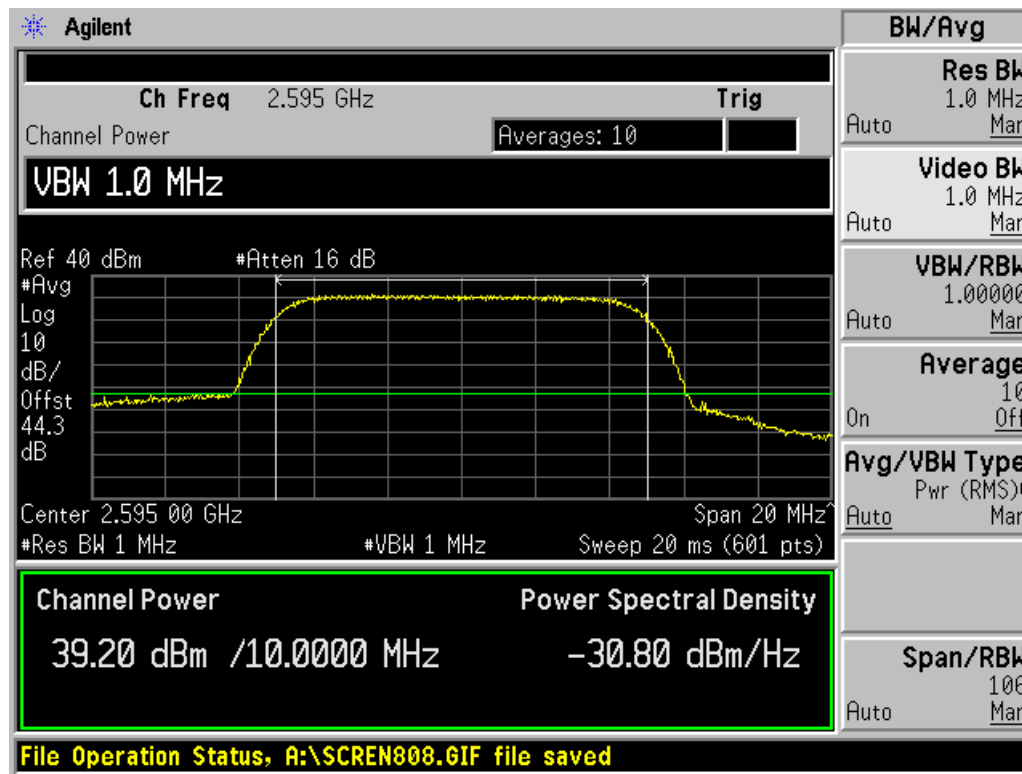


(QPSK High Channel)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 18 of 72

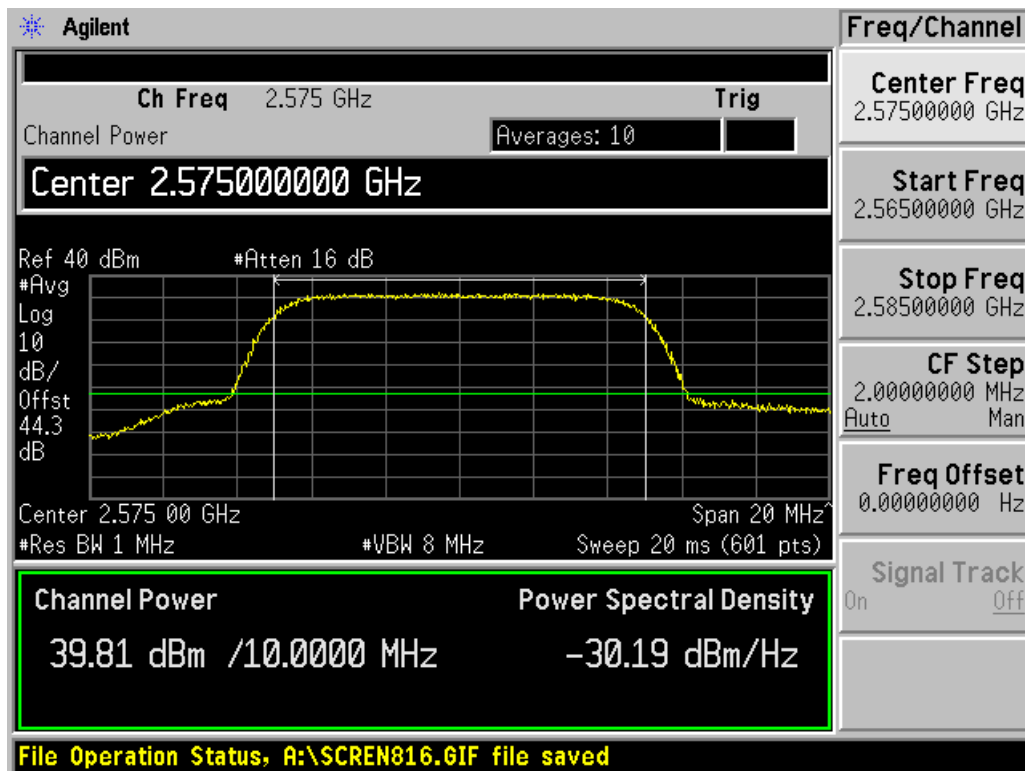


(16QAM Low Channel)

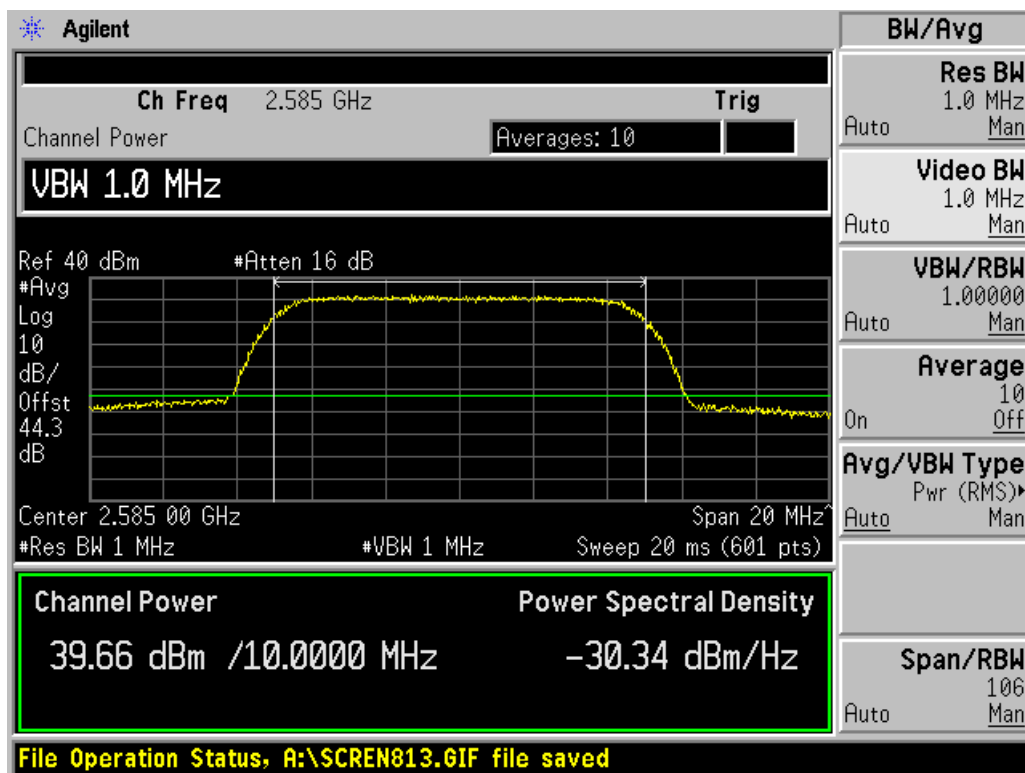


(16QAM Middle Channel)

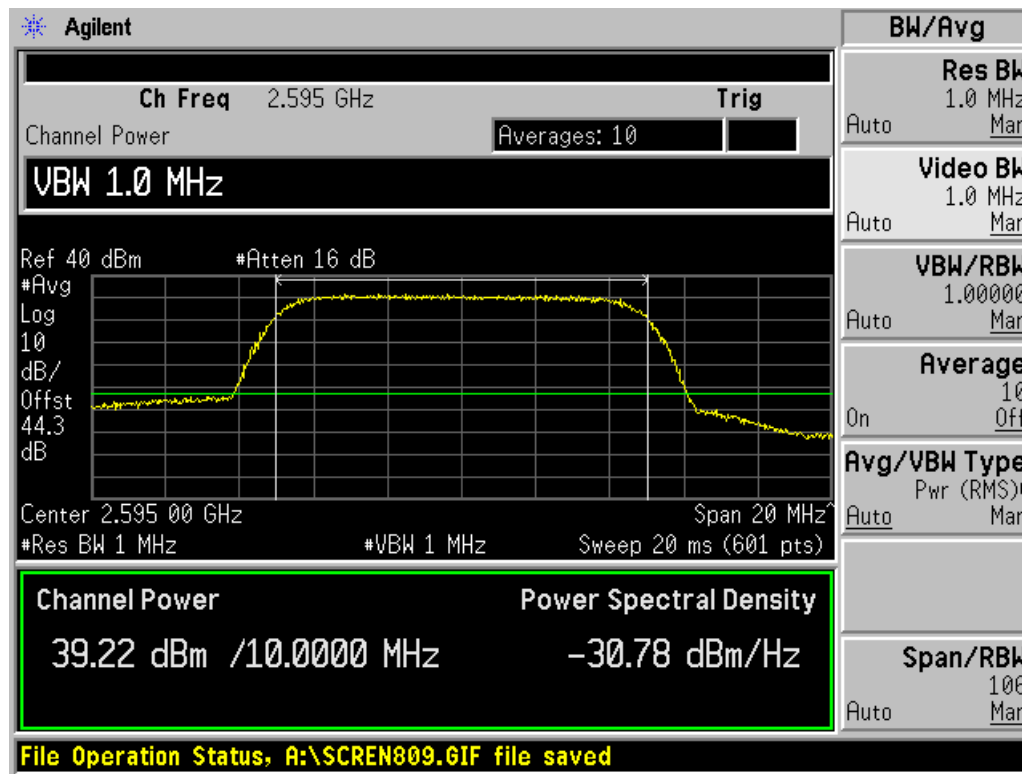

(16QAM High Channel)

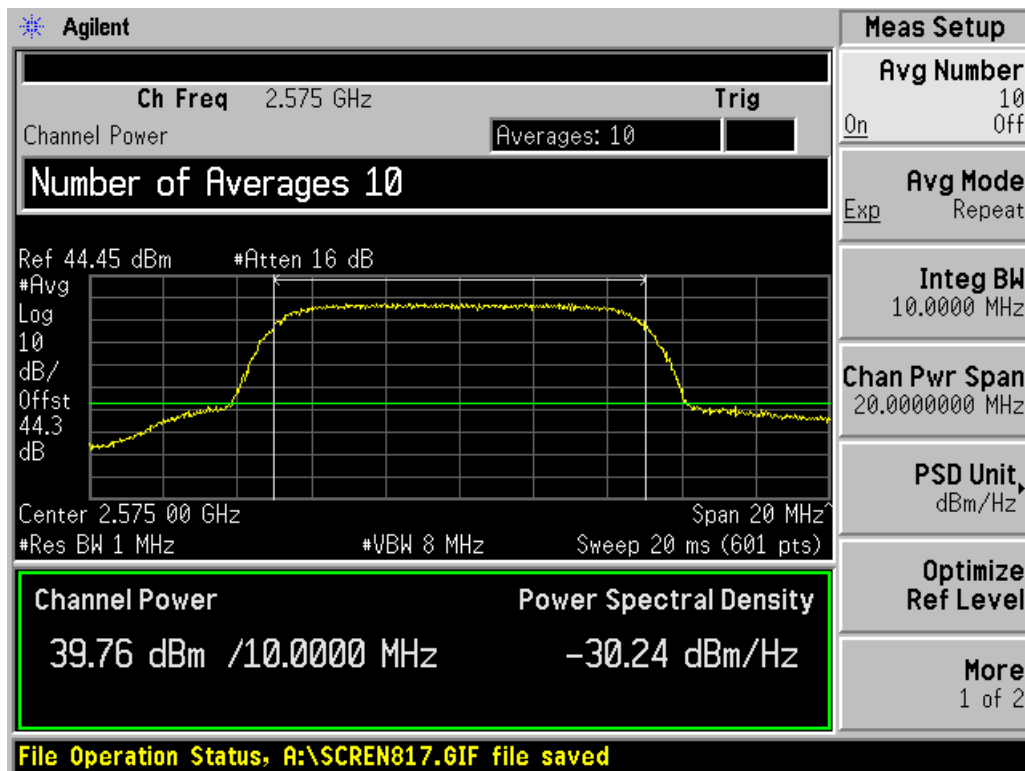


(64QAM Low Channel)

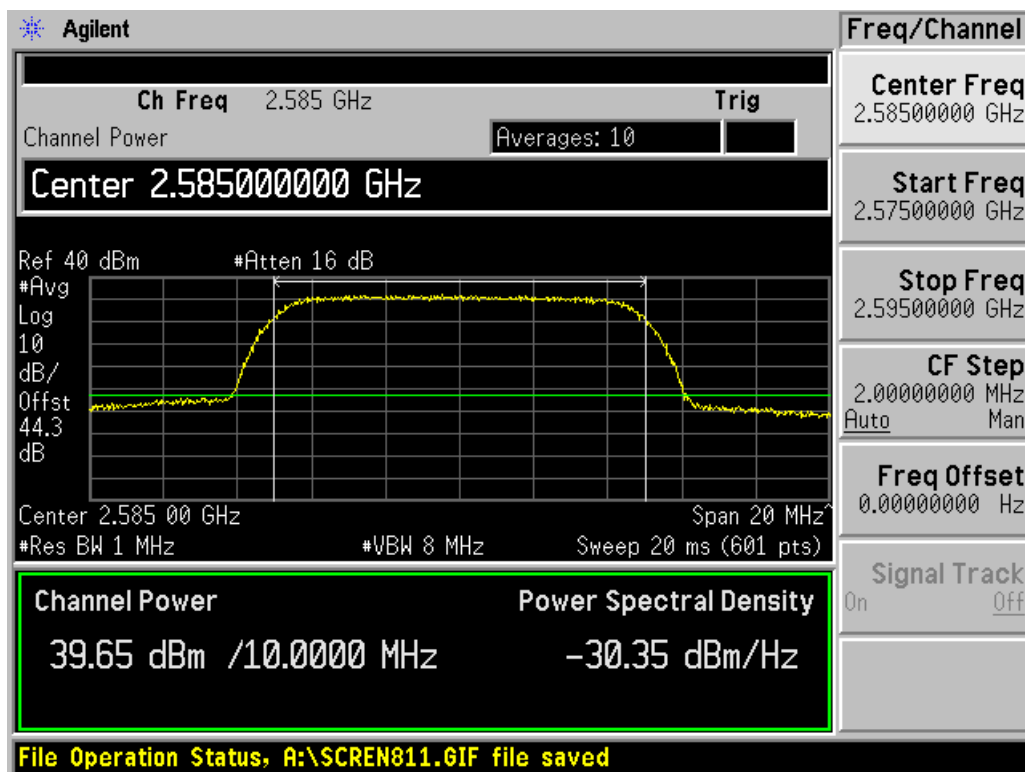

(64QAM Middle Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 21 of 72

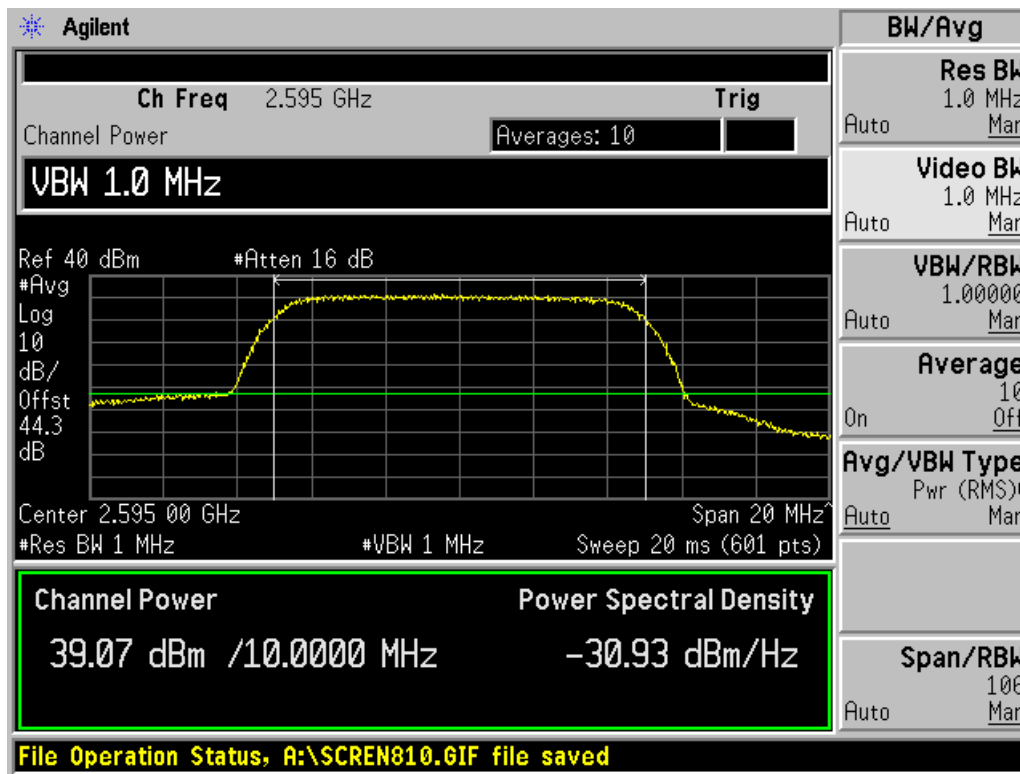

(64QAM High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 22 of 72

6. OCCUPIED BANDWIDTH

6.1. Applicable Standard

Requirements: CFR 47, Section 2.1049

6.2. Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Agilent	Spectrum Analyzer	E4440A	US45303008	01/08/2009
Agilent	Signal Generator	E4438C	MY42082646	12/24/2008

6.3. Test Procedure

Temperature:	25 °C
Relative Humidity:	58 %

6.4. Test Result

: PASS


6.4.1. Test Data at Output Port 0

Modulation	Channel	Frequency	Measured Bandwidth
			99 %
QPSK	Low	2575.00	9.01
	Middle	2585.00	9.09
	High	2595.00	9.06
16QAM	Low	2575.00	9.00
	Middle	2585.00	9.01
	High	2595.00	9.06
64QAM	Low	2575.00	9.02
	Middle	2585.00	9.04
	High	2595.00	9.08


6.4.2. Test Data at Output Port 1

Modulation	Channel	Frequency	Measured Bandwidth
			99 %
QPSK	Low	2575.00	9.09
	Middle	2585.00	9.09
	High	2595.00	9.06
16QAM	Low	2575.00	9.08
	Middle	2585.00	9.08
	High	2595.00	9.06
64QAM	Low	2575.00	9.05
	Middle	2585.00	9.07
	High	2595.00	9.08

6.4.3. Test Data Plot at Output Port 0

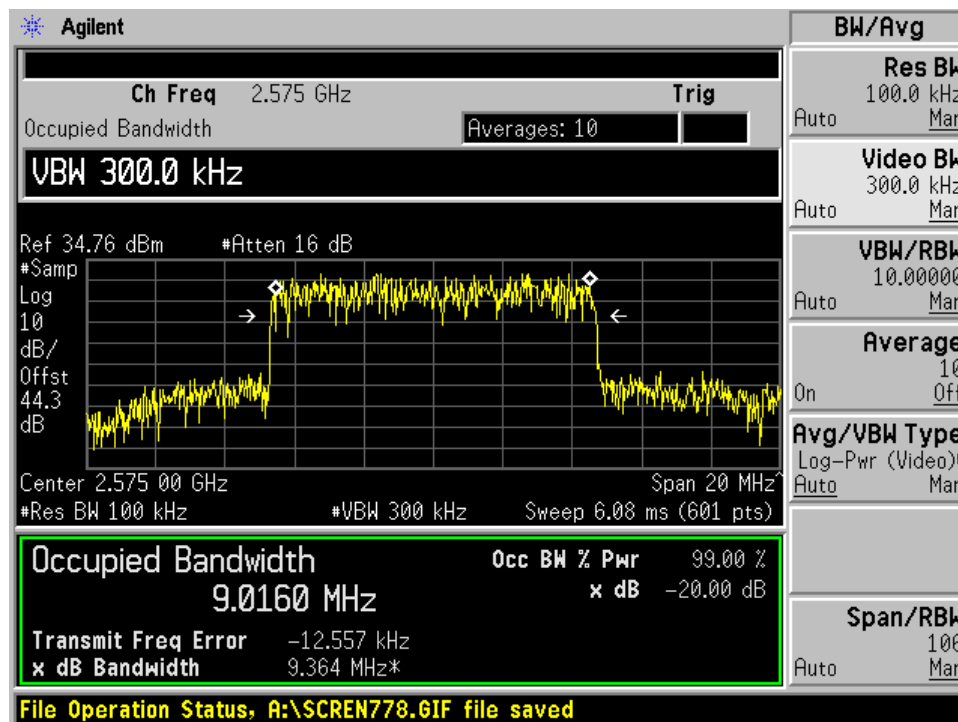


(QPSK Low Channel)

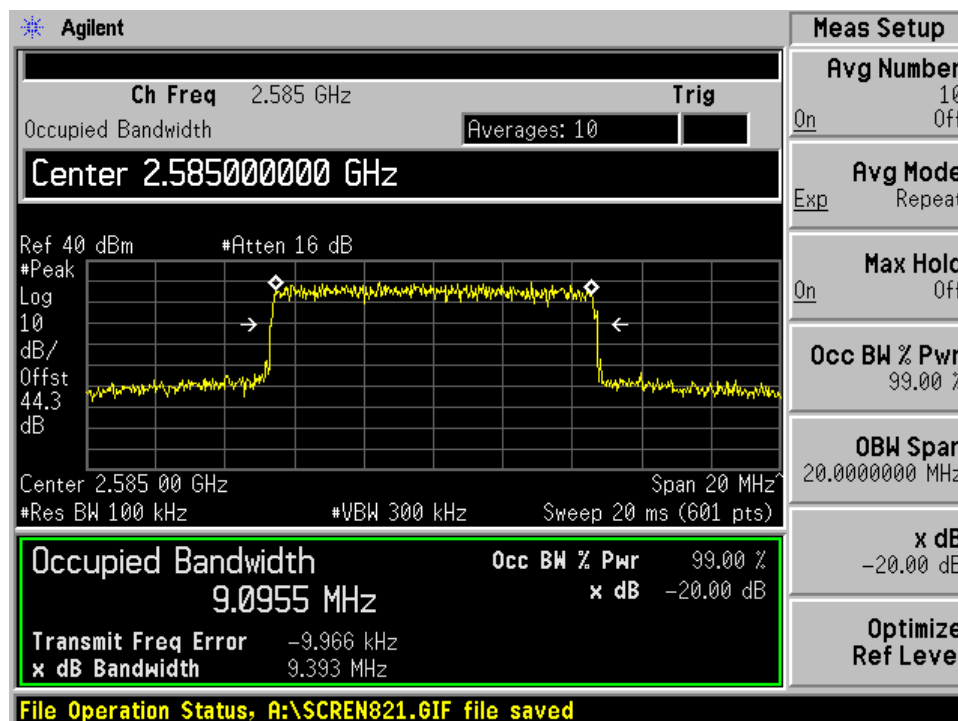


(QPSK Middle Channel)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 25 of 72

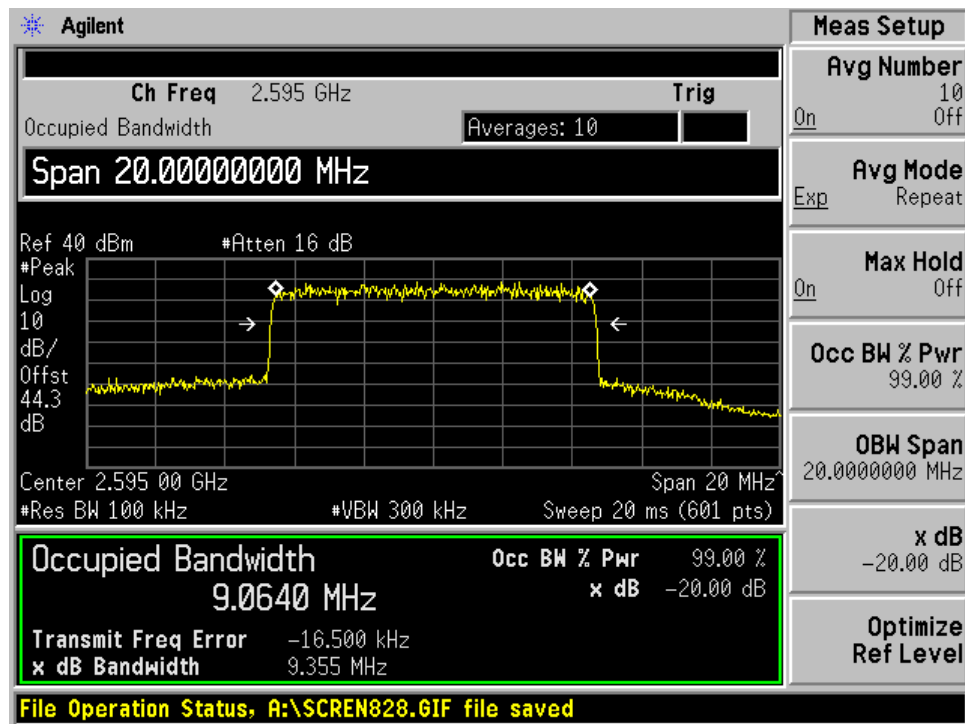


(QPSK High Channel)

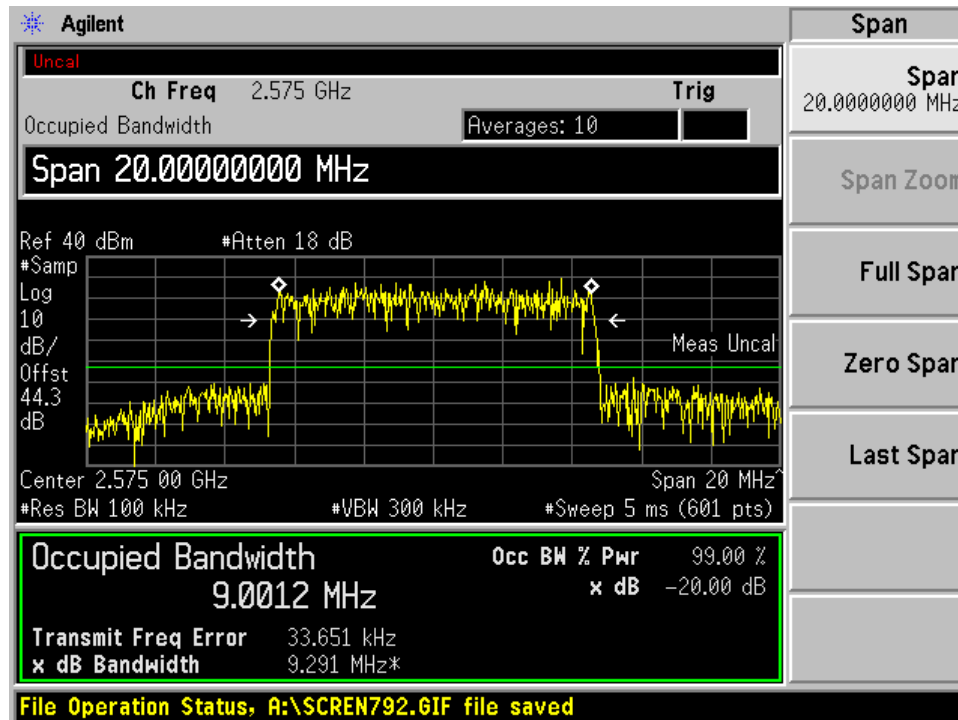

(16QAM Low Channel)

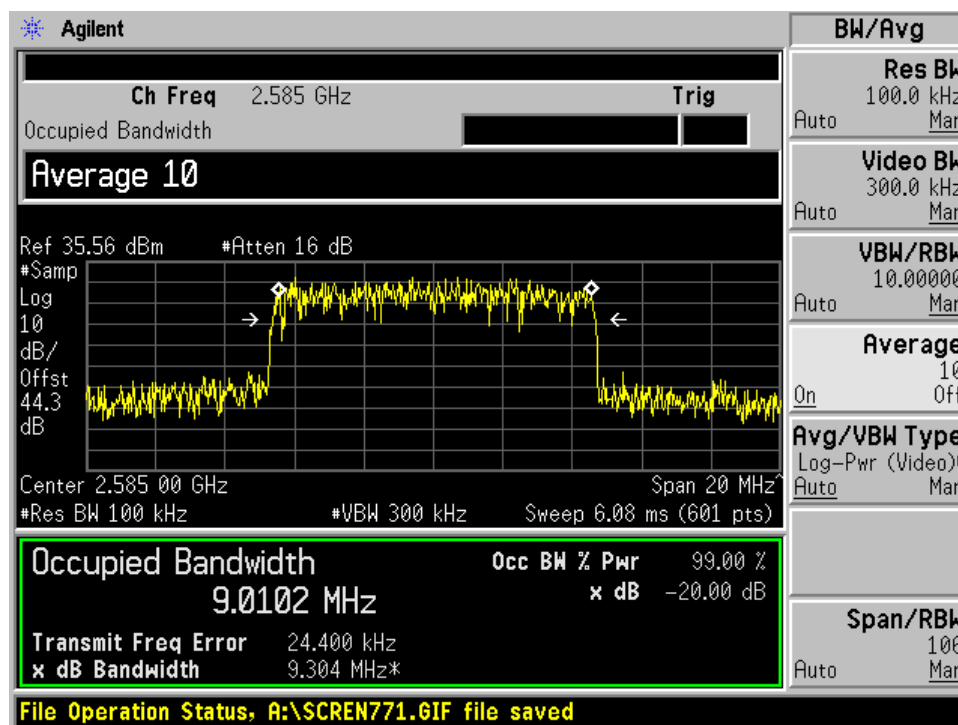


(16QAM Middle Channel)

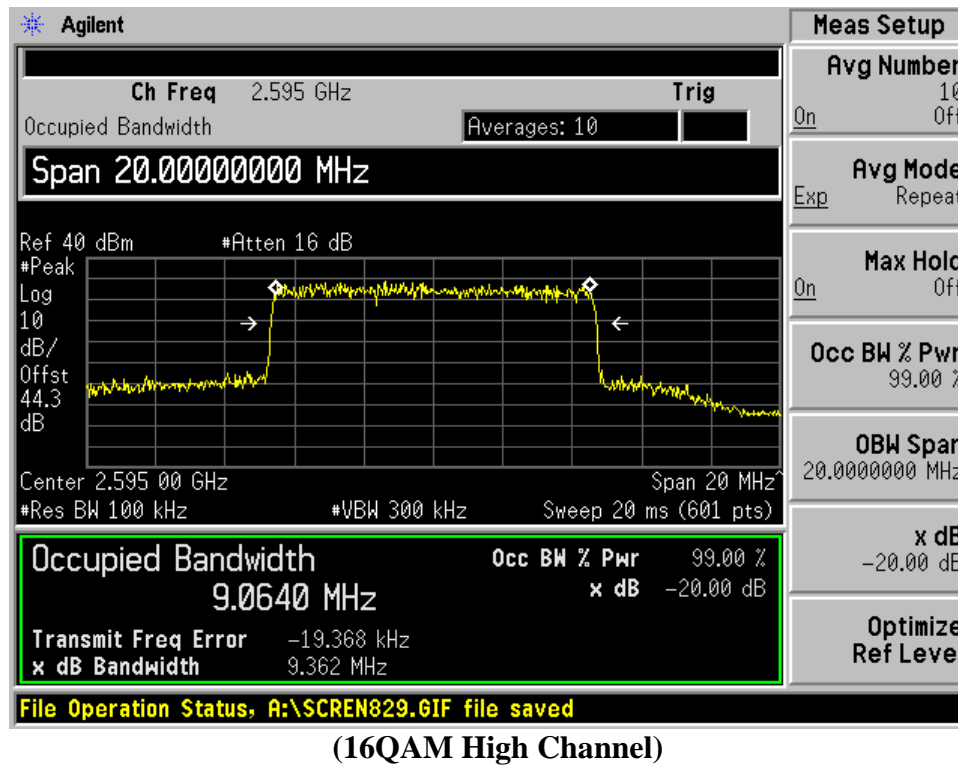

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 28 of 72




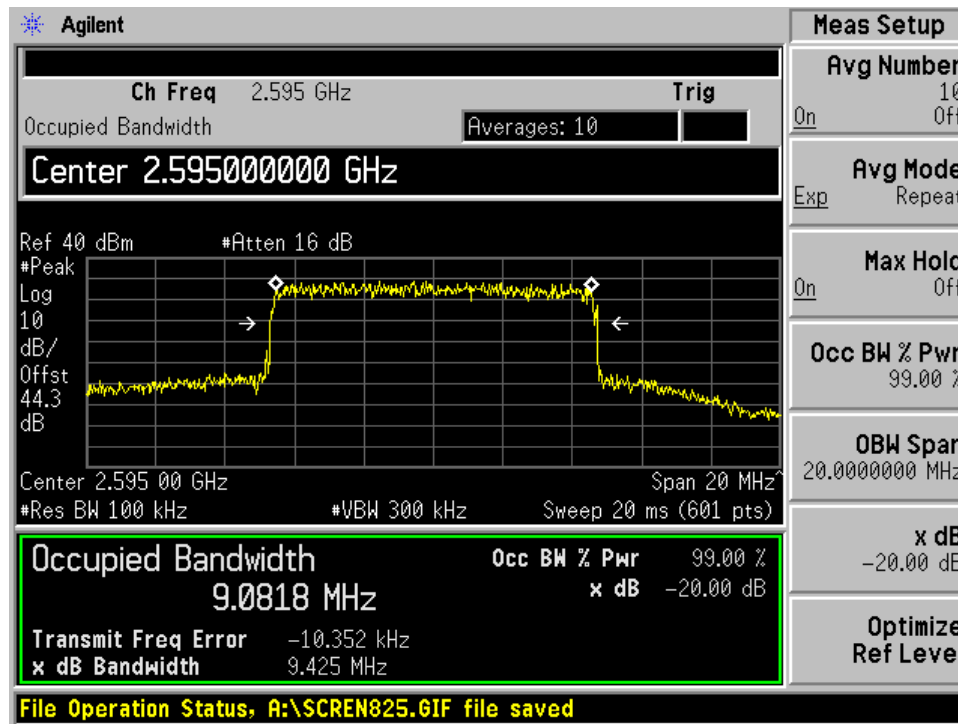


(64QAM High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 30 of 72

6.4.4. Test Data at Output Port 1

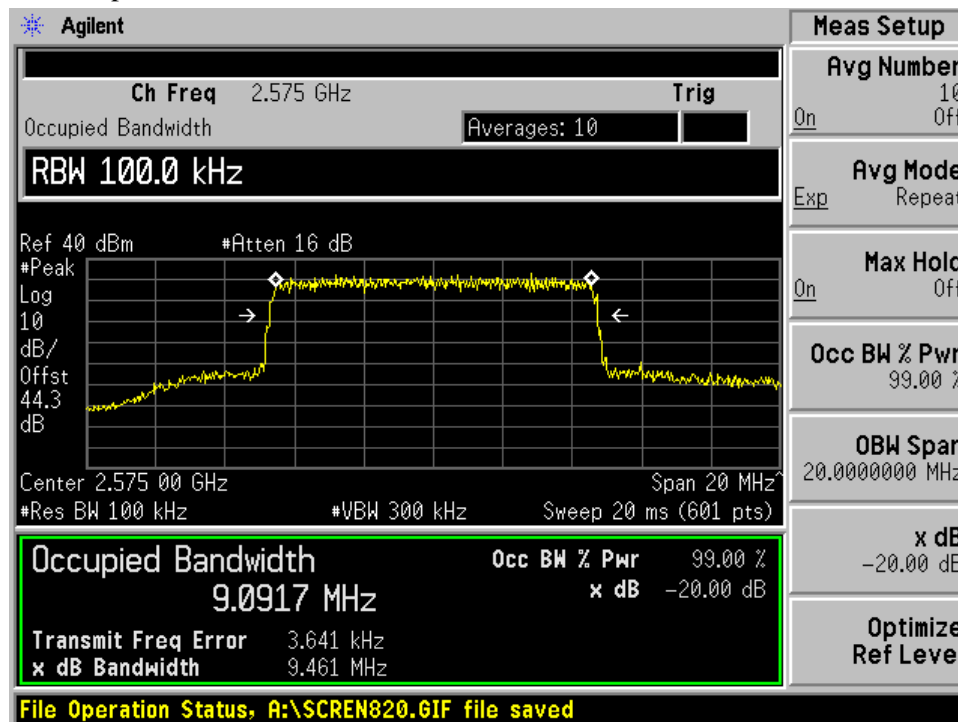


(QPSK Low Channel)

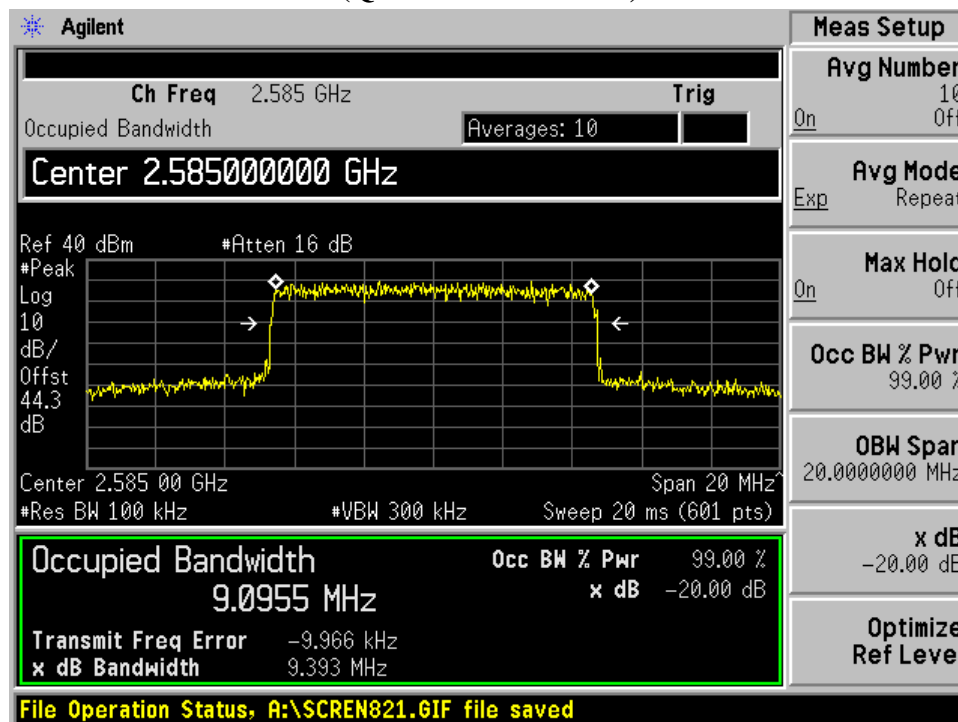


(QPSK Middle Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 31 of 72

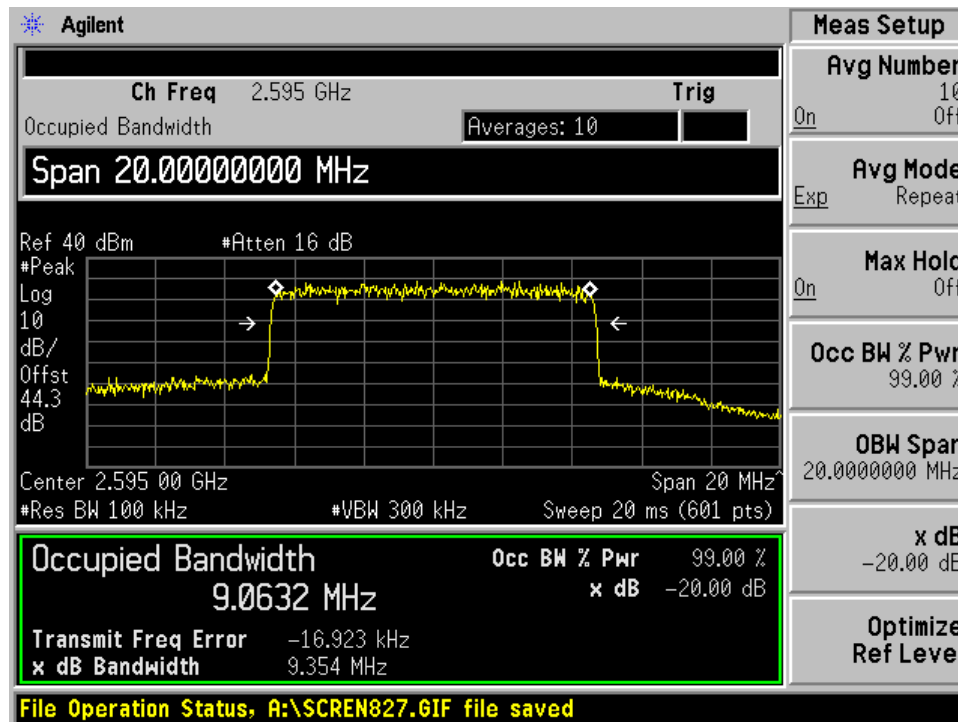


(QPSK High Channel)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 32 of 72

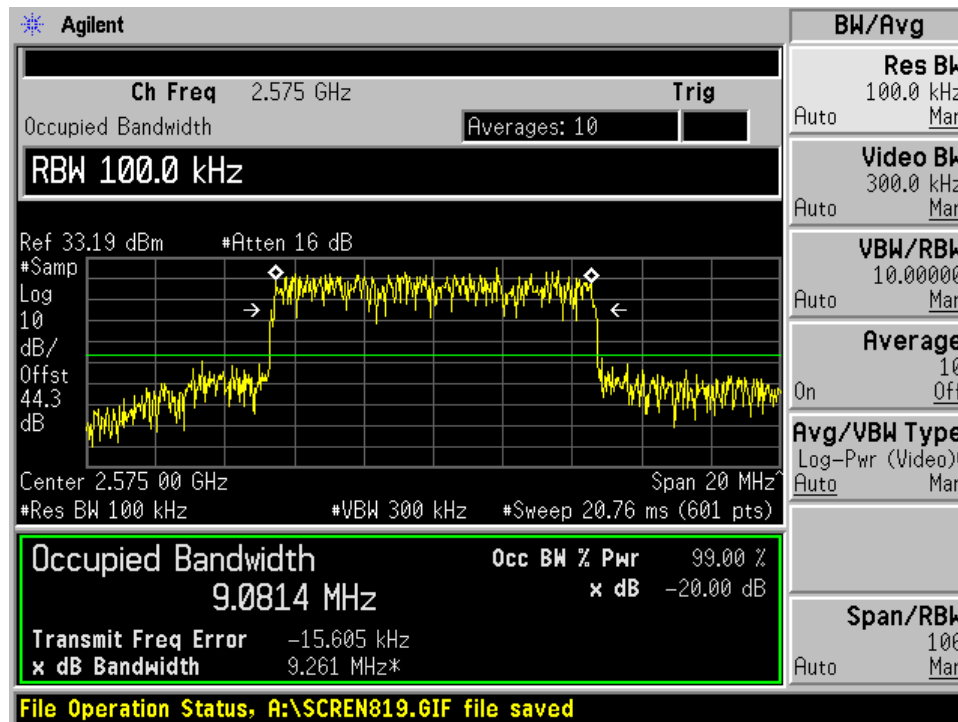

(16QAM Low Channel)

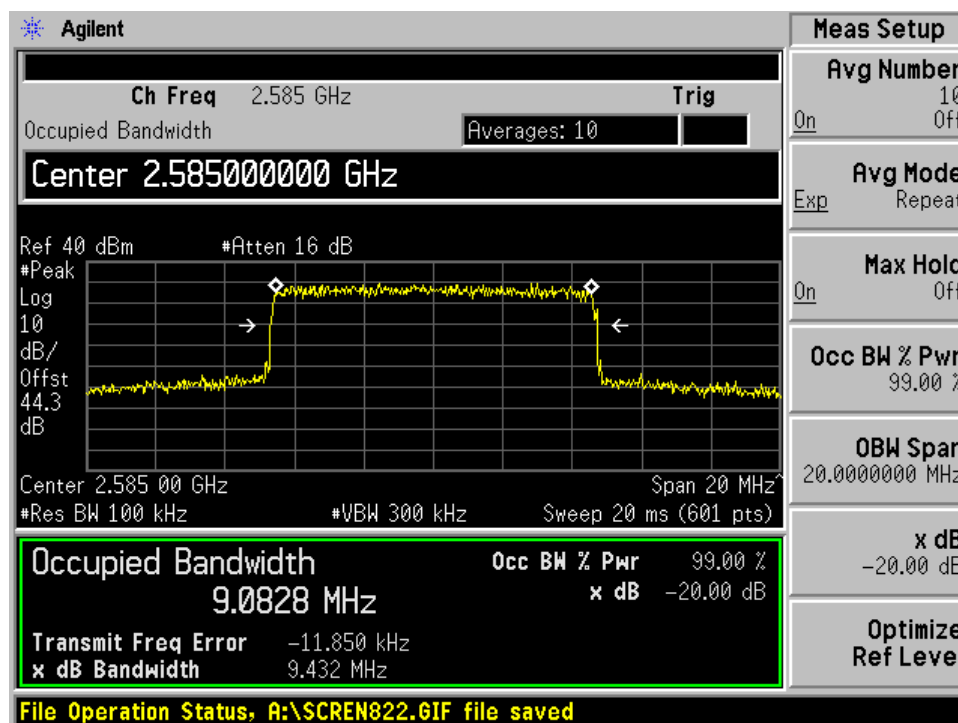


(16QAM Middle Channel)

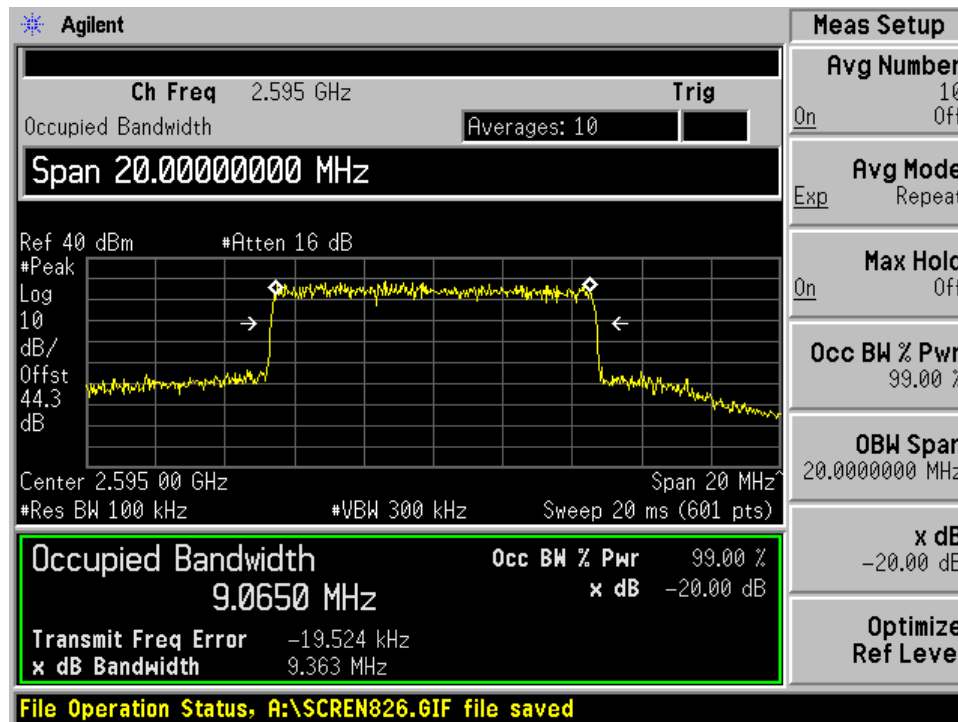


(16QAM High Channel)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 34 of 72

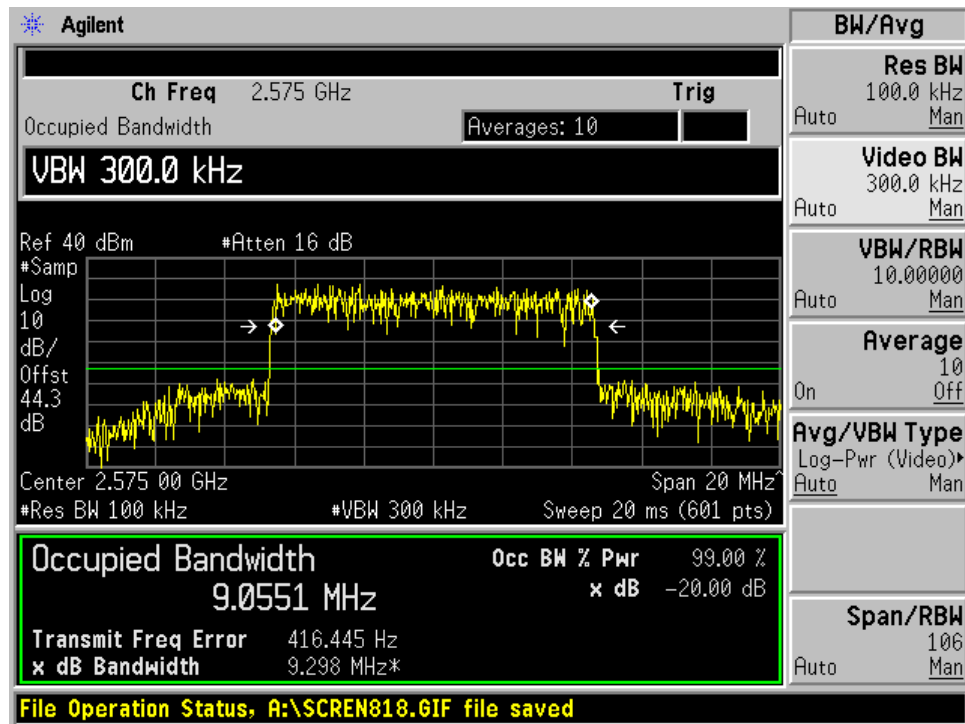

(64QAM Low Channel)

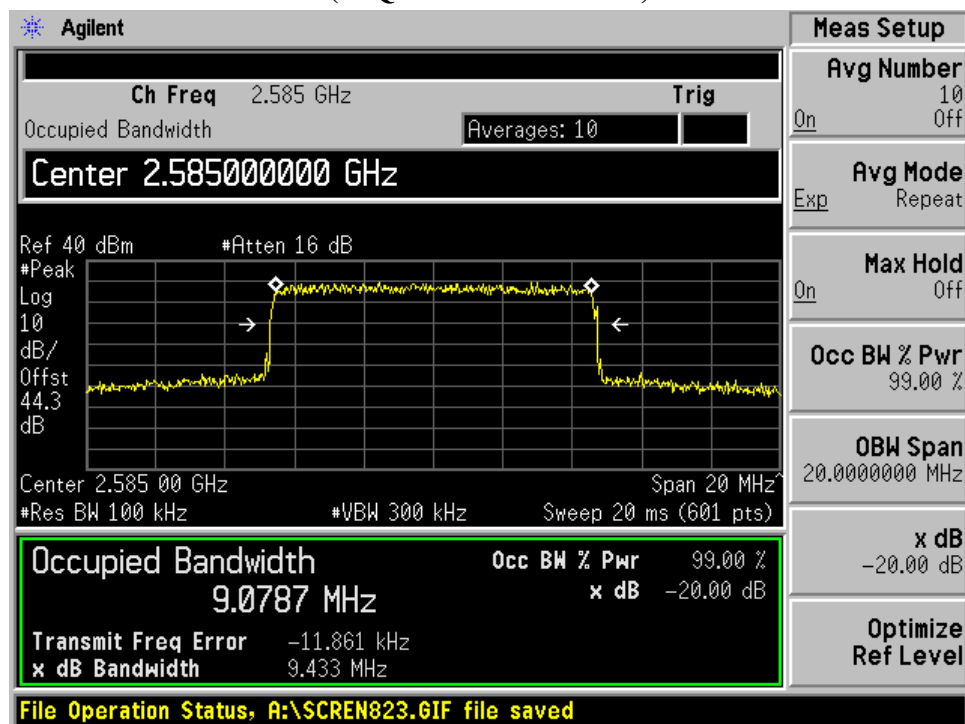

(64QAM Middle Channel)

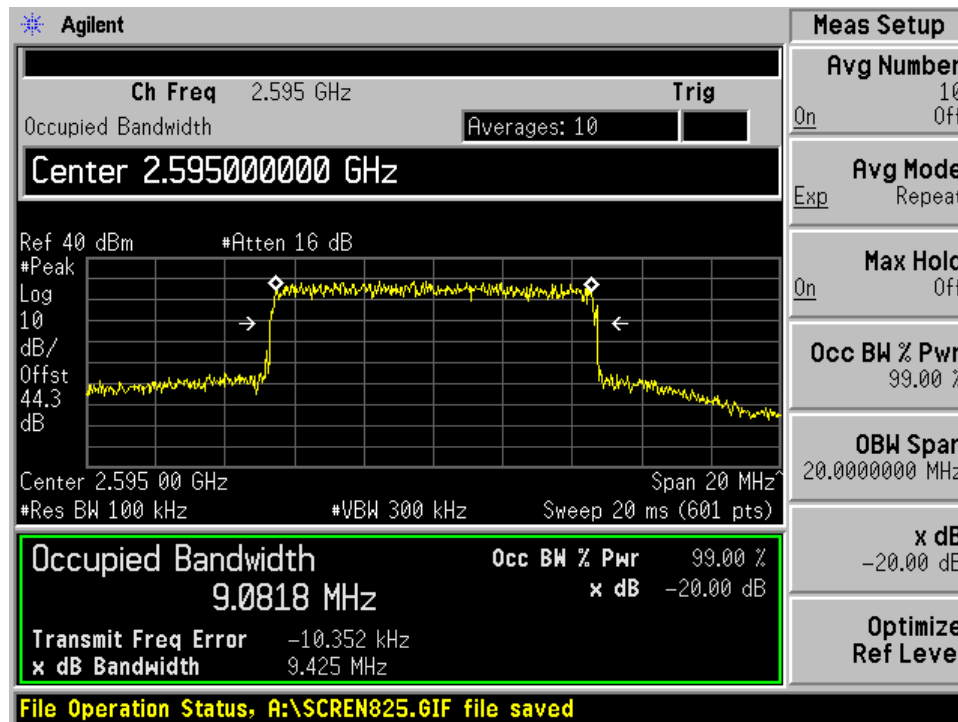

(64QAM High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 36 of 72

7. BAND EDGES

7.1. Applicable Standard

According to §22.917, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log (p)$ dB.

7.2. Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Agilent	Spectrum Analyzer	E4440A	US45303008	01/08/2009
Agilent	Signal Generator	E4438C	MY42082646	12/24/2008

7.3. Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

The EUT provides the MIMO function which is able to transmit on the same channel with same data simultaneously therefore a combiner is used to sum the individual transmitter output power.

The test data is shown as a combined output in the report.

7.3.1. Test Data Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %

7.4. Test Result

: PASS

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 37 of 72

7.4.1. Test data at Output 0

Modulation	Channel	Measured Frequency (MHz)	Max. Measured Value (dBm)	Limit (dBm)
QPSK	Low	2570.00	-29.82	-13.0
	High	2600.00	-24.49	
16QAM	Low	2570.00	-28.87	
	High	2600.00	-25.41	
64QAM	Low	2570.00	-25.48	
	High	2600.00	-27.61	


7.4.2. Test data at Output 1

Modulation	Channel	Measured Frequency (MHz)	Max. Measured Value (dBm)	Limit (dBm)
QPSK	Low	2570.00	-25.55	-13.0
	High	2600.00	-27.29	
16QAM	Low	2570.00	-25.30	
	High	2600.00	-26.41	
64QAM	Low	2570.00	-22.95	
	High	2600.00	-25.47	


Combined Test data at Output

Modulation	Channel	Measured Frequency (MHz)	Max. Measured Value (dBm)	Limit (dBm)
QPSK	Low	2570.00	-21.58	-13.0
	High	2600.00	-22.41	
16QAM	Low	2570.00	-21.49	
	High	2600.00	-21.46	
64QAM	Low	2570.00	-17.34	
	High	2600.00	-21.49	


7.4.3. Plot Data at Output 0

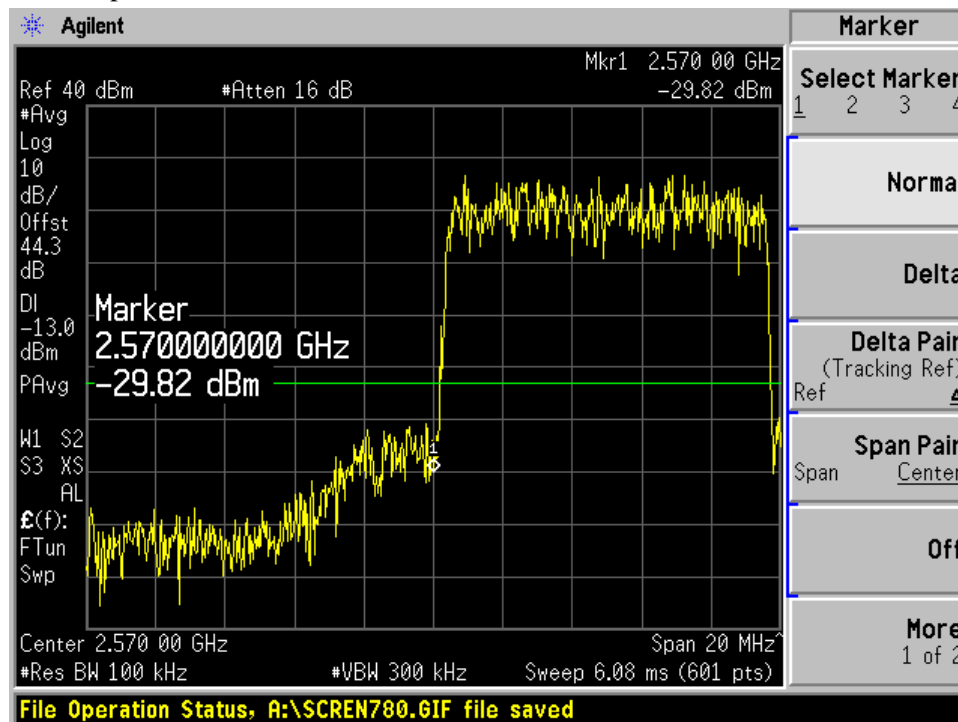


(QPSK Low Channel)

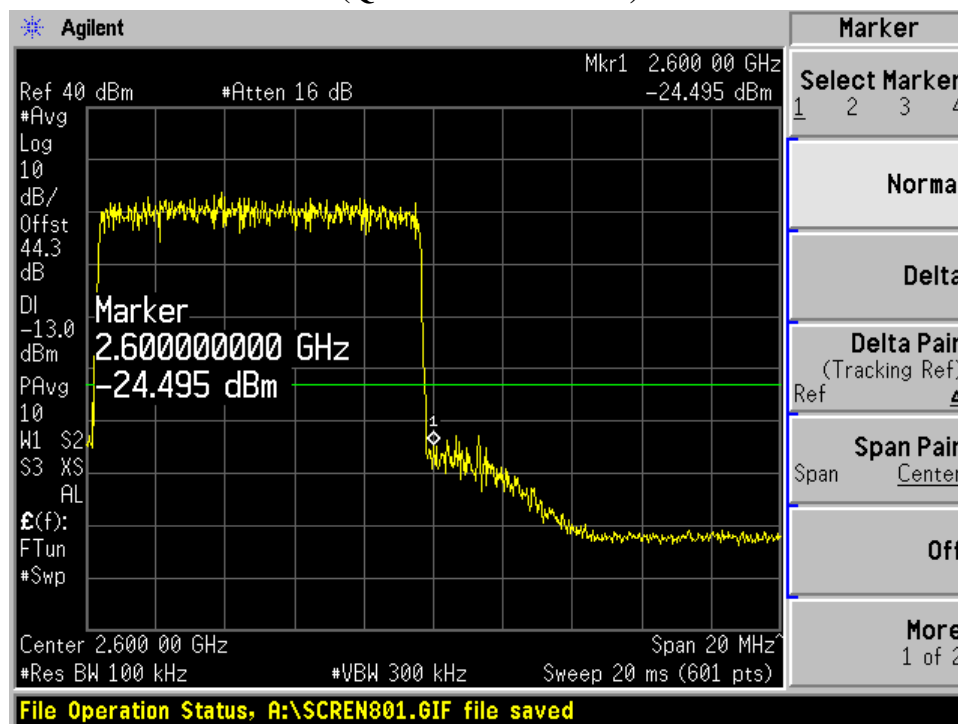


(QPSK High Channel)

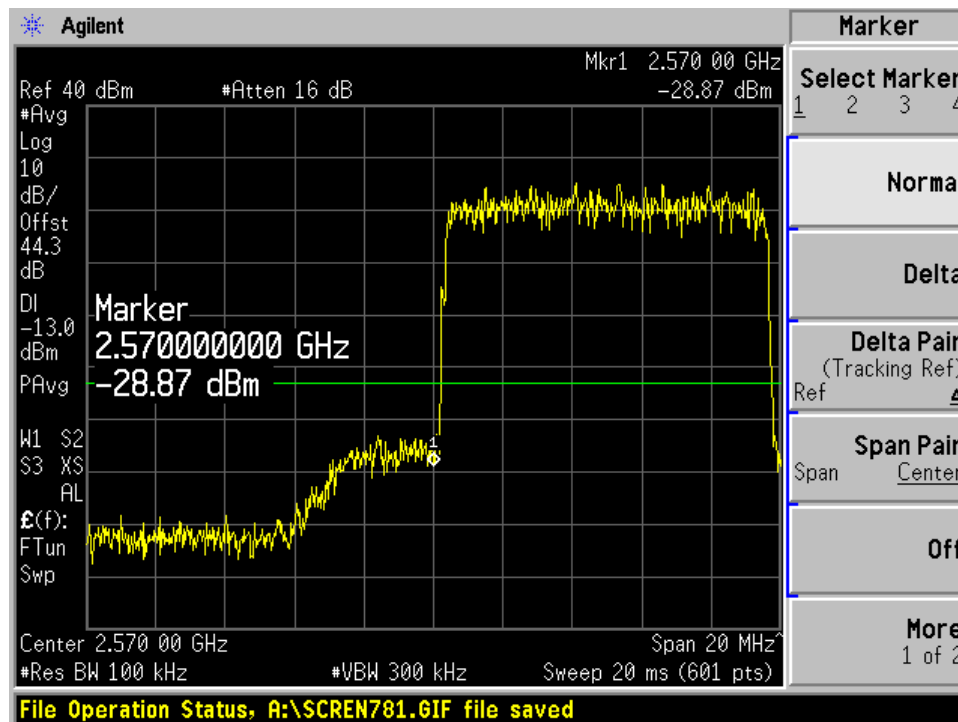


(16QAM Low Channel)

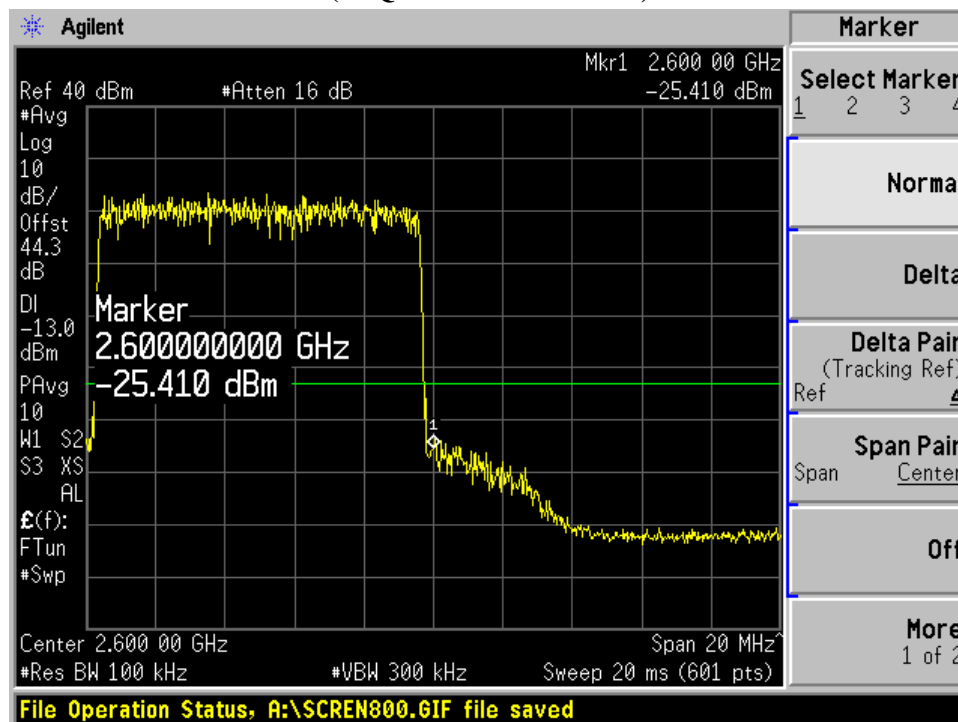

(16QAM High Channel)

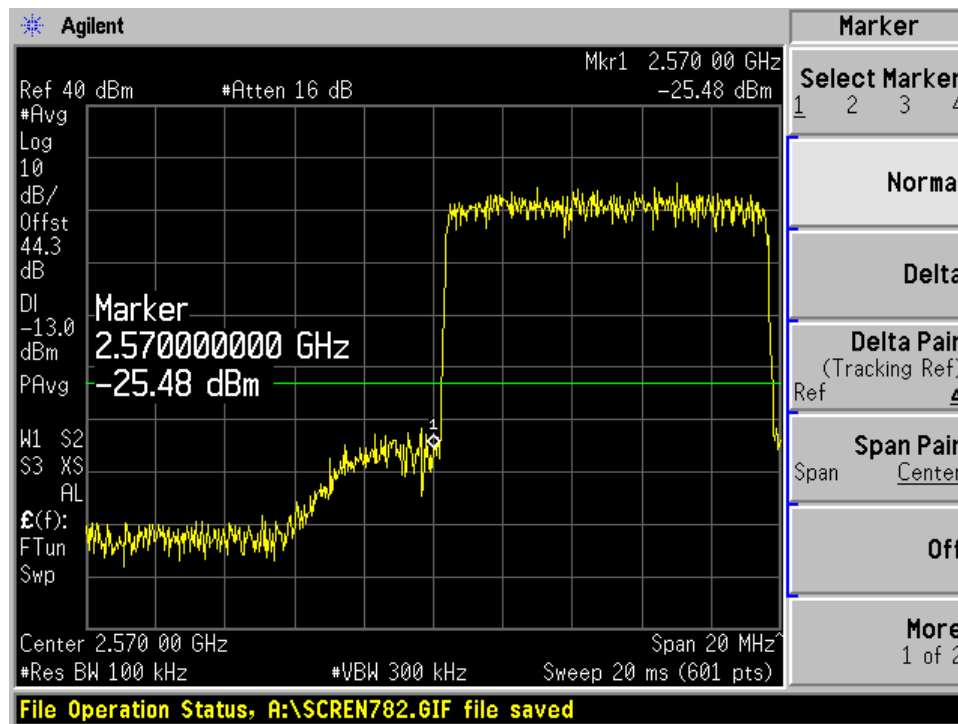


(64QAM Low Channel)

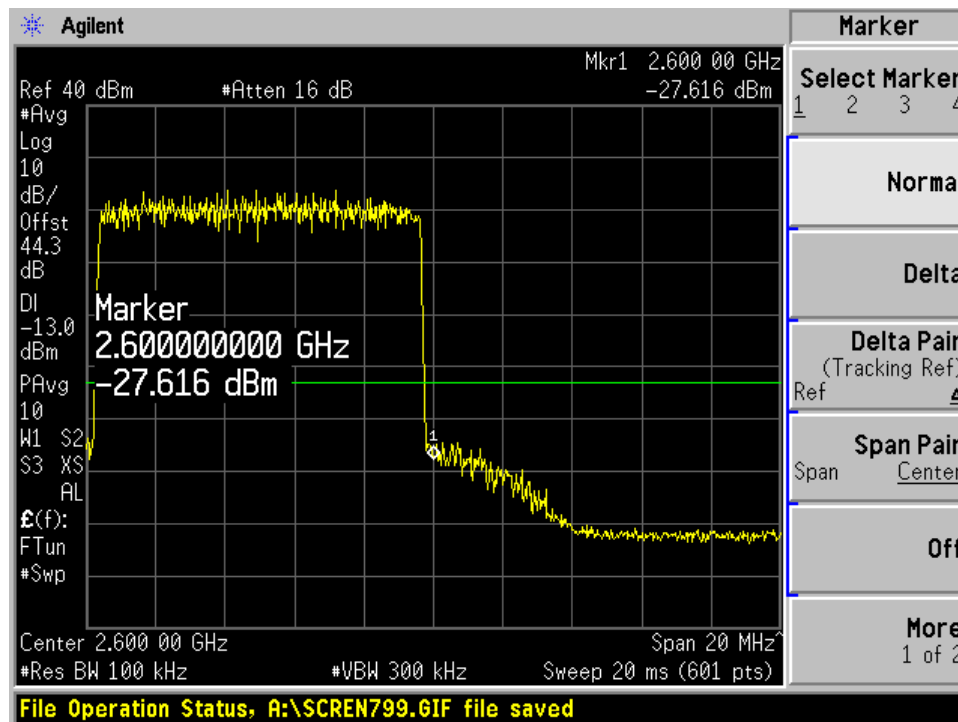


(64QAM High Channel)

7.4.4. Plot Data at Output 1

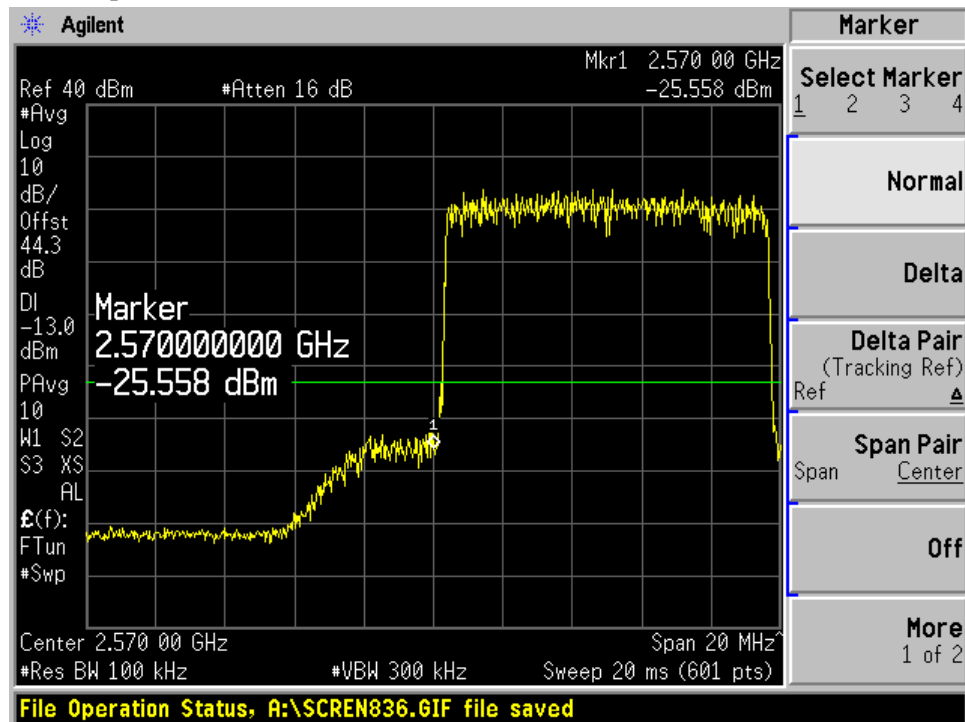


(QPSK Low Channel)

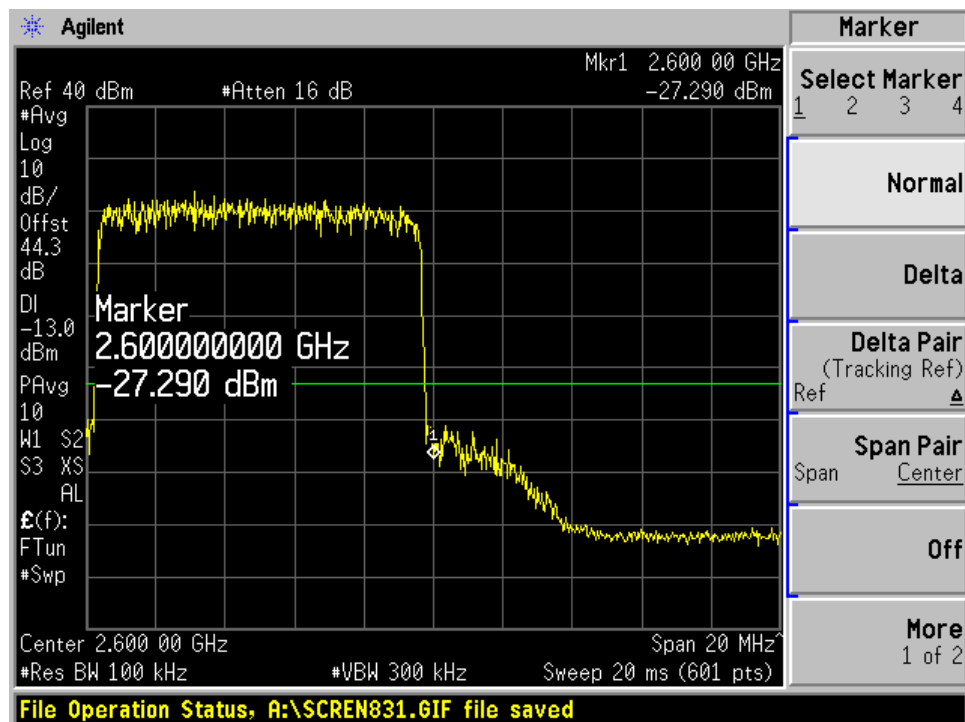


(QPSK High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 42 of 72

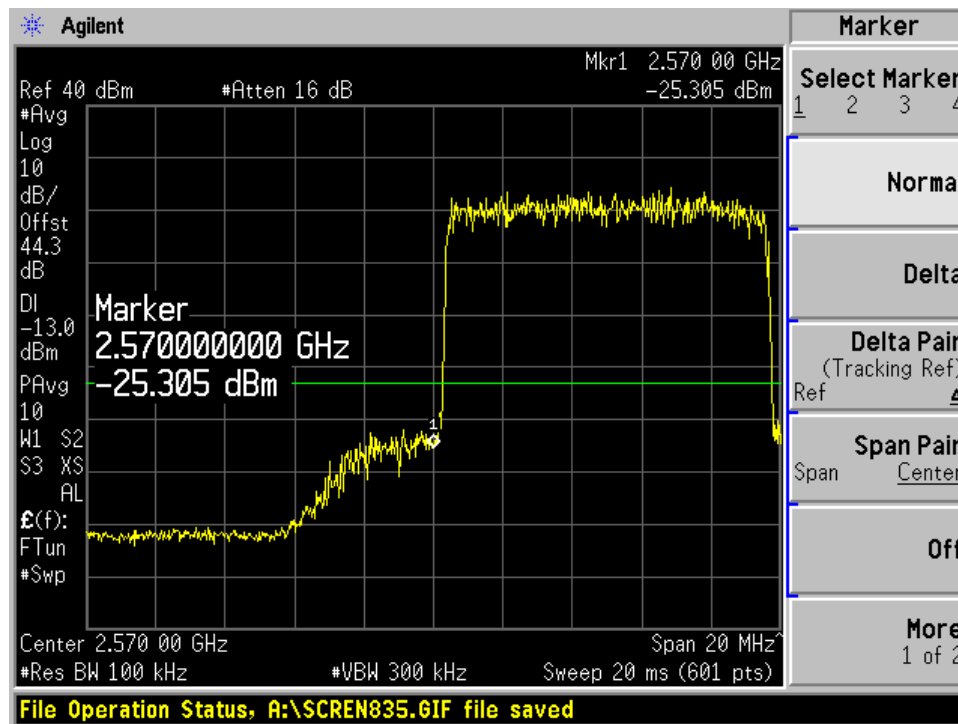


(16QAM Low Channel)

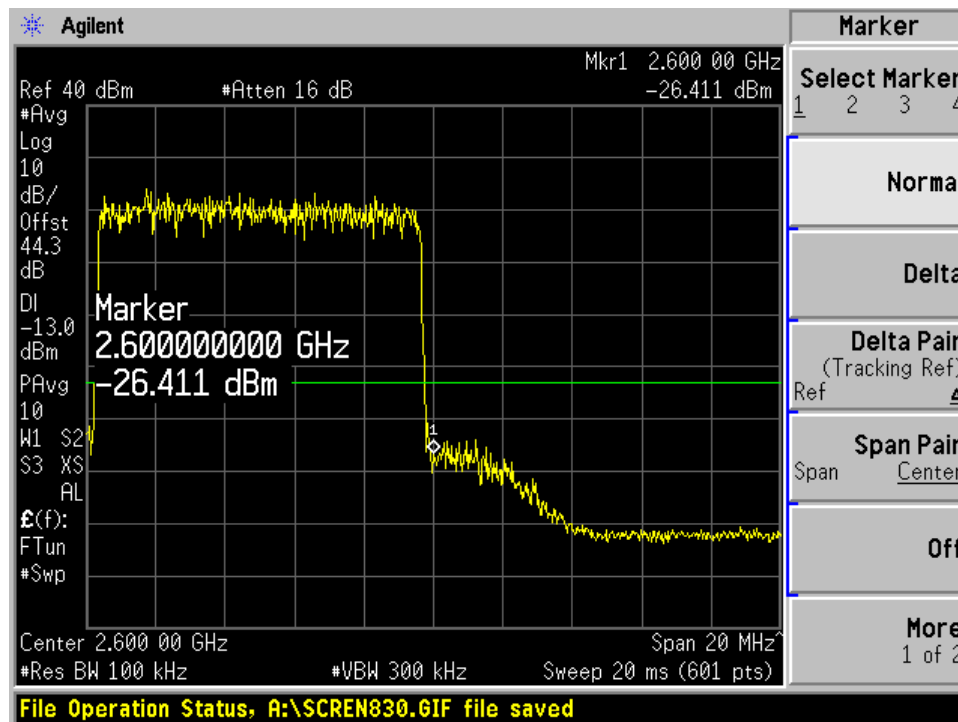


(16QAM High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 43 of 72

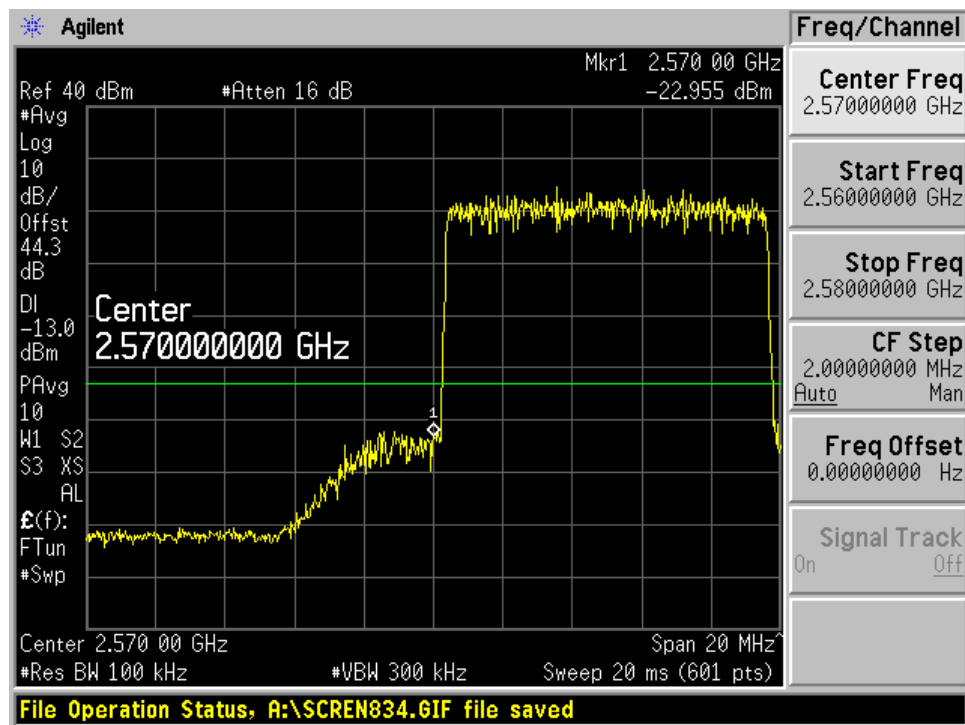


(64QAM Low Channel)

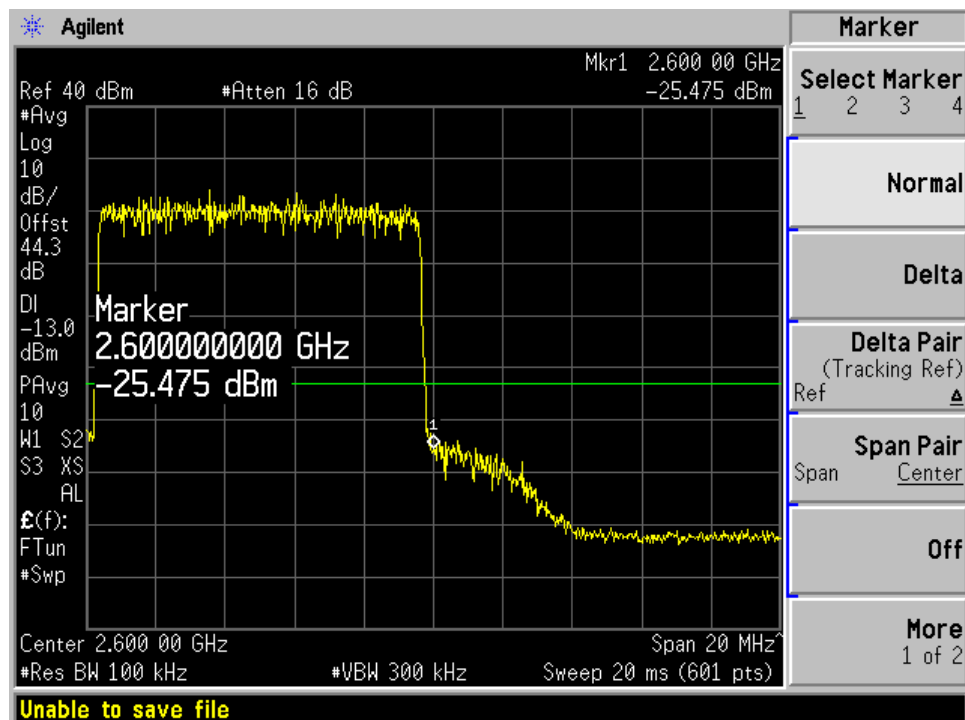


(64QAM High Channel)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 44 of 72


7.4.4. Plot Data at Combined Output

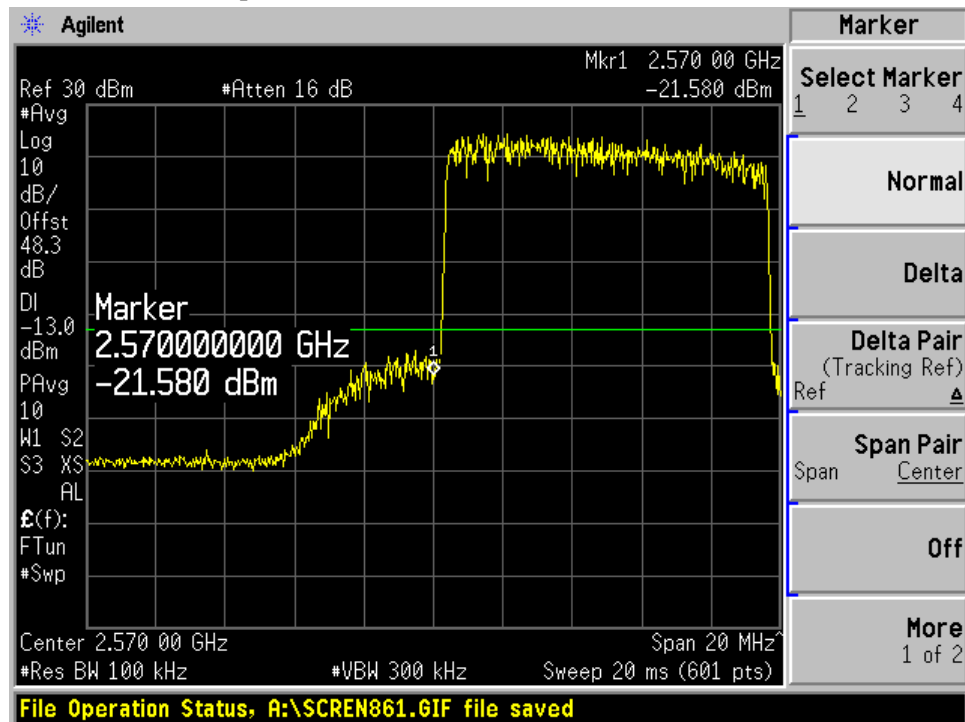


(QPSK Low Channel)

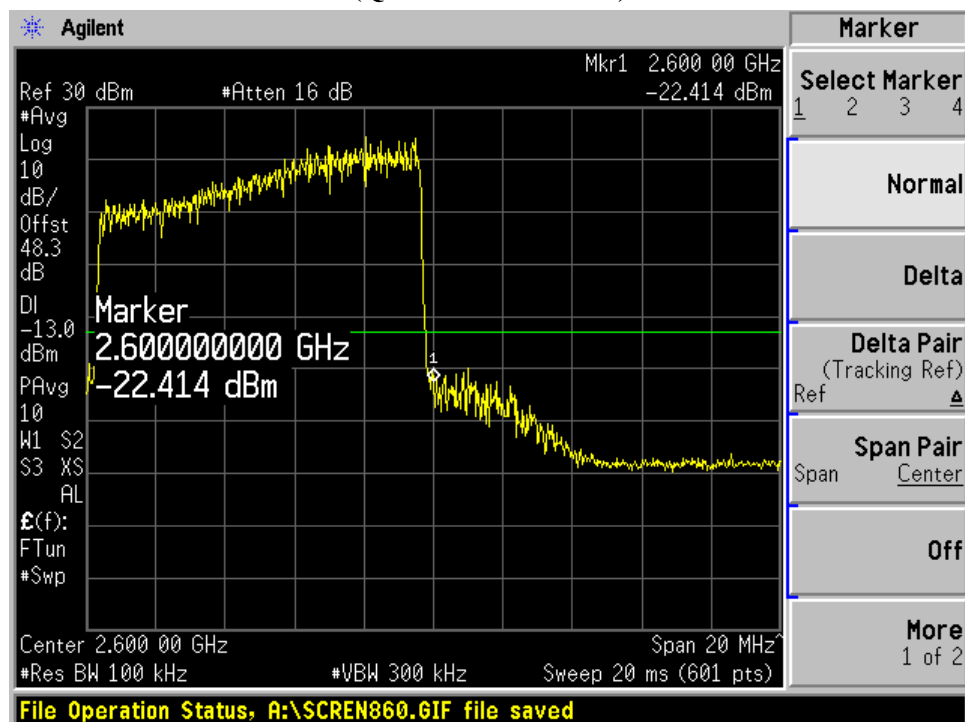


(QPSK High Channel)

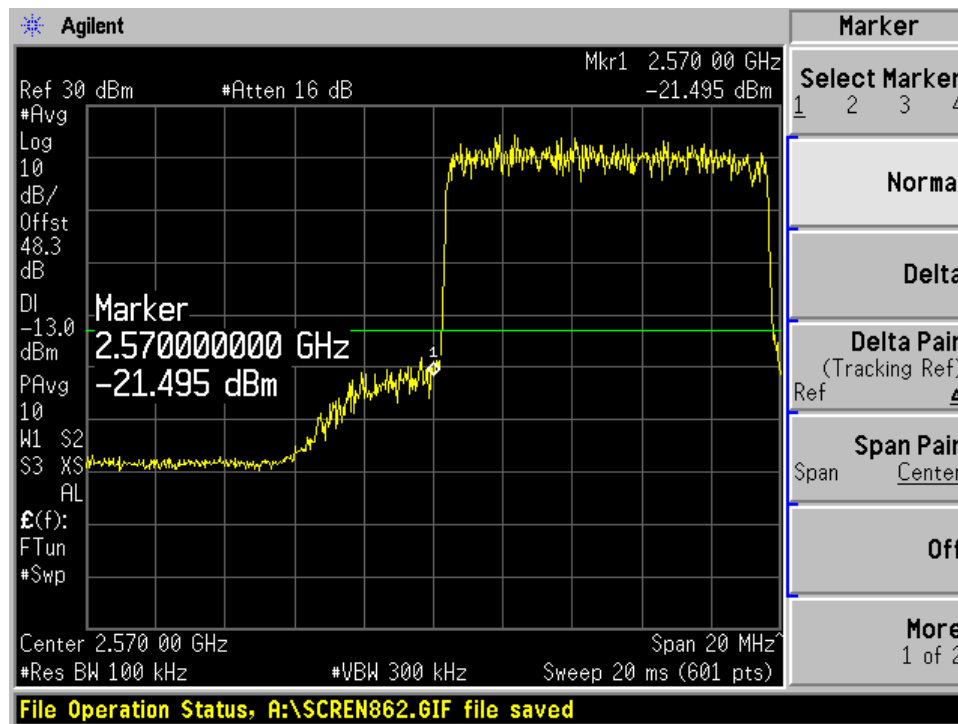


(16QAM Low Channel)

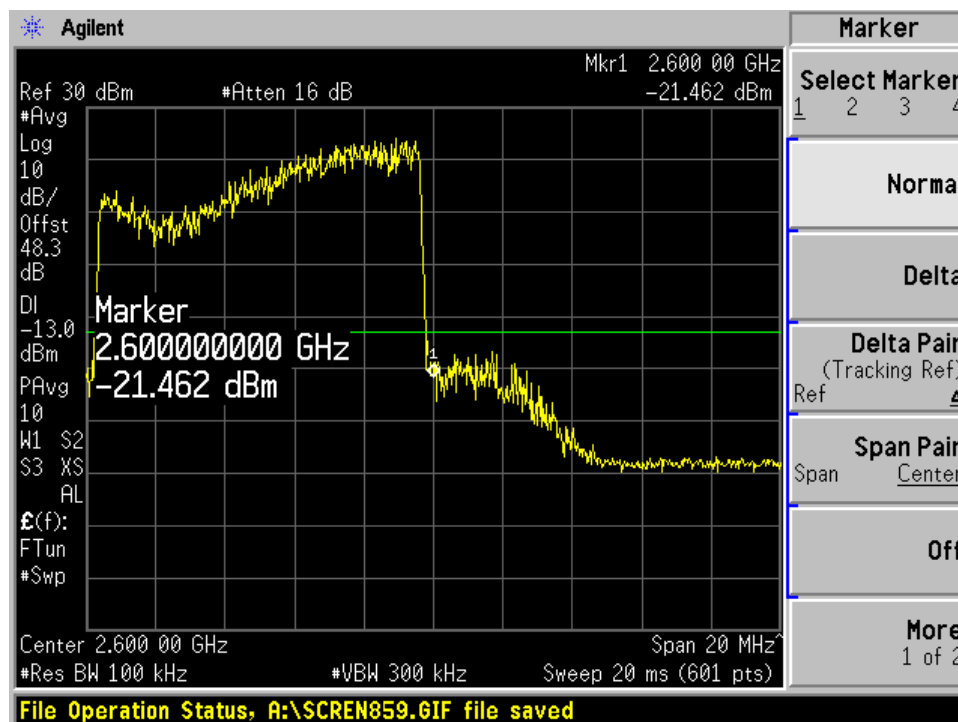

(16QAM High Channel)

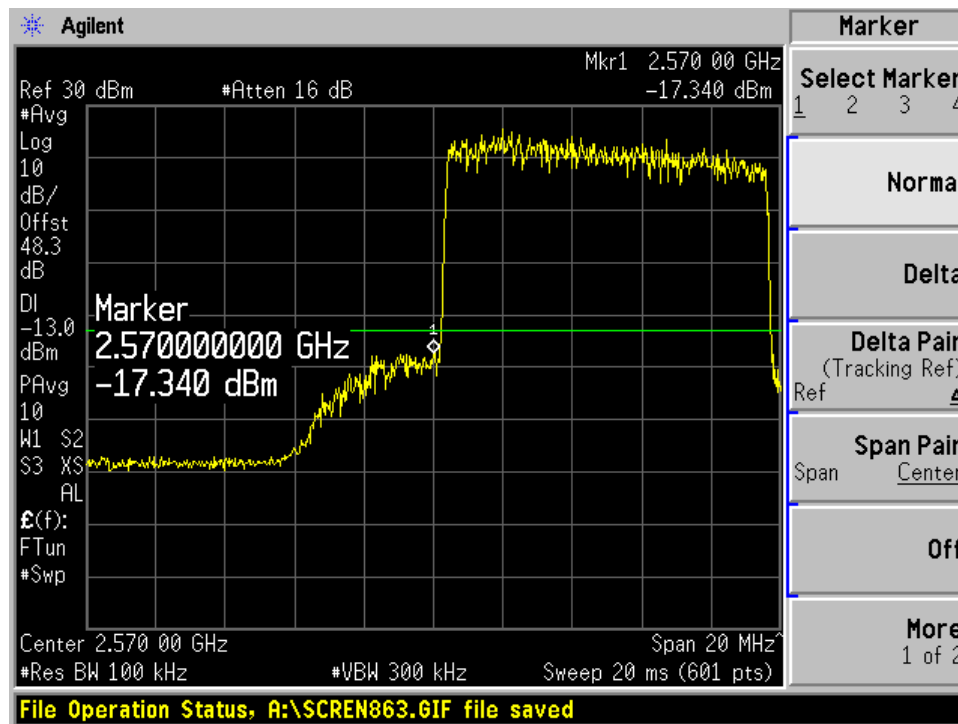

(64QAM Low Channel)

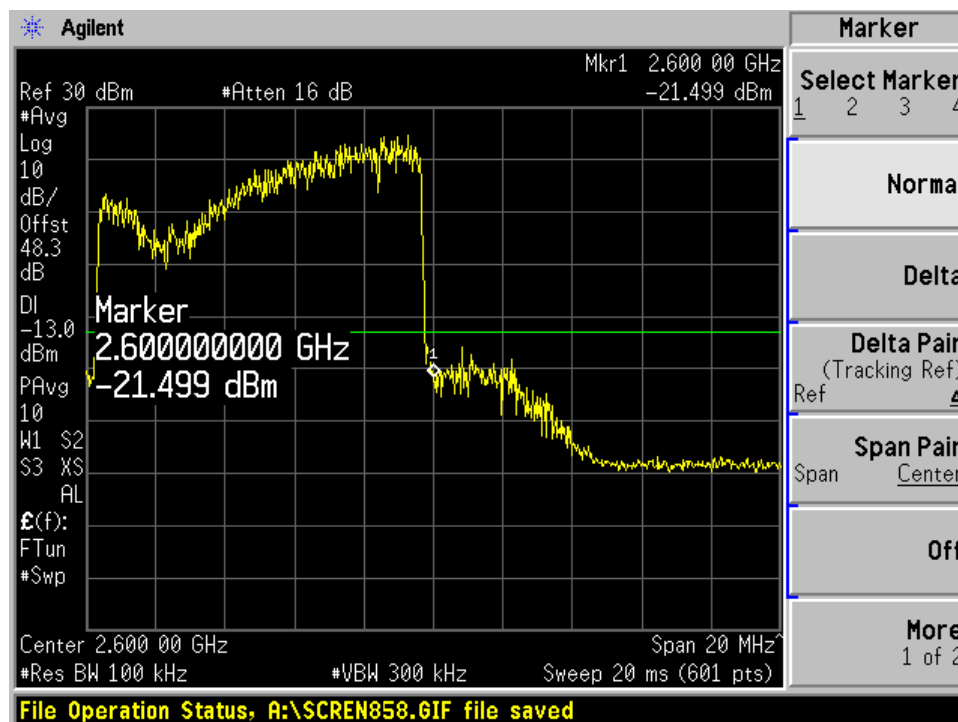

(64QAM High Channel)

8. SPURIOUS EMISSION AT ANTENNA TERMINAL

8.1. Applicable Standard Requirements:

CFR 47§2.1051, §27.53

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1051

8.2. Test Equipment List and Details Test Procedure

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Agilent	Spectrum Analyzer	E4440A	US45303008	01/08/2009
Agilent	Signal Generator	E4438C	MY42082646	12/24/2008

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

The EUT provides the MIMO function which is able to transmit on the same channel with same data simultaneously therefore a combiner is used to sum the individual transmitter output power.

The test data is shown as a combined output in the report.

8.3. Environmental Conditions:

Temperature:	25 °C
Relative Humidity:	59 %


8.4. Test Result

: Pass


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 48 of 72

8.4.1. Plot Data at Output 0

(QPSK Low Channel)

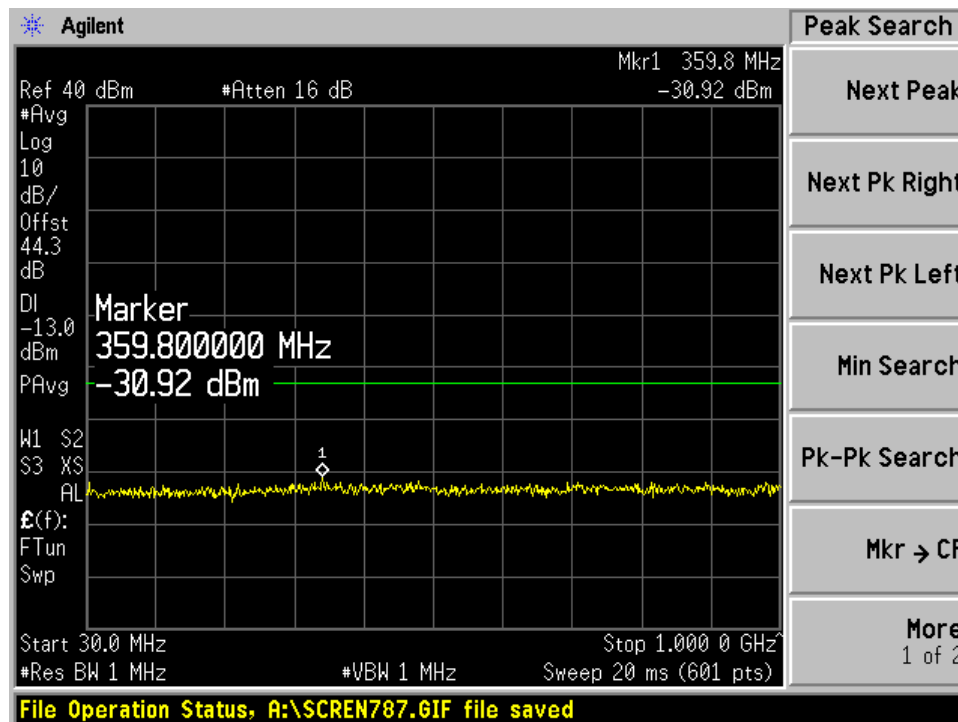


(30MHz~1 GHz)

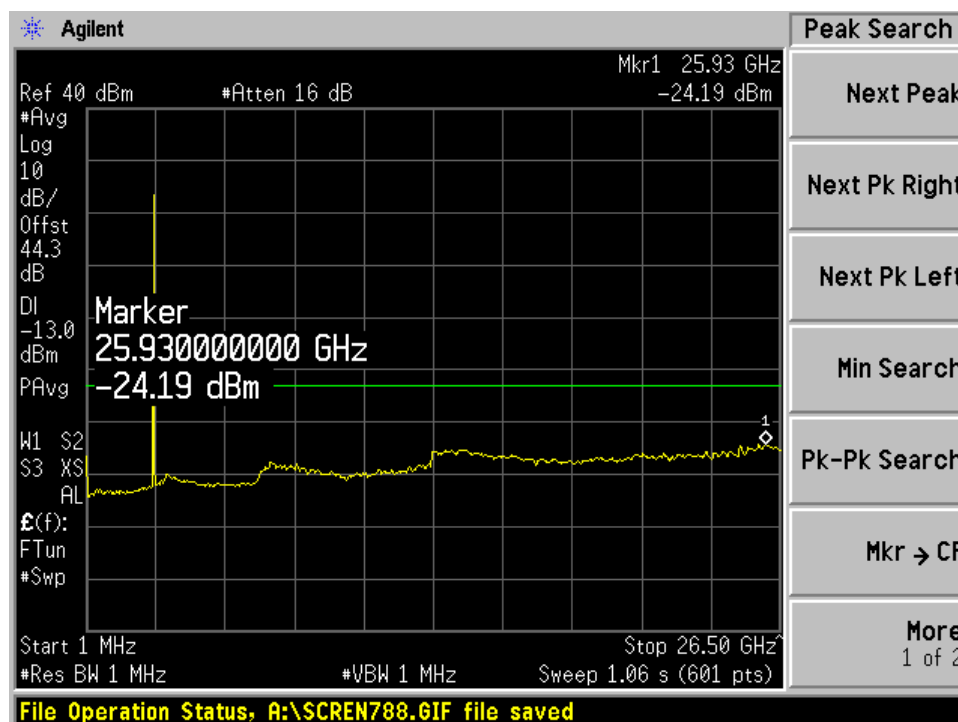


(1 GHz~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 49 of 72

(QPSK Middle Channel)

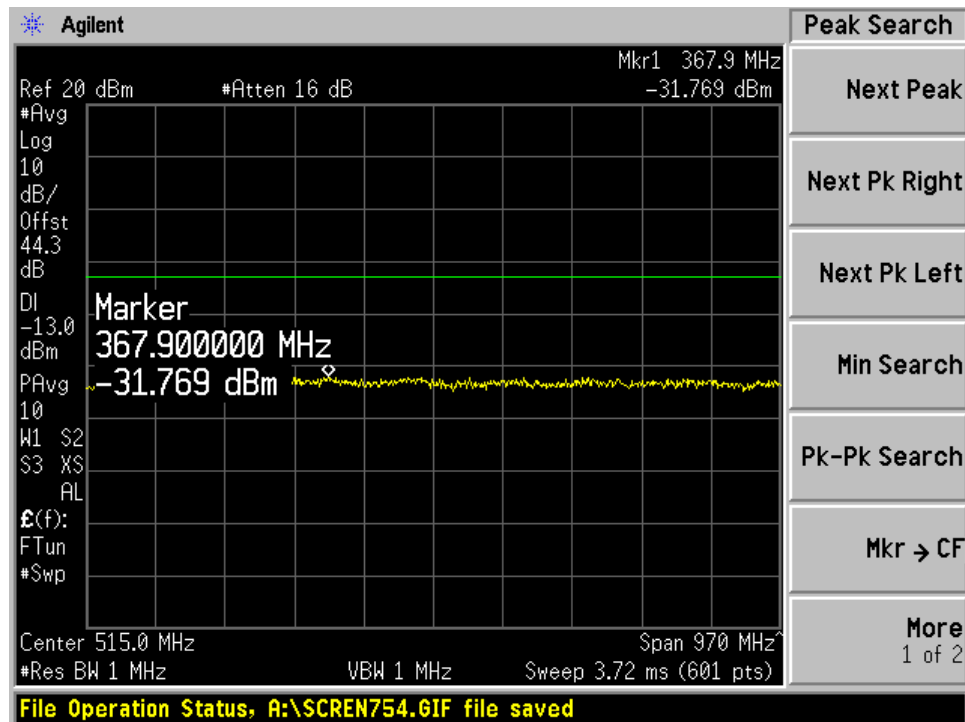


(30MHz~1 GHz)

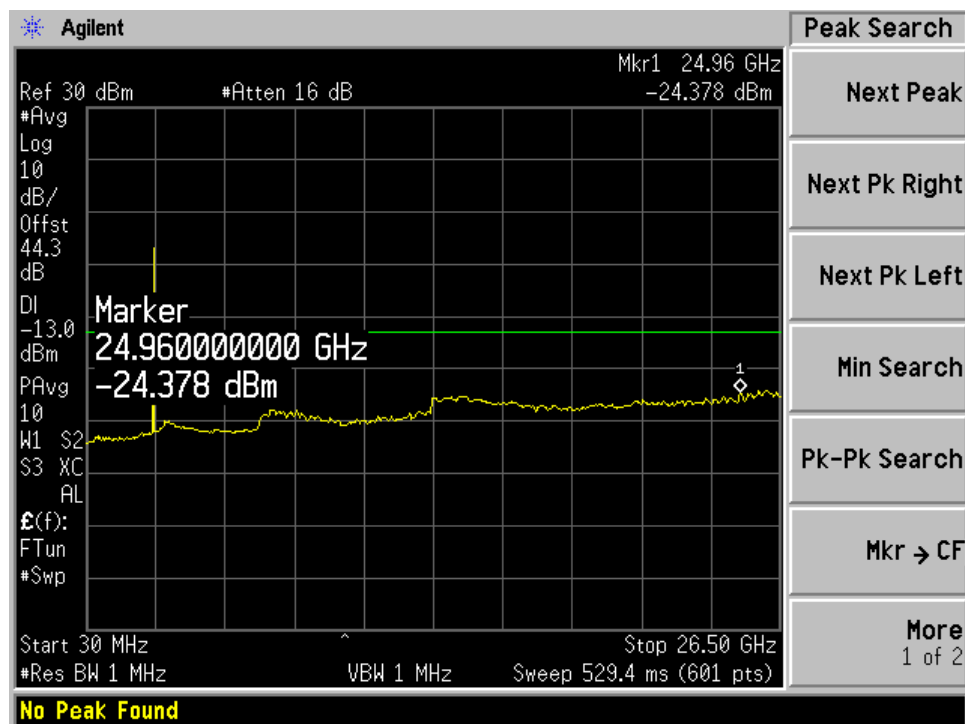


(1 GHz~26.50GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 50 of 72

(QPSK High Channel)

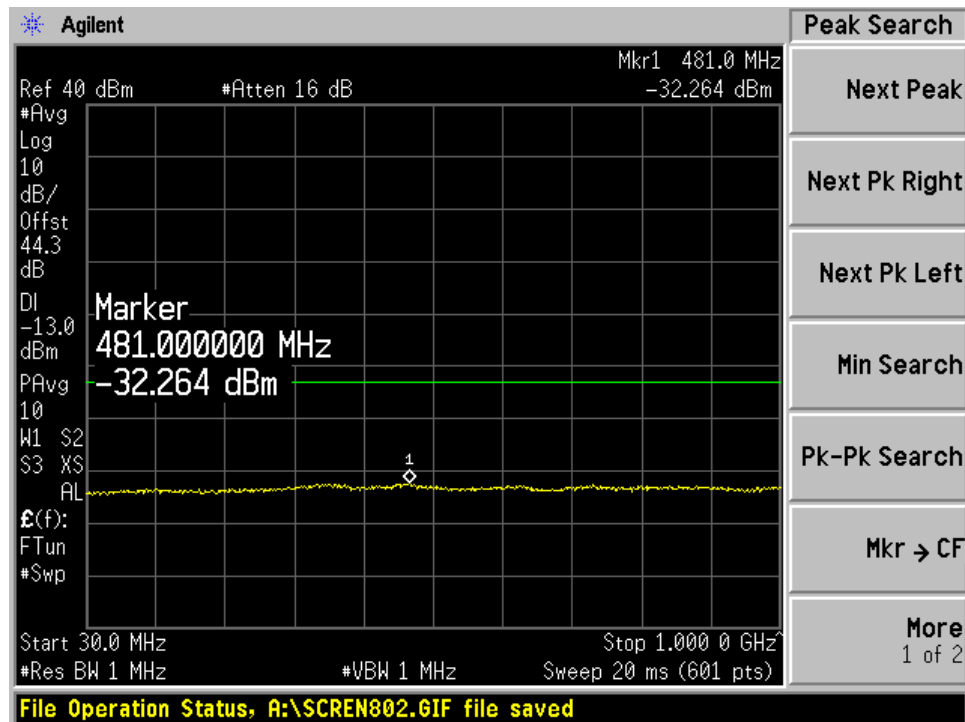


(30MHz~1 GHz)

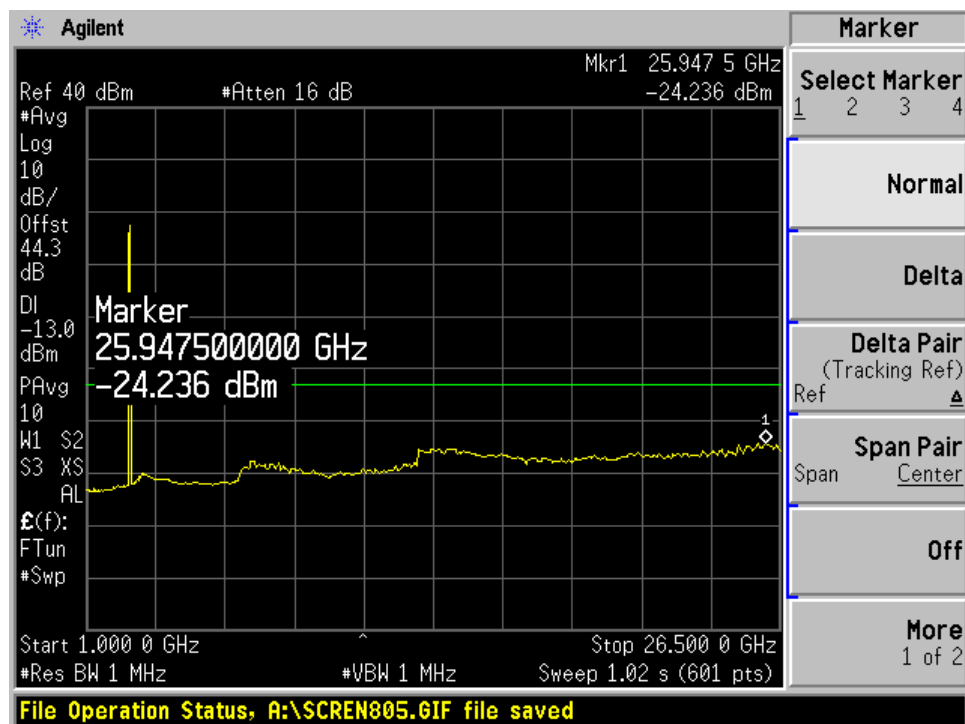


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 51 of 72

(16QAM LOW Channel)

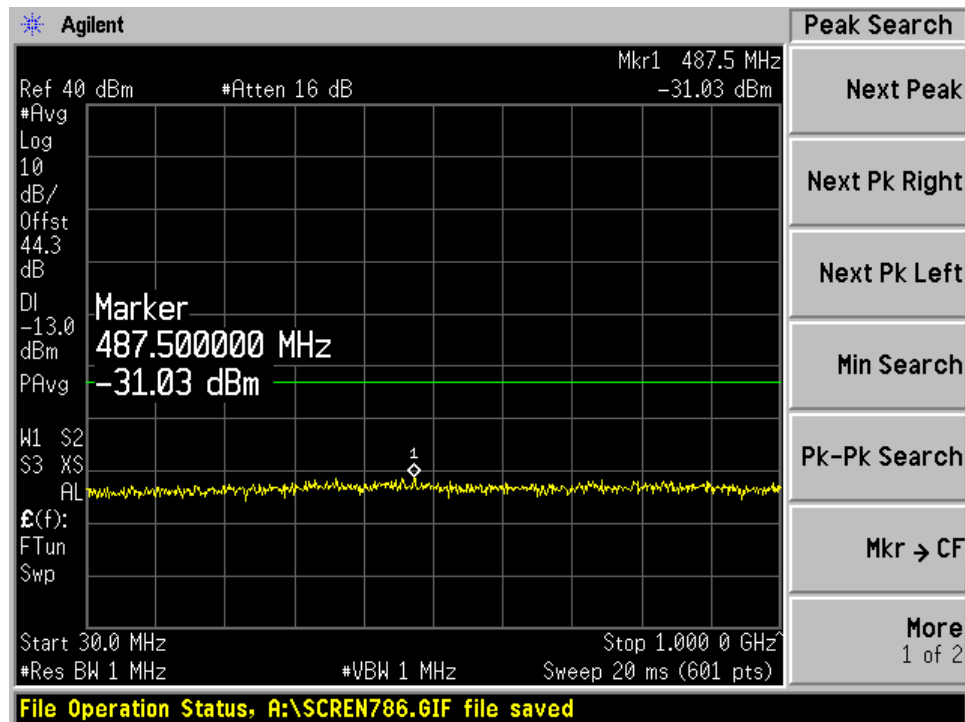


(30MHz~1 GHz)

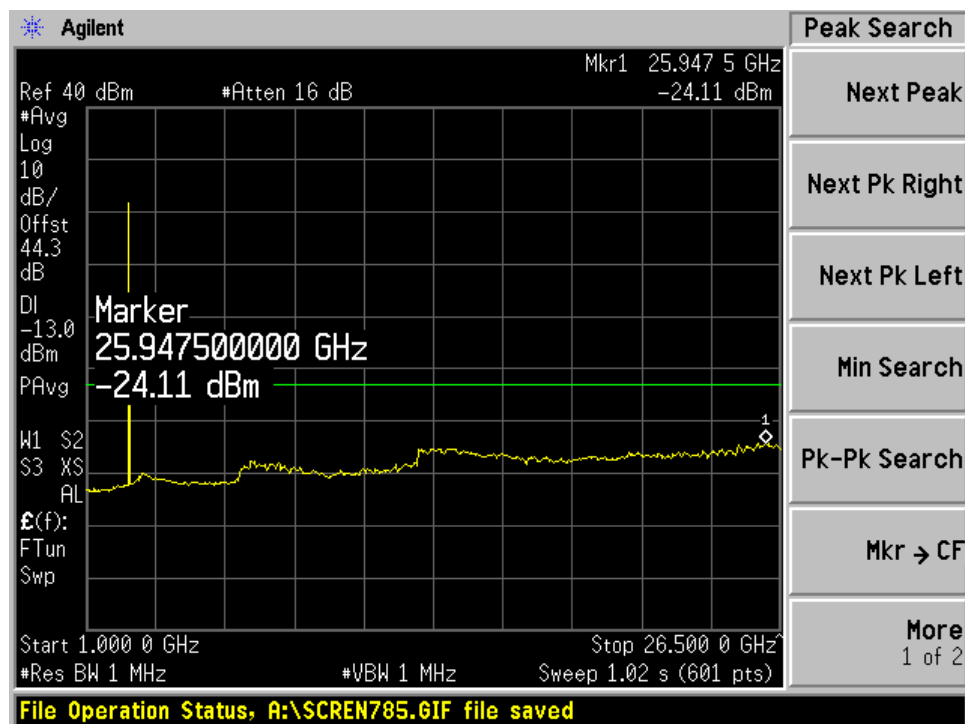


(1 GHz~26.50GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 52 of 72

(16QAM Middle Channel)

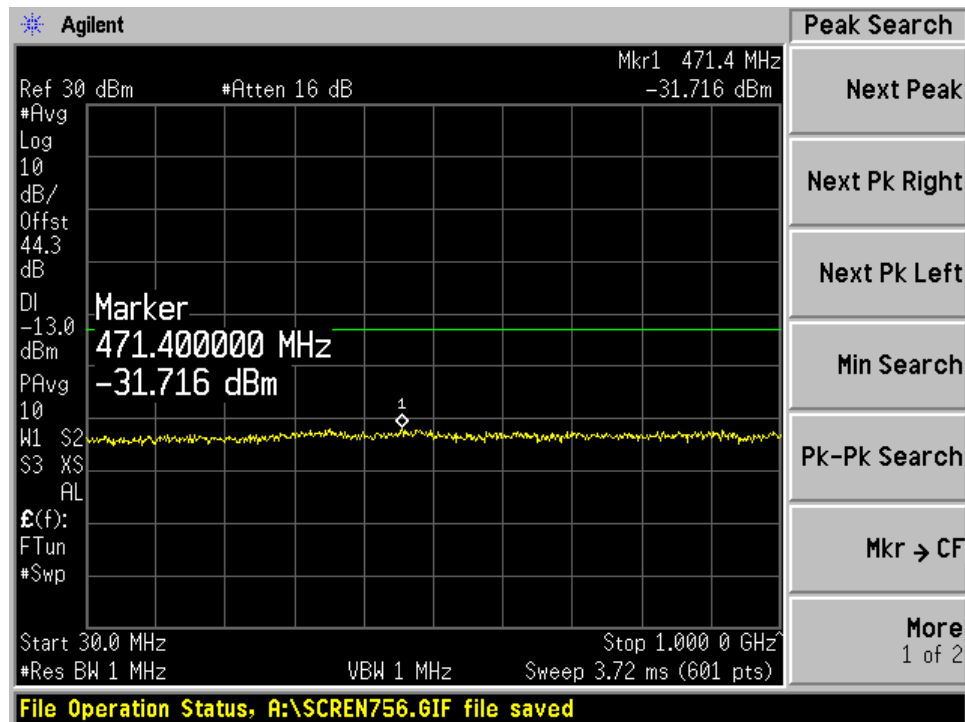


(30MHz~1 GHz)

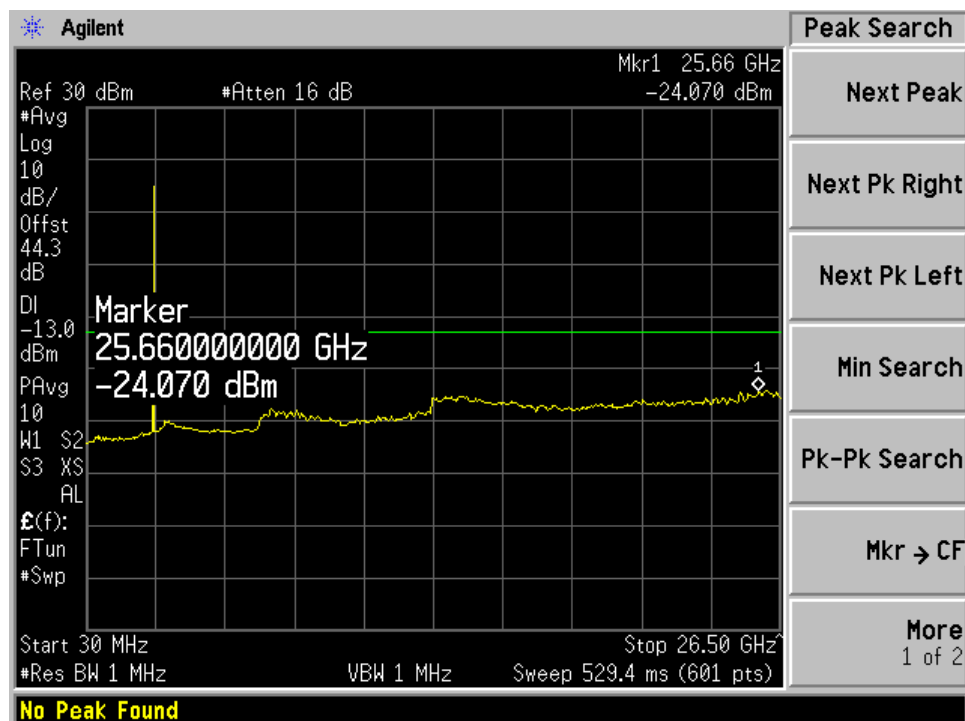


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 53 of 72

(16QAM High Channel)

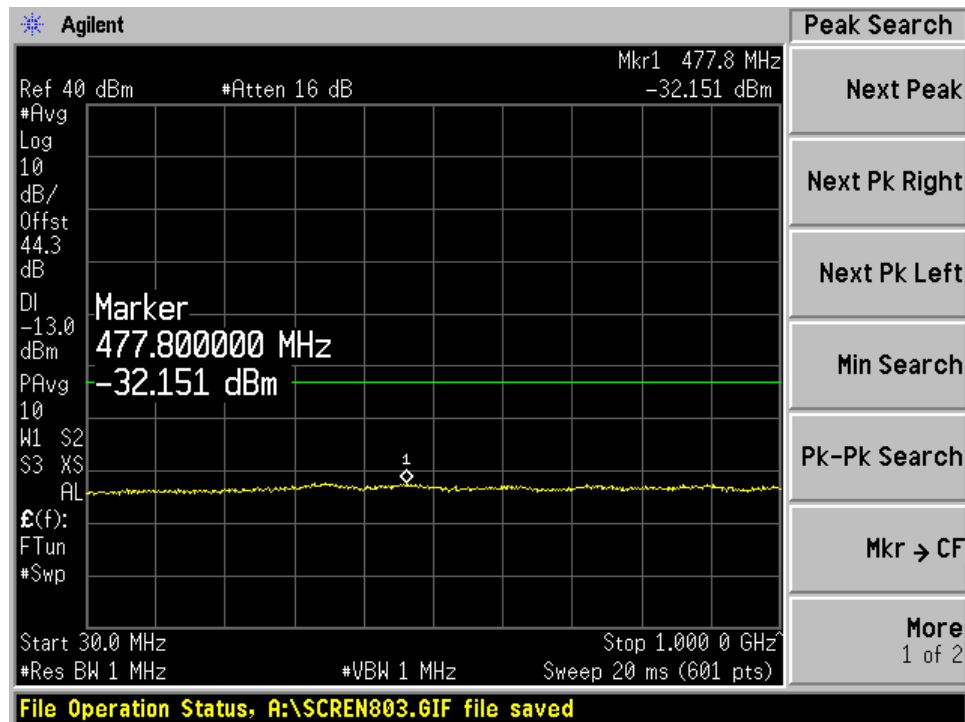


(30MHz~1 GHz)

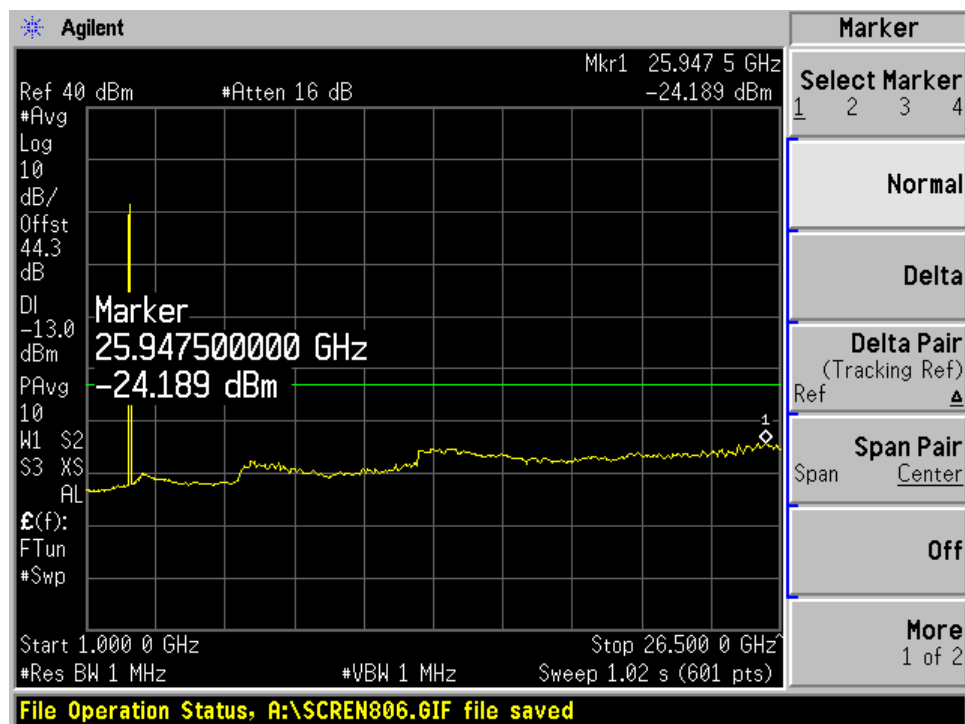


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 54 of 72

(64QAM Low Channel)

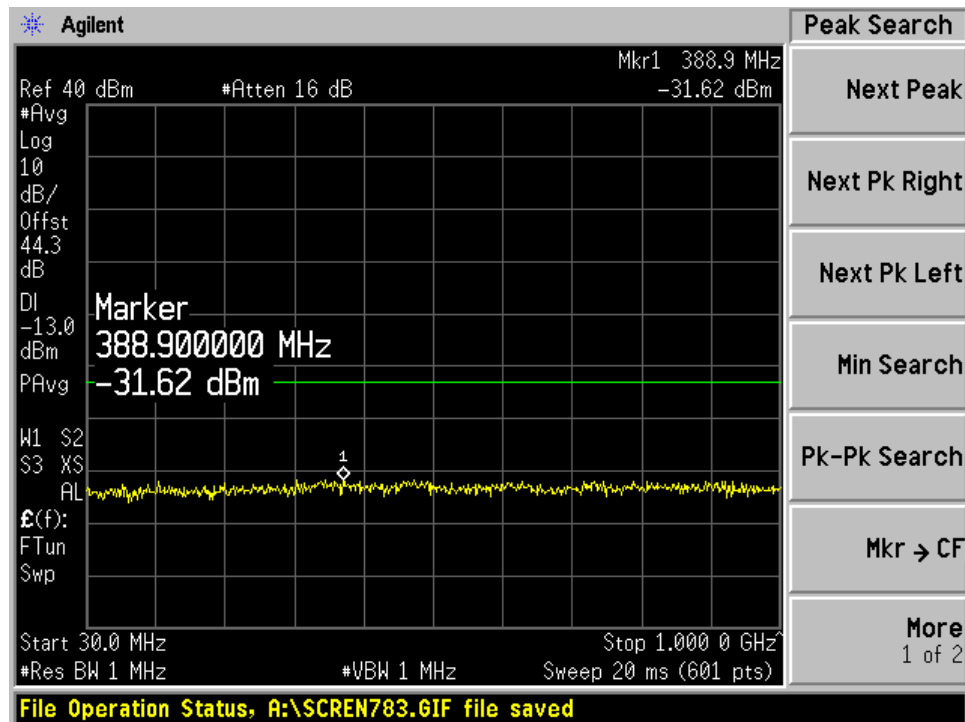


(30MHz~1 GHz)

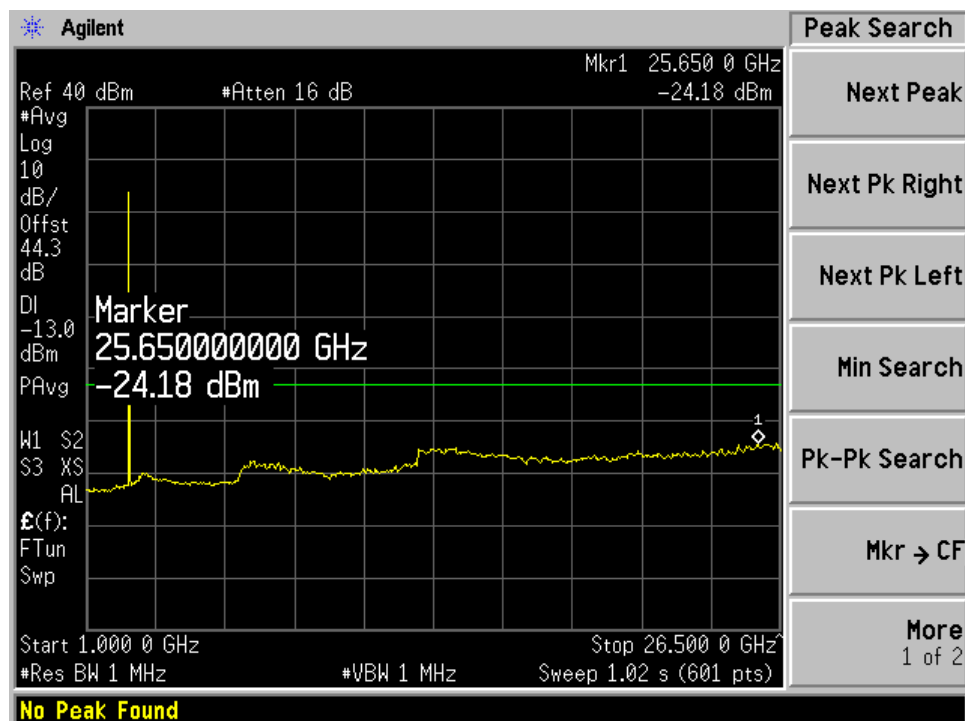


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 55 of 72

(64QAM Middle Channel)

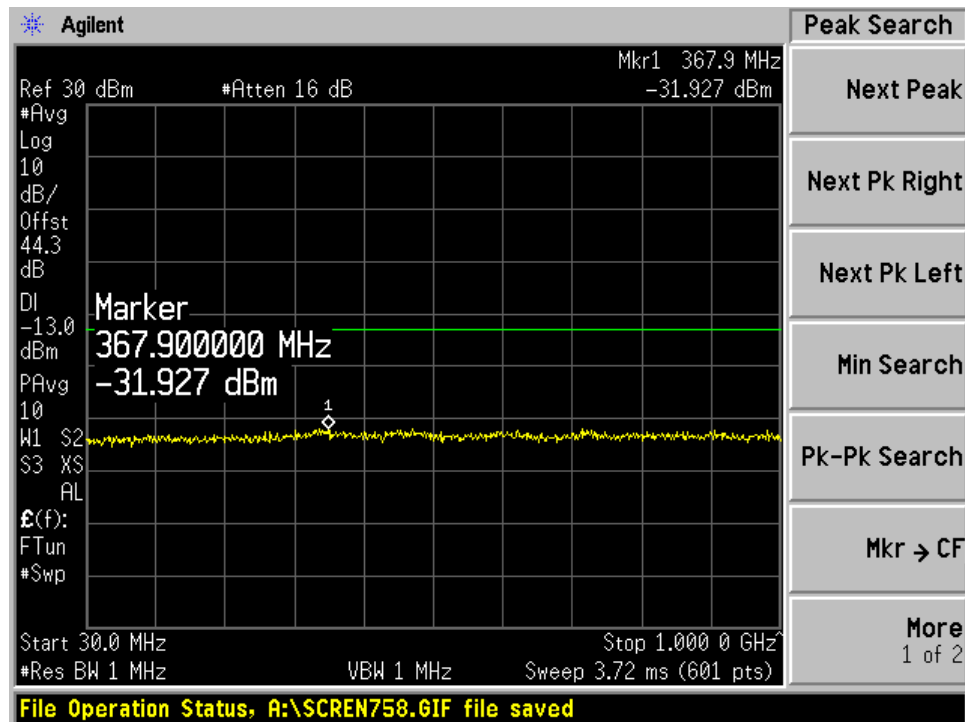


(30MHz~1 GHz)

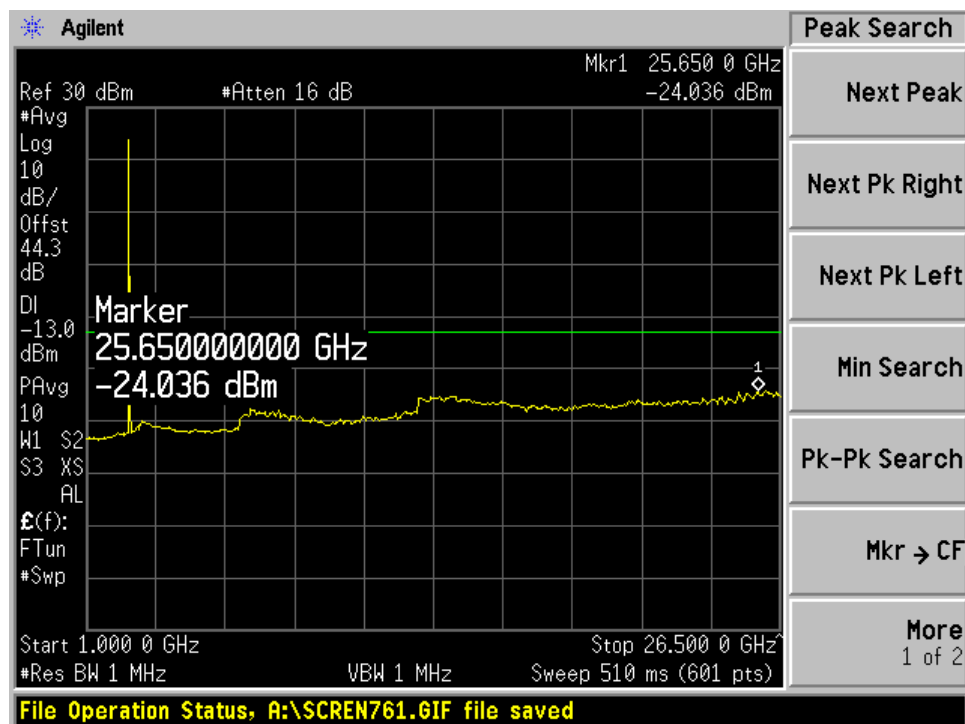


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 56 of 72

(64QAM High Channel)

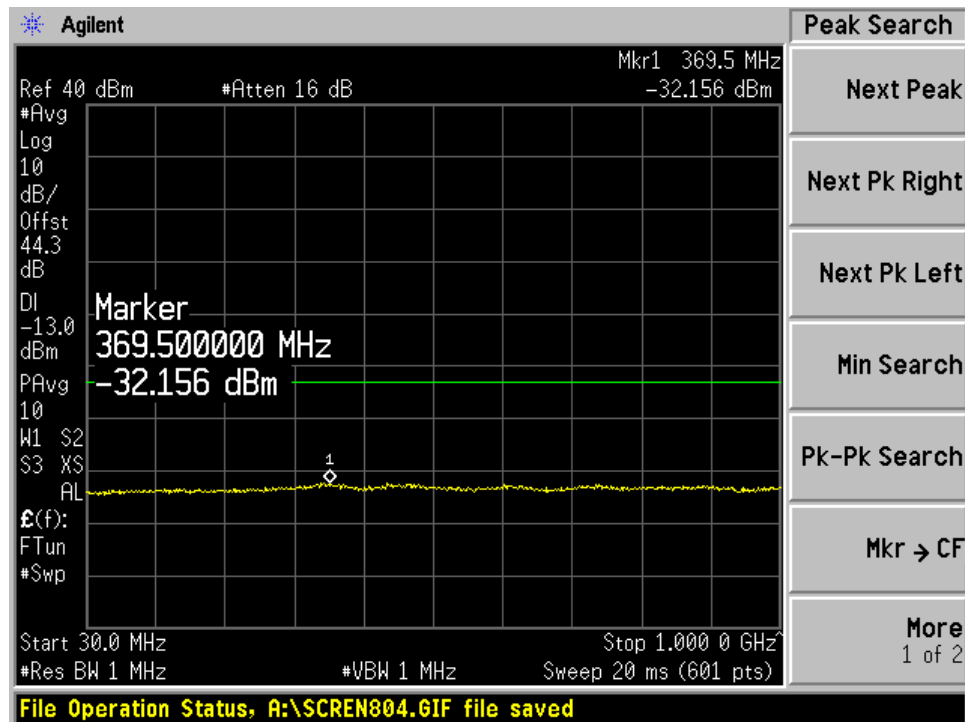

(3.00GHz~1 GHz)

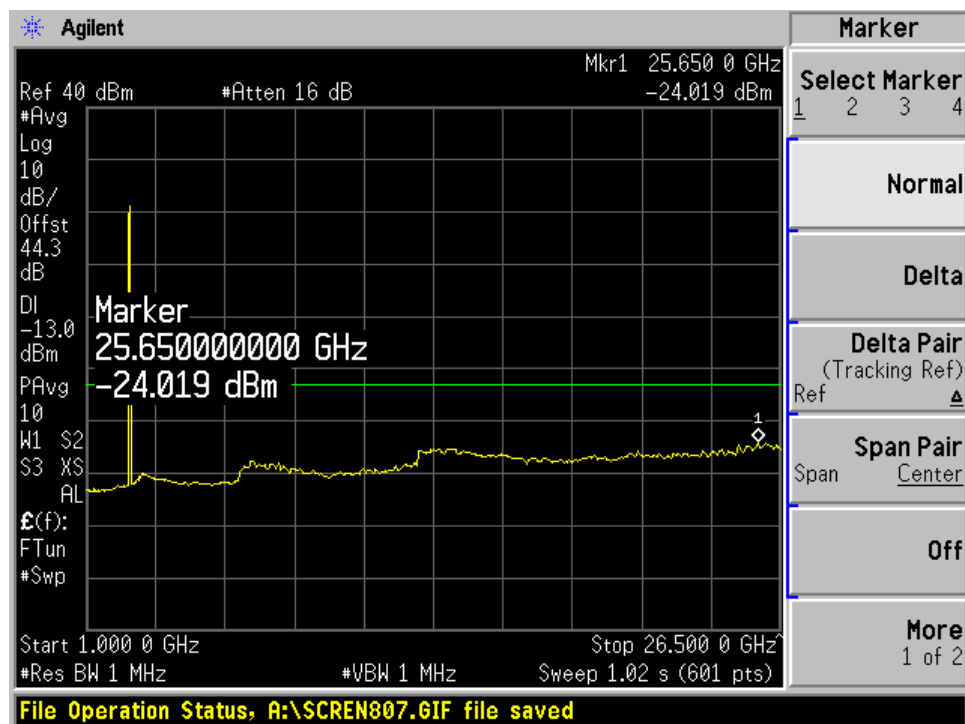


(1 GHz~26.50GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 57 of 72

8.4.2. Plot Data at Output 1

(QPSK Low Channel)

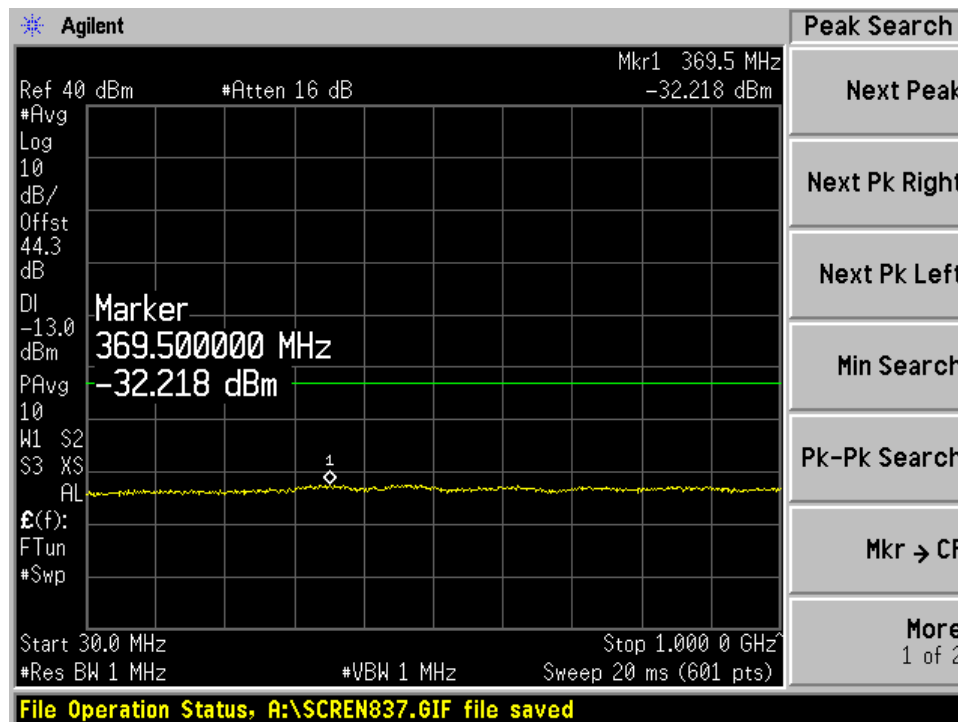


(30MHz~1 GHz)

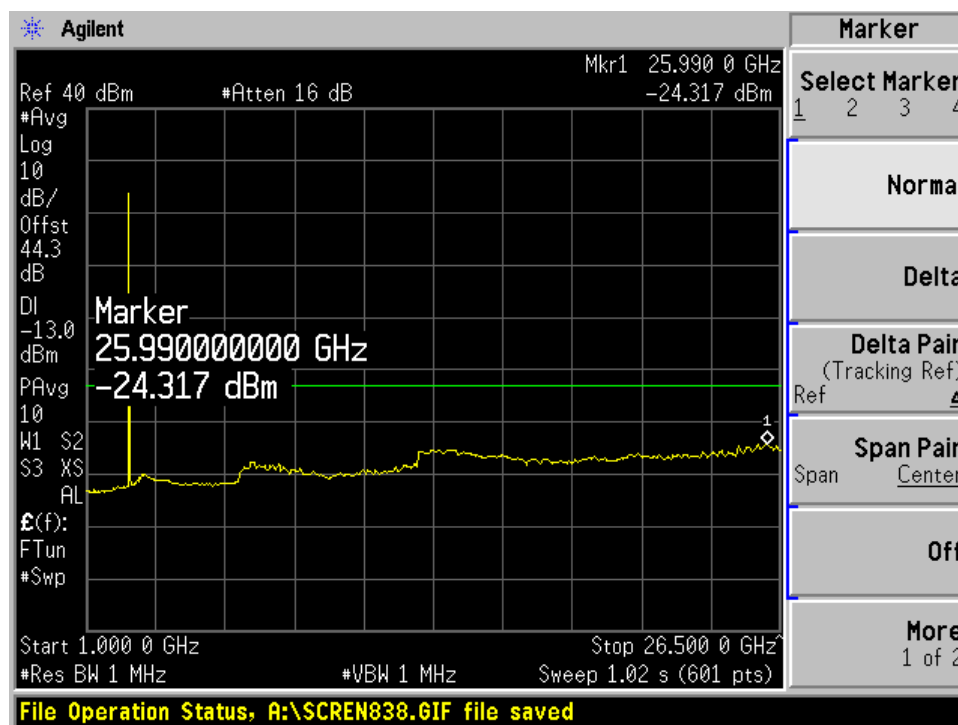


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 58 of 72

(QPSK Middle Channel)

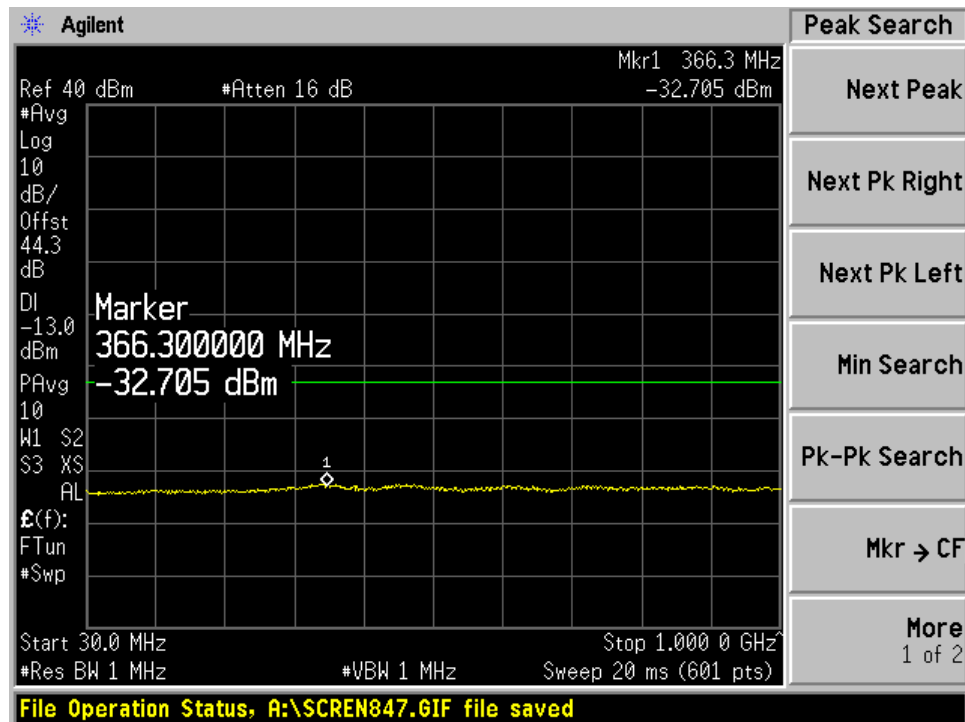


(30MHz~1 GHz)

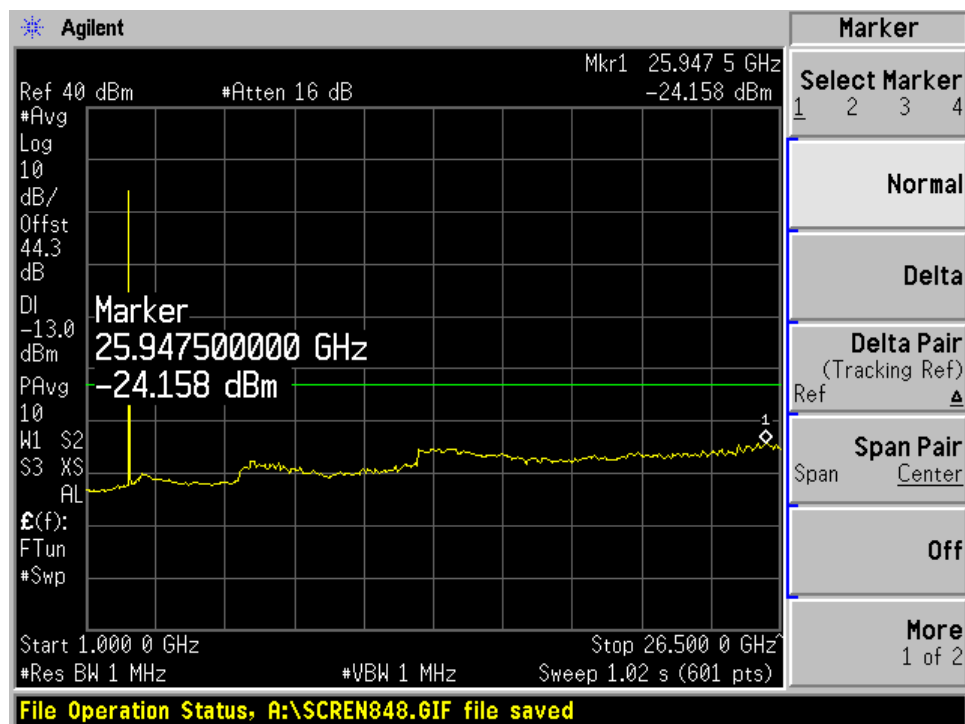


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 59 of 72

(QPSK High Channel)

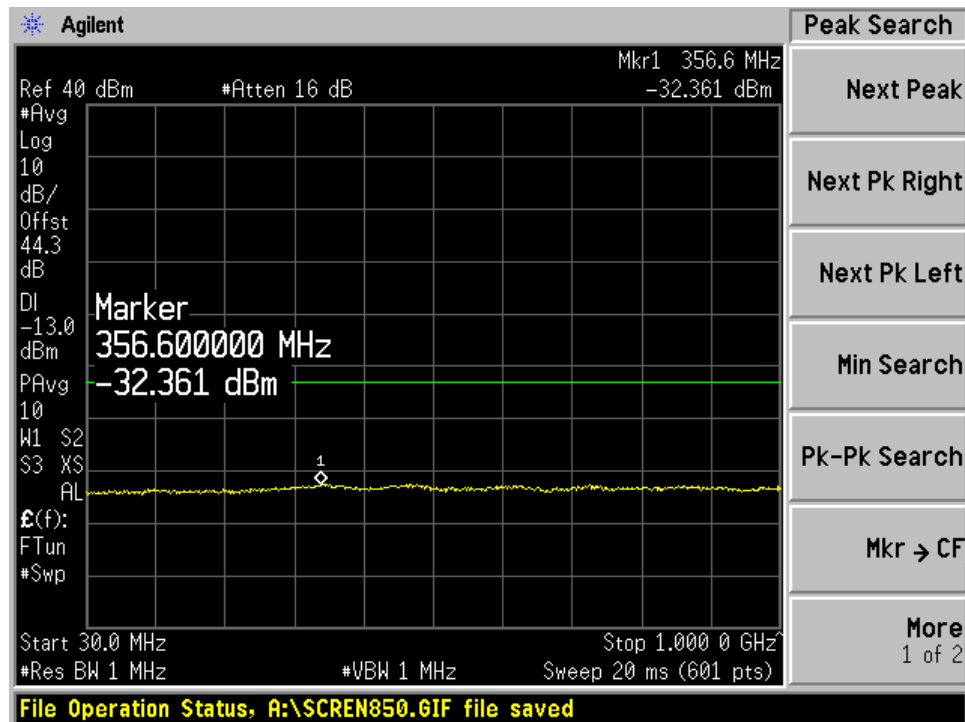


(30MHz~1 GHz)

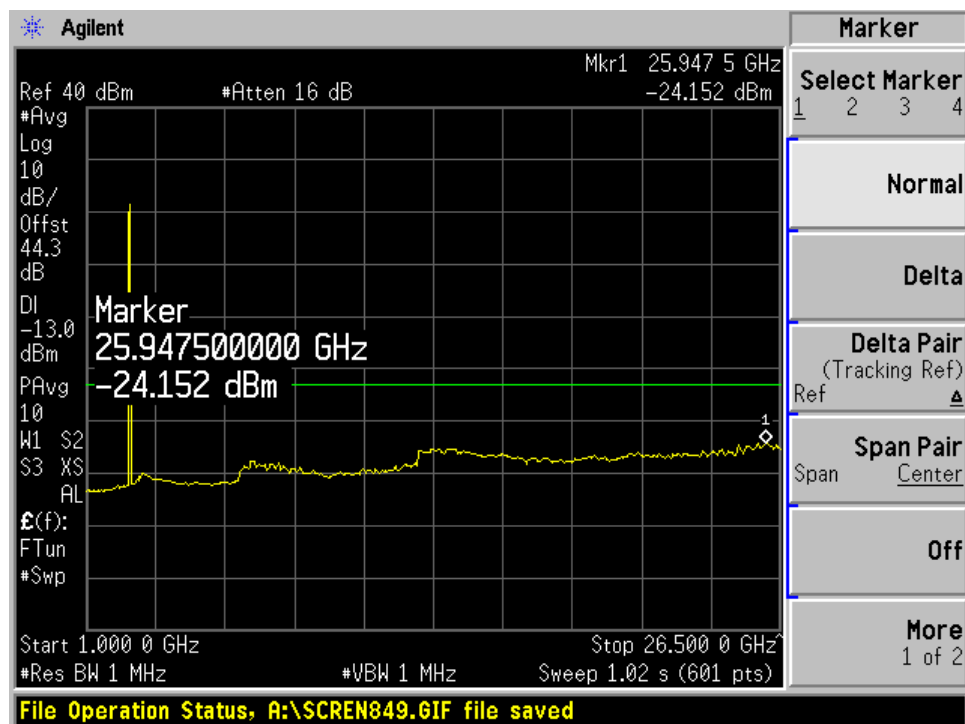


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 60 of 72

(16QAM Low Channel)

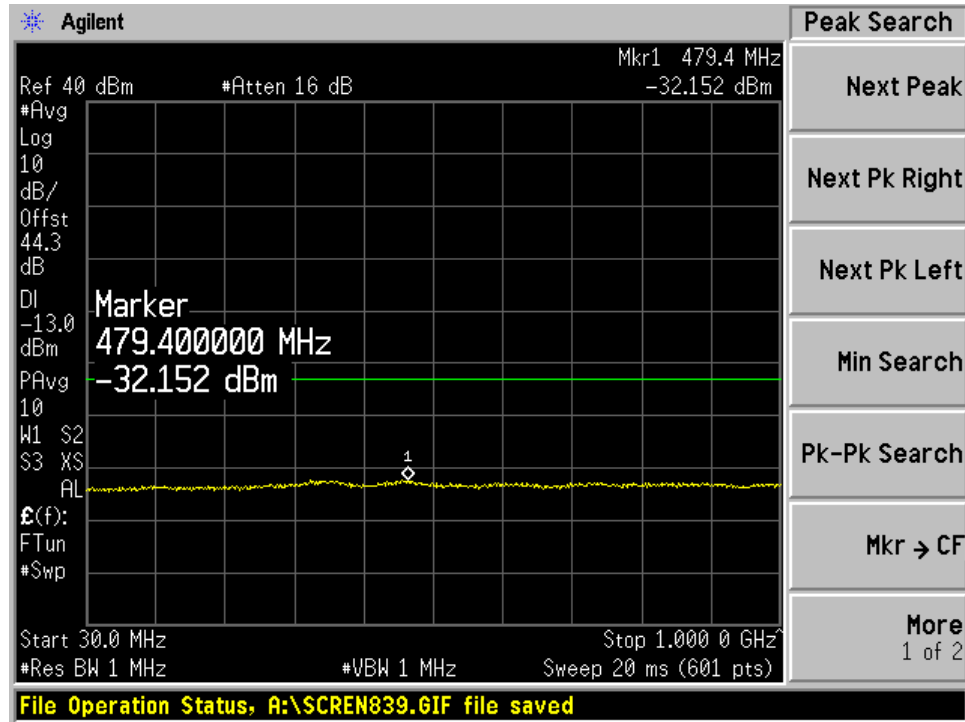


(30MHz~1 GHz)

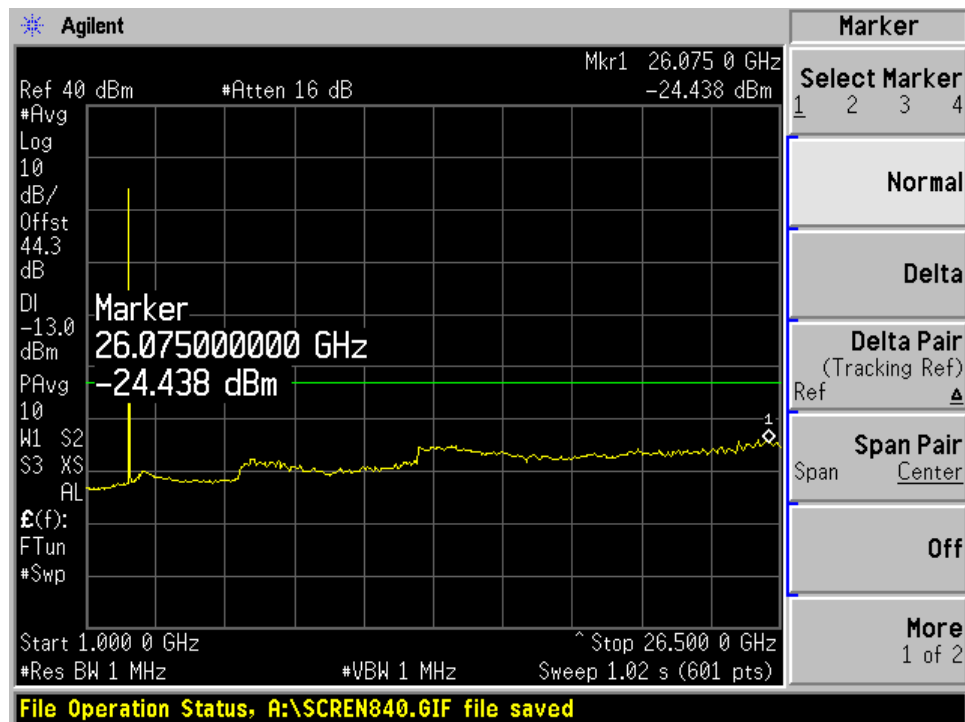


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 61 of 72

(16QAM Middle Channel)

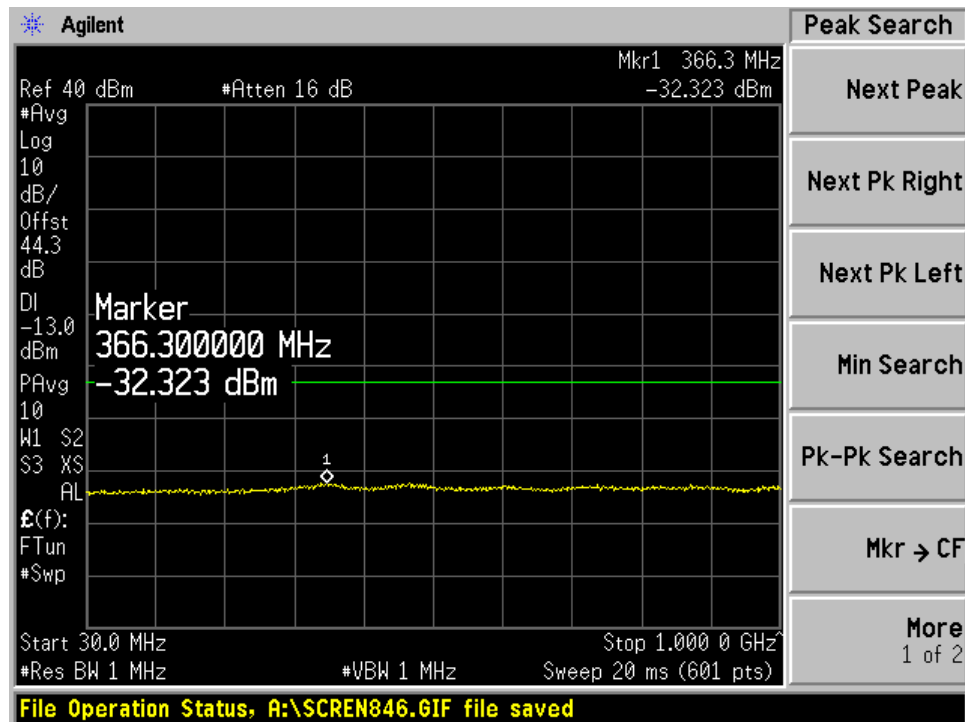


(30MHz~1 GHz)

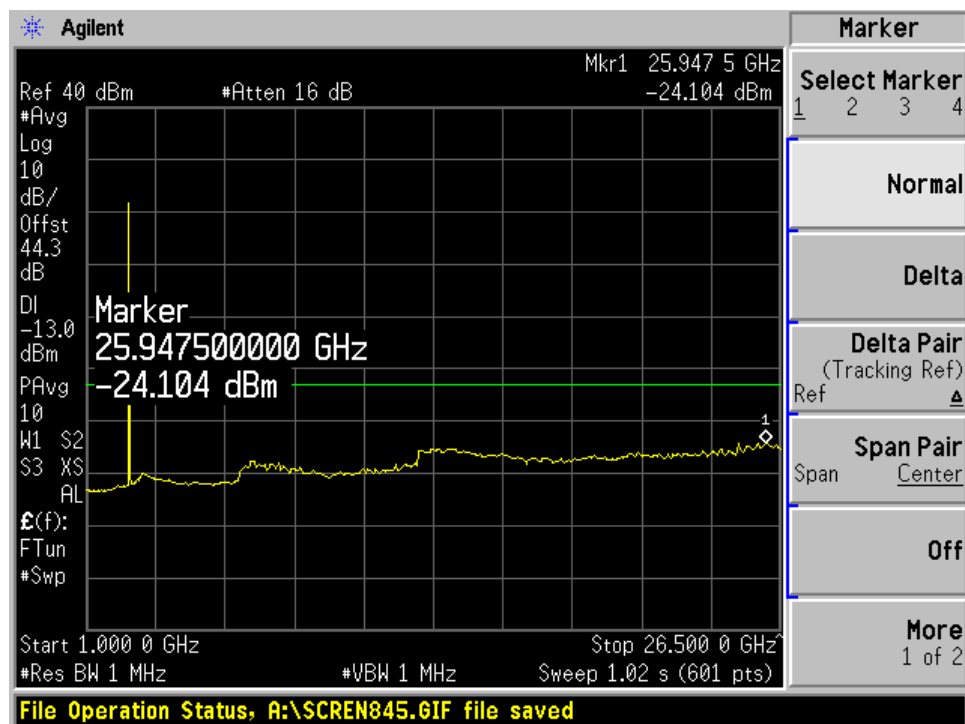


(1 GHz~26.5GHz)

(16QAM High Channel)

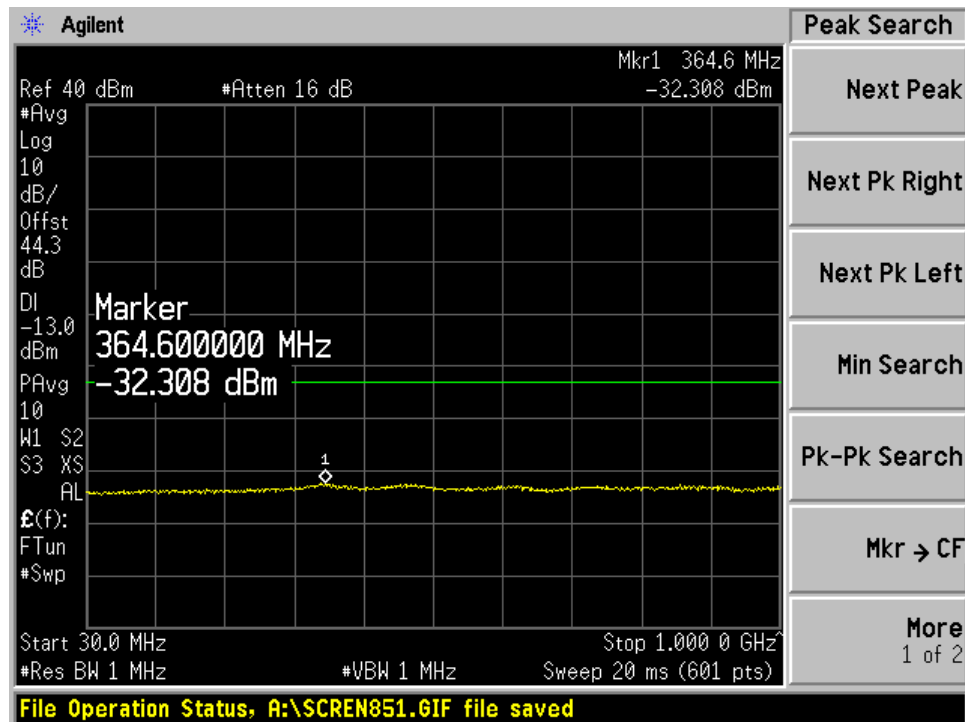


(30MHz~1 GHz)

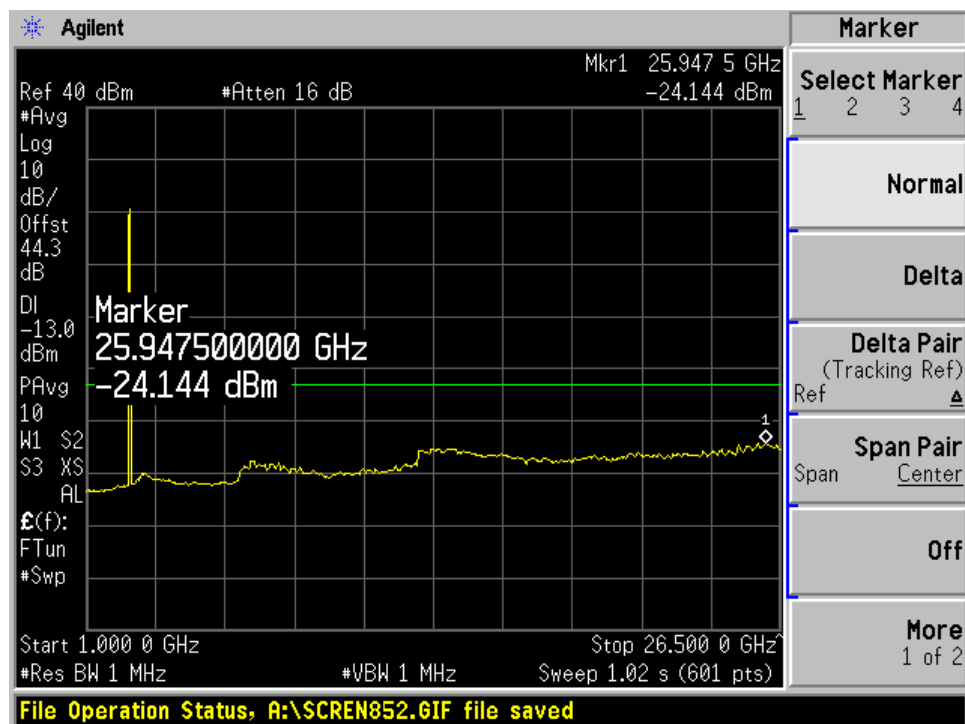


(1 GHz~26.50GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 63 of 72

(64QAM Low Channel)

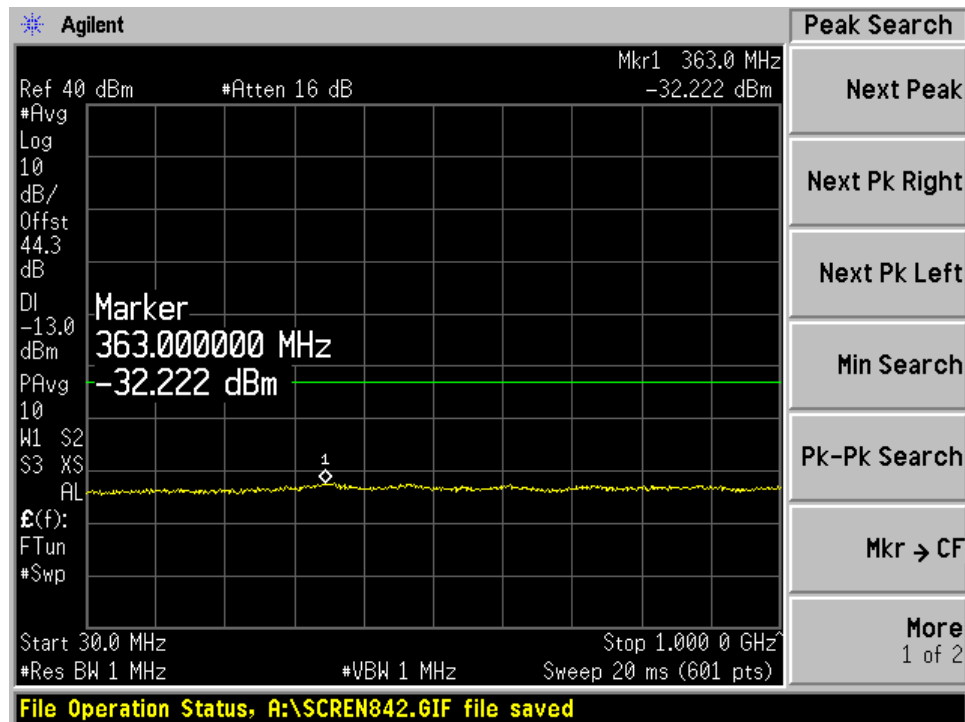


(30MHz~1 GHz)

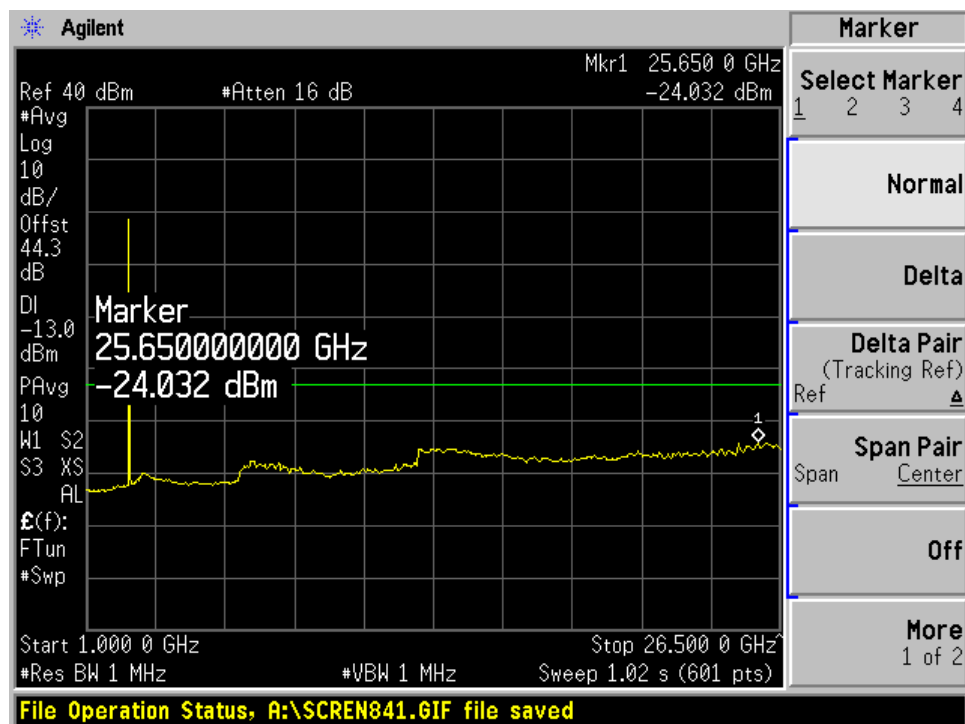


(1 GHz~26.5GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 64 of 72

(64QAM Middle Channel)

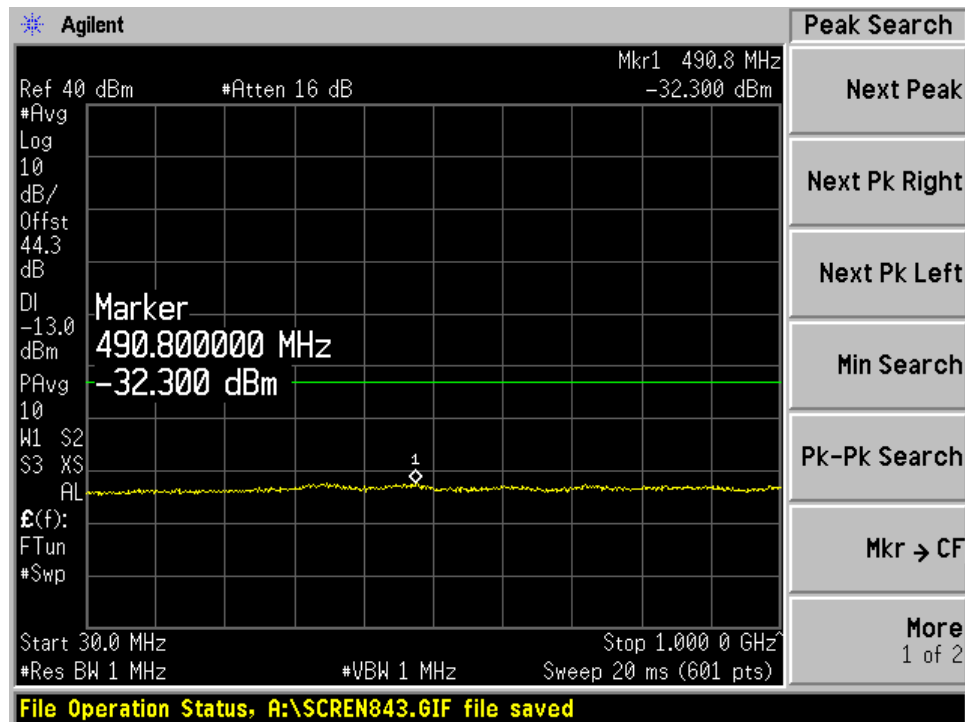


(30MHz~1 GHz)

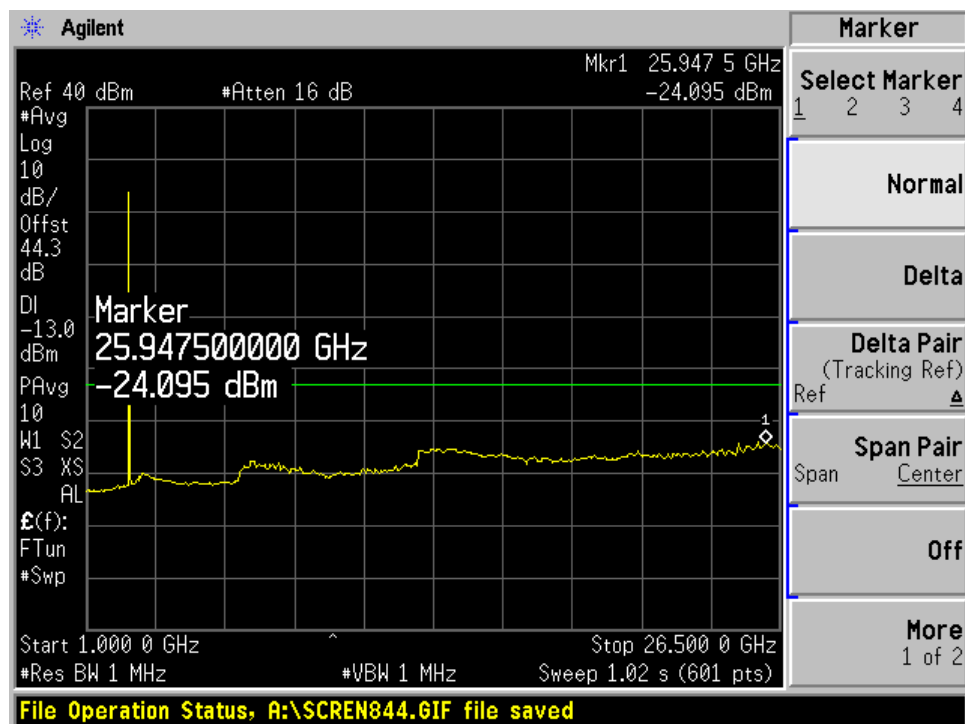


(1 GHz~26.50GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 65 of 72

(64QAM High Channel)

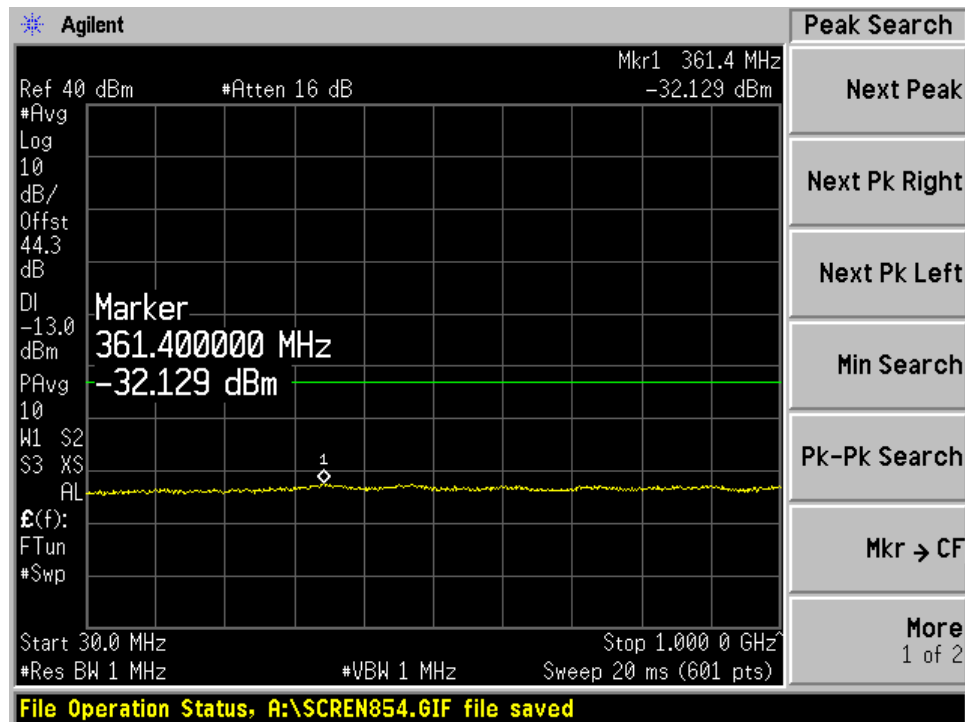

(30MHz~1 GHz)

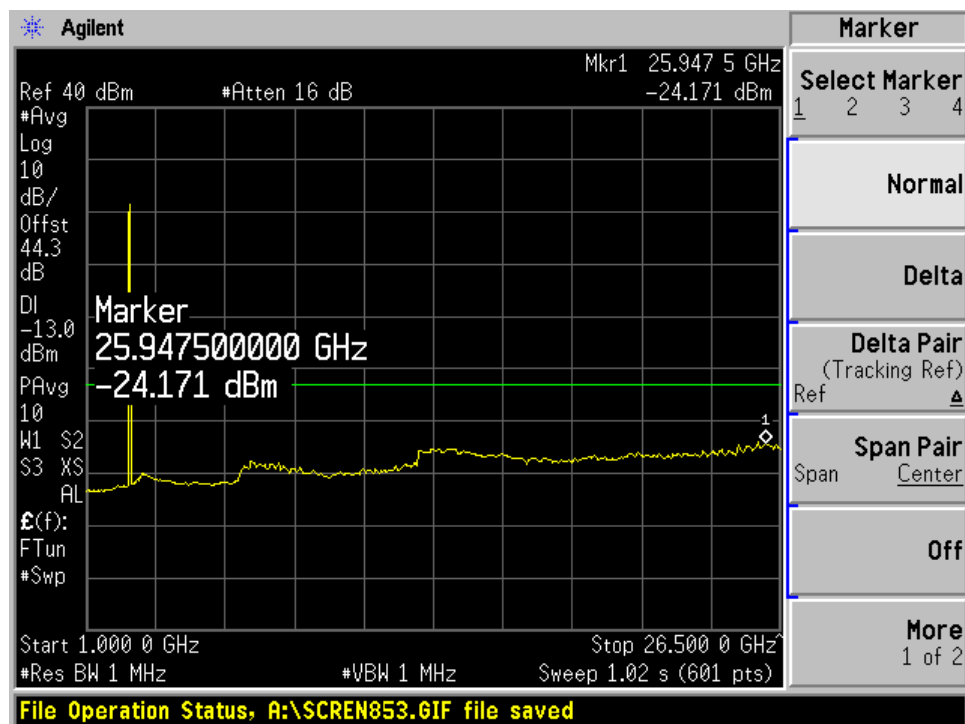

(10GHz~26.50GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 66 of 72

9. RADIATED SPURIOUS EMISSION

9.1 Applicable Standard:

Requirements: CFR 47, §2.1053

9.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Schwarzbeck	Double Ridged Horn Antenna	BBHA 9120D	296	05/02/2009
Schwarzbeck	Double Ridged Horn Antenna	BBHA 9120D	147	03/30/2009
Schwarzbeck	TRILOG Antenna	VULB 9160	9160-3150	04/20/2009
Schwarzbeck	TRILOG Antenna	VULB 9160	3125	04/20/2009
HD	Antenna Position Tower	MA240	556	N/A
EMCO	Turn Table	1050	114	N/A
HD GmbH	Controller	HD 100	13	N/A
HD GmbH	SlideBar	KMS 560	12	N/A
Rohde & Schwarz	Spectrum Analyzer	FSP30	839117/011	06/28/ 2009
MITEQ	Pre-amplifier	AMF-60-0010 1800-35-20P	1200937	01/19/2009
MITEQ	Pre-amplifier	AMF-6D-0010 1800-35-20P	990893	02/24/2009
Schwarzbeck	SHF-EHF Horn Antenna	BBHA9170	BBHA9170342	03/20/2009

9.3 Test Procedure

Radiated emission measurements were performed at an open Site.


The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission.

A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated.

The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 67 of 72

9.3.1 Radiated Spurious Emissions Test Setup

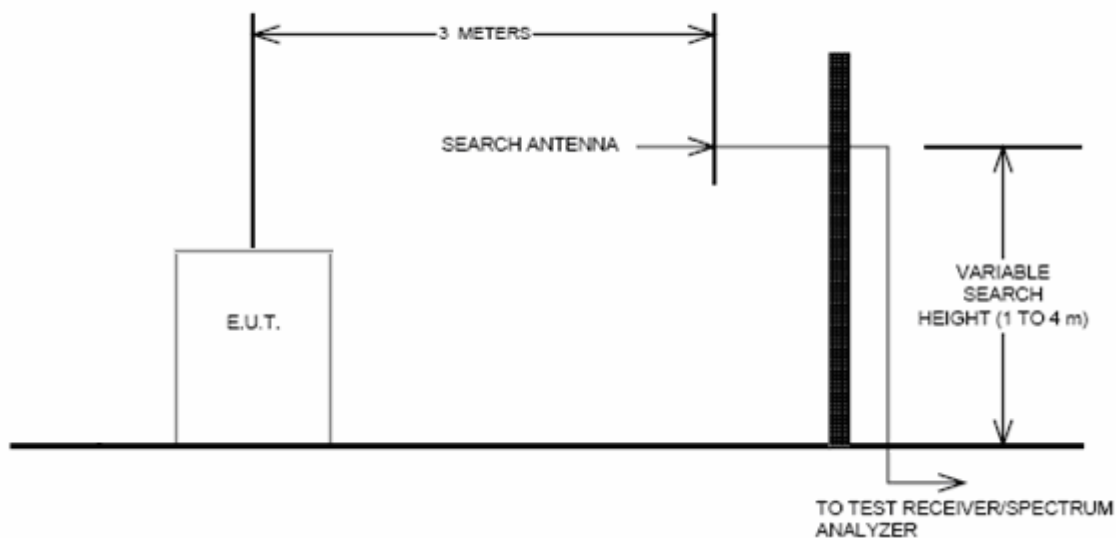

9.3.2 Environmental Conditions:

Temperature:	23 °C
Relative Humidity:	59 %

9.4 Test Result

: PASS (There were no emissions detected above the noise floor which was at least 20 dB below the limit.)

10. FREQUENCY STABILITY


10.1 Applicable Standard

Requirements: FCC § 2.1055 (a), Part 27.54 following: The frequency stability shall be sufficient to ensure that the fundamental emissions stay

10.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Agilent	PSA Spectrum Analyzer	E4440A	MY46186519	01.08.2009
Agilent	VSA Software	VSA89600		12.24.2008

10.3 Test Procedure

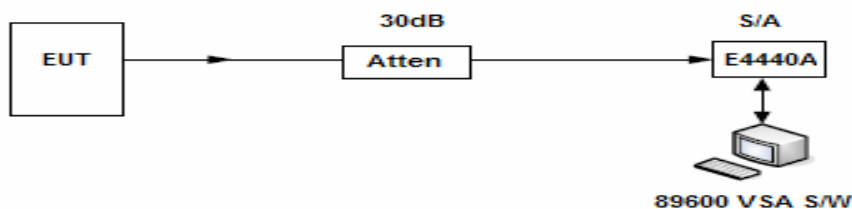

Frequency Stability over Temperature variation:

The equipment under test was connected to an external AC-DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 30 minutes, the frequency output was recorded from the VSA89600 S/W via PSA Spectrum Analyzer.

Frequency stability over Voltage variation:

An external variable AC-DC power supply Source. The voltage was set to 85% and 115% of the nominal value.

The output frequency was recorded for each voltage.

10.3.1. Environmental conditions

Temperature:	25° C
Relative Humidity:	57 %

10.4. Test Result

: Pass

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R08-106	Test Dates: July, 23, 2007	EUT Type: Mobile WiMax Remote SubSystem	FCC ID: WKURSS6411	Page 69 of 72

10.4.1. Frequency Stability over Temperature and Voltage variation

Modulation: QPSK

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,585,000,045	0.016936
40	2,585,000,041	0.015431
30	2585,000,052	0.019571
20	Reference	
10	2,585,000,048	0.018065
0	2,585,000,067	0.025216
-10	2,585,000,053	0.019947
-20	2,585,000,045	0.016936

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,585,000,051	0.019195
55.2	2,585,000,053	0.019947

(Output Port0 Middle CH)

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,585,000,055	0.020700
40	2,585,000,056	0.021076
30	2,585,000,038	0.014302
20	Reference	
10	2,585,000,036	0.013549
0	2,585,000,057	0.021453
-10	2,585,000,062	0.023335
-20	2,585,000,067	0.025216

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,585,000,057	0.021453
55.2	2,585,000,044	0.022050

(Output Port1 Middle CH)

Modulation: 16QAM**Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz**

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,585,000,054	0.020324
40	2,585,000,048	0.018065
30	2,585,000,056	0.021076
20	Reference	
10	2,585,000,057	0.021453
0	2,585,000,037	0.013925
-10	2,585,000,041	0.015431
-20	2,585,000,083	0.031238

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,585,000,062	0.023335
55.2	2,585,000,043	0.016184

(Output Port0 Middle CH)**Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz**

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,585,000,041	0.015431
40	2,585,000,049	0.018442
30	2,585,000,050	0.018818
20	Reference	
10	2,585,000,056	0.021076
0	2,585,000,049	0.018442
-10	2,585,000,045	0.016936
-20	2,585,000,048	0.018065

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,585,000,064	0.024087
55.2	2,585,000,048	0.018065

(Output Port1 Middle CH)

Modulation: 64QAM
Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,585,000,074	0.027851
40	2,585,000,071	0.026722
30	2,585,000,073	0.027475
20	Reference	
10	2,585,000,045	0.016936
0	2,585,000,056	0.021076
-10	2,585,000,063	0.023711
-20	2,585,000,061	0.022958

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,585,000,057	0.021453
55.2	2,585,000,052	0.019571

(Output Port0 Middle CH)
Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,585,000,057	0.021453
40	2,585,000,049	0.018442
30	2,585,000,050	0.018818
20	Reference	
10	2,585,000,041	0.015431
0	2,585,000,052	0.019571
-10	2,585,000,055	0.020700
-20	2,585,000,050	0.018818

Reference: - 48 Vdc at 20°C Freq. = 2585,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,585,000,051	0.019195
55.2	2,585,000,064	0.024087

(Output Port1 Middle CH)