

TEST REPORT For FCC

Test Report No. : 2010120045
Date of Issue : December 13, 2010
FCC ID : WLFSTM-7700
Model/Type No. : STM-7700
Kind of Product : Industrial PDA
Applicant : Woongjin System & Technology Co., Ltd.
Applicant Address : 18th Floor. Ace High-End Tower 3, 371-50, Gasan-dong,
Geumcheon-gu, Seoul, Korea
Manufacturer : Woongjin System & Technology Co., Ltd.
Manufacturer Address : 18th Floor. Ace High-End Tower 3, 371-50, Gasan-dong,
Geumcheon-gu, Seoul, Korea
Contact Person : Ki Seung Jung / Principal Research Engineer
Telephone : +82-2-2081-9321
Received Date : November 24, 2010
Test period : Start : November 24, 2010 End : December 13, 2010

The test results presented in this report relate only to the object tested.

Tested by

Y. T. Lee

Lee Young-taek
Test Engineer
Date: December 13, 2010

Reviewed by

Y. J. Park

Young-Joon, Park
Technical Manager
Date: December 13, 2010



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

REPORT REVISION HISTORY

| Date | Revision | Page No |
|-------------------|---------------------|---------|
| December 13, 2010 | Issued (2010120045) | All |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

| | |
|---|----|
| REPORT REVISION HISTORY | 2 |
| 1.0 General Product Description | 4 |
| 1.1 Tested Frequency | 4 |
| 1.2 Tested Mode | 4 |
| 1.3 Model Differences | 5 |
| 1.4 Device Modifications | 5 |
| 1.5 Peripheral Devices | 5 |
| 1.6 Calibration Details of Equipment Used for Measurement | 5 |
| 1.7 Test Facility..... | 5 |
| 1.8 Laboratory Accreditations and Listings | 6 |
| 2.0 Summary of tests | 7 |
| 2.1 Transmitter Requirements | 8 |
| 2.1.1 Carrier Frequency Separation | 8 |
| 2.1.2 Number of Hopping Frequencies | 10 |
| 2.1.3 20 dB bandwidth | 13 |
| 2.1.4 Time of Occupancy (Dwell Time) | 19 |
| 2.1.5 Maximum peak Conducted Output Power..... | 25 |
| 2.1.6 Band-edge..... | 30 |
| 2.1.7 Field Strength of Emissions | 38 |
| 2.1.8 AC Conducted Emissions..... | 43 |
| APPENDIX A – Test Equipment Used For Tests | 46 |



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

1.0 General Product Description

Equipment model name : STM-7700

Serial number : Prototype

EUT condition : Pre-production, not damaged

Antenna type : Chip antenna Gain -0.77 dBi

Frequency Range : 2402 - 2480 MHz

RF power : 2.093 dBm Peak Conducted (GFSK)
: -0.426 dBm Peak Conducted (8-DPSK)

Type of Modulation : Frequency Hopping Spread Spectrum

Number of channels : 79

Channel Spacing : 1MHz

Channel Access Protocol : Frequency Hopping

Type of Modulation : GFSK(1Mbps), DQPSK(2Mbps), 8-DPSK(3Mbps)

Power Source : Rechargeable Li-ion Battery Pack 7.4 Vdc/1800 mAh

1.1 Tested Frequency

| | LOW | MID | HIGH |
|-----------------|------|------|------|
| Frequency (MHz) | 2402 | 2441 | 2480 |

1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| Tested Ch | Modulation Technology | Modulation Type | Packet Type |
|----------------|-----------------------|-----------------|-------------|
| Low, Mid, High | FHSS | GFSK | DH 5 |
| Low, Mid, High | FHSS | 8-DPSK | 3DH 5 |



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

1.3 Model Differences

Not applicable

1.4 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.5 Peripheral Devices

| Device | Manufacturer | Model No. | Serial No. | FCC ID or DoC |
|-------------------|---------------------------------------|----------------------------------|-------------------------|---------------|
| AC ADAPTER | NingBo ISO Electronics Co., Ltd. | KPA-045E | - | - |
| Cradle | Woongjin System & Technology Co, Ltd. | - | - | - |
| Personal Computer | Samsung Electronics Co., Ltd. | DB-A150 | ZMSI96BSB0012 5F | DoC |
| LCD Monitor | VS17 | Lite-ON Technology Corp. | CNN5130QMC | DoC |
| Keyboard(PS/2) | Samsung Electro-Mechanics Co., Ltd. | SEM-DT35 | 33008101 | DoC |
| Mouse(USB) | Microsoft Corporation | Optical Mouse USB/PS2 Compatible | 69657-492-4974533-40420 | DoC |

1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea.







CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

1.8 Laboratory Accreditations and Listings

| Country | Agency | Scope of Accreditation | Logo |
|---------------|--------|---|--|
| USA | FCC | 3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements. |  805871 |
| JAPAN | VCCI | 10 meter Open Area Test Site and one conducted site. |  R-948, C-986 T-1843 |
| KOREA | KCC | EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) |  No. 51, KR0025 |
| International | KOLAS | EMC |  |



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.0 Summary of tests

| FCC Part Section(s) | Parameter | Limit | Test Condition | Status (note 1) |
|---------------------|-------------------------------|-------------------|----------------|-----------------|
| 15.247(a) | Carrier Frequency Separation | > 25 kHz | Conducted | C |
| 15.247(a) | Number of Hopping Frequencies | > 15 hops | | C |
| 15.247(a) | 20 dB Bandwidth | NA | | C |
| 15.247 | Dwell Time | < 0.4 seconds | | C |
| 15.247(b) | Transmitter Output Power | < 0.125 Watts | | C |
| 15.247(d) | Conducted Spurious emission | > 20 dBc | | C |
| 15.247(d) | Band Edge | > 20 dBc | | C |
| 15.249 /15.209 | Field Strength of Harmonics | < 54 dBuV (at 3m) | Radiated | C |
| 15.207 /15.107 | AC Conducted Emissions | EN 55022 | Line Conducted | C |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:
- FCC Part 15.247, ANSI C63.4-2003

2.1 Transmitter Requirements

2.1.1 Carrier Frequency Separation

Test Location

RF Test Room

Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ($\geq 1\%$ of the span) Sweep = auto

VBW = 30 kHz (\geq RBW) Detector function = peak

Trace = max hold

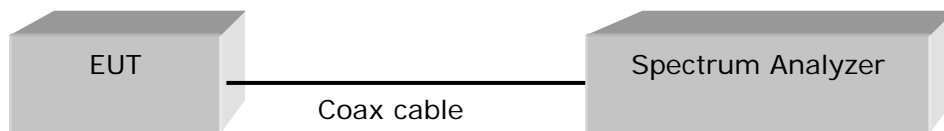


Figure 1 : Measurement setup for the carrier frequency separation

Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| Channel | Adjacent Hopping Channel Separation (kHz) | Two-third of 20dB bandwidth (kHz) | Minimum Bandwidth (kHz) | Result |
|---------|---|-----------------------------------|-------------------------|----------|
| 2441MHz | 1000 | 624 | 25 | Complies |

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

| Channel | Adjacent Hopping Channel Separation (kHz) | Two-third of 20dB bandwidth (kHz) | Minimum Bandwidth (kHz) | Result |
|---------|---|-----------------------------------|-------------------------|----------|
| 2441MHz | 987 | 837 | 25 | Complies |

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Carrier Frequency Separation

Data Rate : GFSK

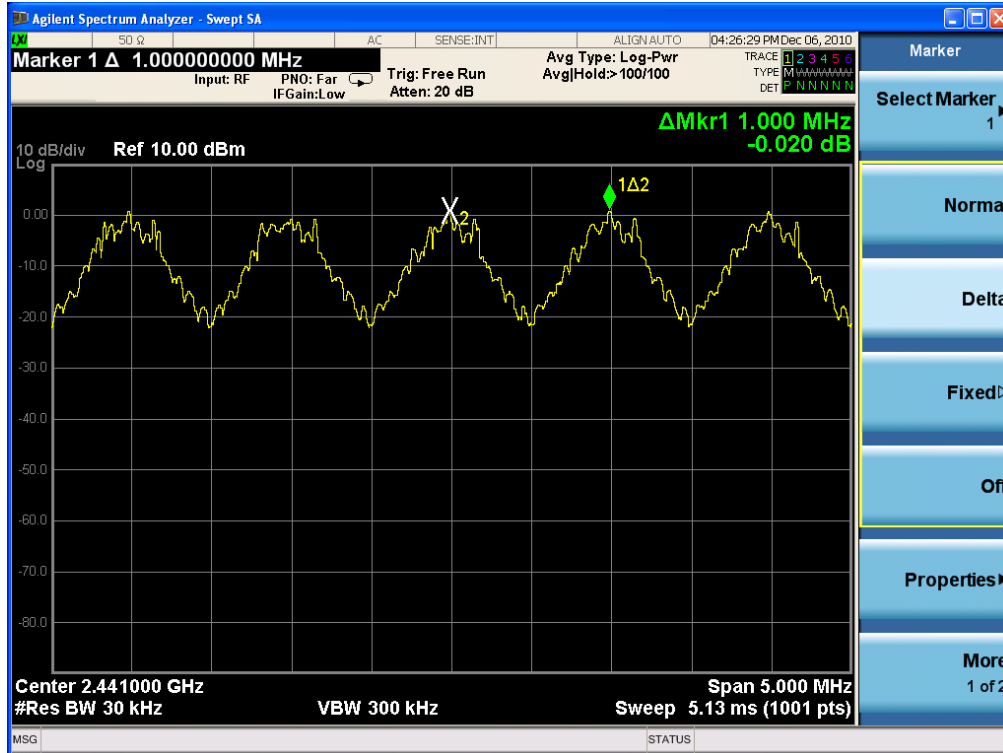

Data Rate : 8-DPSK

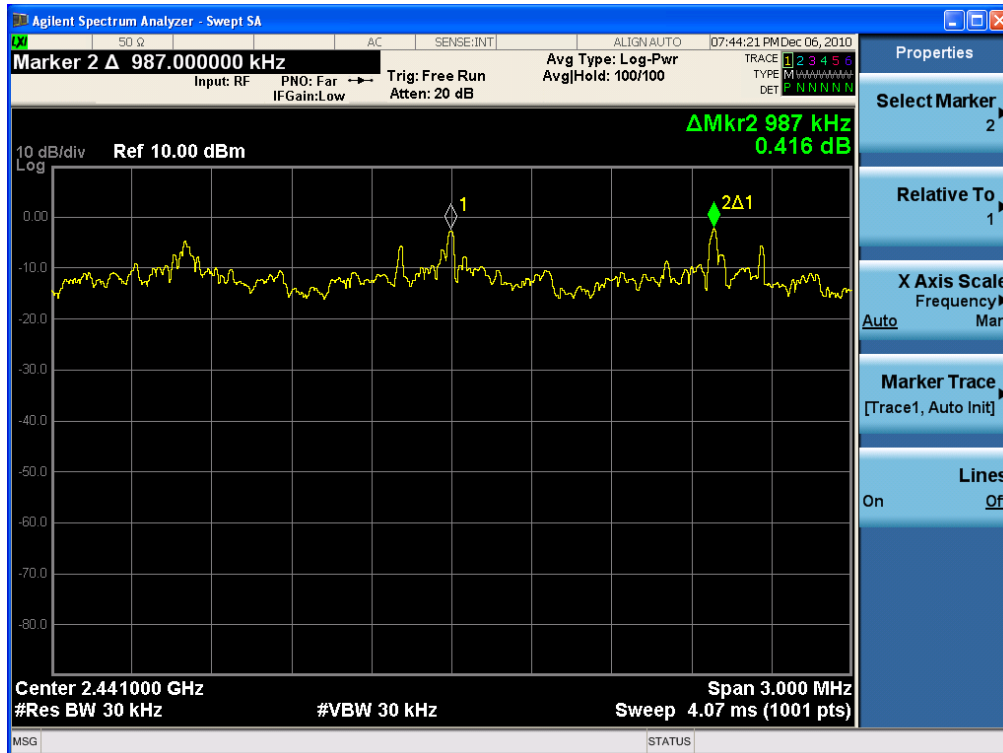

2.1.2 Number of Hopping Frequencies

Test Location

RF Test Room


Test Procedures

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5 MHz, Stop = 2439.5 MHz
 2: Start = 2439.5 MHz, Stop = 2489.5 MHz

Span = 50 MHz
RBW = 300 kHz ($\geq 1\%$ of the span)
VBW = 300 kHz (\geq RBW)
Trace = max hold
Sweep = auto
Detector function = peak

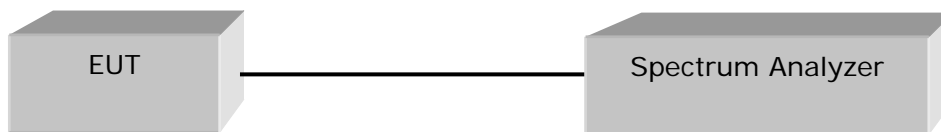

Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| Total number of Hopping Channels | Result |
|----------------------------------|----------|
| 79 | Complies |

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

| Total number of Hopping Channels | Result |
|----------------------------------|----------|
| 79 | Complies |

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Number of Hopping Frequencies(GFSK)

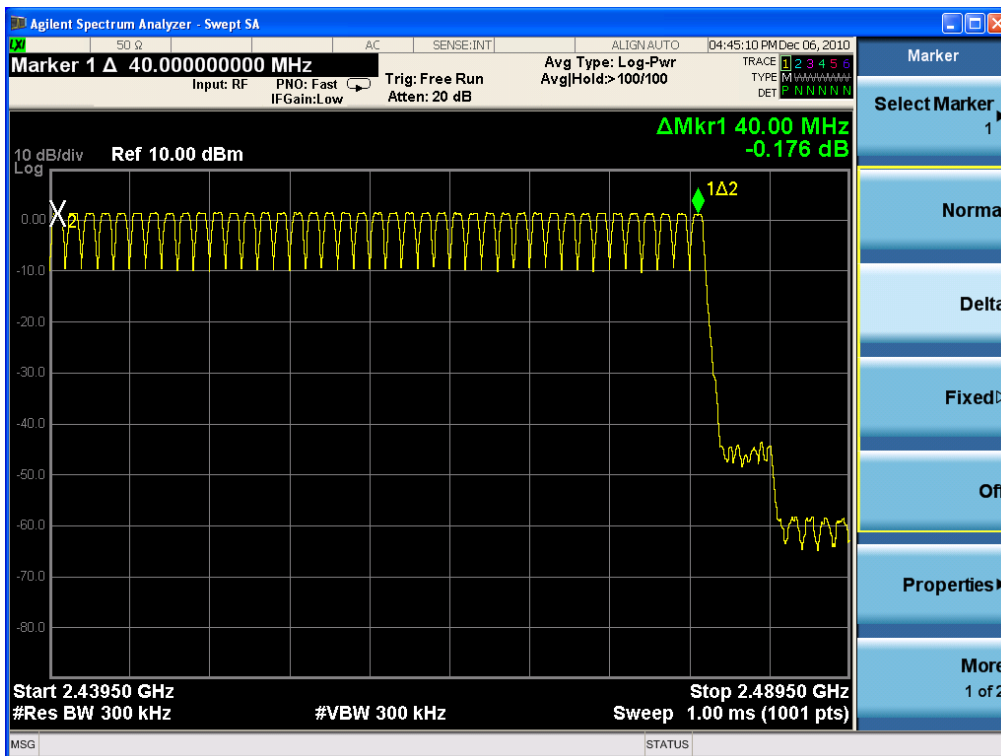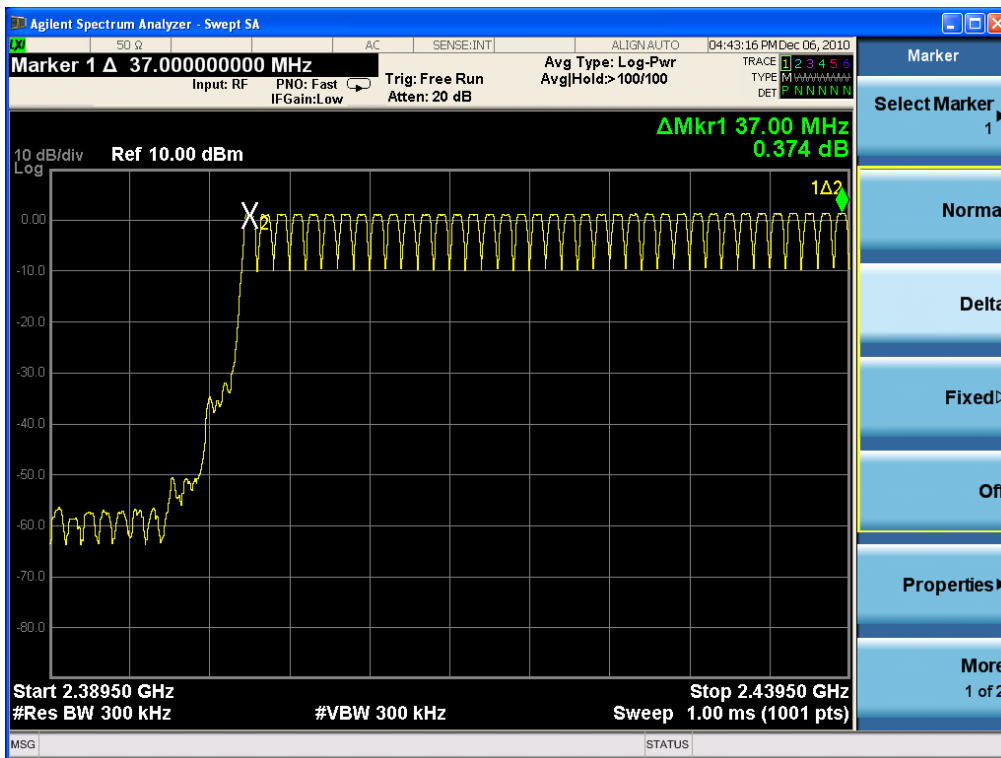



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Number of Hopping Frequencies(8-DPSK)

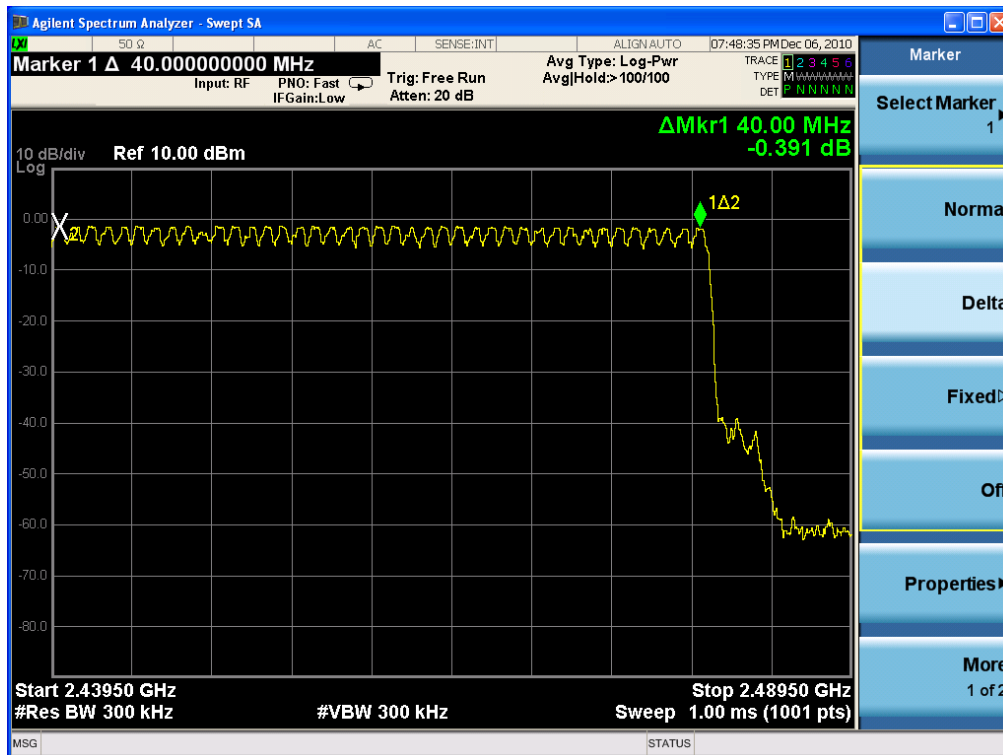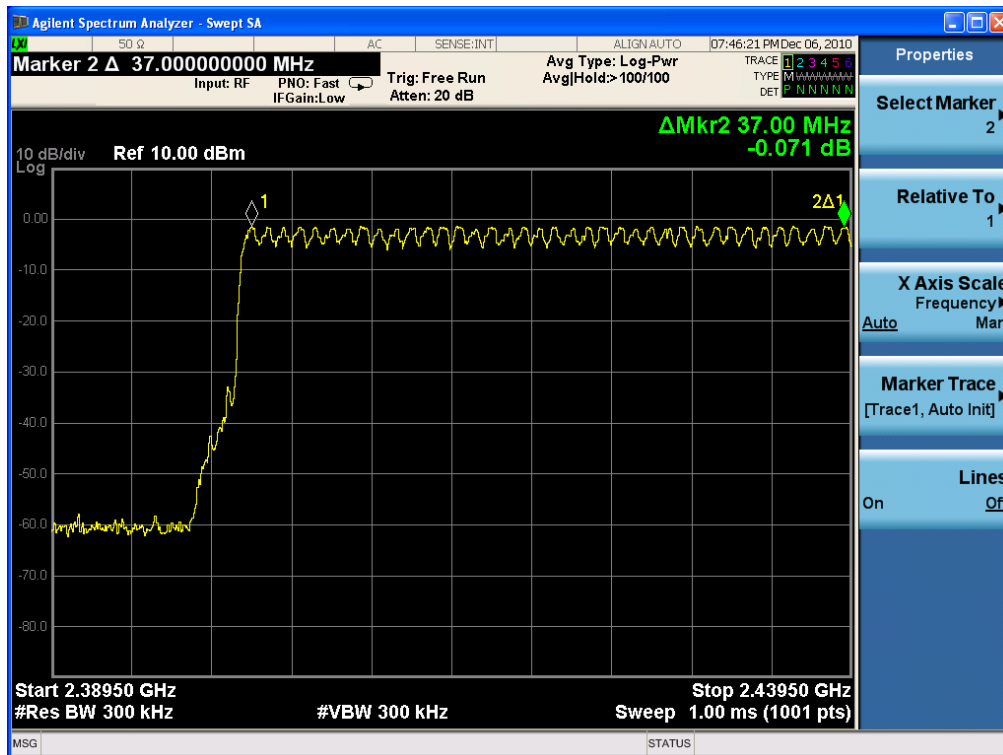

2.1.3 20 dB bandwidth

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ($\geq 1\%$ of the span)

Sweep = auto

VBW = 30 kHz (\geq RBW)

Detector function = peak

Trace = max hold

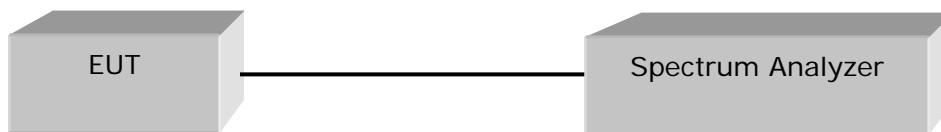

Limit

Limit : N/A



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| Frequency (MHz) | Channel Number. | Measured Bandwidth (MHz) | Result |
|-----------------|-----------------|--------------------------|----------|
| 2402 | 0 | 0.935 | Complies |
| 2441 | 39 | 0.938 | Complies |
| 2480 | 78 | 0.936 | Complies |

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

| Frequency (MHz) | Channel Number. | Measured Bandwidth (MHz) | Result |
|-----------------|-----------------|--------------------------|----------|
| 2402 | 0 | 1.255 | Complies |
| 2441 | 39 | 1.252 | Complies |
| 2480 | 78 | 1.251 | Complies |

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

20 dB Bandwidth - GFSK

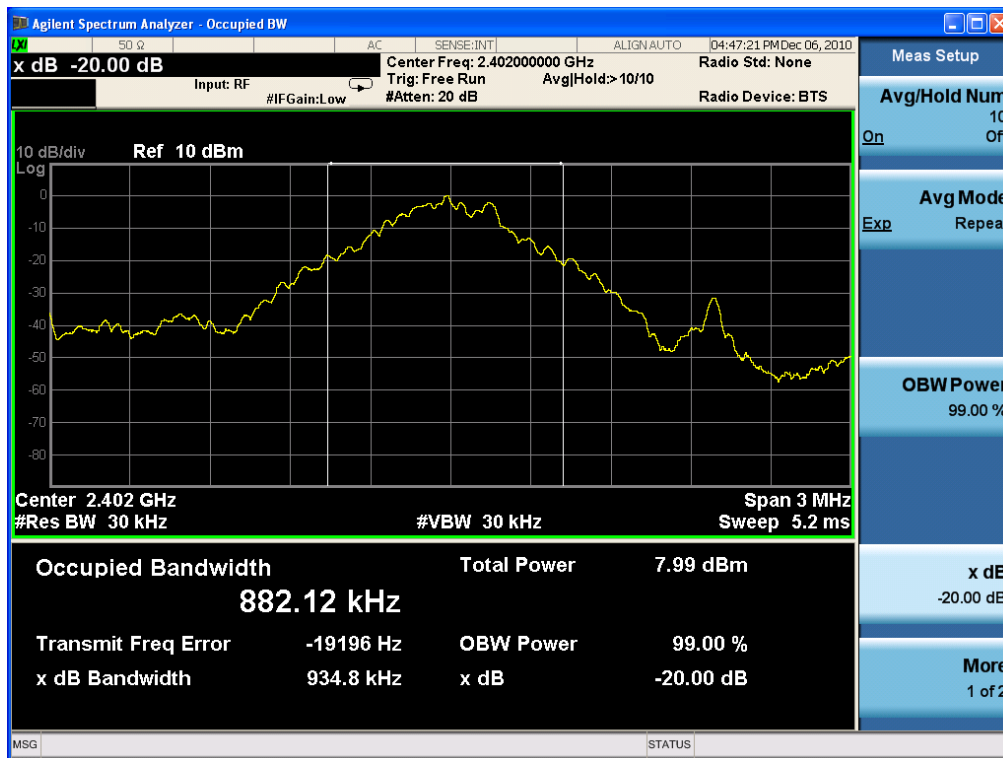




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

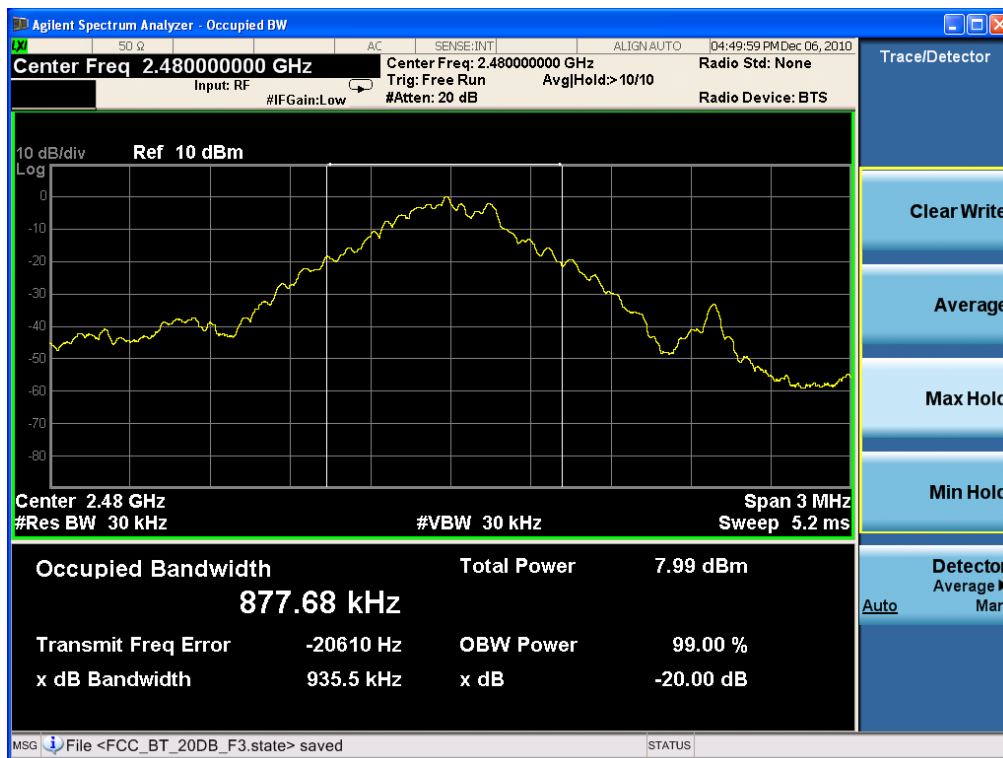





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

20 dB Bandwidth – 8-DPSK

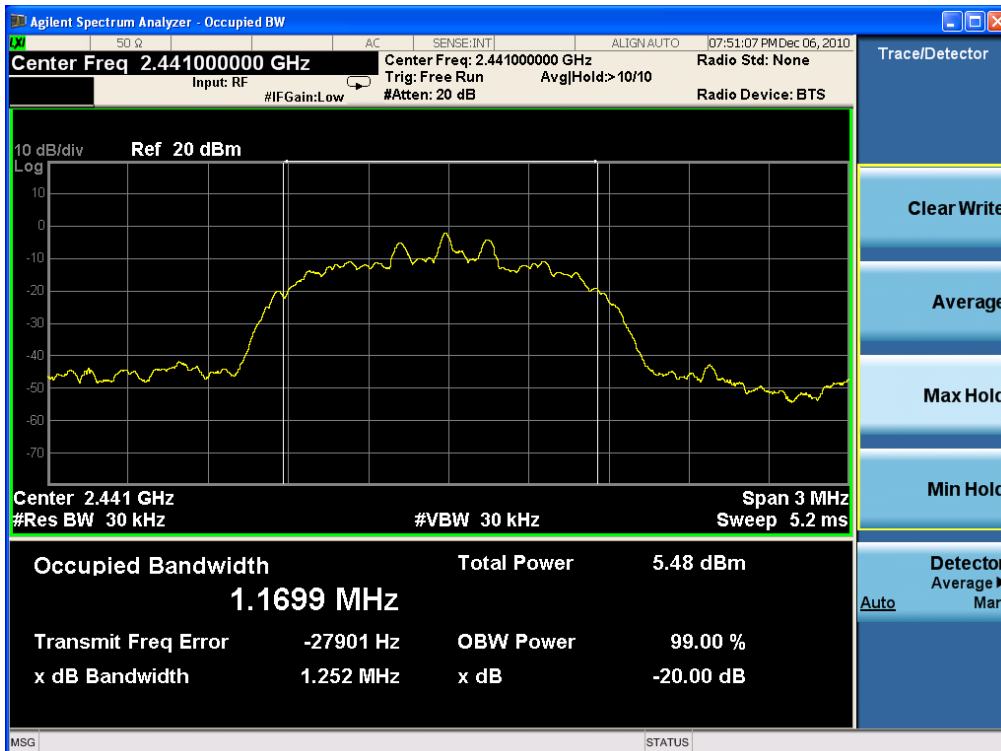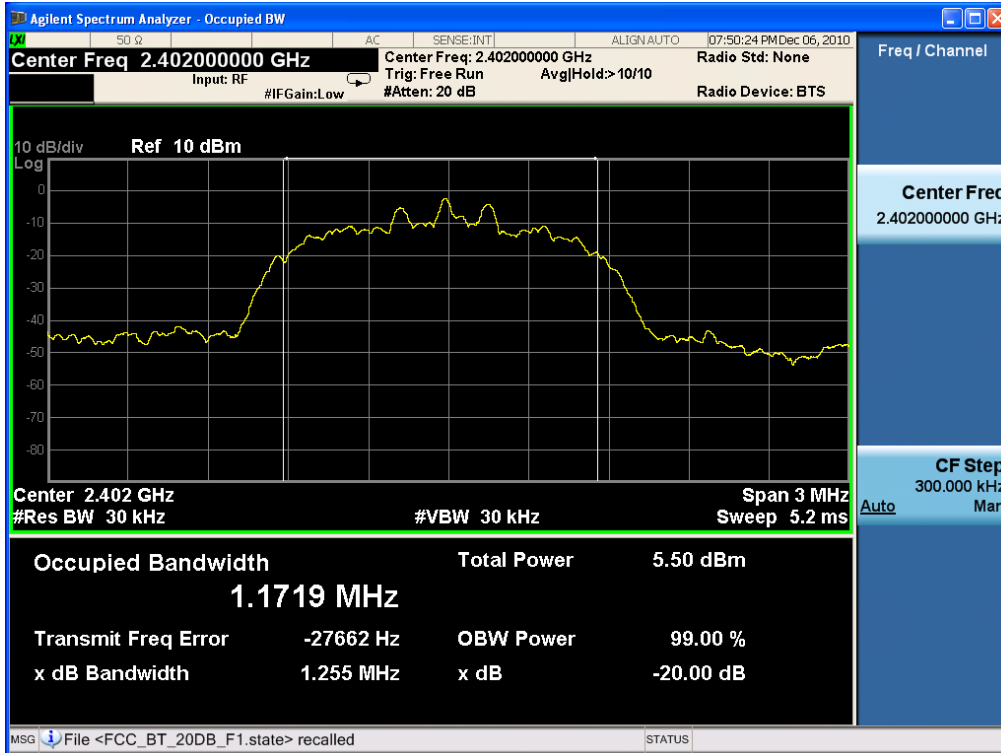




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

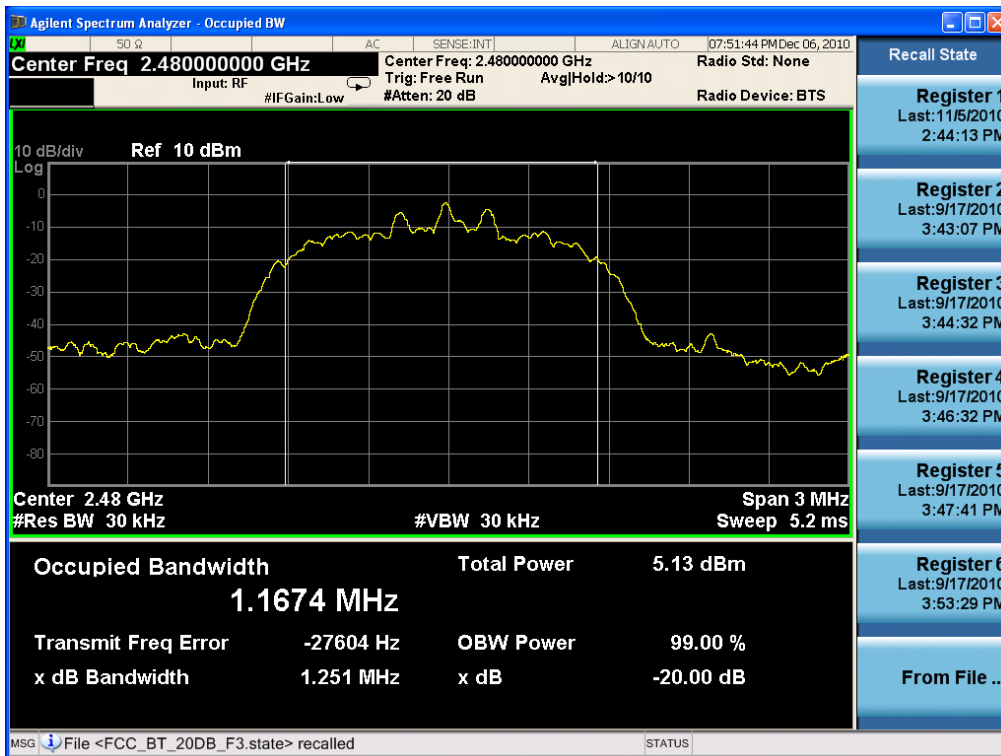

2.1.4 Time of Occupancy (Dwell Time)

Test Location

RF Test Room

Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The H318B has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz (\geq RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷
number of hop per channel × 31.6

Test mode : GFSK

| Channel Frequency (MHz) | Packet Type | Dwell Time (ms) | Test Results | |
|-------------------------|-------------|-----------------|---|----------|
| | | | Time of occupancy on the TX channel in 31.6sec (ms) | Result |
| 2441 | DH 1 | 0.395 | 126.40 | Complies |
| | DH 3 | 1.650 | 264.00 | Complies |
| | DH 5 | 2.900 | 309.33 | Complies |

DH1 Dwell time = $0.395 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 126.40 \text{ ms}$

DH3 Dwell time = $1.650 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ ms}$

DH5 Dwell time = $2.900 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ ms}$

Test mode : 8-DPSK

| Channel Frequency (MHz) | Packet Type | Dwell Time (ms) | Test Results | |
|-------------------------|-------------|-----------------|---|----------|
| | | | Time of occupancy on the TX channel in 31.6sec (ms) | Result |
| 2441 | 3DH 1 | 0.405 | 129.60 | Complies |
| | 3DH 3 | 1.660 | 265.60 | Complies |
| | 3DH 5 | 2.900 | 309.33 | Complies |

3DH1 Dwell time = $0.405 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 129.60 \text{ ms}$

3DH3 Dwell time = $1.660 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 265.60 \text{ ms}$

3DH5 Dwell time = $2.900 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ ms}$

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Time of Occupancy for PACKET Type DH1(GFSK)

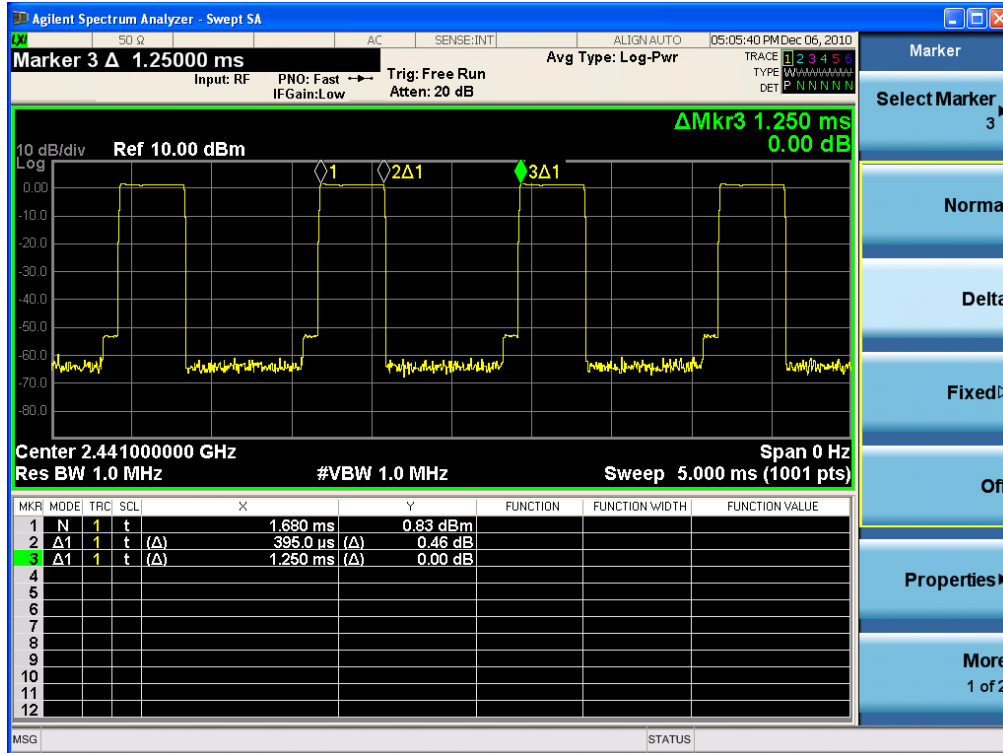

Time of Occupancy for PACKET Type DH3(GFSK)

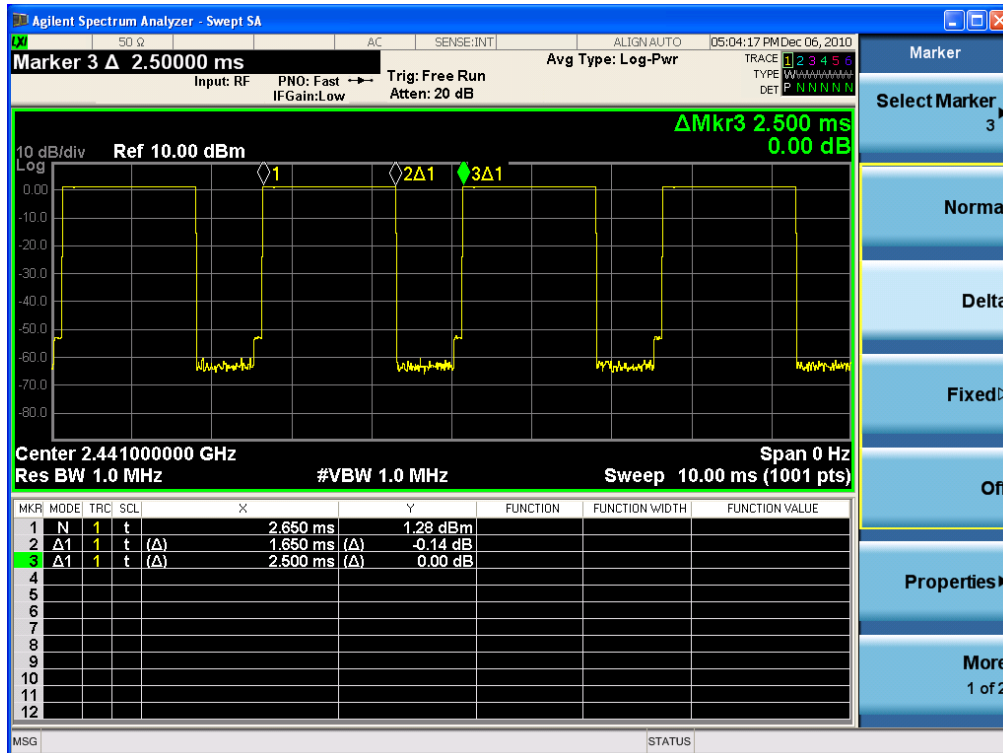




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Time of Occupancy for PACKET Type DH5(GFSK)

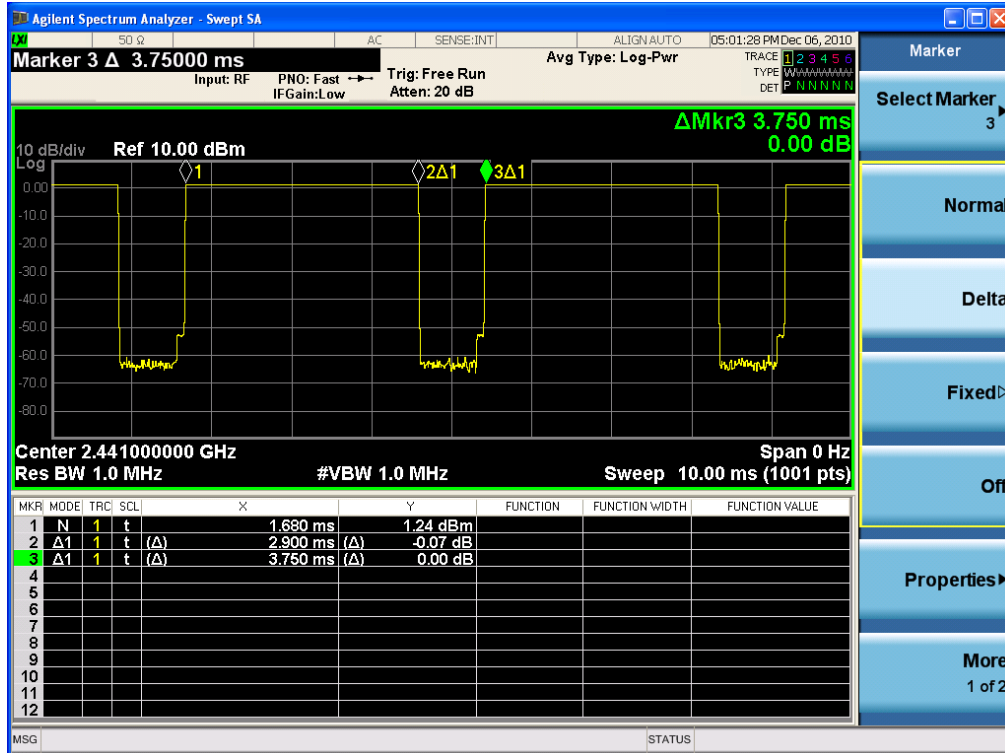




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Time of Occupancy for PACKET Type 3DH1 (8-DPSK)

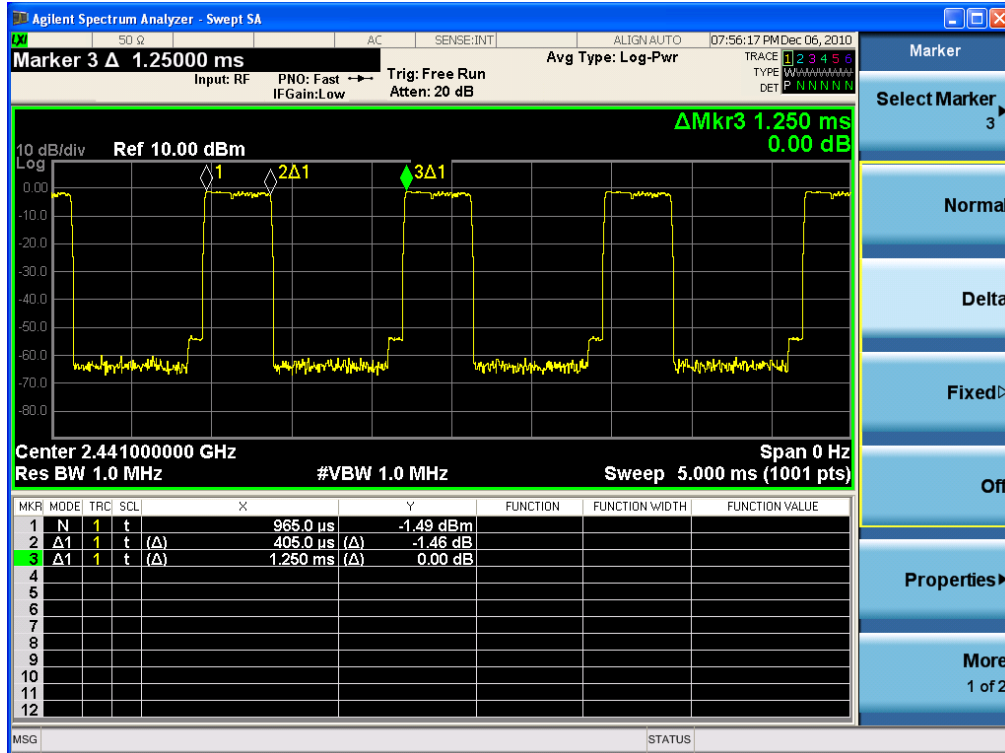

Time of Occupancy for PACKET Type 3DH3 (8-DPSK)

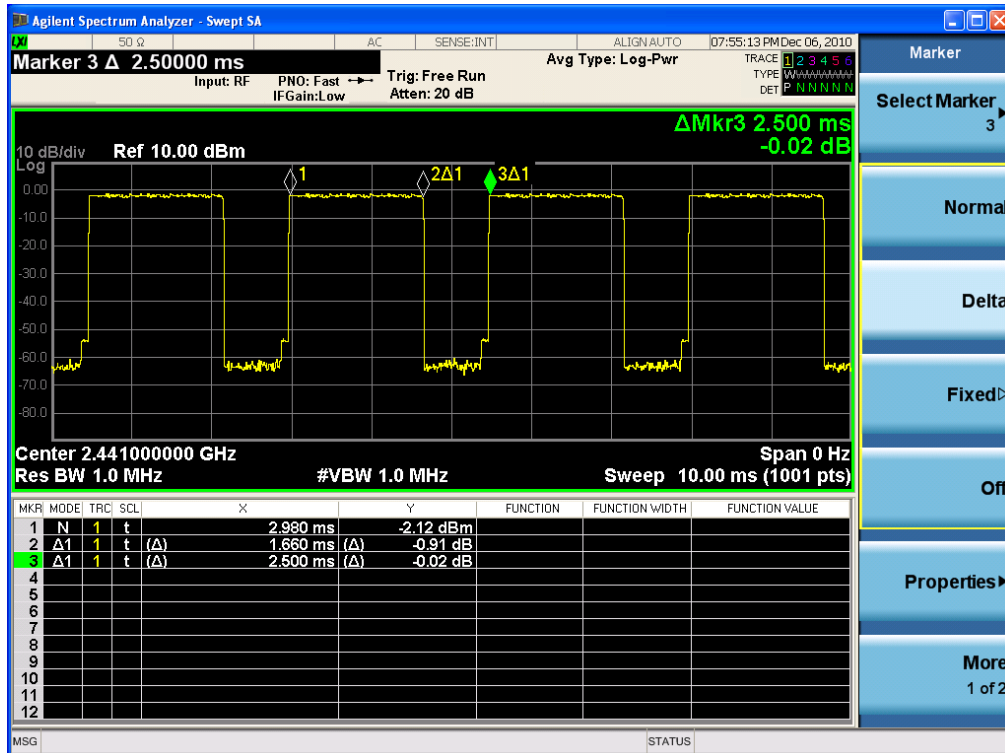




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Time of Occupancy for PACKET Type 3DH5(8-DPSK)

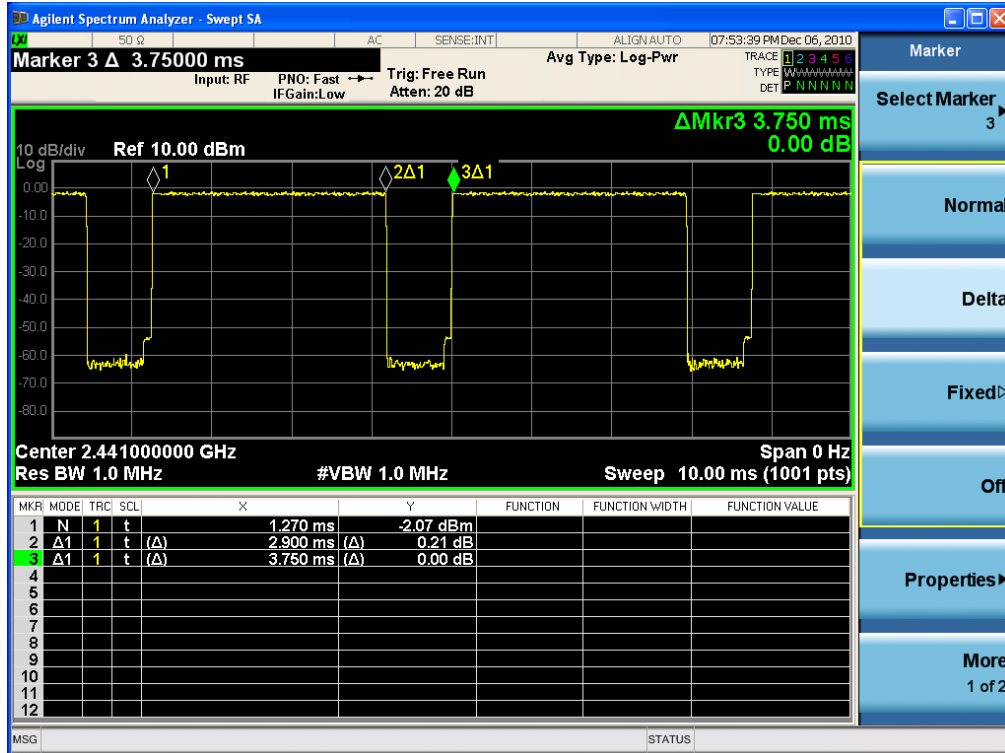

2.1.5 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz (\geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto



Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

Test Results

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| Frequency (MHz) | Channel No. | Peak output power(dBm) | Peak output power(mW) | Result |
|-----------------|-------------|------------------------|-----------------------|----------|
| 2402 | 0 | 1.863 | 1.536 | Complies |
| 2441 | 39 | 2.093 | 1.619 | Complies |
| 2480 | 78 | 2.058 | 1.606 | Complies |

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

| Frequency (MHz) | Channel No. | Peak output power(dBm) | Peak output power(mW) | Result |
|-----------------|-------------|------------------------|-----------------------|----------|
| 2402 | 0 | -0.466 | 0.898 | Complies |
| 2441 | 39 | -0.426 | 0.907 | Complies |
| 2480 | 78 | -0.709 | 0.849 | Complies |

See next pages for actual measured spectrum plots.





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Maximum peak Conducted Output Power - GFSK

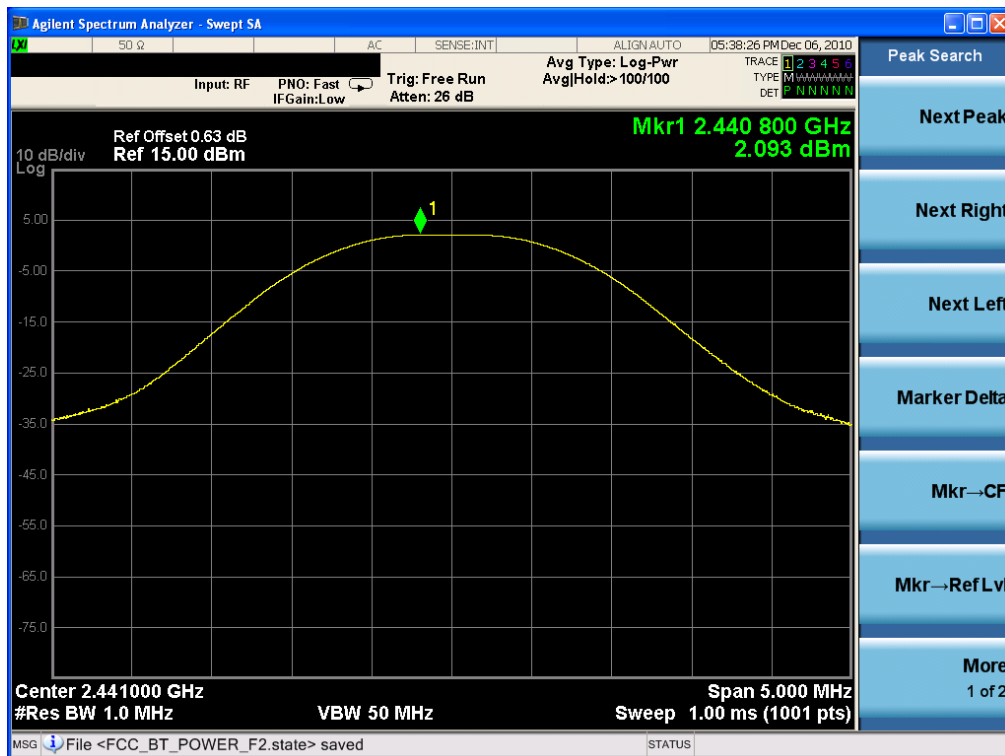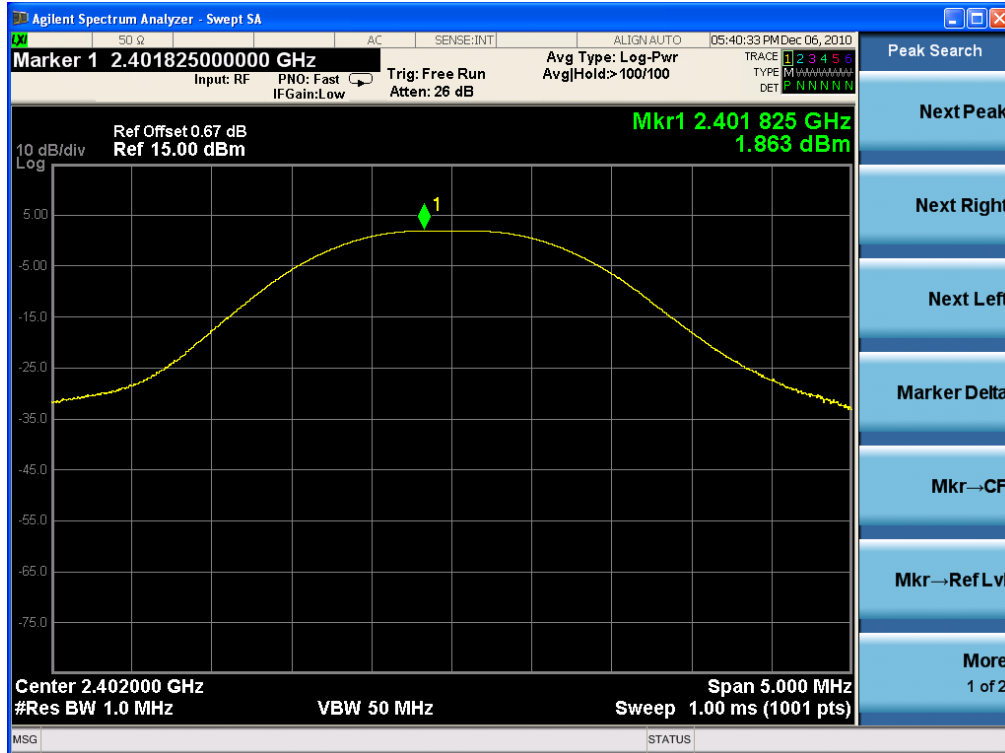




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

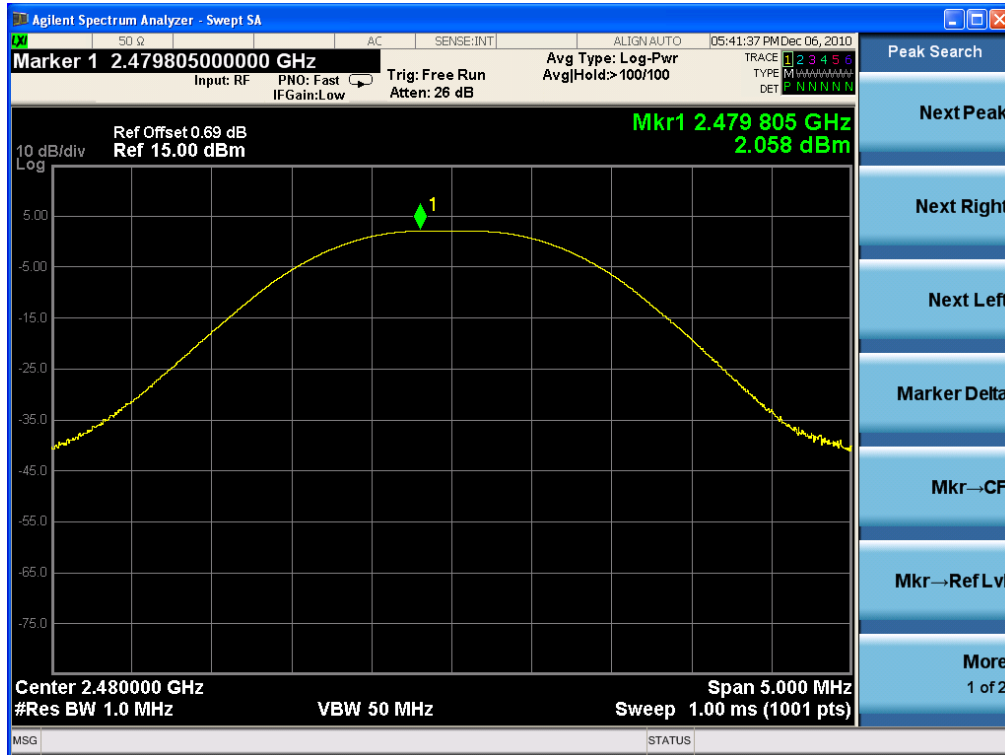





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Maximum peak Conducted Output Power - 8-DPSK

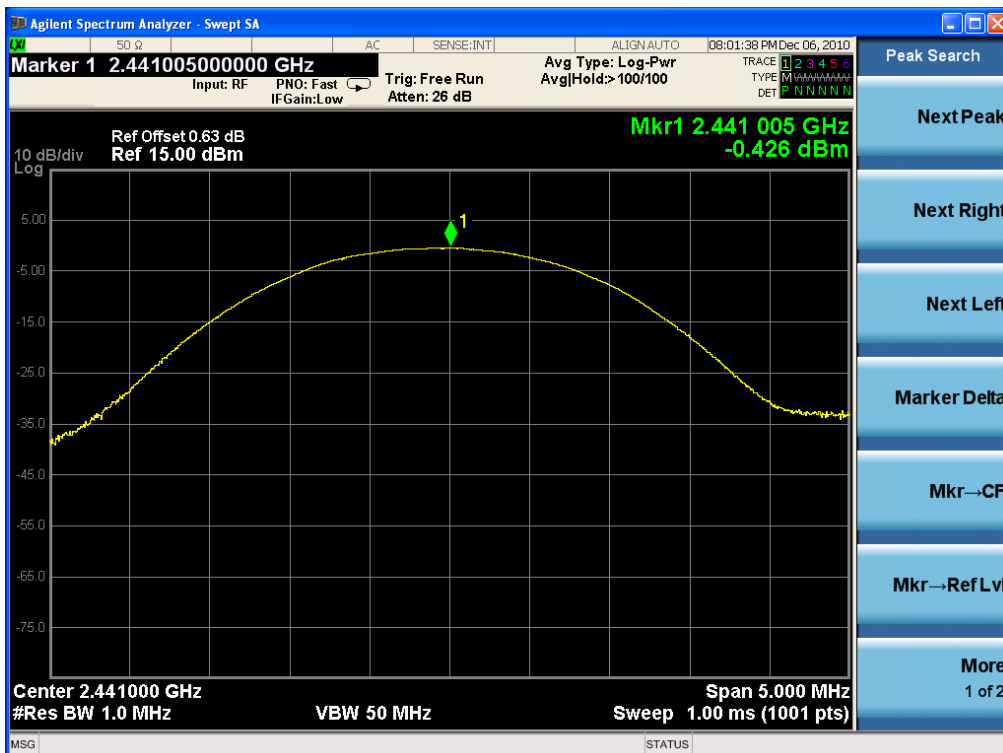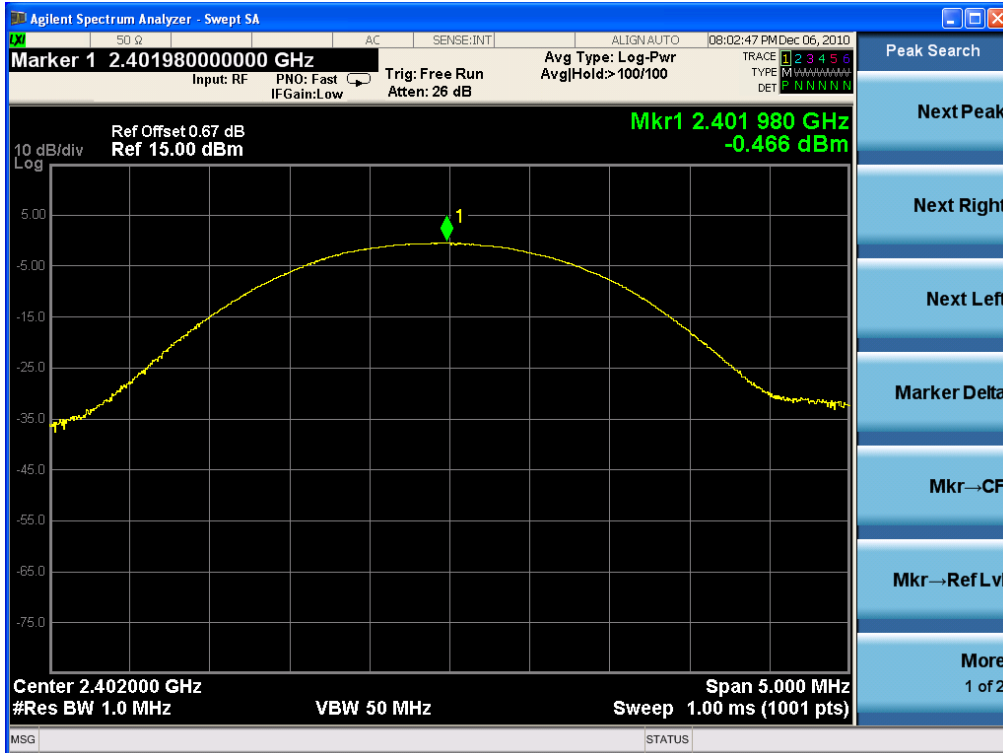




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

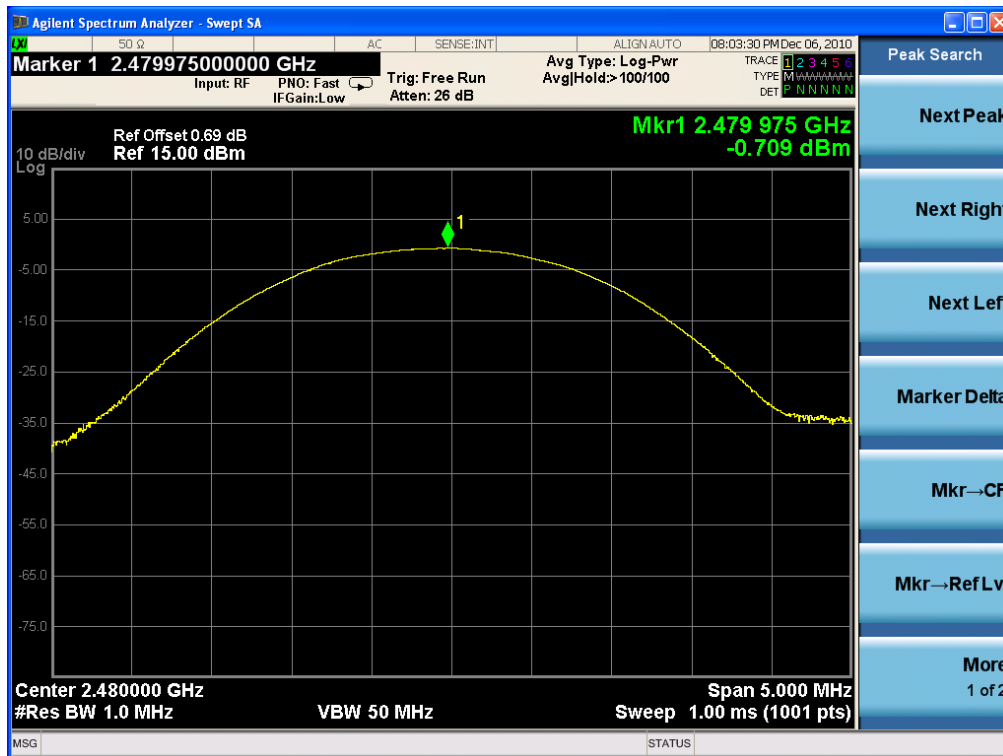

2.1.6 Band-edge

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz (\geq RBW)

Span = 10 MHz

Trace = max hold

Detector function = peak

Sweep = auto



Limit

> 20 dBc

Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (with Hopping) - GFSK

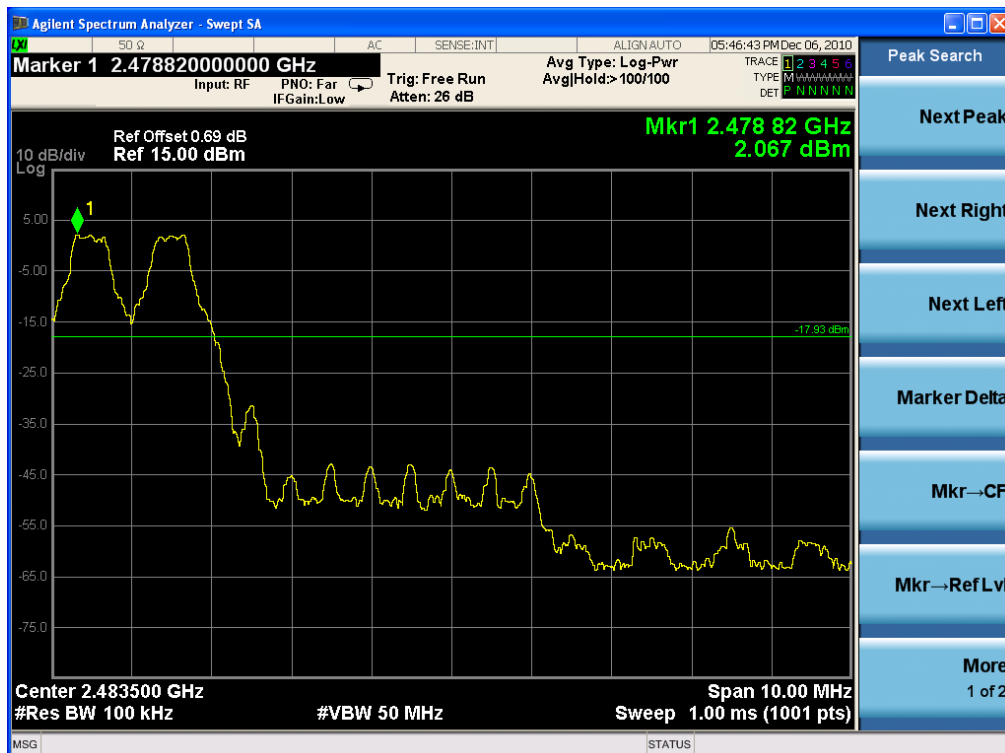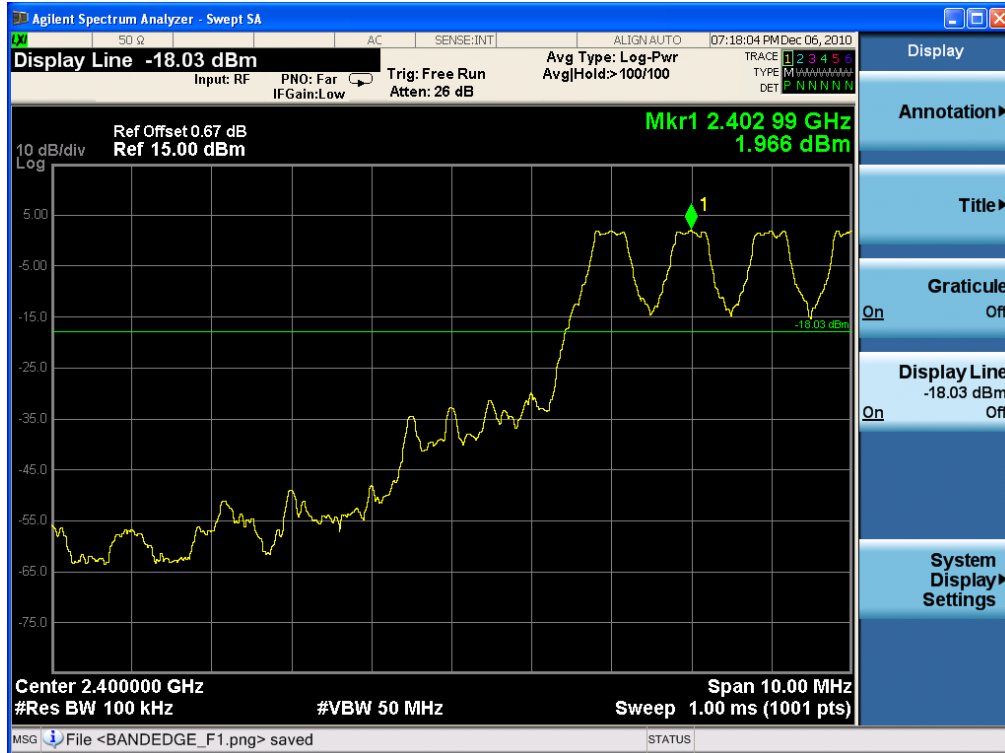




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (with Hopping) - 8-DPSK

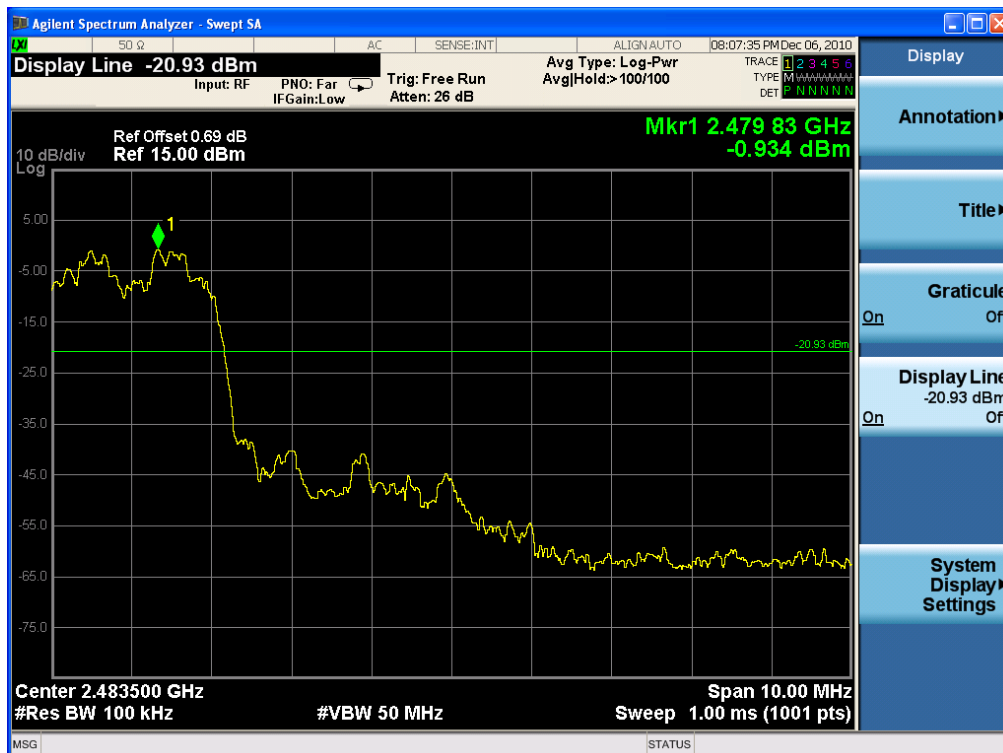





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (without Hopping) - GFSK

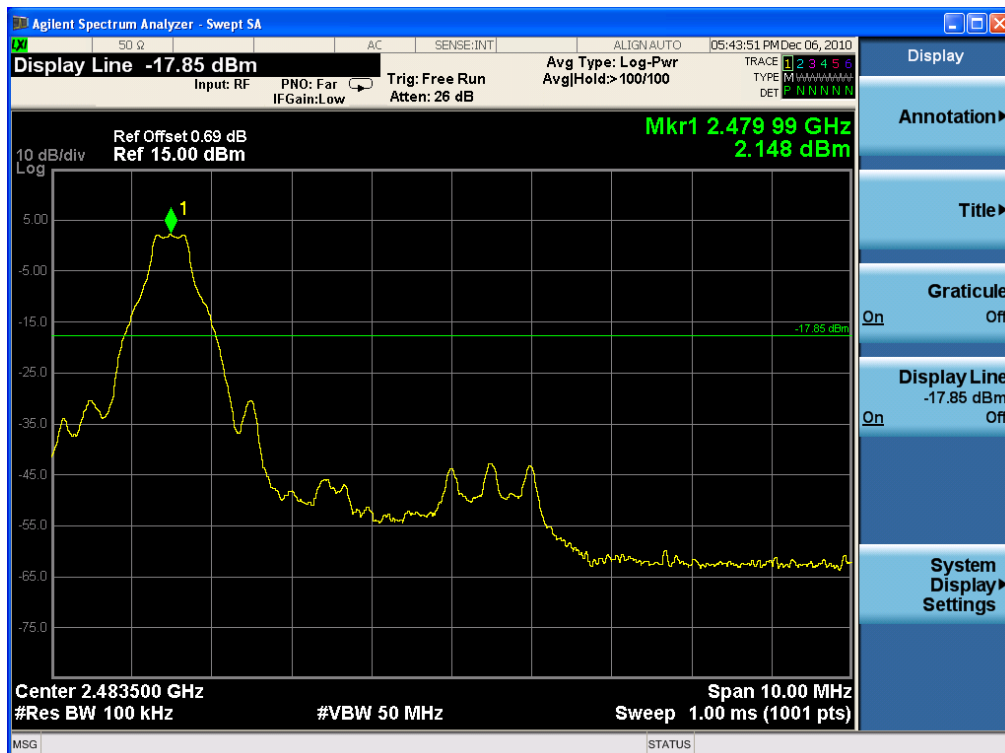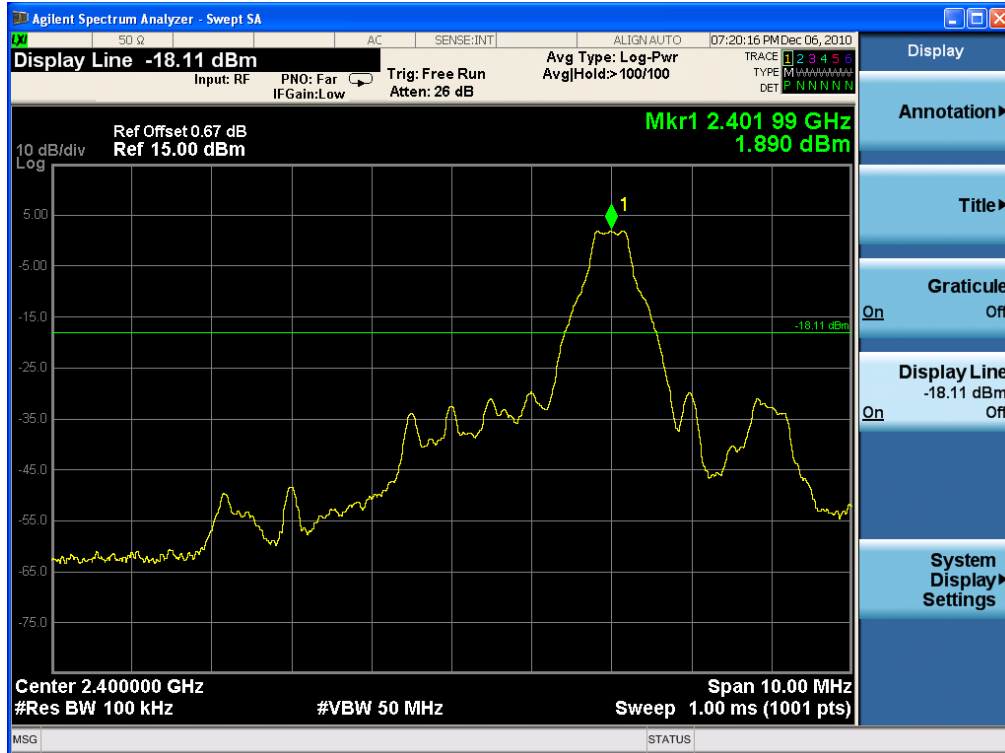





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (without Hopping) - 8-DPSK

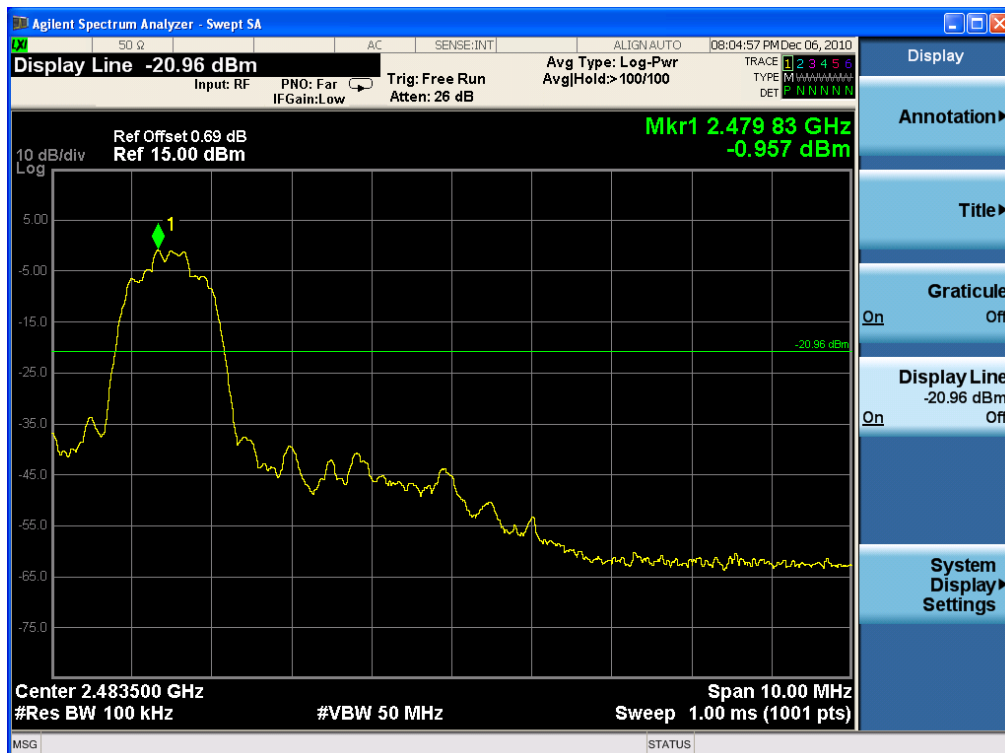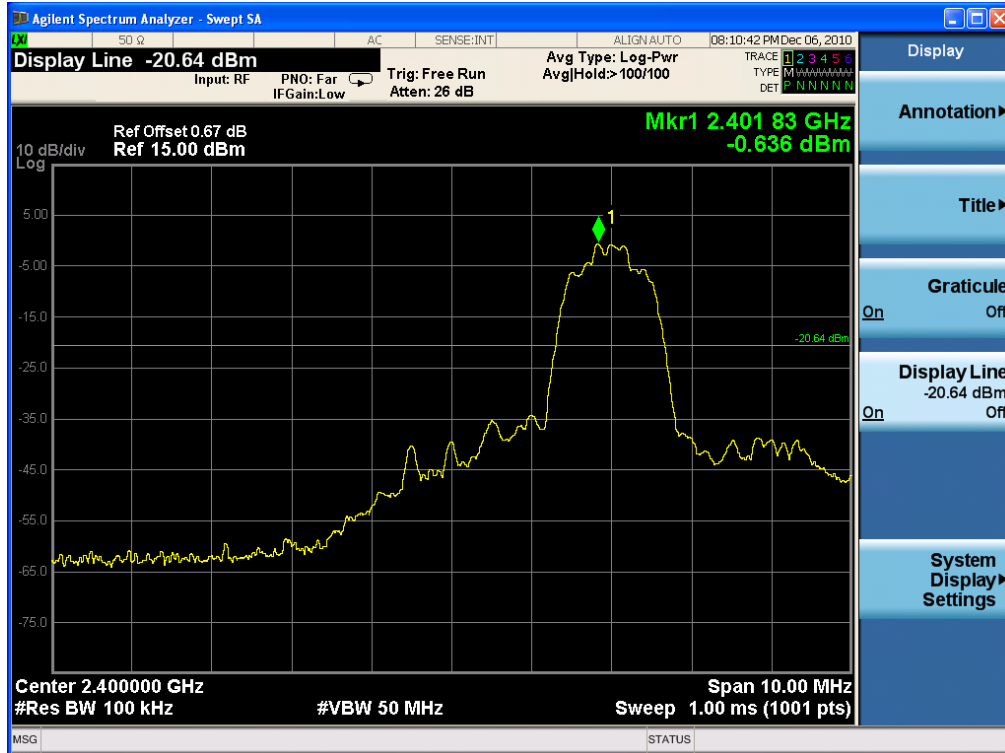




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – High channel
Frequency Range = 30 MHz ~ 10th harmonic
(GFSK : Worst-Case)

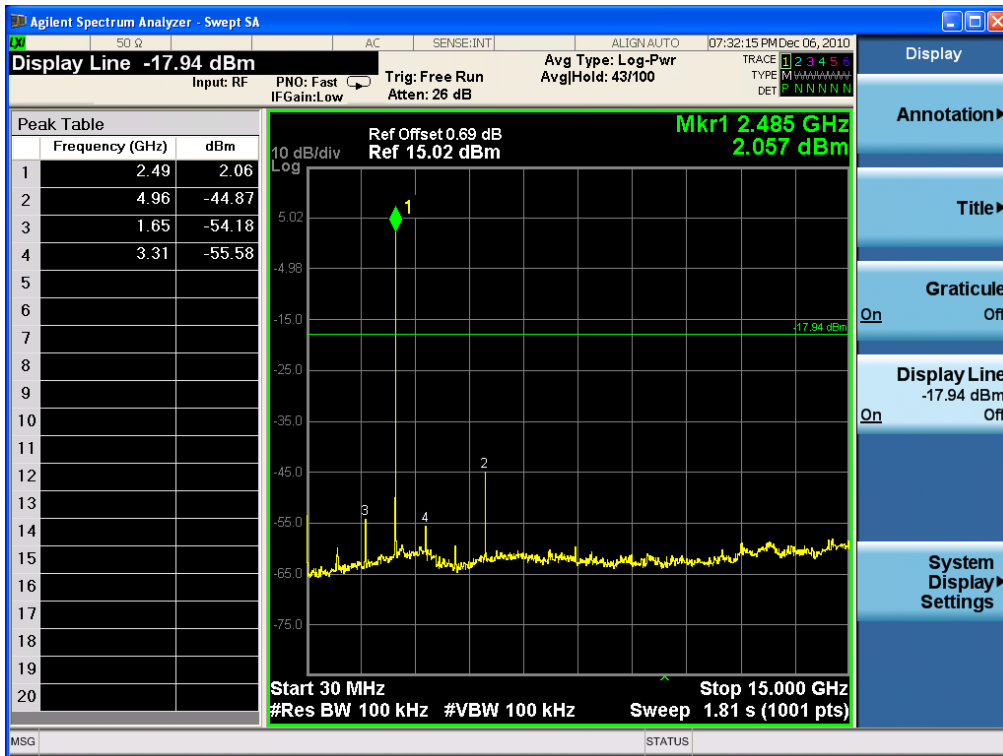

2.1.7 Field Strength of Emissions

Test Location

☒ Testing was performed at a test distance of 3 meter Open Area Test Site

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic


RBW = 120 kHz (30 MHz ~ 1 GHz) VBW ≥ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Detector function = Quasi-peak

Trace = max hold

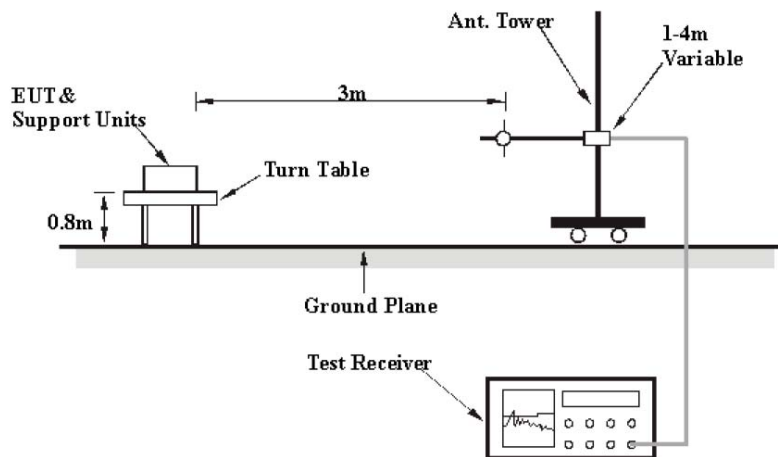

Limit

- 15.209(a)

| Frequency(MHz) | Field Strength uV/m@3m | Field Strength dBuV/m@3m |
|----------------|------------------------|--------------------------|
| 30-88 | 100** | 40 |
| 88-216 | 150** | 43.5 |
| 216-960 | 200** | 46 |
| Above 960 | 500 | 54 |

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Test Results

Test mode : Hopping(GFSK), CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| | | | |
|-----------|-------------------|--------------------|---------------|
| EUT | Industrial PDA | Measurement Detail | |
| Model | STM-7700 | Frequency Range | Below 1000MHz |
| Test mode | GFSK (Worst case) | Detector function | Quasi-Peak |

The requirements are:

☒ Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|--------------------|---------------------------|----------------|------------|
| 197.36 | 37.6 | 5.9 | Quasi-peak |

Test Data

| Frequency [MHz] | Reading [dBμV/m] | Pol. | Height [m] | Correction Factor | | | Limits [dBμV/m] | Result [dBμV/m] | Margin [dB] |
|--------------------|---------------------|------|---------------|----------------------|-------|-----------|--------------------|--------------------|----------------|
| | | | | Antenna | Cable | Amp. Gain | | | |
| 88.29 | 58.4 | V | 1.2 | 8.9 | 0.7 | 31.4 | 43.5 | 36.6 | 6.9 |
| 197.36 | 59.8 | H | 2.3 | 7.6 | 1.5 | 31.3 | 43.5 | 37.6 | 5.9 |
| 202.29 | 59.2 | V | 1.0 | 7.8 | 1.6 | 31.3 | 43.5 | 37.3 | 6.2 |
| 272.56 | 54.7 | V | 1.1 | 10.5 | 2.1 | 31.3 | 46.0 | 36.0 | 10.0 |
| 718.75 | 45.9 | H | 2.0 | 18.8 | 4.0 | 31.3 | 46.0 | 37.4 | 8.6 |
| 750.21 | 46.9 | V | 1.5 | 19.3 | 4.1 | 31.3 | 46.0 | 39.0 | 7.0 |

H : Horizontal, V : Vertical

Result = Reading + Antenna + Cable - Amp.Gain

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| | | | |
|-----------|-------------------|--------------------|---------|
| EUT | Industrial PDA | Measurement Detail | |
| Model | STM-7700 | Frequency Range | 1-25GHz |
| Channel | Channel 0 | Detector function | Peak |
| Test Mode | GFSK (Worst case) | | |

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|----------------|
| 4804.00 | 51.5 / 60.6 | 2.5 / 13.4 | Average / Peak |

Test Data

| Frequency [MHz] | Reading [dBuV/m] AV / Peak | | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] AV / Peak | | Result [dBuV/m] AV / Peak | | Margin [dB] AV / Peak | |
|-----------------|-------------------------------|------|------|------------|-------------------|-----------|-------|------------------------------|------|------------------------------|------|--------------------------|------|
| | | | | | Antenna | Amp. Gain | Cable | | | | | | |
| 4804.00 | 42.3 | 51.4 | V | 1.1 | 32.7 | 34.9 | 11.4 | 54.0 | 74.0 | 51.5 | 60.6 | 2.5 | 13.4 |
| 7206.00 | 32.1 | 40.7 | V | 1.0 | 37.7 | 34.8 | 14.3 | 54.0 | 74.0 | 49.3 | 57.9 | 4.7 | 16.1 |

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency [MHz] | Reading [dBuV/m] AV / Peak | | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] AV / Peak | | Result [dBuV/m] AV / Peak | | Margin [dB] AV / Peak | |
|-----------------|-------------------------------|------|------|------------|-------------------|-----------|-------|------------------------------|------|------------------------------|------|--------------------------|------|
| | | | | | Antenna | Amp. Gain | Cable | | | | | | |
| 2388.00 | 45.9 | 56.4 | V | 1.1 | 28.2 | 35.3 | 7.4 | 54.0 | 74.0 | 46.2 | 56.7 | 7.8 | 17.3 |



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| | | | |
|-----------|-------------------|--------------------|---------|
| EUT | Industrial PDA | Measurement Detail | |
| Model | STM-7700 | Frequency Range | 1-25GHz |
| Channel | Channel 39 | Detector function | Peak |
| Test Mode | GFSK (Worst case) | | |

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|----------------|
| 4882.00 | 50.9 / 58.0 | 3.1 / 16.0 | Average / Peak |

Test Data

| Frequency [MHz] | Reading [dBuV/m] AV / Peak | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] AV / Peak | Result [dBuV/m] AV / Peak | Margin [dB] AV / Peak |
|-----------------|----------------------------|------|------------|-------------------|-----------|-------|---------------------------|---------------------------|-----------------------|
| | | | | Antenna | Amp. Gain | Cable | | | |
| 4882.00 | 41.7 48.8 | V | 1.0 | 32.7 | 34.9 | 11.4 | 54.0 74.0 | 50.9 58.0 | 3.1 16.0 |
| 7332.00 | 31.1 41.3 | V | 1.0 | 37.7 | 34.8 | 14.3 | 54.0 74.0 | 48.3 58.5 | 5.7 15.5 |

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency [MHz] | Reading [dBuV/m] | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] | Result [dBuV/m] | Margin [dB] |
|--|---------------------|------|---------------|----------------------|-----------|-------|--------------------|--------------------|----------------|
| | | | | Antenna | Amp. Gain | Cable | | | |
| No emissions were detected at a level greater than 20dB below limit. | | | | | | | | | |



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| | | | |
|-----------|-------------------|--------------------|---------|
| EUT | Industrial PDA | Measurement Detail | |
| Model | STM-7700 | Frequency Range | 1-25GHz |
| Channel | Channel 78 | Detector function | Peak |
| Test Mode | GFSK (Worst case) | | |

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|--------------------|---------------------------|----------------|----------------|
| 2483.5 | 50.0 / 57.8 | 4.0 / 16.2 | Average / Peak |

Test Data

| Frequency [MHz] | Reading [dBuV/m] AV / Peak | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] AV / Peak | Result [dBuV/m] AV / Peak | Margin [dB] AV / Peak |
|--------------------|----------------------------------|------|---------------|----------------------|-----------|-------|---------------------------------|---------------------------------|-----------------------------|
| | | | | Antenna | Amp. Gain | Cable | | | |
| 4960.00 | 27.6 / 45.8 | V | 1.0 | 32.7 | 34.9 | 11.4 | 54.0 / 74.0 | 36.8 / 55.0 | 17.2 / 19.0 |
| 7439.00 | 32.7 / 42.6 | V | 1.1 | 37.7 | 34.8 | 14.3 | 54.0 / 74.0 | 49.9 / 59.8 | 4.1 / 14.3 |

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency [MHz] | Reading [dBuV/m] AV / Peak | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] AV / Peak | Result [dBuV/m] AV / Peak | Margin [dB] AV / Peak |
|--------------------|----------------------------------|------|---------------|----------------------|-----------|-------|---------------------------------|---------------------------------|-----------------------------|
| | | | | Antenna | Amp. Gain | Cable | | | |
| 2483.50 | 49.7 / 57.5 | V | 1.1 | 28.2 | 35.3 | 7.4 | 54.0 / 74.0 | 50.0 / 57.8 | 4.0 / 16.2 |



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.1.8 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56* | 56 to 46* |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

☒ Complies

Test mode : Hopping(GFSK), CFG PKT Packet Type : 15,
Packet Size : 339(DH5), With Cradle mode

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|------------|
| 0.4515 | 44.4 | 12.4 | Quasi-peak |

Test Data

[HOT]

Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.150000 | 50.4 | 1000.0 | 9.000 | On | L1 | 10.1 | 15.6 | 66.0 |
| 0.163500 | 48.6 | 1000.0 | 9.000 | On | L1 | 10.3 | 16.7 | 65.3 |
| 0.163500 | 50.6 | 1000.0 | 9.000 | On | L1 | 10.3 | 14.7 | 65.3 |
| 0.406500 | 36.3 | 1000.0 | 9.000 | On | L1 | 10.1 | 21.4 | 57.7 |
| 0.415500 | 39.2 | 1000.0 | 9.000 | On | L1 | 10.1 | 18.3 | 57.5 |
| 0.438000 | 43.9 | 1000.0 | 9.000 | On | L1 | 10.2 | 13.2 | 57.1 |
| 9.271500 | 36.1 | 1000.0 | 9.000 | On | L1 | 9.8 | 23.9 | 60.0 |
| 18.496500 | 42.4 | 1000.0 | 9.000 | On | L1 | 9.9 | 17.6 | 60.0 |
| 21.057000 | 34.0 | 1000.0 | 9.000 | On | L1 | 10.0 | 26.0 | 60.0 |
| 29.463000 | 32.4 | 1000.0 | 9.000 | On | L1 | 10.1 | 27.6 | 60.0 |

Final Result 2

| Frequency (MHz) | Average (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.150000 | 22.9 | 1000.0 | 9.000 | On | L1 | 10.1 | 33.1 | 56.0 |
| 0.451500 | 26.8 | 1000.0 | 9.000 | On | L1 | 10.2 | 20.0 | 46.8 |
| 0.456000 | 26.5 | 1000.0 | 9.000 | On | L1 | 10.2 | 20.3 | 46.8 |
| 3.664500 | 16.0 | 1000.0 | 9.000 | On | L1 | 9.8 | 30.0 | 46.0 |
| 7.431000 | 12.4 | 1000.0 | 9.000 | On | L1 | 9.8 | 37.6 | 50.0 |
| 9.334500 | 25.7 | 1000.0 | 9.000 | On | L1 | 9.8 | 24.3 | 50.0 |
| 15.855000 | 22.2 | 1000.0 | 9.000 | On | L1 | 9.9 | 27.8 | 50.0 |
| 18.487500 | 34.7 | 1000.0 | 9.000 | On | L1 | 9.9 | 15.3 | 50.0 |
| 21.052500 | 30.0 | 1000.0 | 9.000 | On | L1 | 10.0 | 20.0 | 50.0 |
| 29.458500 | 27.1 | 1000.0 | 9.000 | On | L1 | 10.1 | 22.9 | 50.0 |

[NEUTRAL]

Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.159000 | 45.6 | 1000.0 | 9.000 | On | N | 10.2 | 19.9 | 65.5 |
| 0.163500 | 50.8 | 1000.0 | 9.000 | On | N | 10.3 | 14.5 | 65.3 |
| 0.168000 | 49.2 | 1000.0 | 9.000 | On | N | 10.3 | 15.9 | 65.1 |
| 0.217500 | 39.8 | 1000.0 | 9.000 | On | N | 10.0 | 23.1 | 62.9 |
| 0.424500 | 42.4 | 1000.0 | 9.000 | On | N | 10.1 | 15.0 | 57.4 |
| 0.433500 | 44.0 | 1000.0 | 9.000 | On | N | 10.1 | 13.2 | 57.2 |
| 0.451500 | 44.4 | 1000.0 | 9.000 | On | N | 10.2 | 12.4 | 56.8 |
| 9.334500 | 33.9 | 1000.0 | 9.000 | On | N | 9.8 | 26.1 | 60.0 |
| 18.379500 | 41.2 | 1000.0 | 9.000 | On | N | 10.0 | 18.8 | 60.0 |
| 29.791500 | 31.3 | 1000.0 | 9.000 | On | N | 10.2 | 28.7 | 60.0 |

Final Result 2

| Frequency (MHz) | Average (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.150000 | 23.9 | 1000.0 | 9.000 | On | N | 10.1 | 32.1 | 56.0 |
| 0.442500 | 20.9 | 1000.0 | 9.000 | On | N | 10.1 | 26.1 | 47.0 |
| 0.451500 | 21.5 | 1000.0 | 9.000 | On | N | 10.2 | 25.3 | 46.8 |
| 3.696000 | 16.8 | 1000.0 | 9.000 | On | N | 9.8 | 29.2 | 46.0 |
| 7.422000 | 18.8 | 1000.0 | 9.000 | On | N | 9.8 | 31.2 | 50.0 |
| 9.361500 | 25.2 | 1000.0 | 9.000 | On | N | 9.8 | 24.8 | 50.0 |
| 15.841500 | 22.2 | 1000.0 | 9.000 | On | N | 9.9 | 27.8 | 50.0 |
| 18.483000 | 35.4 | 1000.0 | 9.000 | On | N | 10.0 | 14.6 | 50.0 |
| 21.052500 | 29.5 | 1000.0 | 9.000 | On | N | 10.0 | 20.5 | 50.0 |
| 29.481000 | 27.5 | 1000.0 | 9.000 | On | N | 10.2 | 22.5 | 50.0 |



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

[Hot]

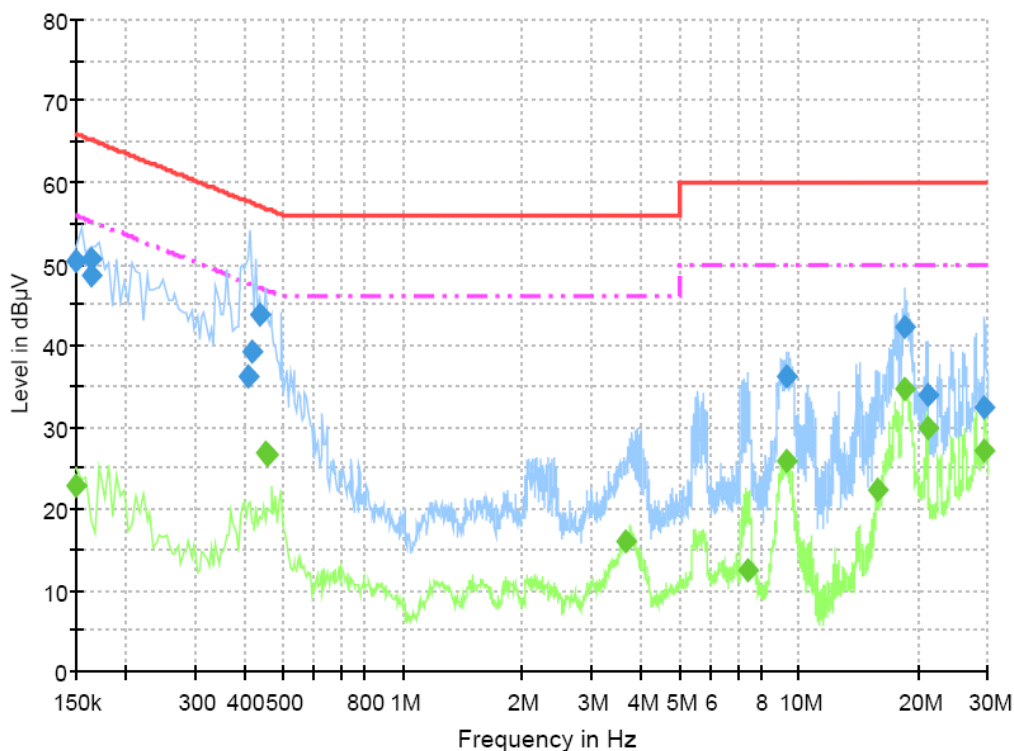

[NEUTRAL]

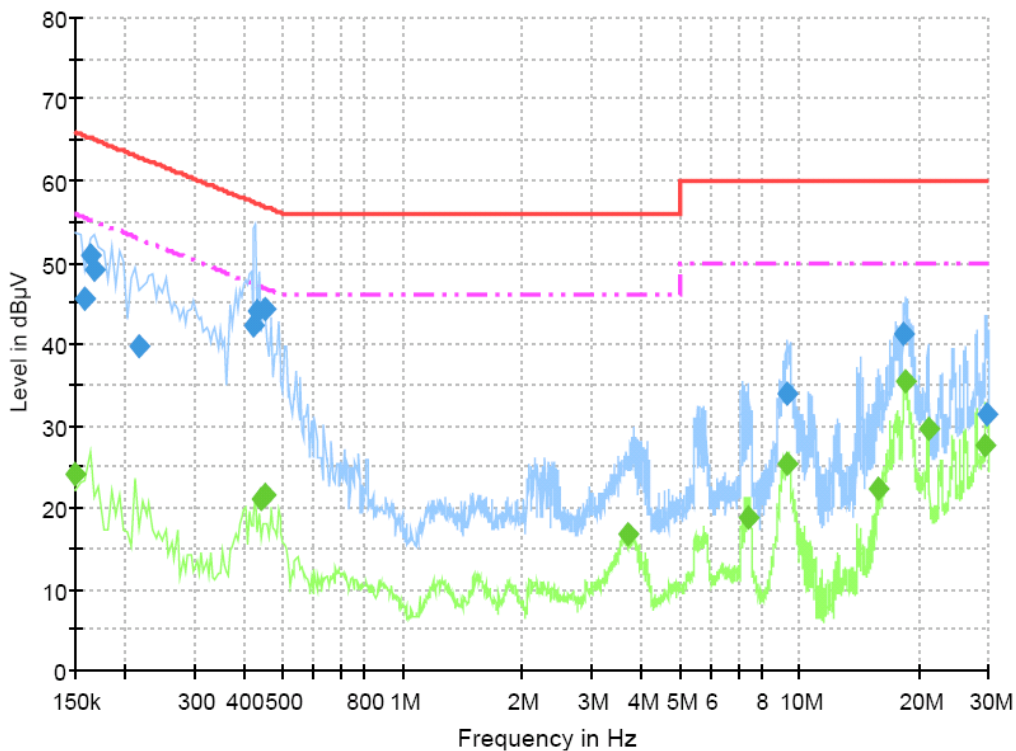



CTK Co., Ltd.

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

| | Name of Equipment | Manufacturer | Model No. | Serial No. | Due Date |
|----|-------------------------------|-----------------|-----------|--------------|------------|
| 1 | Signal Analyzer | Agilent | N9020A | MY48011598 | 2011-11-12 |
| 2 | Spectrum Analyzer | Rohde & Schwarz | FSP-30 | 100994 | 2011-11-12 |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESVS30 | 826638/008 | 2011-07-12 |
| 4 | ULTRA Broadband Antenna | Rohde & Schwarz | HL562 | 361324/014 | 2011-11-18 |
| 5 | LOOP ANTENNA | EMCO | 6502 | 9107-2652 | 2012-10-29 |
| 6 | Attenuator | HP | 8498A | 1801A06913 | 2011-11-15 |
| 7 | EPM Series Power Meter | HP | E4418A | GB38272734 | 2011-11-12 |
| 8 | Power Sensor | HP | 8487A | 3318A03524 | 2011-07-12 |
| 9 | Audio Analyzer | HP | 8903B | 2747A03432 | 2011-11-12 |
| 10 | ESG-D Series Signal Generator | Agilent | E4432B | US40054094 | 2011-11-12 |
| 11 | SYNTHESIZED SWEEPER | HP | 8341B | 2819A01563 | 2011-11-12 |
| 12 | Modulation Analyzer | HP | 8901B | 3438A05228 | 2011-11-16 |
| 13 | Attenuator | HP | 8494A | 3308A33351 | 2011-11-15 |
| 14 | Temp&Humi Chamber | Kunpoong | KP-1000 | 2002KP050041 | 2011-01-25 |
| 15 | DC POWER SUPPLY | Agilent | E3632A | MY40011638 | 2011-11-12 |
| 16 | EMC Analyzer | Agilent | E7405A | MY45110859 | 2011-01-25 |
| 17 | Horn Antenna | ETS-Lindgren | 3115 | 00078894 | 2010-12-18 |
| 18 | Horn Antenna | ETS-Lindgren | 3115 | 00078895 | 2010-12-18 |
| 19 | Dipole Antenna | SCHWARZBECK | VHA 9103 | VHA91032557 | 2011-09-18 |
| 20 | Dipole Antenna | SCHWARZBECK | UHA 9105 | UHA91052417 | 2011-09-18 |
| 21 | OPT H64 AMPLIFIER | HP | 8447F | 3113A06814 | 2011-03-31 |
| 22 | PREAMPLIFIER | Agilent | 8449B | 3008A02307 | 2011-11-16 |
| 23 | Radio Communication Tester | Rohde & Schwarz | CMU200 | 106765 | 2011-02-23 |
| 24 | Field Strength Meter | Rohde & Schwarz | ESHS30 | 862024/001 | 2011-03-08 |
| 25 | LISN | Rohde & Schwarz | ESH3-Z5 | 100207 | 2011-11-15 |
| 26 | LISN | Rohde & Schwarz | ENV216 | 101151 | 2011-02-27 |
| 27 | DC POWER SUPPLY | Agilent | E3632A | MY40011638 | 2011-11-12 |
| 28 | EMI Test Receiver | Rohde & Schwarz | ESCI3 | 100032 | 2011-01-27 |