

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Polk Audio

SURROUNDBAR 6500BT

Model Number: SB6500BT SPEAKER

FCC ID: WLQSB5000CDTX

Prepared for : Polk Audio

5601 Metro Drive, Baltimore, Maryland, United States, 21215

Prepared By : EST Technology Co., Ltd.

Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.

Tel: 86-769-83081888-808

Report Number: ESTE-R1309004




Date of Test : August 20~ 31, 2013

Date of Report : September 07, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
2. SUMMARY OF TEST	5
2.1. Summary of test result.....	5
2.2. Test Facilities	6
2.3. Assistant equipment used for test.....	7
2.4. Block Diagram	7
2.5. Test mode	8
2.6. Channel List for Bluetooth.....	8
2.7. Test Equipment.....	9
3. RADIATED EMISSIONS.....	10
3.1. Limit	10
3.2. Block Diagram of Test setup.....	11
3.3. Test Procedure	11
3.4. Test Result.....	11
3.5. Test Data	12
4. BAND EDGE COMPLIANCE	48
4.1. Limit	48
4.2. Block Diagram of Test setup.....	48
4.3. Test Procedure	48
4.4. Test Result.....	48
4.5. Test Data	49
5. POWER LINE CONDUCTED EMISSIONS	65
5.1. Limit	65
5.2. Test Procedure.....	65
6. TEST SETUP PHOTO.....	68
7. PHOTOS OF EUT	70

Test Report Verification

Applicant:	Polk Audio		
Address:	5601 Metro Drive, Baltimore, Maryland, United States, 21215		
Manufacturer	Polk Audio		
Address:	5601 Metro Drive, Baltimore, Maryland, United States, 21215		
E.U.T:	SURROUNDBAR 6500BT		
Model Number:	SB6500BT SPEAKER		
Power Supply:	DC 24V From Adapter Input AC 100-240V~50/60Hz		
Test Voltage:	DC 24V From Adapter Input AC 120V/60Hz		
Trade Name:	Polk	Serial No.:	-----
Date of Receipt:	August 20, 2013	Date of Test:	August 20~31, 2013
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2012 ANSI C63.4:2009		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the ETSI EN FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p style="text-align: right;">This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: September 07, 2013</p>		
Prepared by:	Tested by:	Approved by:	
			
_____ Ada / Assistant	_____ Tony.Tang/ Engineer	_____ IcemanHu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	: SURROUNDBAR 6500BT
Model Number	: SB6500BT SPEAKER
FCC ID	: WLQSB5000CDTX
Operation frequency	: 2402MHz~2480MHz
Number of channel	: 79
Antenna	: Internal antenna, 0 dBi gain
Modulation	: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Power Supply	: DC 24V From Adapter Input AC 120V/60Hz
Sample Type	: Prototype production
Note	: The EUT Have a NFC module, it's only have receiver function

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	N/A
20dB Bandwidth	FCC Part 15: 15.215 DA 00-705	N/A
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	N/A
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	N/A
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	N/A
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4: 2003 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4: 2003 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	N/A
Note: Because the transmitter module it self has not changed. So relevant test needn't re-tested, Test data refer to test report "ESTE-R1307006".		

2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: October 28, 2011 Certificated by FCC, USA Registration No.: 989591 Date of registration: December 07, 2010 Certificated by Industry Canada Registration No.: 46405-9405 Date of registration: December 16, 2010 Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011 Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China


2.3. Assistant equipment used for test

2.3.1. Adapter

M/N	:	S065BP2400250	
Input	:	AC 100-240V~50/60Hz	1800mA Max
Output	:	DC 24V/2500mA	

2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by software before test.



(EUT: SURROUNDBAR 6500BT)

2.5. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.6. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.7. Test Equipment

2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	May,30,13	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	May,30,13	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	July,24,13	1 Year

2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	May,30,13	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	May,30,13	1 Year
Bilog Antenna	Teseq	CBL 6111D	25872	Nov,08,12	1.5 Year
Signal Amplifier	Agilent	310N	187037	July,24,13	1 Year

2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Temperature controller	Terchy	MHQ	120	May,08,13	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	May,08,13	1 Year
Vector Signal Generator	R&S	SMBV100A	1407.6004K02	May,08,13	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Jan,16,13	2 Year
Double Ridged Horn Antenna	R&S	HF907	100268	Jan,16,13	2 Year
Log-periodic Dipole Antenna	R&S	HL223	100435	Jan,16,13	2 Year
Biconical Antenna	R&S	HK116	100431	Jan,16,13	2 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-462	Jan,16,13	2 Year
Pre-amplifier	AH	PAM-0118	10008	May,08,13	1 Year
Pre-amplifier	R&S	SCU-01	10049	May,08,13	1 Year
High Pass filter	Micro	HPM50111	324455	May,08,13	1 Year
RF Cable	Hubersuhner	W10.02	534096	May,08,13	1 Year
RF Cable	Hubersuhner	W10.02	534123	May,08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	May,08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	523455	May,08,13	1 Year

3. RADIATED EMISSIONS

3.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

3.2. Block Diagram of Test setup

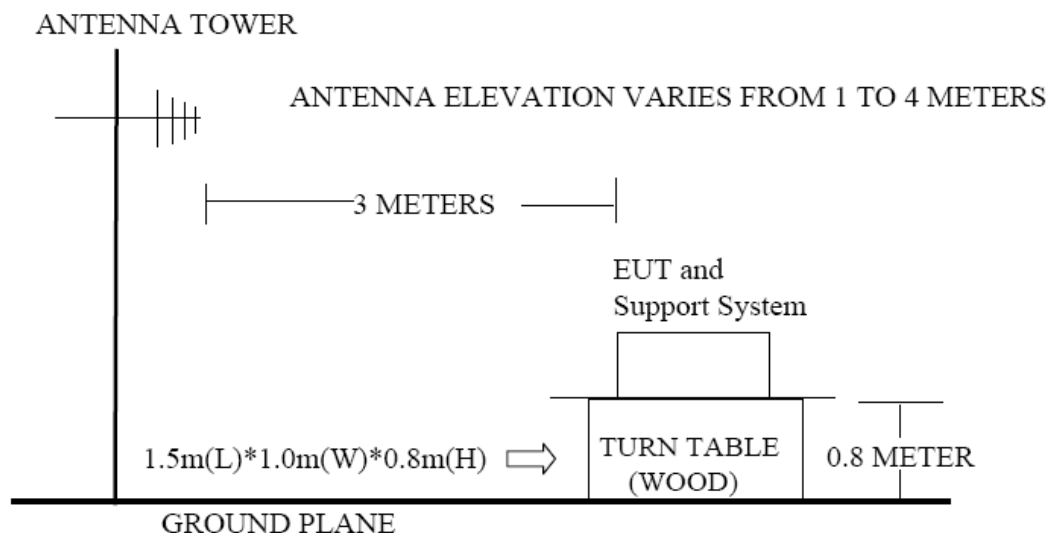

3.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

3.4. Test Result


30MHz—25GHz Radiated emissison Test result	
EUT: SURROUNDBAR 6500BT	
M/N: SB6500BT SPEAKER	
Power: DC 24V From Adapter Input AC 120V/60Hz	
Test date: 2013-08-23~27 Test site: 3m Chamber Tested by: Tony Tang	
Test mode: Tx Mode	
Pass	

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


3.5. Test Data

30 MHz – 1000 MHz

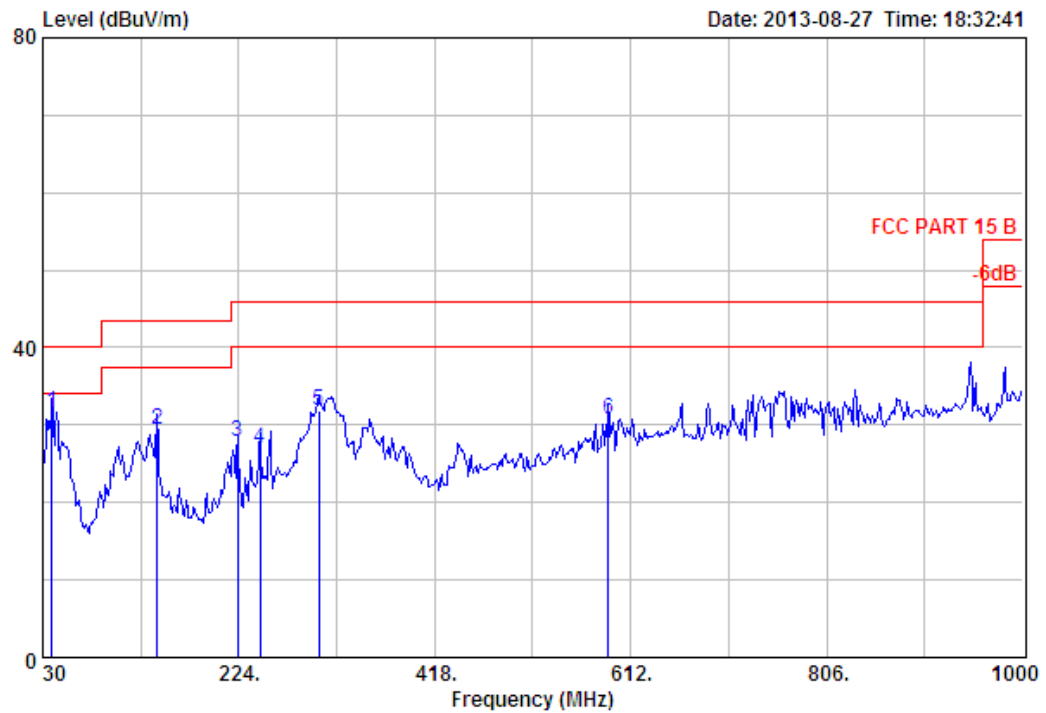


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	38.73	13.48	2.10	15.96	31.54	40.00	8.46	QP
2	143.49	11.29	3.71	14.48	29.48	43.50	14.02	QP
3	223.03	9.37	4.47	13.99	27.83	46.00	18.17	QP
4	245.34	11.06	4.77	11.20	27.03	46.00	18.97	QP
5	303.54	13.08	5.27	13.59	31.94	46.00	14.06	QP
6	589.69	19.43	7.29	4.06	30.78	46.00	15.22	QP

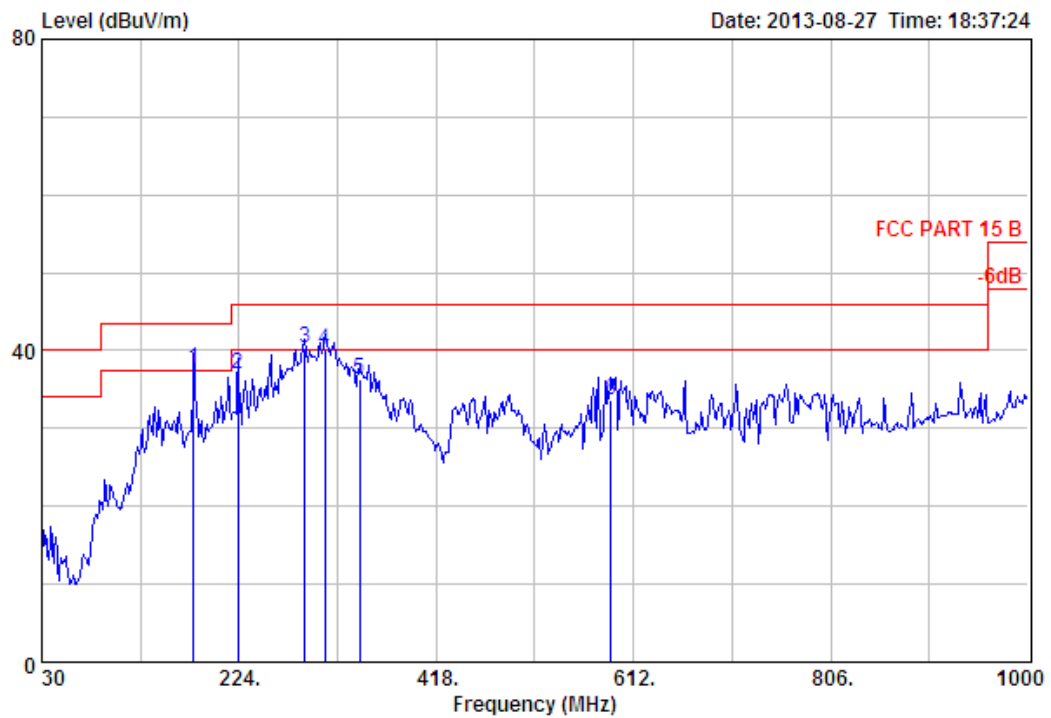


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	179.38	8.96	4.11	24.60	37.67	43.50	5.83	QP
2	223.03	9.37	4.47	23.21	37.05	46.00	8.95	QP
3	288.99	12.70	5.16	22.54	40.40	46.00	5.60	QP
4	308.39	13.17	5.30	21.58	40.05	46.00	5.95	QP
5	342.34	14.22	5.62	16.38	36.22	46.00	9.78	QP
6	589.69	19.43	7.29	6.90	33.62	46.00	12.38	QP

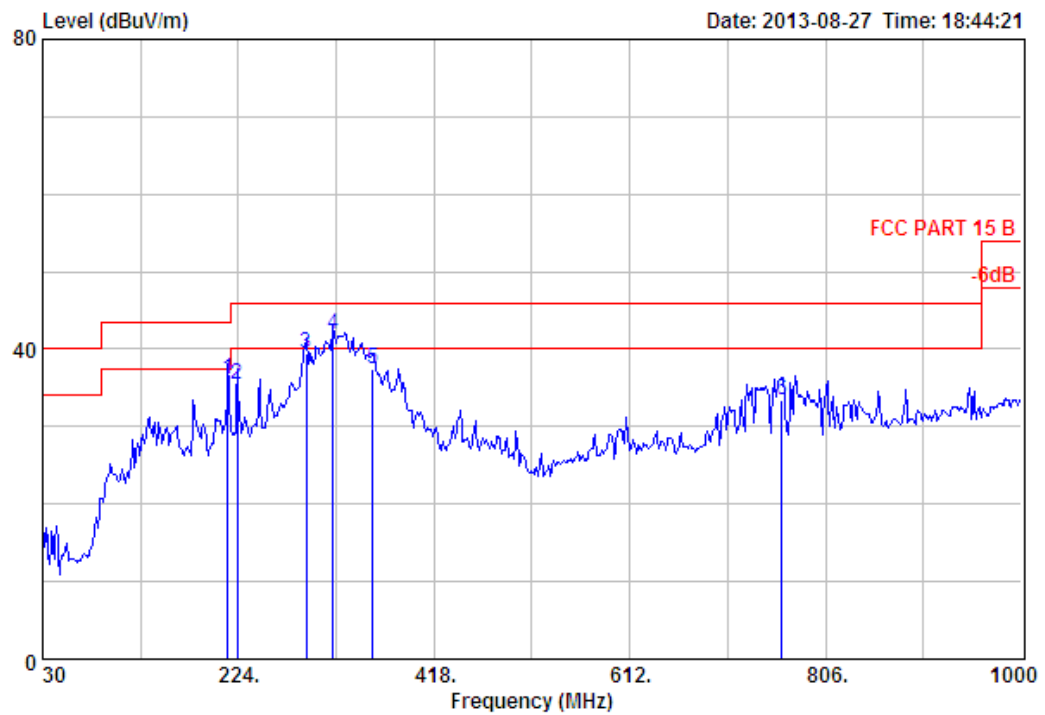


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2441MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	213.33	8.60	4.35	23.09	36.04	43.50	7.46	QP
2	223.03	9.37	4.47	21.63	35.47	46.00	10.53	QP
3	290.93	12.78	5.17	21.46	39.41	46.00	6.59	QP
4	318.09	13.50	5.36	23.07	41.93	46.00	4.07	QP
5	356.89	14.46	5.72	17.31	37.49	46.00	8.51	QP
6	762.35	22.04	8.47	2.91	33.42	46.00	12.58	QP

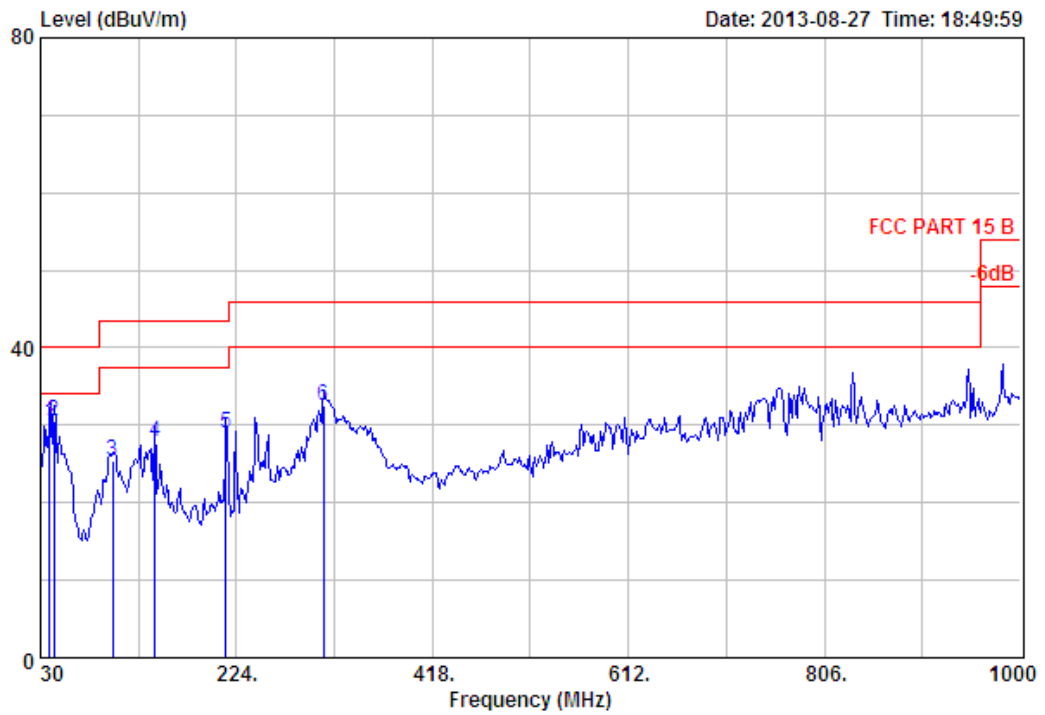


Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2441MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	38.73	13.48	2.10	14.78	30.36	40.00	9.64	QP
2	43.58	10.52	2.21	17.70	30.43	40.00	9.57	QP
3	101.78	9.65	3.07	12.71	25.43	43.50	18.07	QP
4	143.49	11.29	3.71	12.81	27.81	43.50	15.69	QP
5	213.33	8.60	4.35	16.00	28.95	43.50	14.55	QP
6	310.33	13.20	5.32	14.05	32.57	46.00	13.43	QP

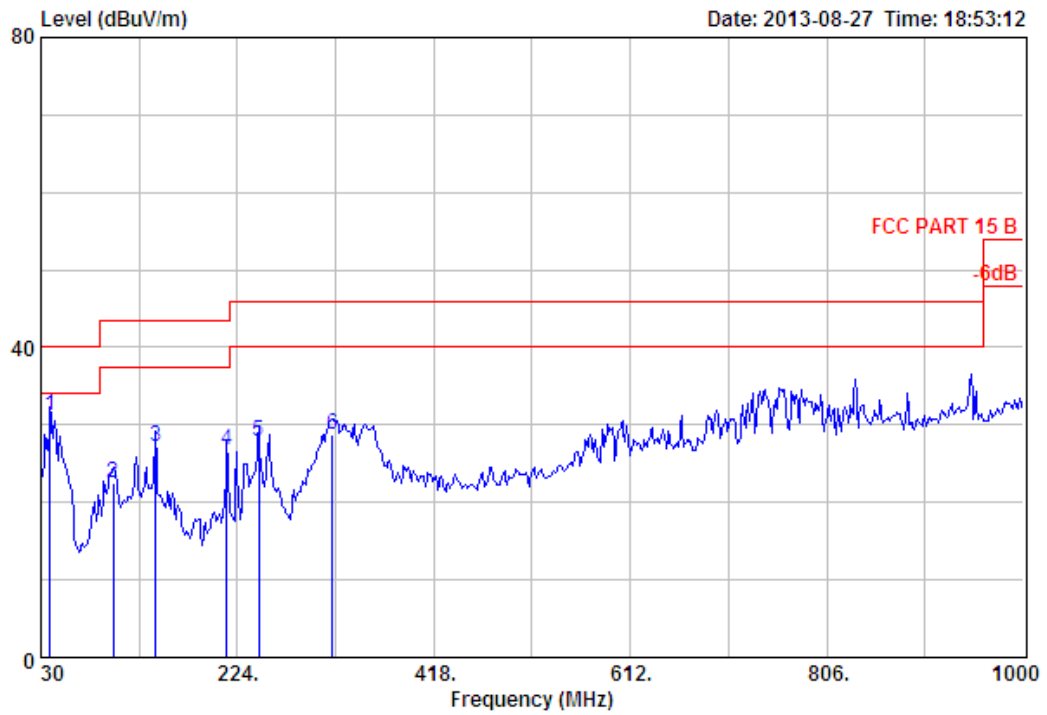


Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	38.73	13.48	2.10	15.65	31.23	40.00	8.77	QP
2	101.78	9.65	3.07	9.80	22.52	43.50	20.98	QP
3	143.49	11.29	3.71	12.16	27.16	43.50	16.34	QP
4	213.33	8.60	4.35	13.86	26.81	43.50	16.69	QP
5	245.34	11.06	4.77	12.07	27.90	46.00	18.10	QP
6	318.09	13.50	5.36	9.83	28.69	46.00	17.31	QP

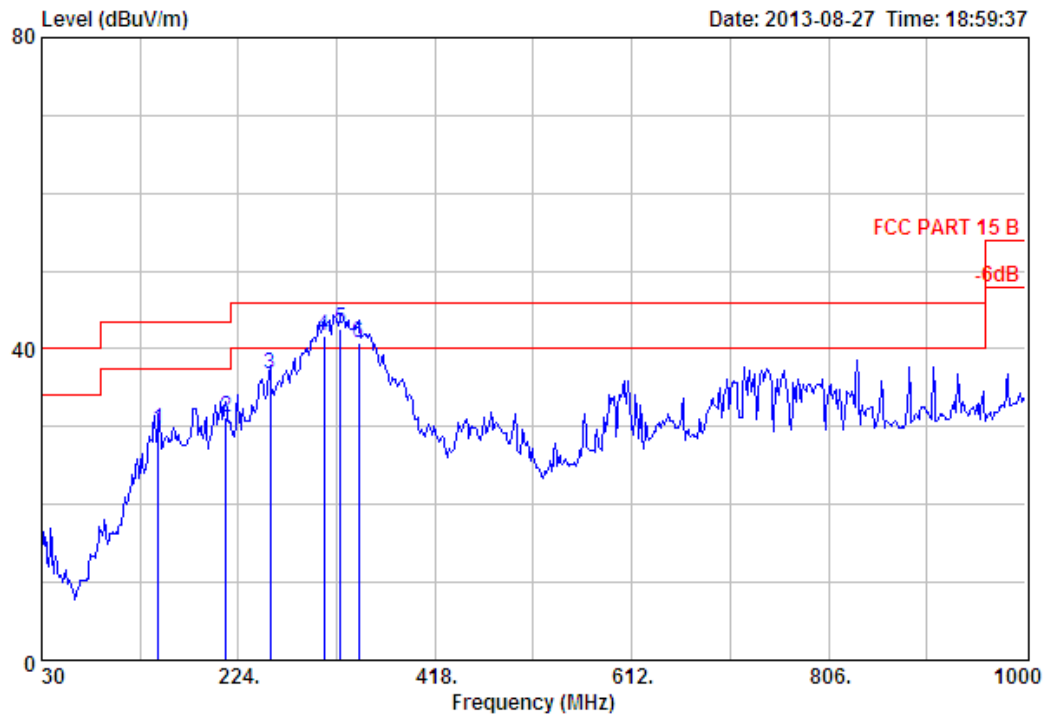


Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	145.43	11.22	3.73	14.67	29.62	43.50	13.88	QP
2	211.39	8.51	4.34	18.46	31.31	43.50	12.19	QP
3	255.04	12.41	4.87	19.49	36.77	46.00	9.23	QP
4	308.39	13.17	5.30	23.29	41.76	46.00	4.24	QP
5	324.88	13.71	5.43	23.47	42.61	46.00	3.39	QP
6	342.34	14.22	5.62	20.90	40.74	46.00	5.26	QP

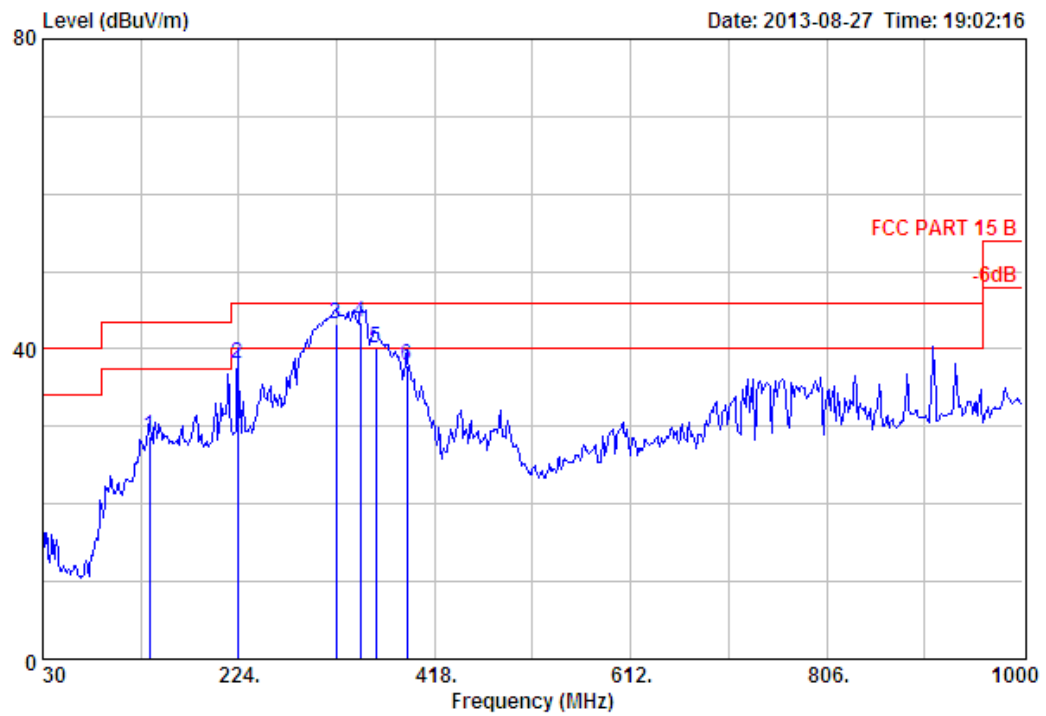


Site no. : 3m Chamber Data no. : 107
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	13.78	28.76	43.50	14.74	QP
2	223.03	9.37	4.47	24.27	38.11	46.00	7.89	QP
3	320.03	13.57	5.37	24.34	43.28	46.00	2.72	QP
4	344.28	14.28	5.63	23.62	43.53	46.00	2.47	QP
5	359.80	14.45	5.74	19.97	40.16	46.00	5.84	QP
6	390.84	15.65	5.88	16.39	37.92	46.00	8.08	QP

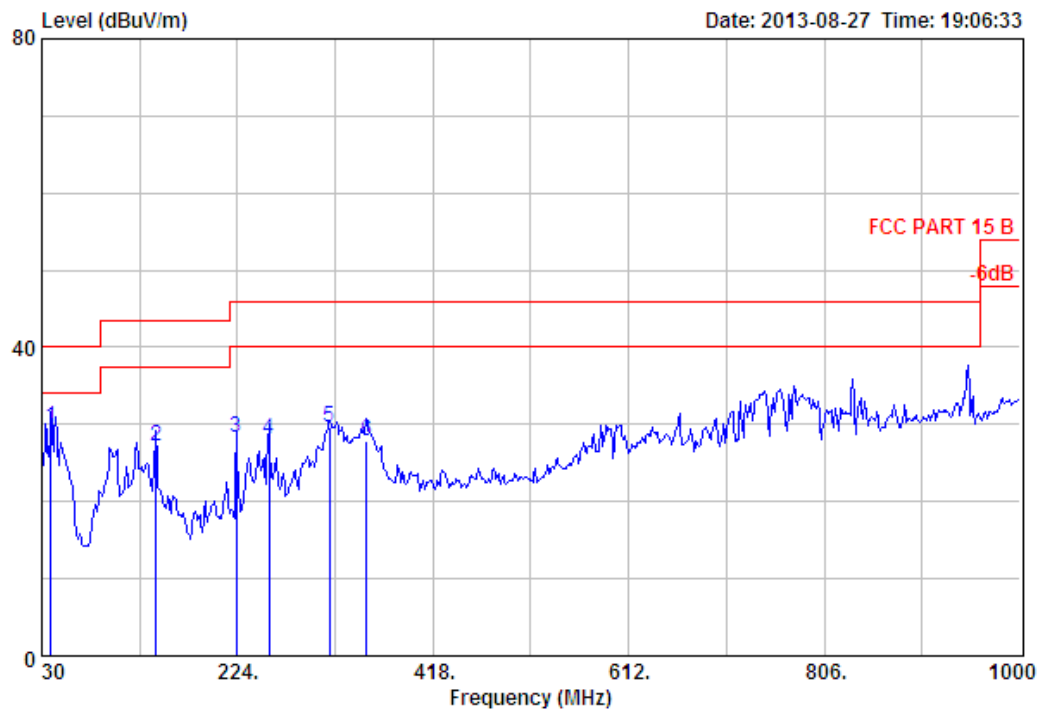


Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	38.73	13.48	2.10	14.11	29.69	40.00	10.31	QP
2	143.49	11.29	3.71	12.26	27.26	43.50	16.24	QP
3	223.03	9.37	4.47	14.35	28.19	46.00	17.81	QP
4	255.04	12.41	4.87	10.83	28.11	46.00	17.89	QP
5	315.18	13.39	5.33	10.88	29.60	46.00	16.40	QP
6	352.04	14.47	5.69	7.61	27.77	46.00	18.23	QP

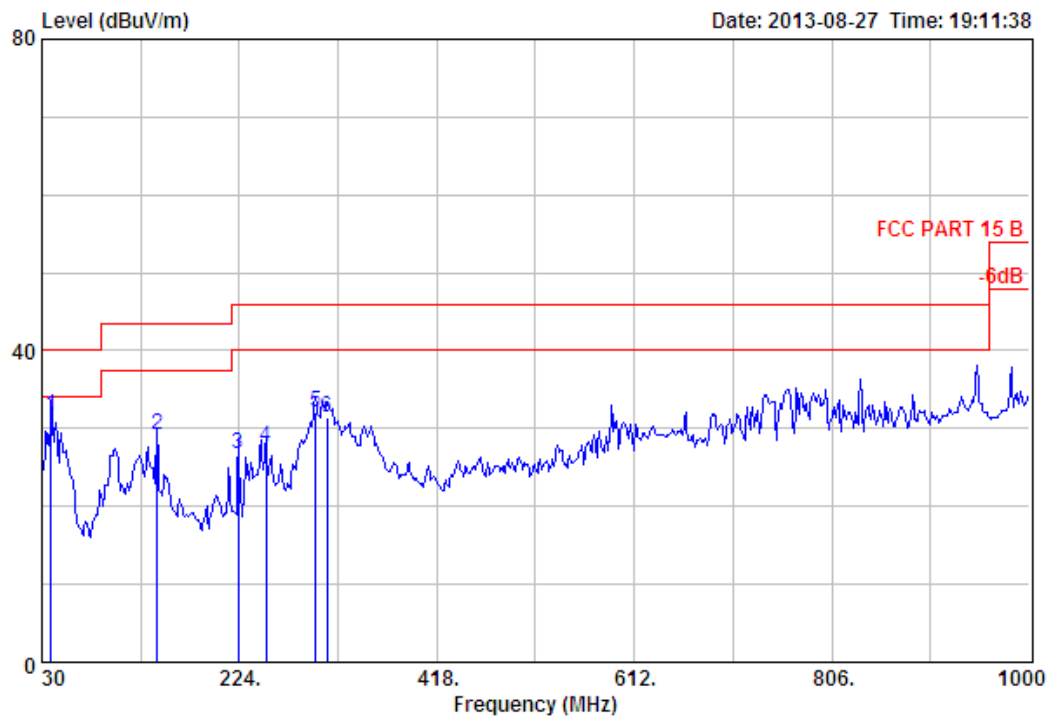


Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	38.73	13.48	2.10	16.12	31.70	40.00	8.30	QP
2	143.49	11.29	3.71	14.11	29.11	43.50	14.39	QP
3	223.03	9.37	4.47	13.01	26.85	46.00	19.15	QP
4	250.19	11.82	4.84	11.06	27.72	46.00	18.28	QP
5	298.69	13.00	5.24	13.95	32.19	46.00	13.81	QP
6	310.33	13.20	5.32	12.88	31.40	46.00	14.60	QP

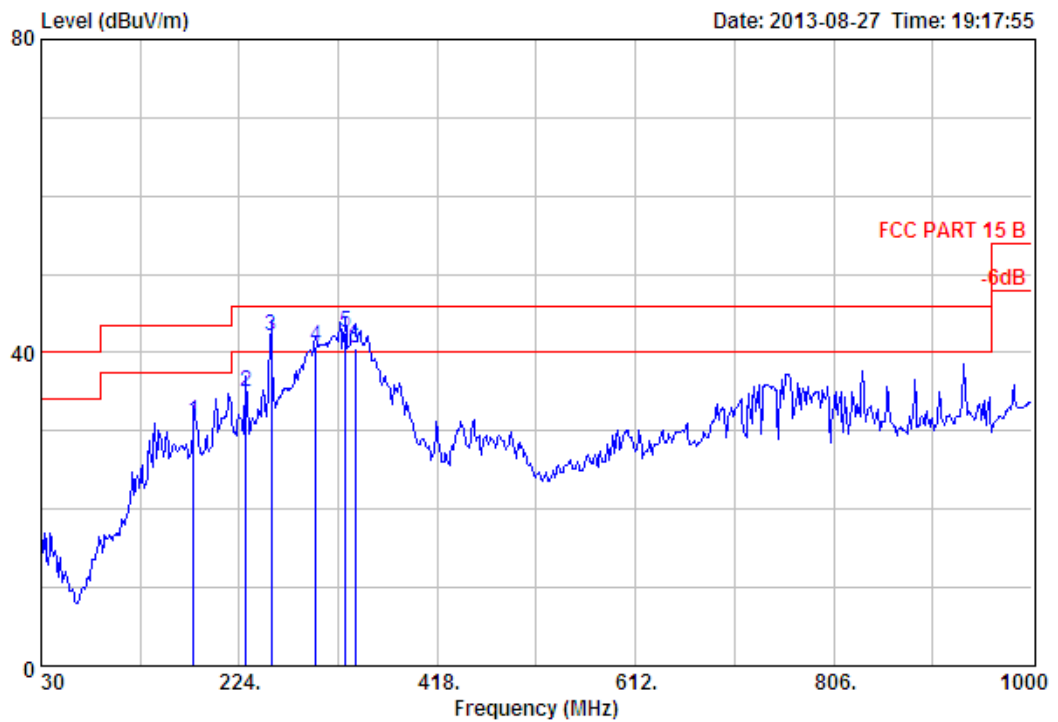


Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	179.38	8.96	4.11	18.23	31.30	43.50	12.20	QP
2	230.79	9.49	4.58	20.91	34.98	46.00	11.02	QP
3	255.04	12.41	4.87	24.95	42.23	46.00	3.77	QP
4	298.69	13.00	5.24	22.55	40.79	46.00	5.21	QP
5	327.79	13.79	5.45	23.32	42.56	46.00	3.44	QP
6	337.49	14.08	5.55	20.96	40.59	46.00	5.41	QP

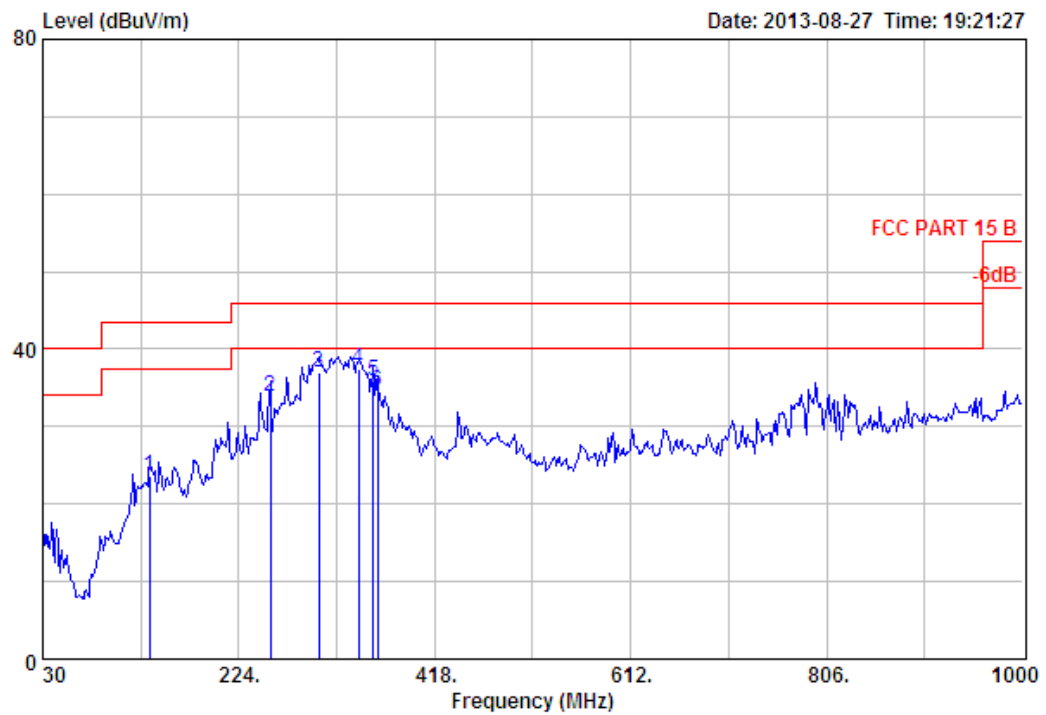

Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz


	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	135.73	11.38	3.60	8.74	23.72	43.50	19.78	QP
2	255.04	12.41	4.87	16.55	33.83	46.00	12.17	QP
3	303.54	13.08	5.27	18.64	36.99	46.00	9.01	QP
4	342.34	14.22	5.62	17.70	37.54	46.00	8.46	QP
5	356.89	14.46	5.72	15.61	35.79	46.00	10.21	QP
6	361.74	14.53	5.75	14.26	34.54	46.00	11.46	QP

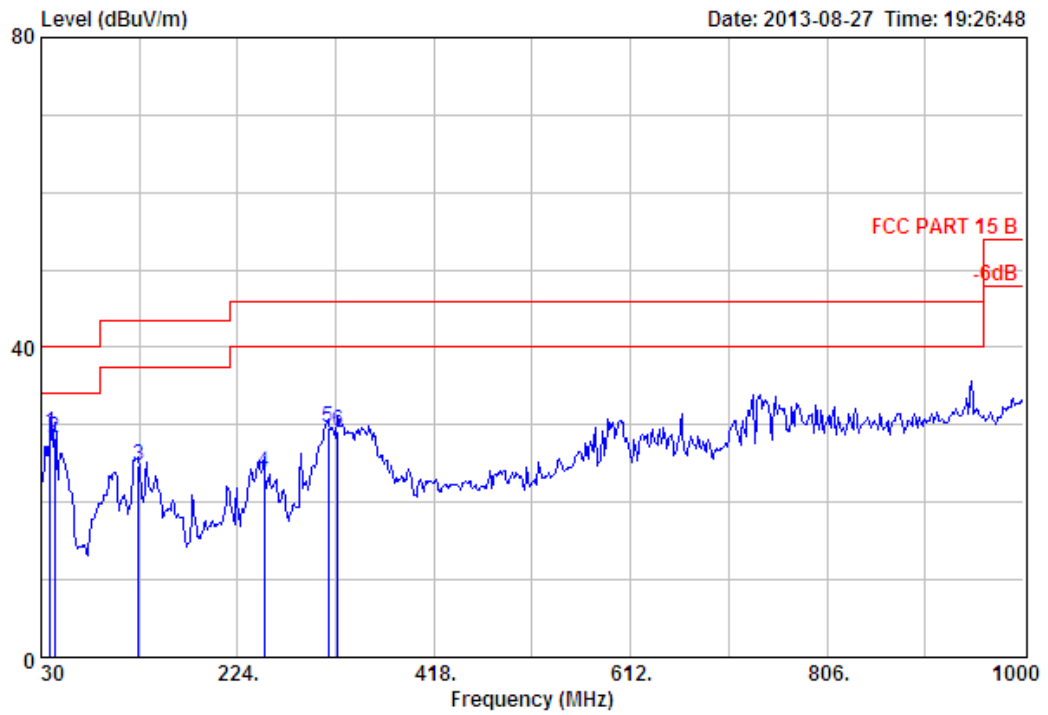

Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	38.73	13.48	2.10	13.49	29.07	40.00	10.93	QP
2	43.58	10.52	2.21	15.56	28.29	40.00	11.71	QP
3	126.03	11.34	3.44	10.05	24.83	43.50	18.67	QP
4	250.19	11.82	4.84	7.24	23.90	46.00	22.10	QP
5	313.24	13.31	5.34	11.00	29.65	46.00	16.35	QP
6	322.94	13.65	5.41	10.09	29.15	46.00	16.85	QP


1000 MHz – 18000MHz

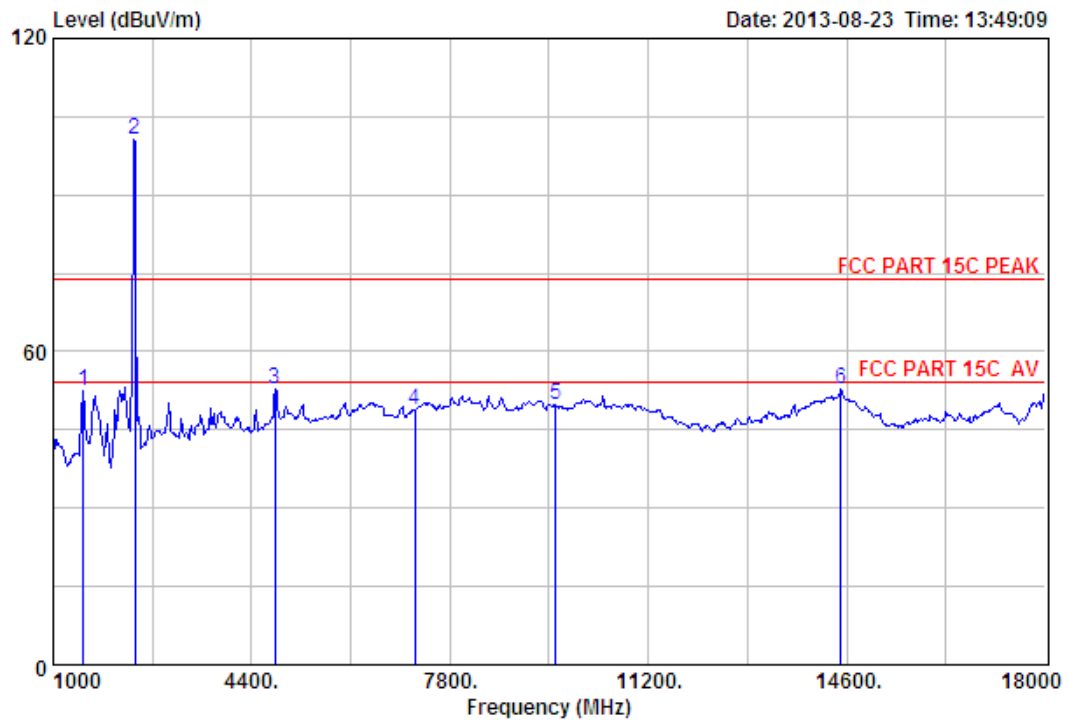

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1510.00	24.89	4.38	34.45	57.64	52.46	74.00	21.54	Peak
2	2402.00	27.61	6.62	34.18	100.52	100.57	74.00	-26.57	Peak
3	4804.00	31.25	11.77	31.81	41.60	52.81	74.00	21.19	Peak
4	7206.00	36.52	11.54	32.11	32.98	48.93	74.00	25.07	Peak
5	9608.00	37.91	11.69	31.93	32.07	49.74	74.00	24.26	Peak
6	14498.00	41.88	10.93	33.08	32.92	52.65	74.00	21.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

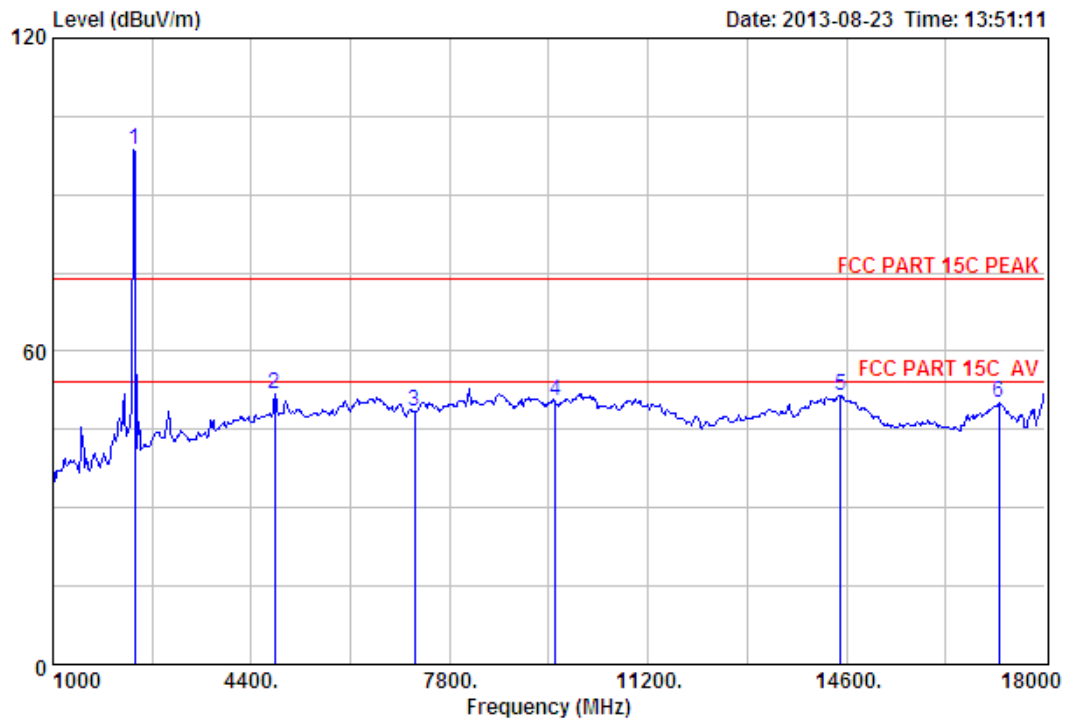

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	98.48	98.53	74.00	-24.53	Peak
2	4804.00	31.25	11.77	31.81	40.56	51.77	74.00	22.23	Peak
3	7206.00	36.52	11.54	32.11	32.61	48.56	74.00	25.44	Peak
4	9608.00	37.91	11.69	31.93	32.81	50.48	74.00	23.52	Peak
5	14498.00	41.88	10.93	33.08	31.83	51.56	74.00	22.44	Peak
6	17218.00	40.58	10.91	33.55	32.15	50.09	74.00	23.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

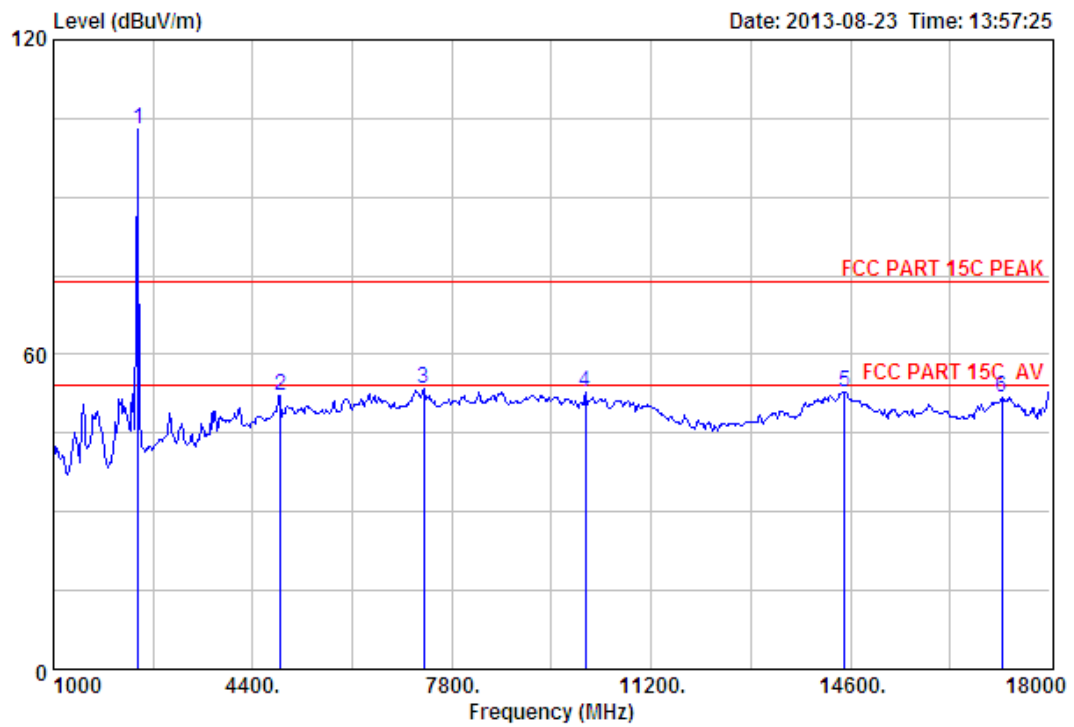

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2441MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	102.75	102.90	74.00	-28.90	Peak
2	4882.00	31.37	12.07	31.90	40.64	52.18	74.00	21.82	Peak
3	7324.00	36.55	11.57	31.99	37.45	53.58	74.00	20.42	Peak
4	10078.00	38.24	11.54	31.92	34.85	52.71	74.00	21.29	Peak
5	14498.00	41.88	10.93	33.08	33.14	52.87	74.00	21.13	Peak
6	17184.00	40.45	10.92	33.34	33.70	51.73	74.00	22.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

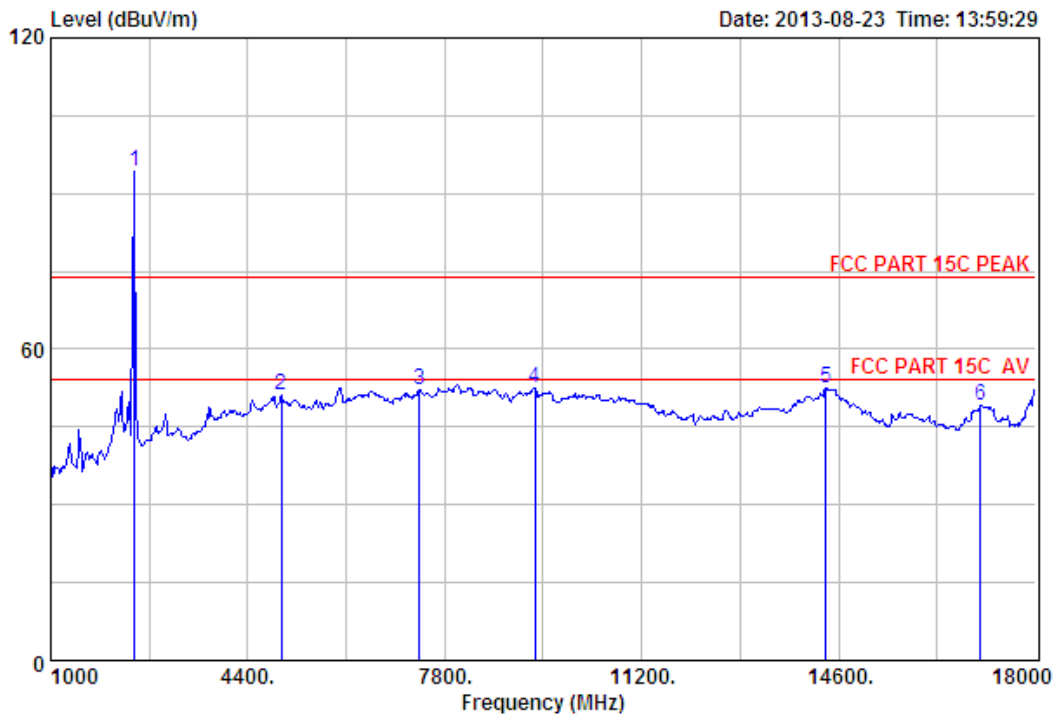

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading	Level	Limits	Margin	Remark
					(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	94.26	94.41	74.00	-20.41	Peak
2	4978.00	31.52	12.52	31.99	39.19	51.24	74.00	22.76	Peak
3	7358.00	36.56	11.58	31.99	36.09	52.24	74.00	21.76	Peak
4	9364.00	38.02	11.64	32.06	34.94	52.54	74.00	21.46	Peak
5	14379.00	41.77	10.92	32.88	32.79	52.60	74.00	21.40	Peak
6	17048.00	39.93	10.97	33.09	31.34	49.15	74.00	24.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

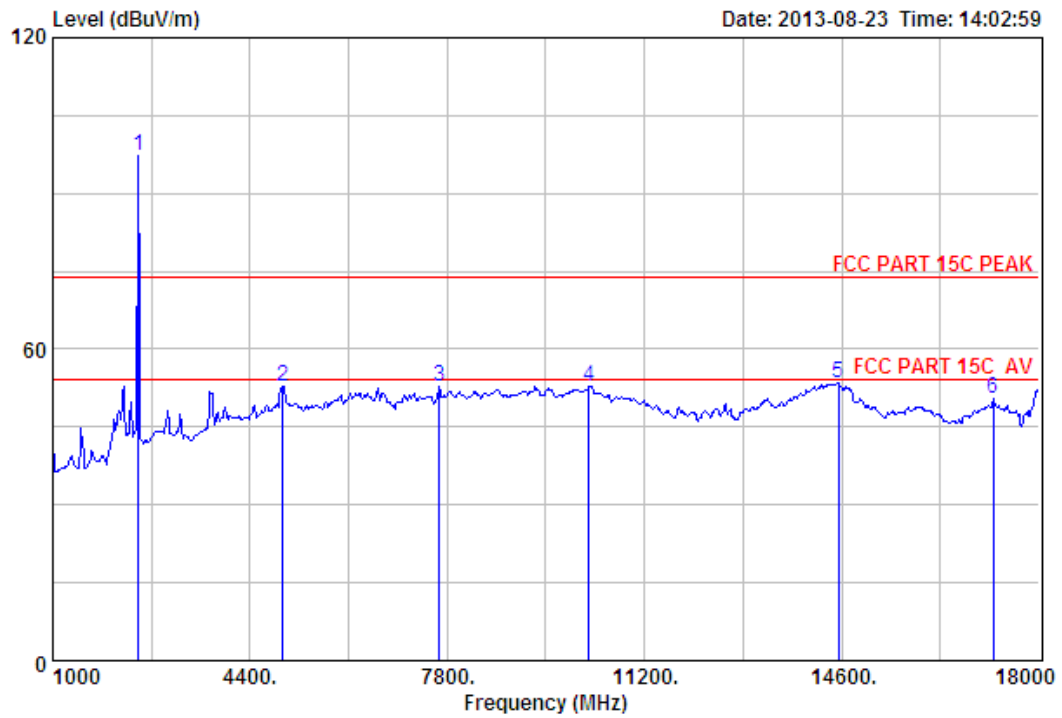

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	97.10	97.36	74.00	-23.36	Peak
2	4960.00	31.49	12.44	31.97	41.02	52.98	74.00	21.02	Peak
3	7664.00	36.45	11.55	31.61	36.40	52.79	74.00	21.21	Peak
4	10248.00	38.53	11.45	32.24	34.99	52.73	74.00	21.27	Peak
5	14549.00	41.77	10.92	33.26	33.89	53.32	74.00	20.68	Peak
6	17218.00	40.58	10.91	33.55	32.48	50.42	74.00	23.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

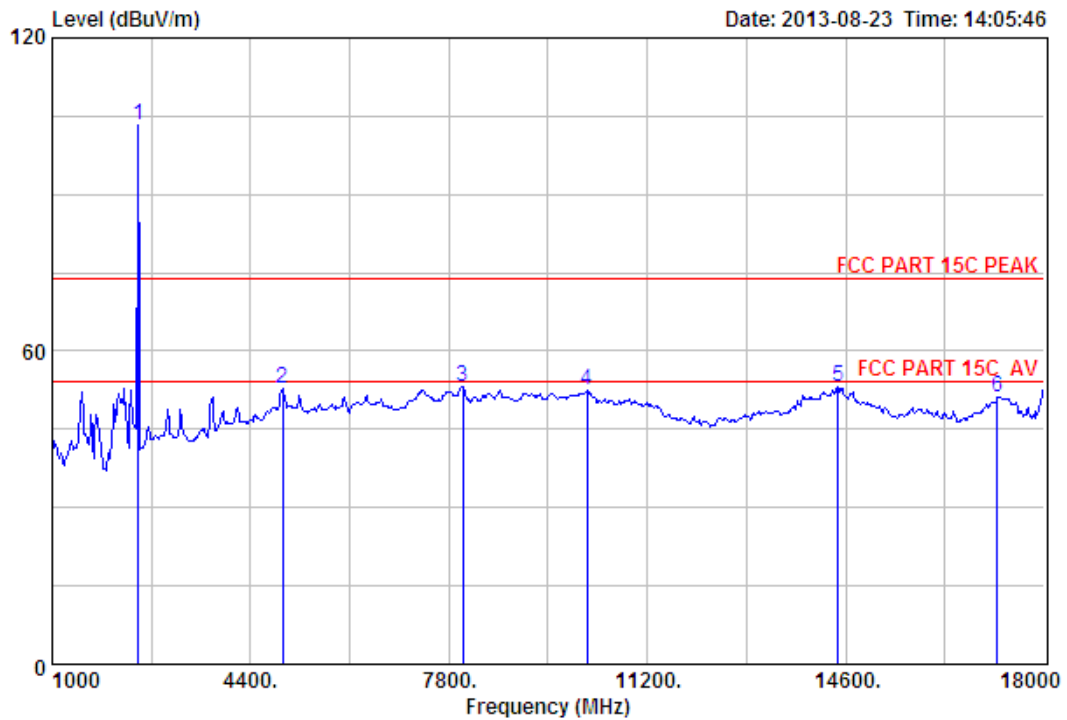

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	103.04	103.30	74.00	-29.30	Peak
2	4944.00	31.47	12.37	31.96	40.80	52.68	74.00	21.32	Peak
3	8038.00	36.95	11.40	31.28	36.18	53.25	74.00	20.75	Peak
4	10163.00	38.39	11.50	32.08	34.54	52.35	74.00	21.65	Peak
5	14464.00	41.85	10.93	32.96	33.25	53.07	74.00	20.93	Peak
6	17201.00	40.52	10.91	33.45	33.21	51.19	74.00	22.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

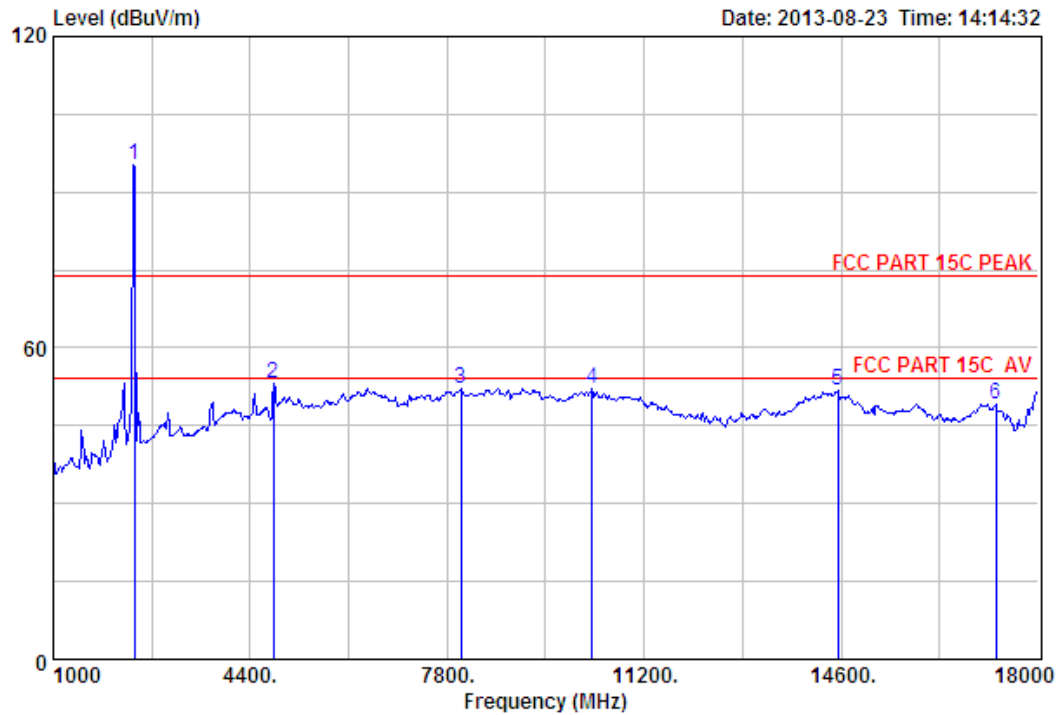

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	95.35	95.40	74.00	-21.40	Peak
2	4804.00	31.25	11.77	31.81	41.92	53.13	74.00	20.87	Peak
3	8038.00	36.95	11.40	31.28	35.08	52.15	74.00	21.85	Peak
4	10299.00	38.62	11.42	32.34	34.56	52.26	74.00	21.74	Peak
5	14549.00	41.77	10.92	33.26	32.27	51.70	74.00	22.30	Peak
6	17269.00	40.78	10.89	33.87	31.48	49.28	74.00	24.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

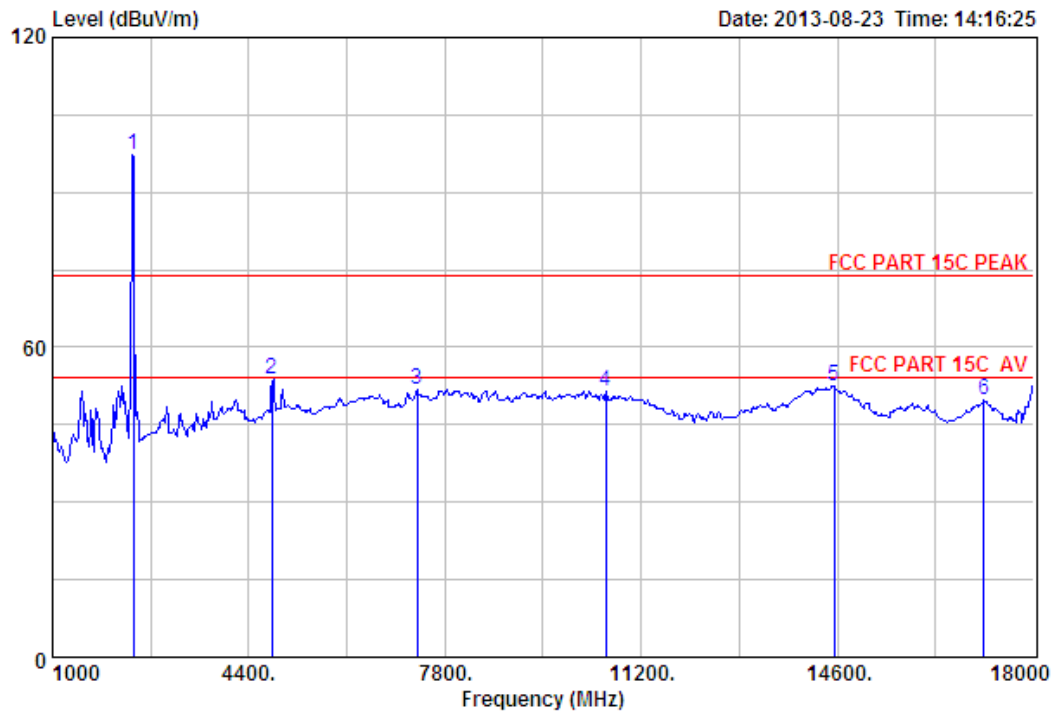

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	97.17	97.22	74.00	-23.22	Peak
2	4804.00	31.25	11.77	31.81	42.65	53.86	74.00	20.14	Peak
3	7324.00	36.55	11.57	31.99	35.65	51.78	74.00	22.22	Peak
4	10588.00	39.07	11.31	32.88	34.04	51.54	74.00	22.46	Peak
5	14549.00	41.77	10.92	33.26	33.13	52.56	74.00	21.44	Peak
6	17133.00	40.26	10.94	33.03	31.50	49.67	74.00	24.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

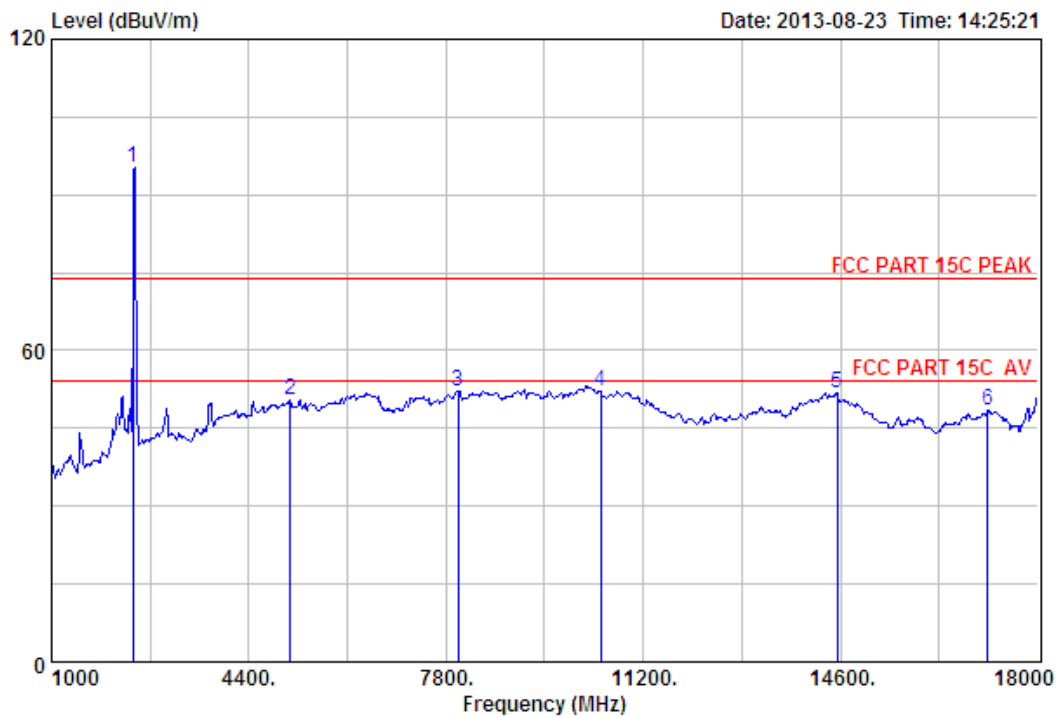

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	95.38	95.43	74.00	-21.43	Peak
2	5114.00	31.62	12.45	32.17	38.54	50.44	74.00	23.56	Peak
3	8004.00	37.01	11.40	31.22	35.11	52.30	74.00	21.70	Peak
4	10469.00	38.92	11.33	32.66	34.53	52.12	74.00	21.88	Peak
5	14549.00	41.77	10.92	33.26	32.36	51.79	74.00	22.21	Peak
6	17133.00	40.26	10.94	33.03	30.38	48.55	74.00	25.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

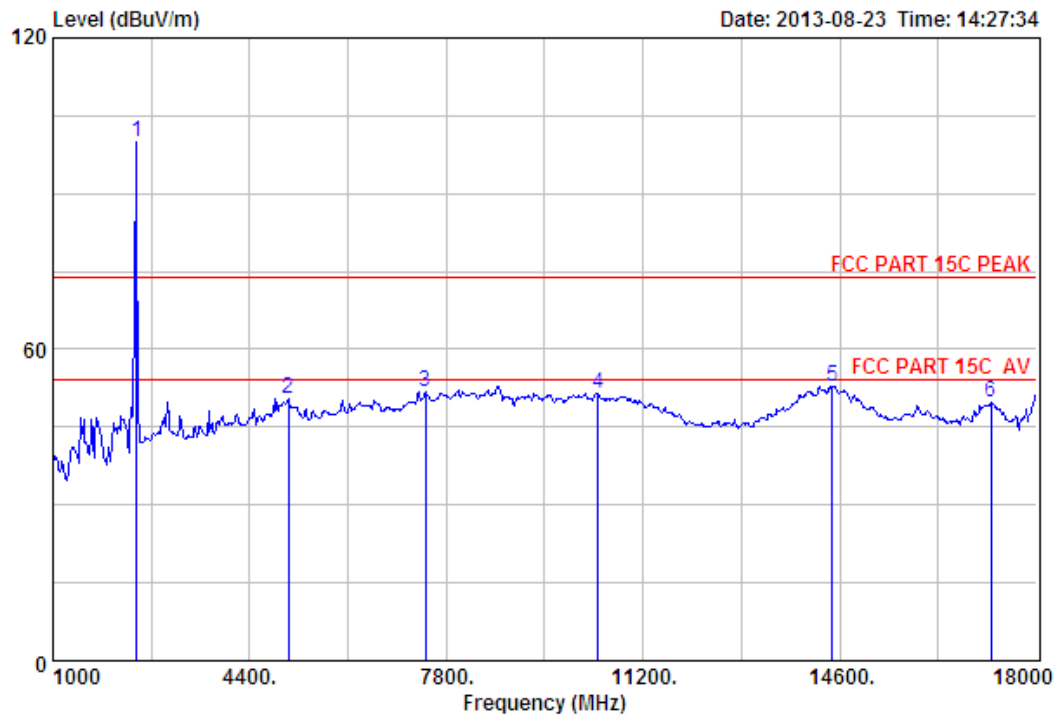

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2441MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	99.63	99.78	74.00	-25.78	Peak
2	5063.00	31.58	12.51	32.11	38.62	50.60	74.00	23.40	Peak
3	7443.00	36.54	11.61	31.93	35.52	51.74	74.00	22.26	Peak
4	10418.00	38.83	11.36	32.56	33.97	51.60	74.00	22.40	Peak
5	14464.00	41.85	10.93	32.96	33.11	52.93	74.00	21.07	Peak
6	17218.00	40.58	10.91	33.55	31.76	49.70	74.00	24.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

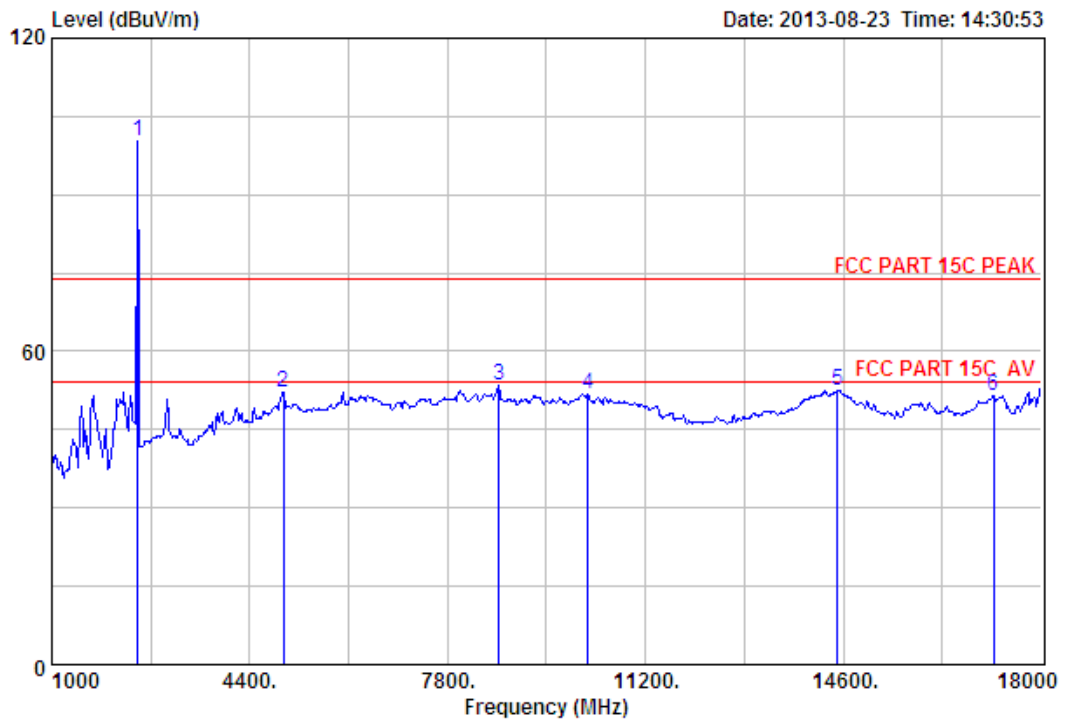

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	100.03	100.29	74.00	-26.29	Peak
2	4978.00	31.52	12.52	31.99	40.15	52.20	74.00	21.80	Peak
3	8684.00	37.32	11.45	32.43	37.16	53.50	74.00	20.50	Peak
4	10214.00	38.48	11.47	32.17	34.14	51.92	74.00	22.08	Peak
5	14498.00	41.88	10.93	33.08	32.85	52.58	74.00	21.42	Peak
6	17184.00	40.45	10.92	33.34	33.49	51.52	74.00	22.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

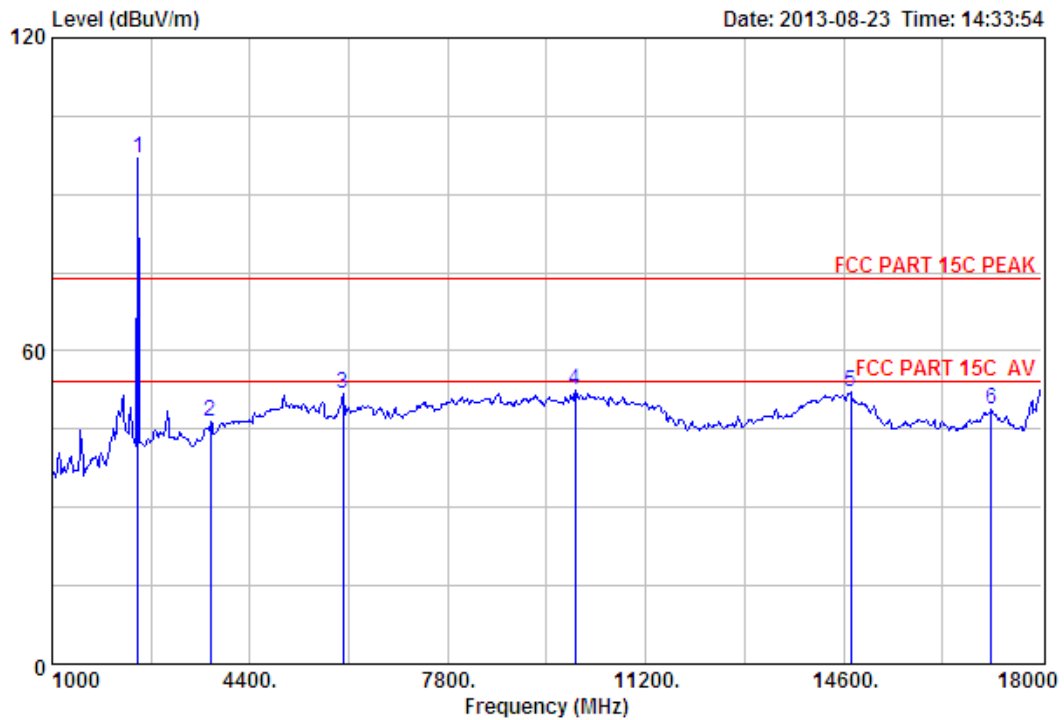


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2480.00	27.58	6.71	34.03	96.57	96.83	74.00	-22.83	Peak
2	3720.00	28.92	9.68	32.64	40.60	46.56	74.00	27.44	Peak
3	5998.00	32.77	12.12	32.25	39.14	51.78	74.00	22.22	Peak
4	9993.00	38.12	11.59	31.78	34.63	52.56	74.00	21.44	Peak
5	14719.00	41.18	10.90	33.85	33.84	52.07	74.00	21.93	Peak
6	17133.00	40.26	10.94	33.03	30.80	48.97	74.00	25.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


18000MHz – 25000MHz

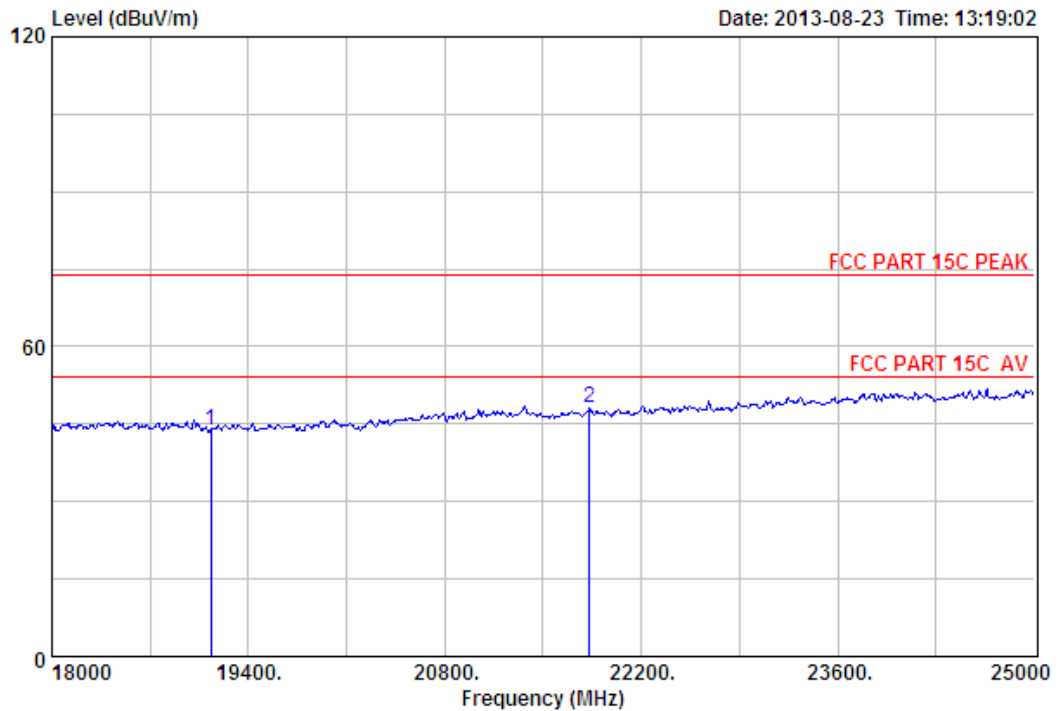

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	19134.00	45.55	18.69	35.96	15.47	43.75	74.00	30.25	Peak
2	21829.00	45.80	20.49	35.06	16.79	48.02	74.00	25.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

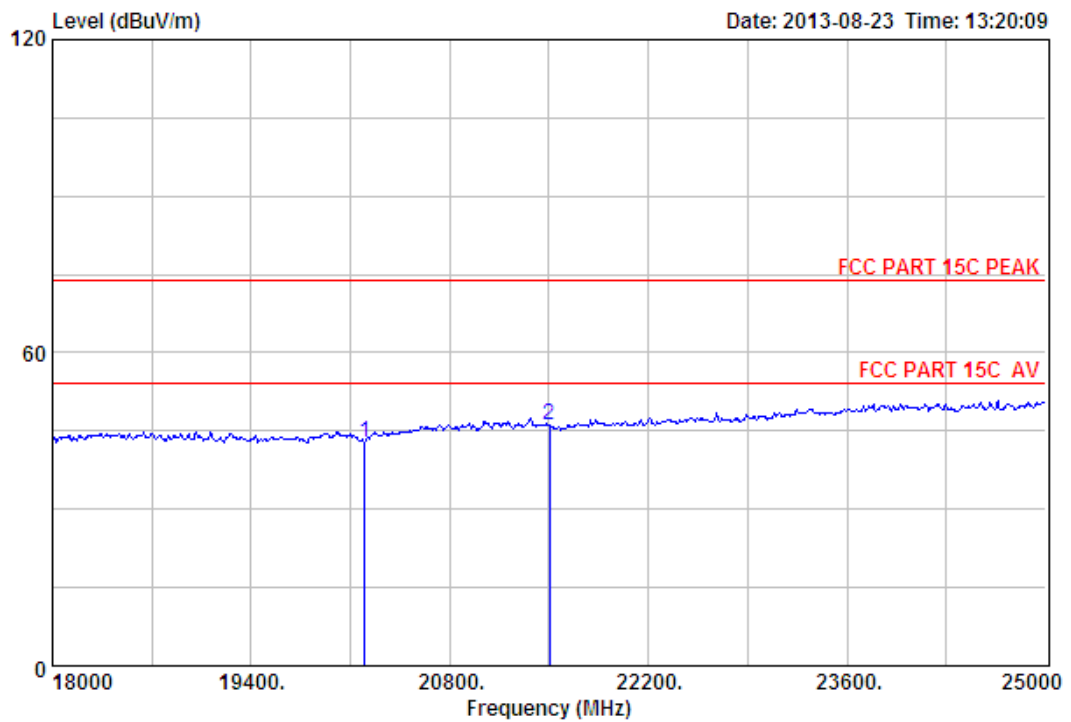

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading	Level	Limits	Margin	
					(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20198.00	46.06	19.77	36.52	13.64	42.95	74.00	31.05	Peak
2	21500.00	46.00	20.35	35.35	15.01	46.01	74.00	27.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

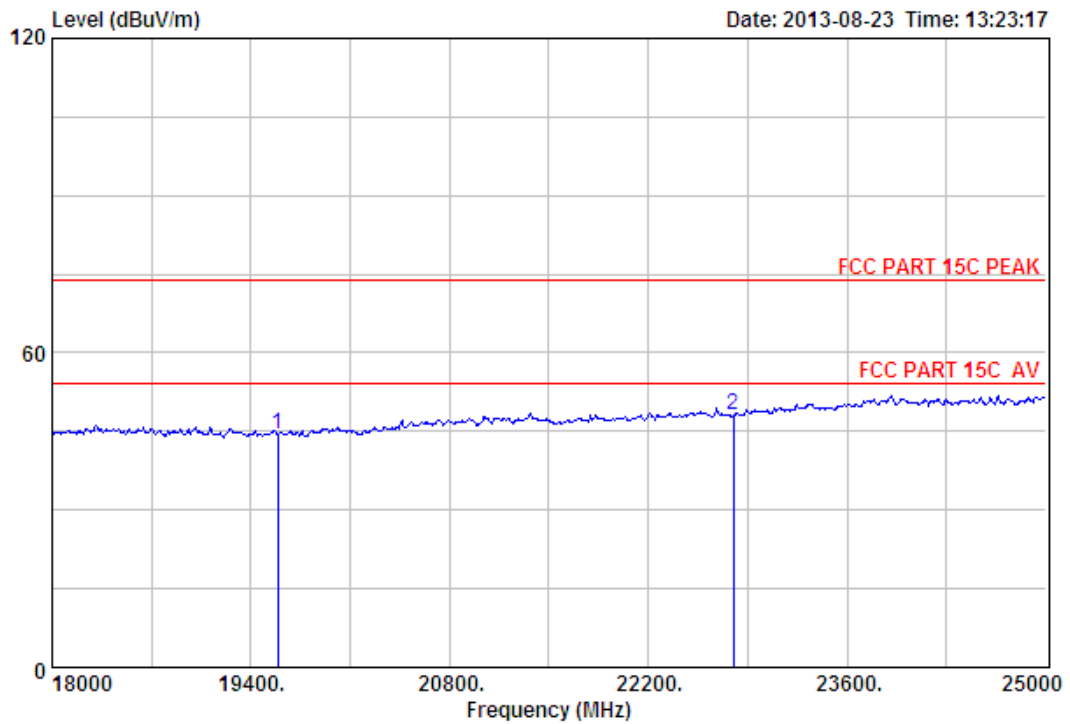

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2441MHz

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	19589.00	45.93	19.22	36.36	15.51	44.30	74.00	29.70	Peak
2	22802.00	45.68	21.03	34.06	15.42	48.07	74.00	25.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

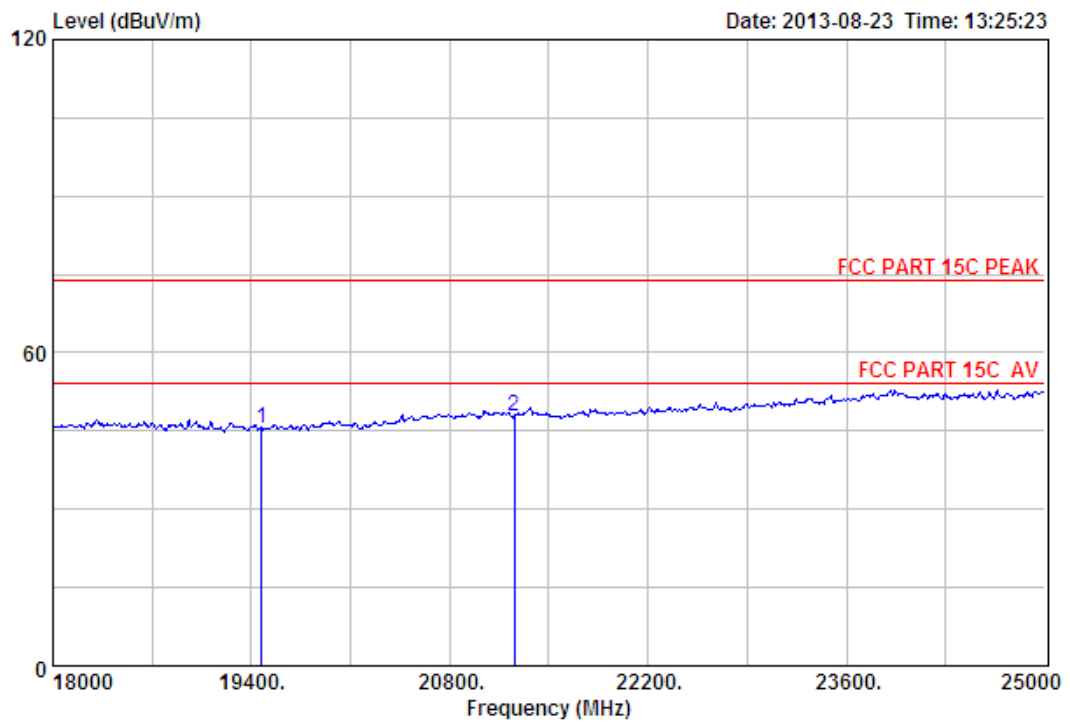

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2441MHz

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 19470.00	45.88	19.07	36.25	16.78	45.48	74.00	28.52	Peak	
2 21255.00	46.14	20.24	35.58	16.92	47.72	74.00	26.28	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

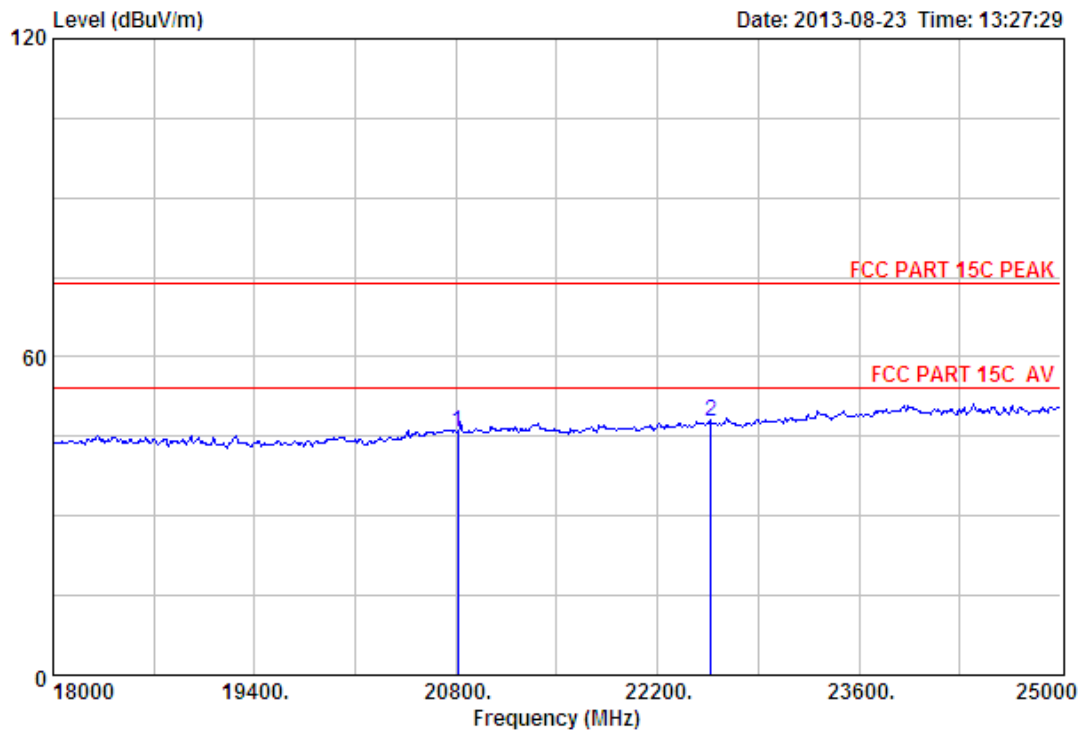

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1 20814.00	46.19	20.05	35.96	15.37	45.65		74.00	28.35	Peak
2 22571.00	45.77	20.90	34.30	15.36	47.73		74.00	26.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

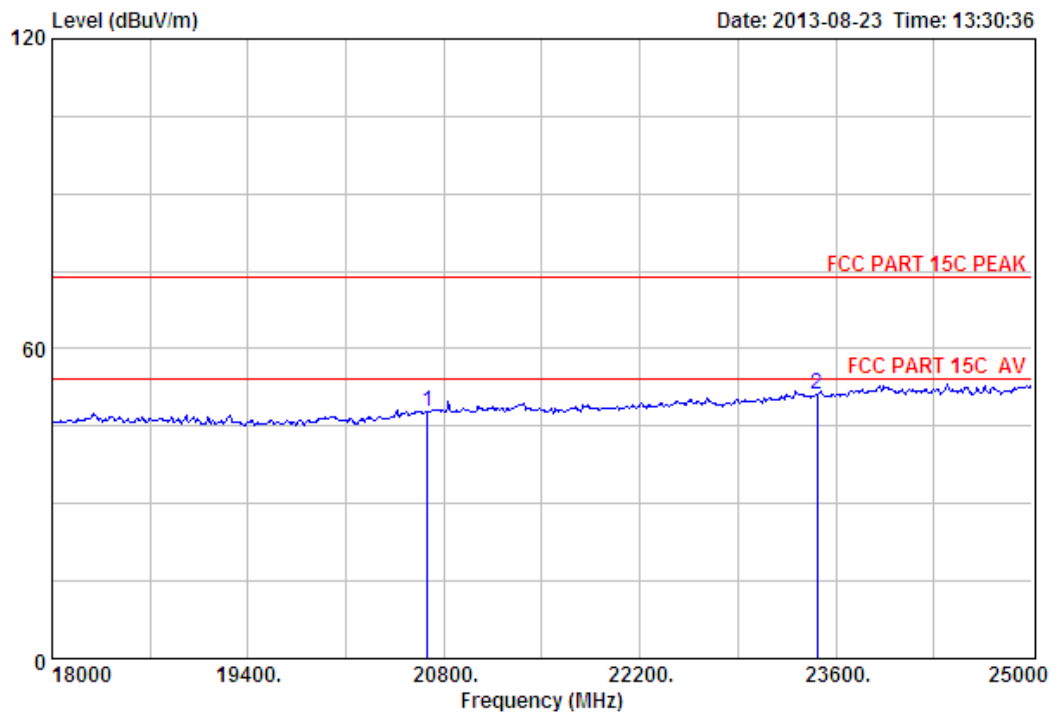

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20681.00	46.11	19.99	36.09	17.86	47.87	74.00	26.13	Peak
2	23467.00	45.69	21.56	33.35	17.20	51.10	74.00	22.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

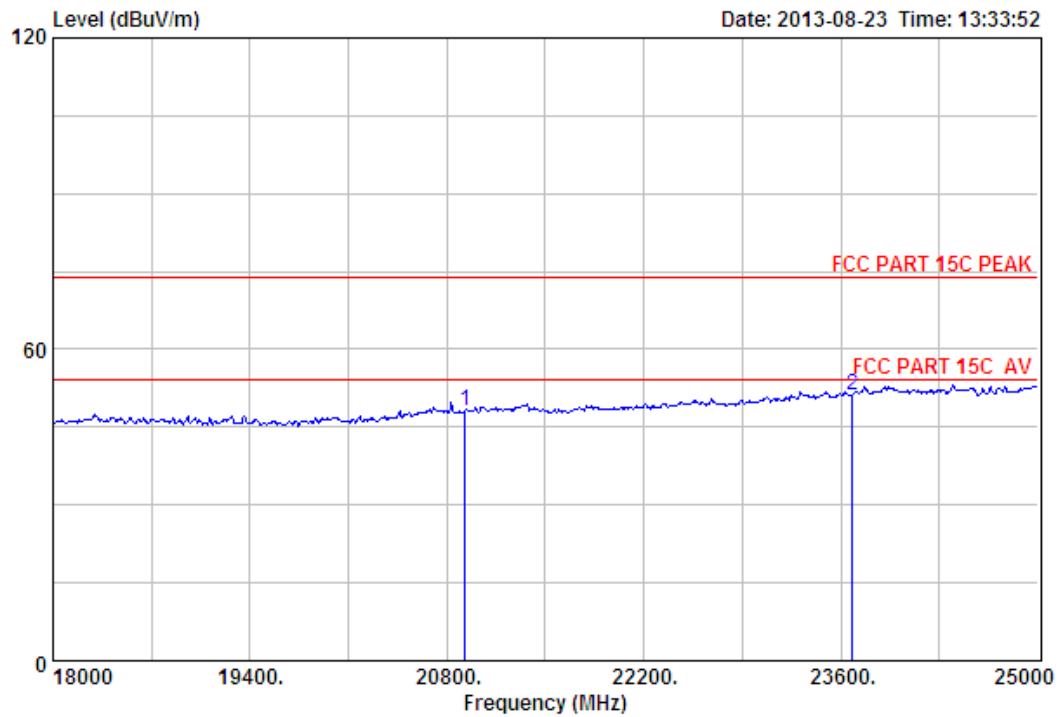

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20926.00	46.26	20.10	35.87	17.60	48.09	74.00	25.91	Peak
2	23684.00	45.67	21.77	33.14	16.76	51.06	74.00	22.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

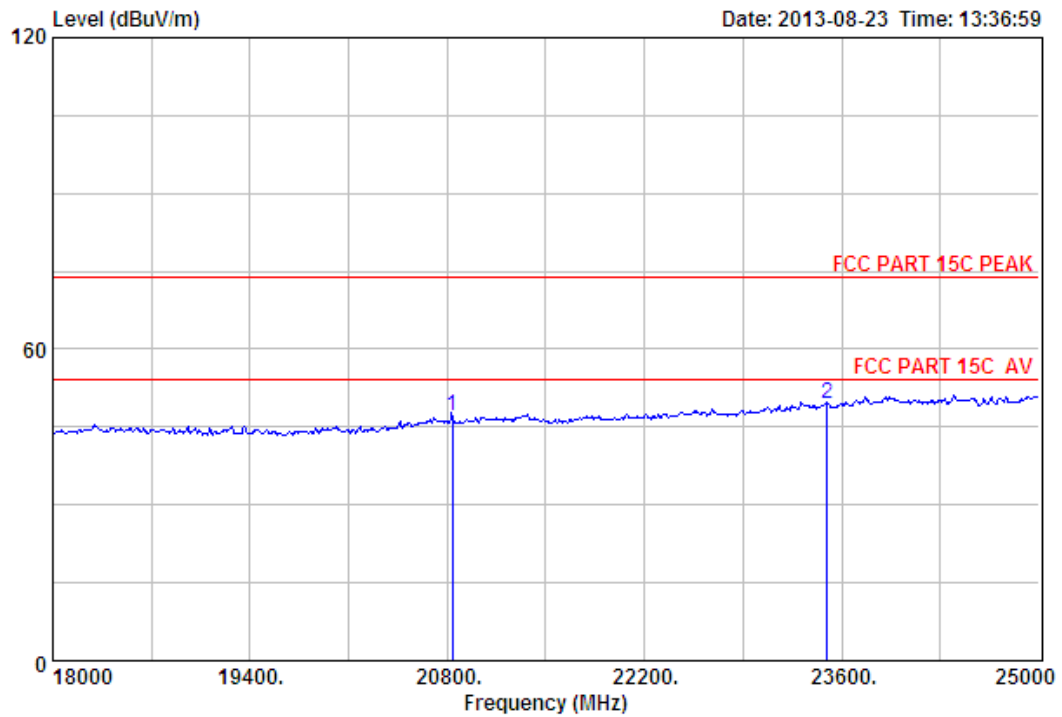

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20835.00	46.20	20.06	35.96	16.84	47.14	74.00	26.86	Peak
2	23495.00	45.70	21.60	33.33	15.66	49.63	74.00	24.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

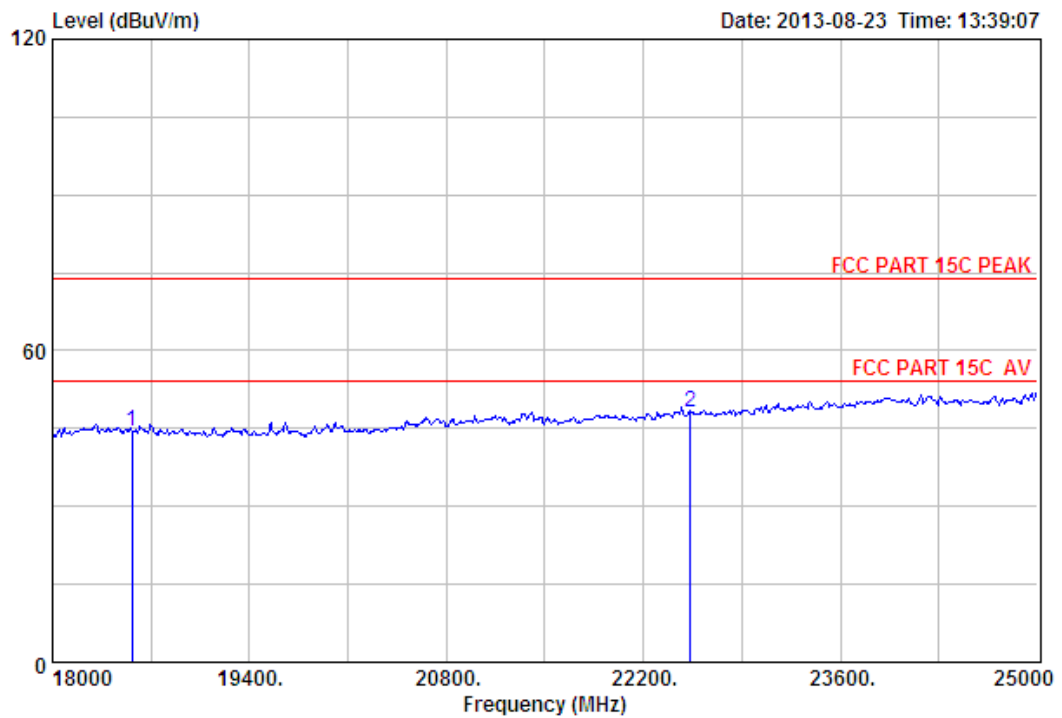

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2441MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	18567.00	44.97	18.01	35.49	16.98	44.47	74.00	29.53	Peak
2	22536.00	45.79	20.88	34.35	15.89	48.21	74.00	25.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

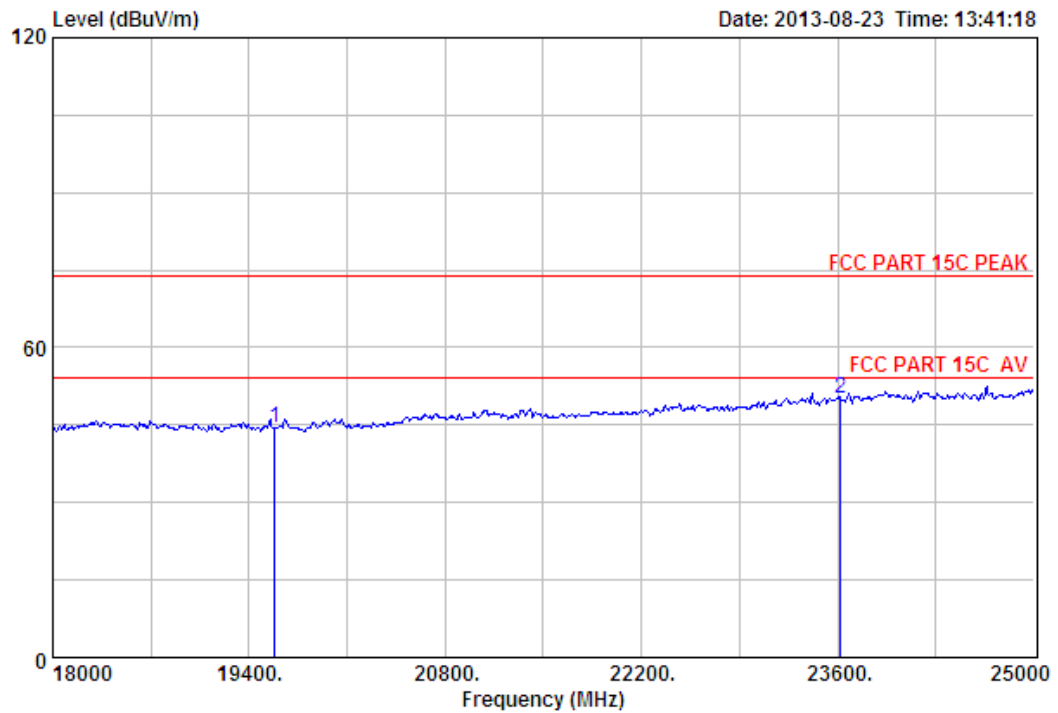

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2441MHz

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	19582.00	45.93	19.21	36.34	15.69	44.49	74.00	29.51	Peak
2	23621.00	45.68	21.71	33.19	15.92	50.12	74.00	23.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

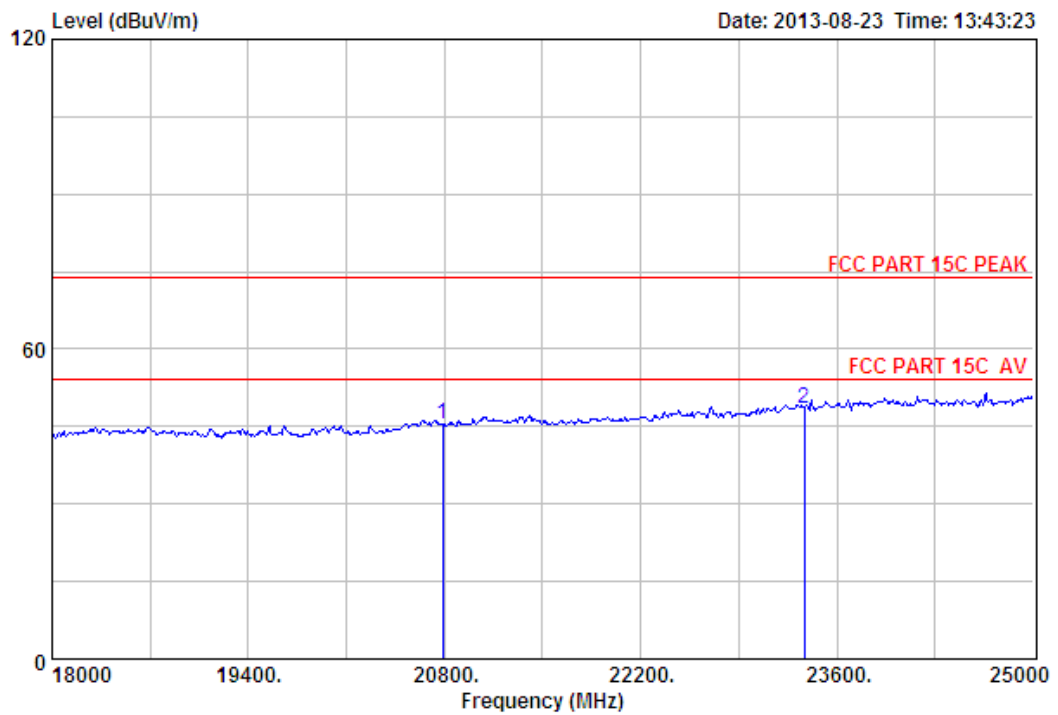

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	20786.00	46.18	20.04	36.00	15.23	45.45	74.00	28.55	Peak
2	23369.00	45.67	21.48	33.46	14.79	48.48	74.00	25.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

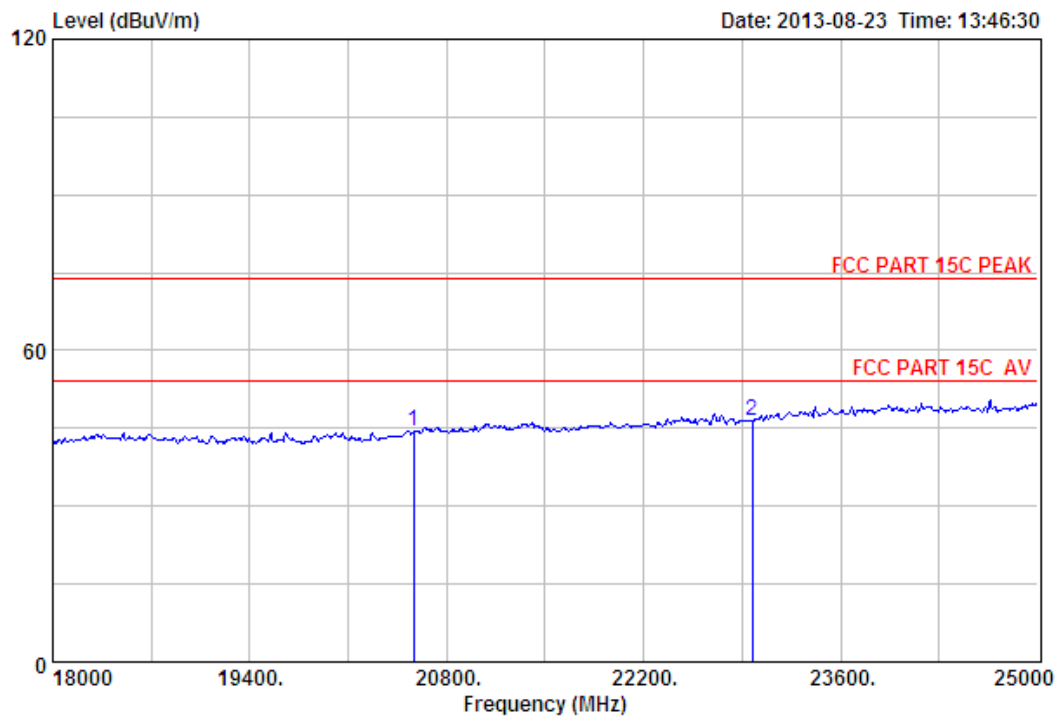

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20562.00	46.03	19.94	36.21	14.59	44.35	74.00	29.65	Peak
2	22970.00	45.61	21.13	33.88	13.57	46.43	74.00	27.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

4. BAND EDGE COMPLIANCE

4.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2. Block Diagram of Test setup

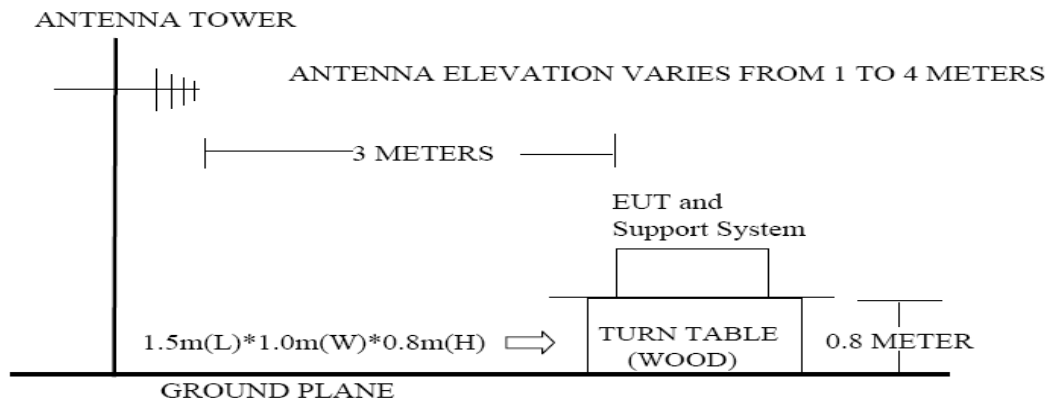

4.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


4.4. Test Result

EUT: SURROUNDBAR 6500BT
M/N: SB6500BT SPEAKER
Power: DC 24V From Adapter Input AC 120V/60Hz
Test date: 2013-08-23 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode (Hopping On & No Hopping)
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、 2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


4.5. Test Data

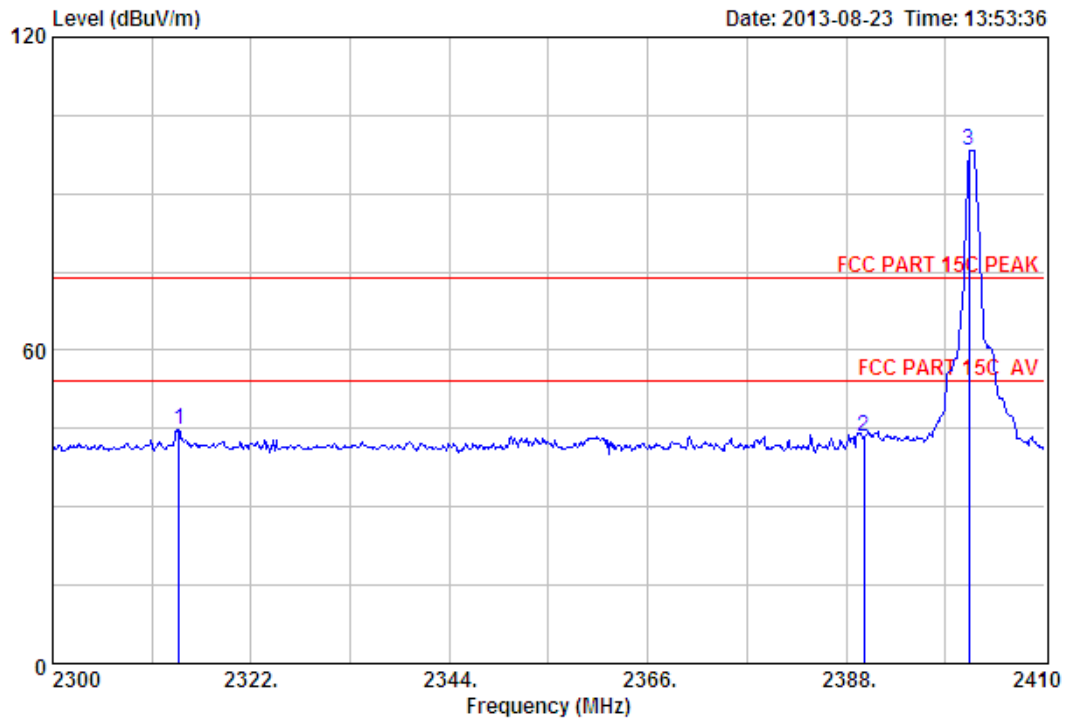

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz(No Hopping)

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2313.97	27.76	6.53	34.24	44.90	44.95	74.00	29.05	Peak
2	2390.00	27.64	6.62	34.19	43.25	43.32	74.00	30.68	Peak
3	2401.64	27.61	6.62	34.18	98.39	98.44	74.00	-24.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

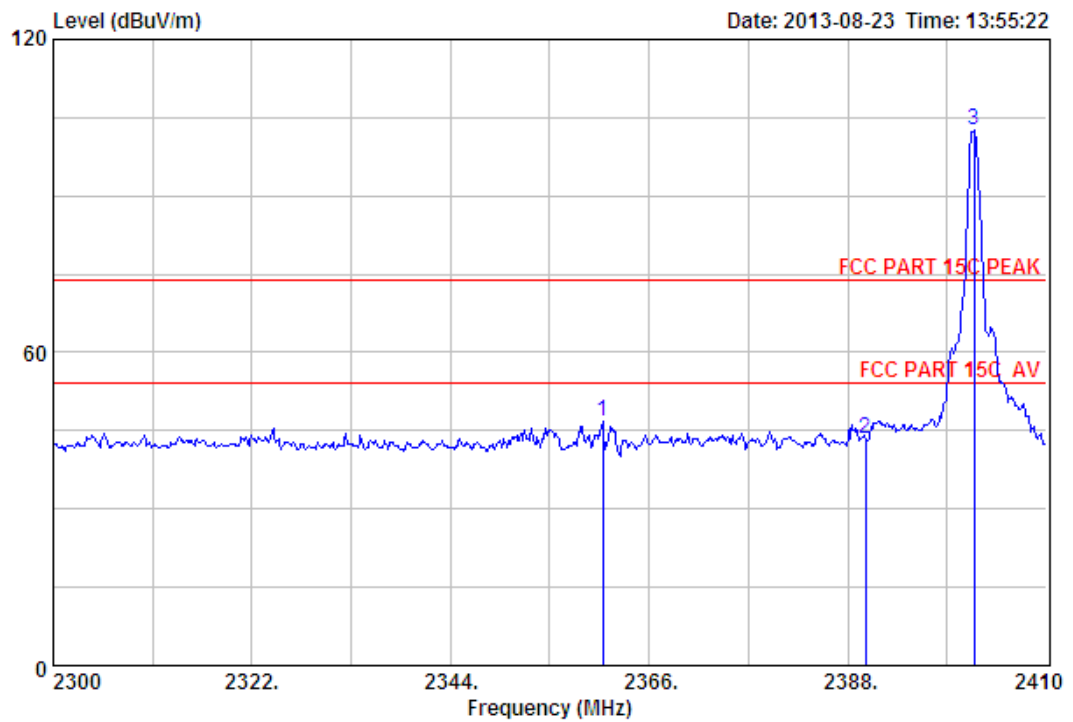

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2402MHz(No Hopping)

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2360.83	27.67	6.58	34.20	46.59	46.64	74.00	27.36	
2	2390.00	27.64	6.62	34.19	43.37	43.44	74.00	30.56	
3	2401.97	27.61	6.62	34.18	102.52	102.57	74.00	-28.57	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

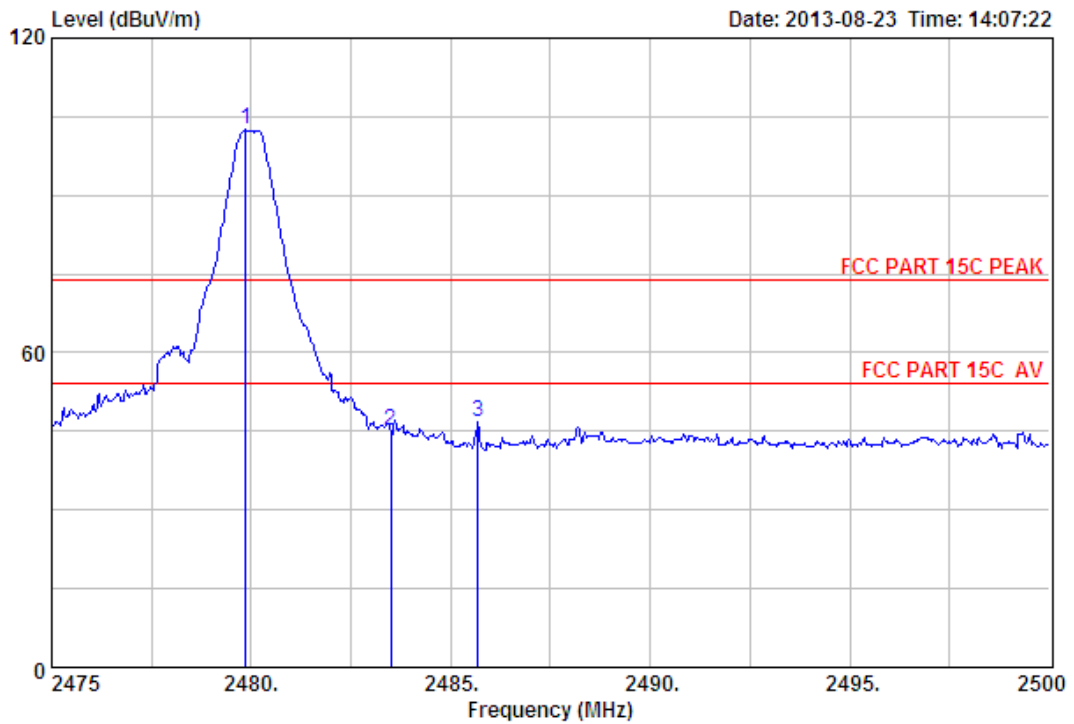

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz(No Hopping)

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2479.85	27.58	6.71	34.03	102.22	102.48	74.00	-28.48	Peak
2	2483.50	27.58	6.71	34.03	44.79	45.05	74.00	28.95	Peak
3	2485.68	27.58	6.71	34.03	46.60	46.86	74.00	27.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

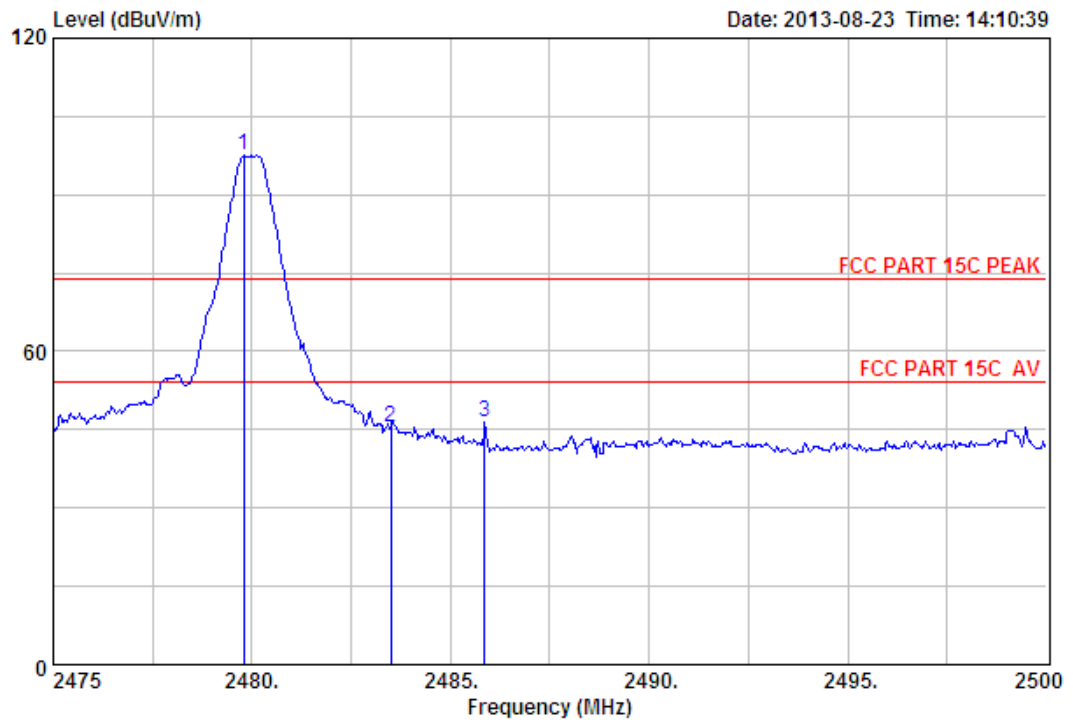

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK TX 2480MHz(No Hopping)

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.80	27.58	6.71	34.03	97.32	97.58	74.00	-23.58	Peak
2	2483.50	27.58	6.71	34.03	45.33	45.59	74.00	28.41	Peak
3	2485.85	27.58	6.71	34.03	46.15	46.41	74.00	27.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

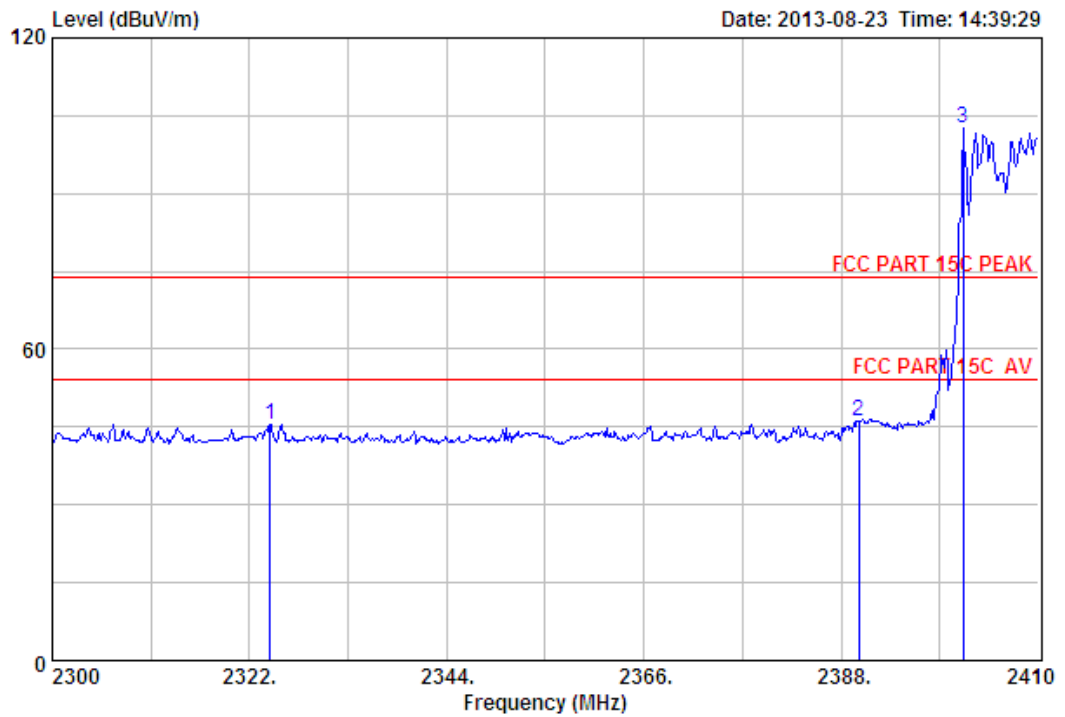

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	(dBuV/m)	(dB)	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)			
1	2324.31	27.73	6.54	34.23	45.53	45.57	74.00	28.43	Peak
2	2390.00	27.64	6.62	34.19	46.08	46.15	74.00	27.85	Peak
3	2401.64	27.61	6.62	34.18	102.65	102.70	74.00	-28.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

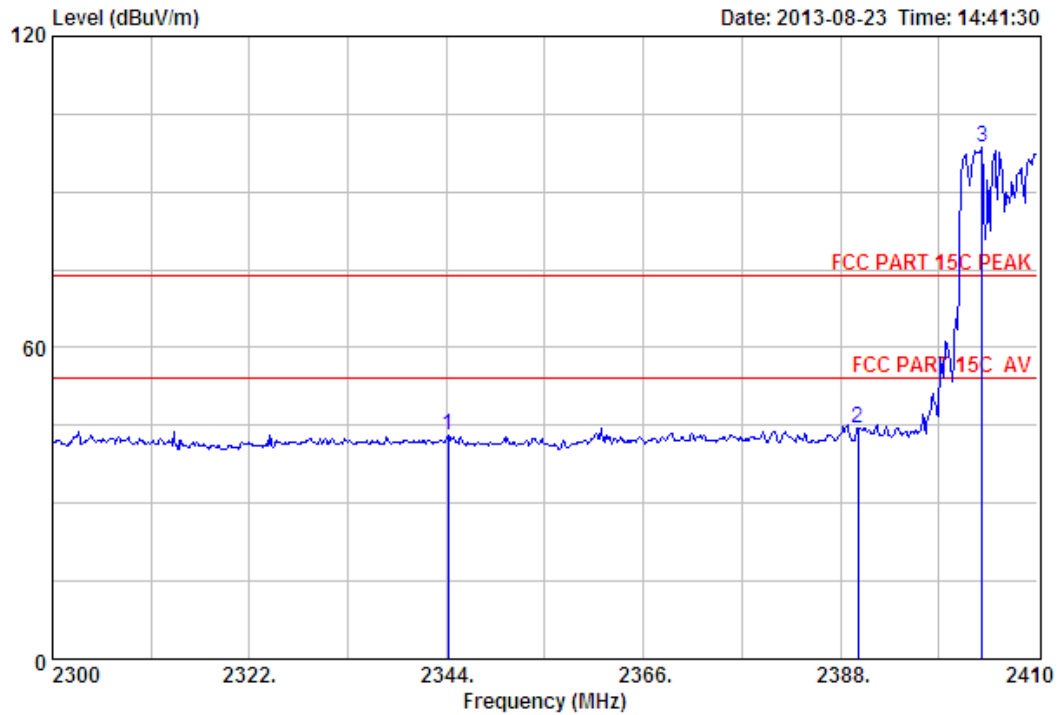

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2344.22	27.70	6.56	34.22	43.23	43.27	74.00	30.73	Peak
2	2390.00	27.64	6.62	34.19	44.33	44.40	74.00	29.60	Peak
3	2403.84	27.61	6.64	34.18	98.53	98.60	74.00	-24.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

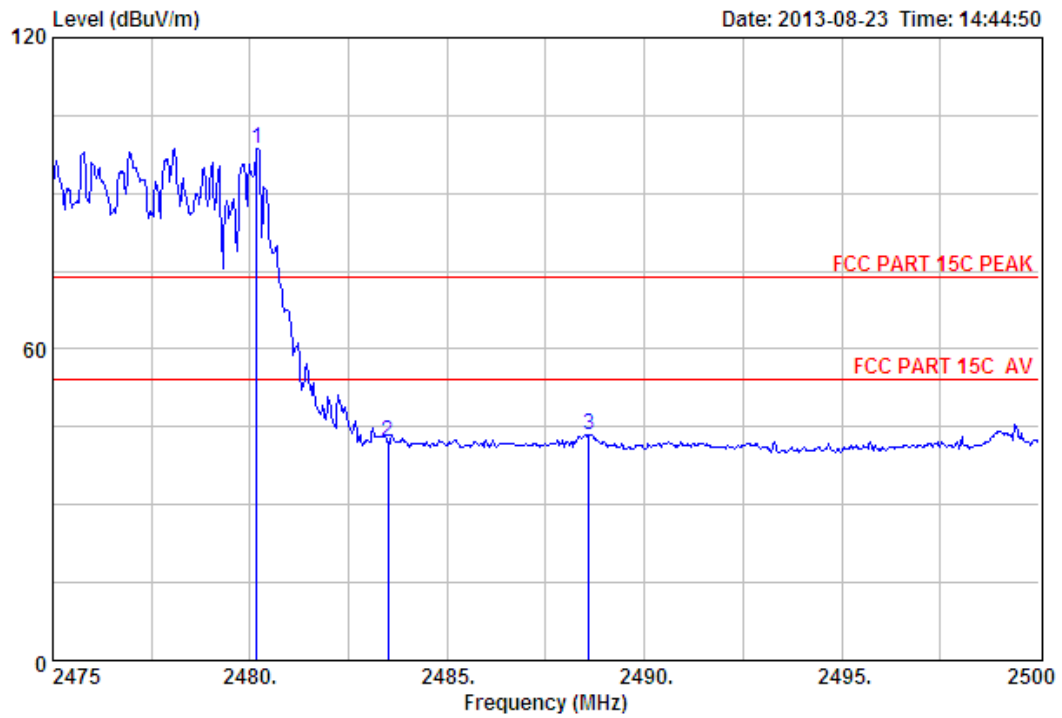

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.18	27.58	6.71	34.03	98.45	98.71	74.00	-24.71	Peak
2	2483.50	27.58	6.71	34.03	41.74	42.00	74.00	32.00	Peak
3	2488.60	27.58	6.73	34.03	43.29	43.57	74.00	30.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

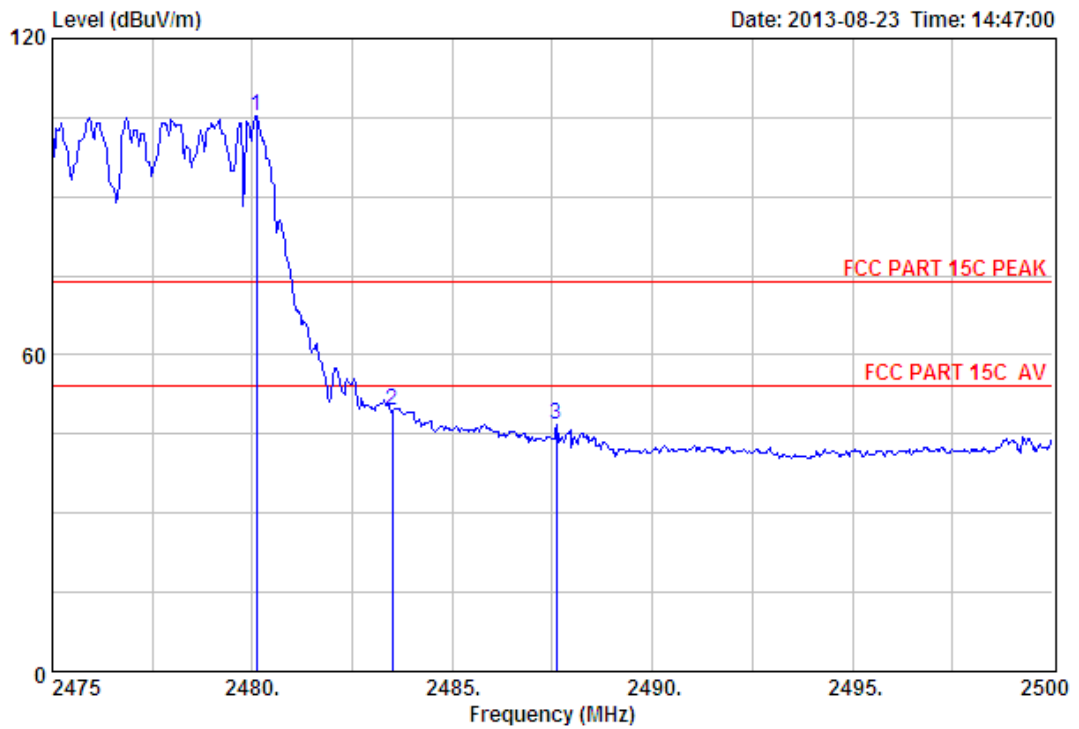

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : GFSK (Hopping On)

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2480.10	27.58	6.71	34.03	105.14	105.40	74.00	-31.40	Peak
2	2483.50	27.58	6.71	34.03	49.11	49.37	74.00	24.63	Peak
3	2487.60	27.58	6.73	34.03	46.68	46.96	74.00	27.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

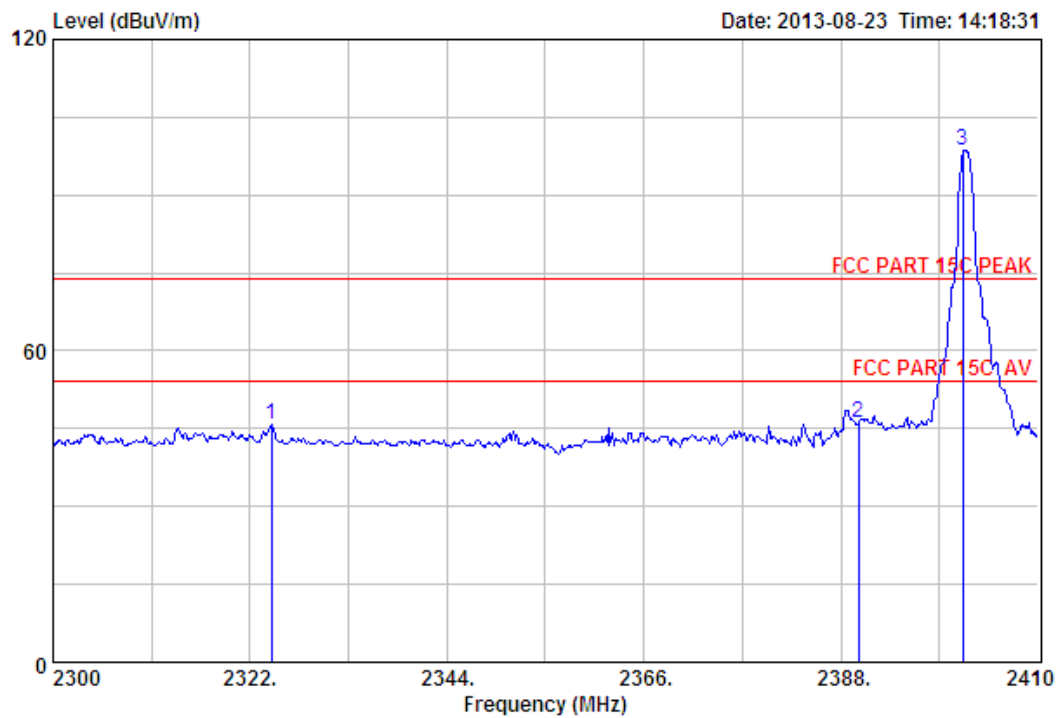

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2324.42	27.73	6.54	34.23	45.65	45.69	74.00	28.31	Peak
2	2390.00	27.64	6.62	34.19	46.12	46.19	74.00	27.81	Peak
3	2401.64	27.61	6.62	34.18	98.69	98.74	74.00	-24.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

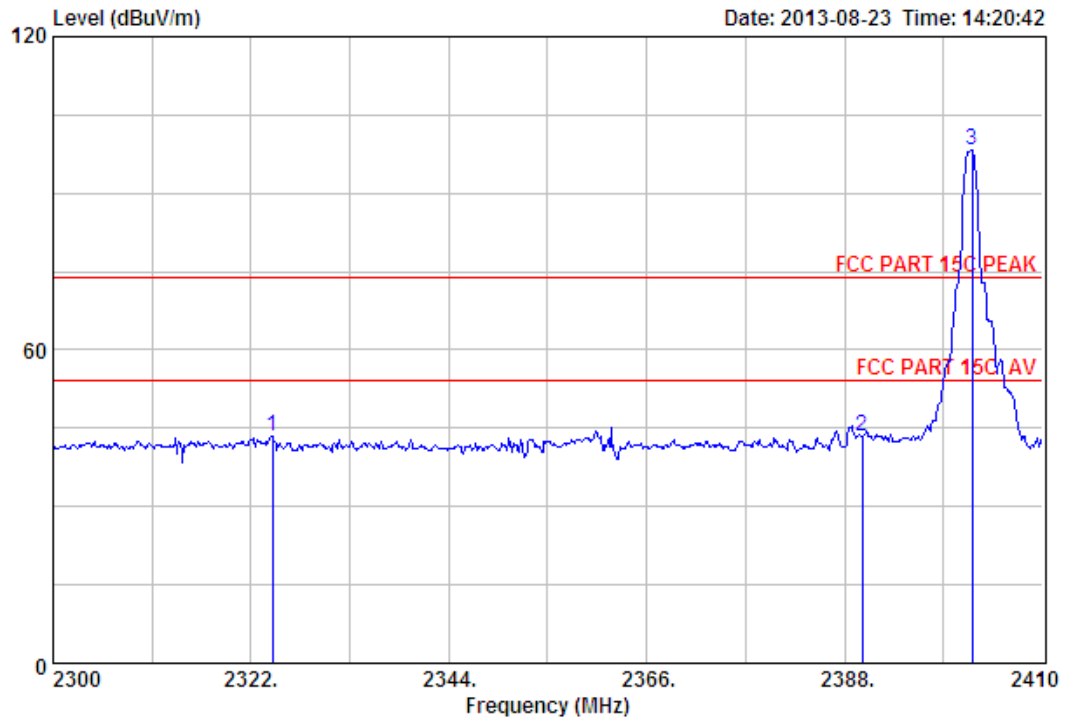

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading	Level			
					(dBuV)	(dBuV/m)			
1	2324.42	27.73	6.54	34.23	43.42	43.46	74.00	30.54	Peak
2	2390.00	27.64	6.62	34.19	43.34	43.41	74.00	30.59	Peak
3	2402.19	27.61	6.62	34.18	98.19	98.24	74.00	-24.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

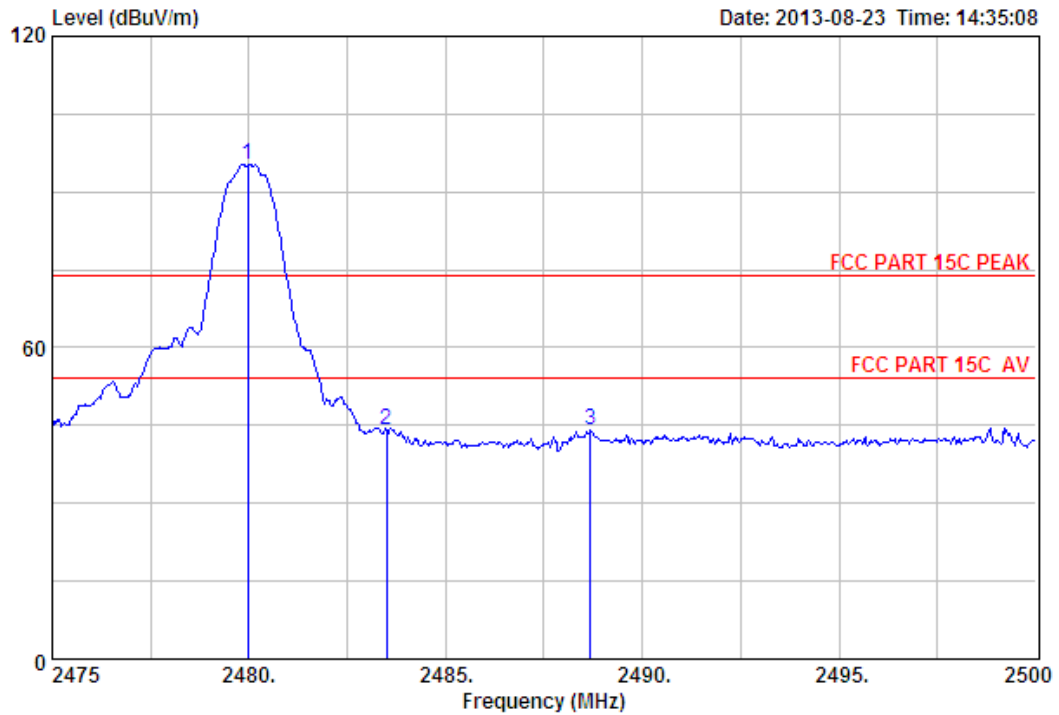

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.98	27.58	6.71	34.03	95.03	95.29	74.00	-21.29	Peak
2	2483.50	27.58	6.71	34.03	43.92	44.18	74.00	29.82	Peak
3	2488.68	27.58	6.73	34.03	43.81	44.09	74.00	29.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

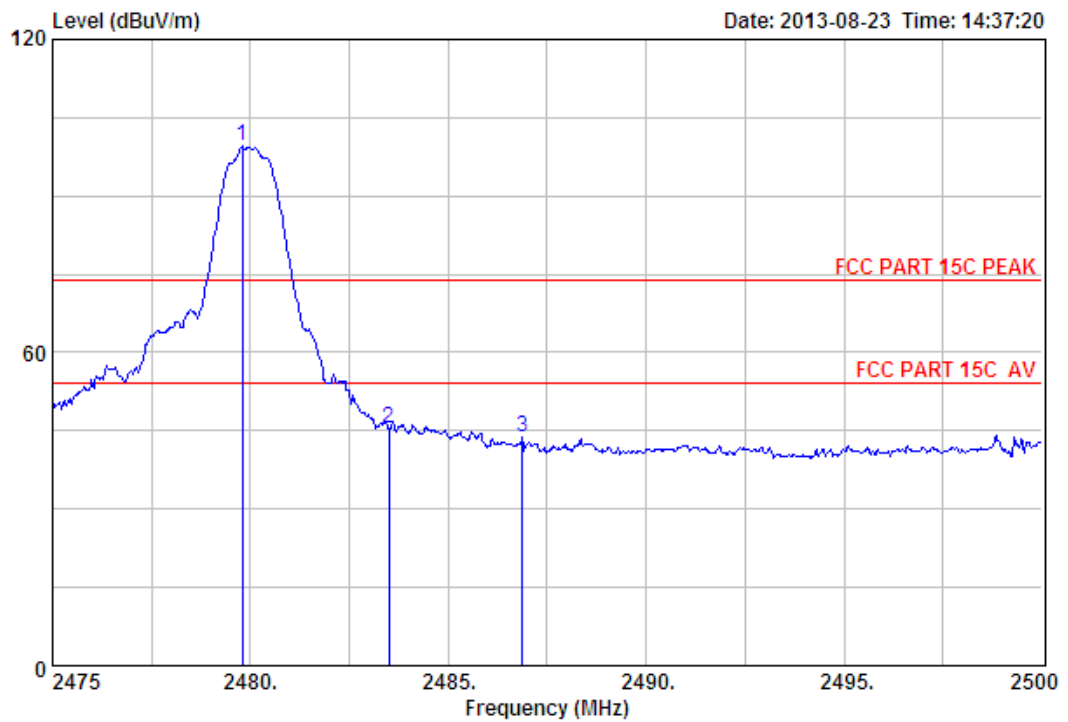

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK TX 2480MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading Level (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2479.80	27.58	6.71	34.03	99.19	99.45	74.00	-25.45	Peak
2	2483.50	27.58	6.71	34.03	45.12	45.38	74.00	28.62	Peak
3	2486.88	27.58	6.71	34.03	43.45	43.71	74.00	30.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

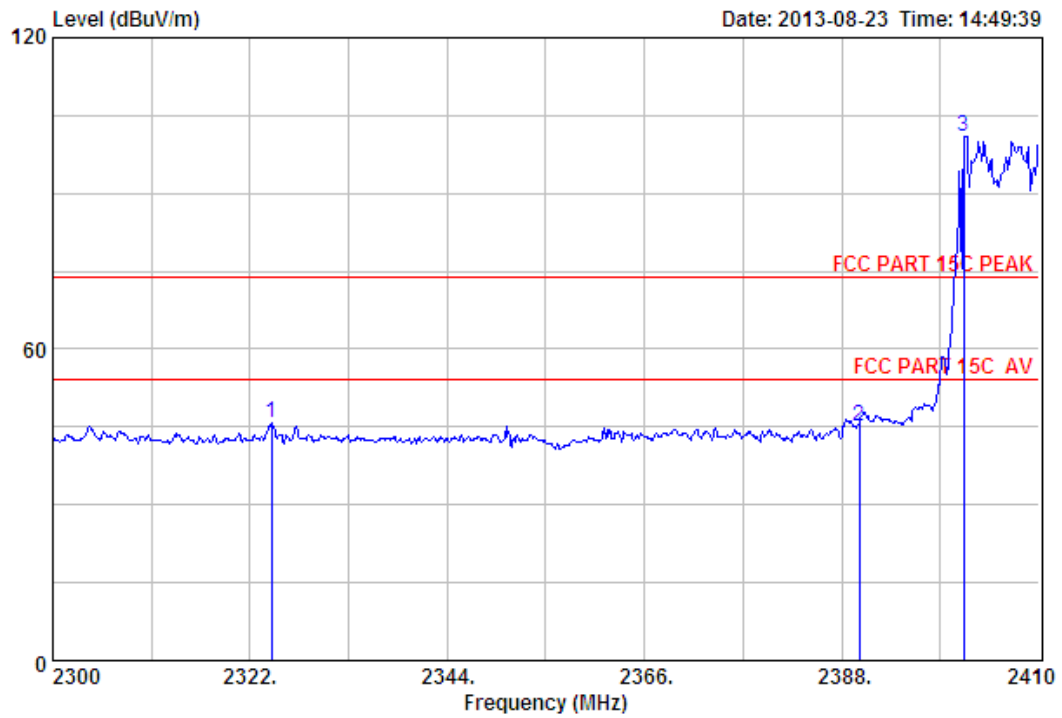

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2324.42	27.73	6.54	34.23	45.67	45.71	74.00	28.29	Peak
2	2390.00	27.64	6.62	34.19	45.03	45.10	74.00	28.90	Peak
3	2401.64	27.61	6.62	34.18	100.82	100.87	74.00	-26.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

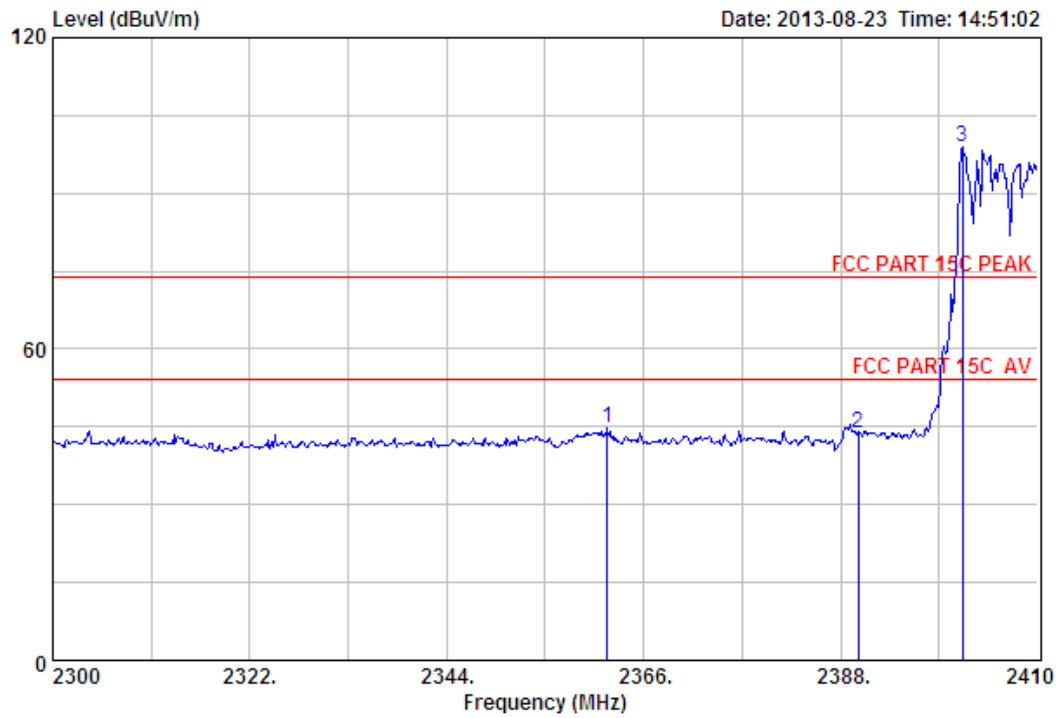

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2361.93	27.67	6.58	34.20	44.62	44.67	74.00	29.33	Peak
2	2390.00	27.64	6.62	34.19	43.72	43.79	74.00	30.21	Peak
3	2401.64	27.61	6.62	34.18	98.73	98.78	74.00	-24.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

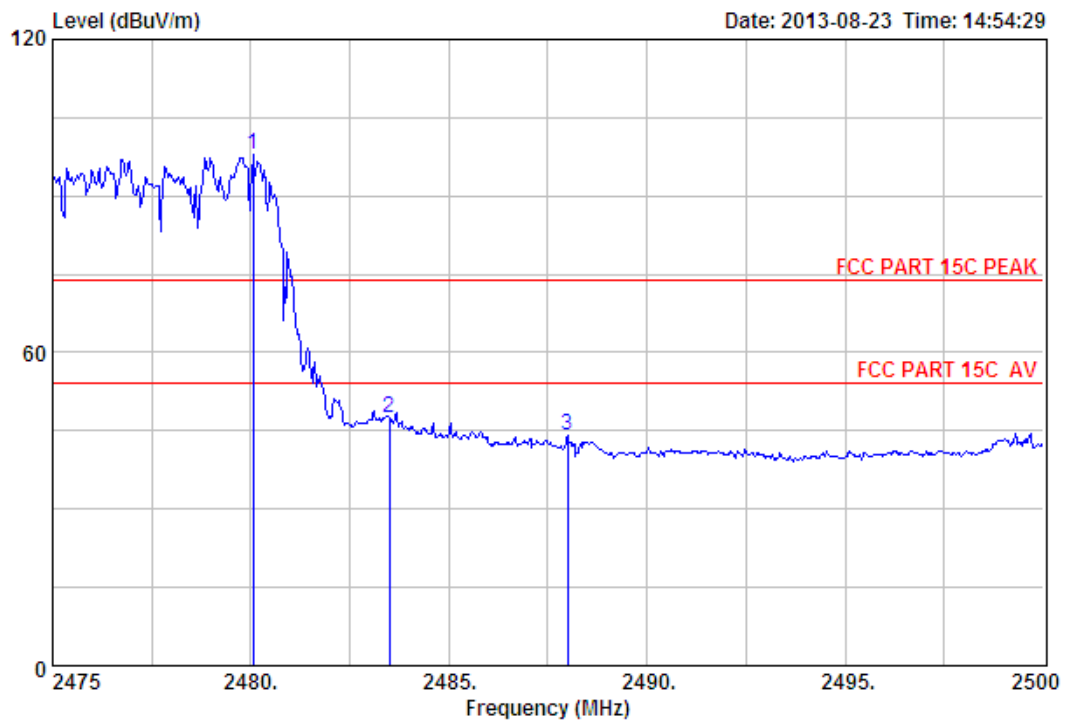

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.05	27.58	6.71	34.03	97.73	97.99	74.00	-23.99	Peak
2	2483.50	27.58	6.71	34.03	47.24	47.50	74.00	26.50	Peak
3	2488.00	27.58	6.73	34.03	43.69	43.97	74.00	30.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

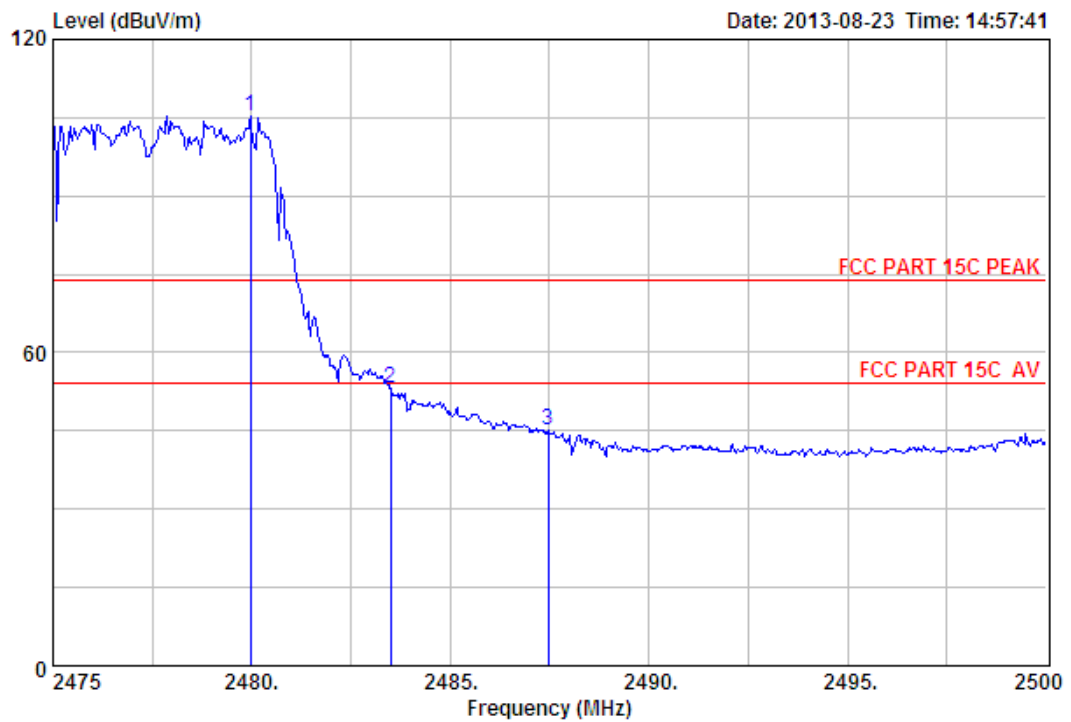

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6'; Humi:56%; Press:101.52kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : 8-DPSK (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.98	27.58	6.71	34.03	105.12	105.38	74.00	-31.38	Peak
2	2483.50	27.58	6.71	34.03	52.78	53.04	74.00	20.96	Peak
3	2487.48	27.58	6.71	34.03	44.92	45.18	74.00	28.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

5. POWER LINE CONDUCTED EMISSIONS

5.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was charged from PC's USB port which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#).. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

5.3. Test Result


0.15MHz—30MHz Conducted emissison Test result		
EUT: SURROUNDBAR 6500BT		
M/N: SB6500BT SPEAKER		
Power: DC 24V From Adapter Input AC 120V/60Hz		
Test date: 2013-08-26	Test site: 3m Chamber	Tested by: Tony.Tang
Test mode: Tx Mode		
Pass		

5.4. Test data

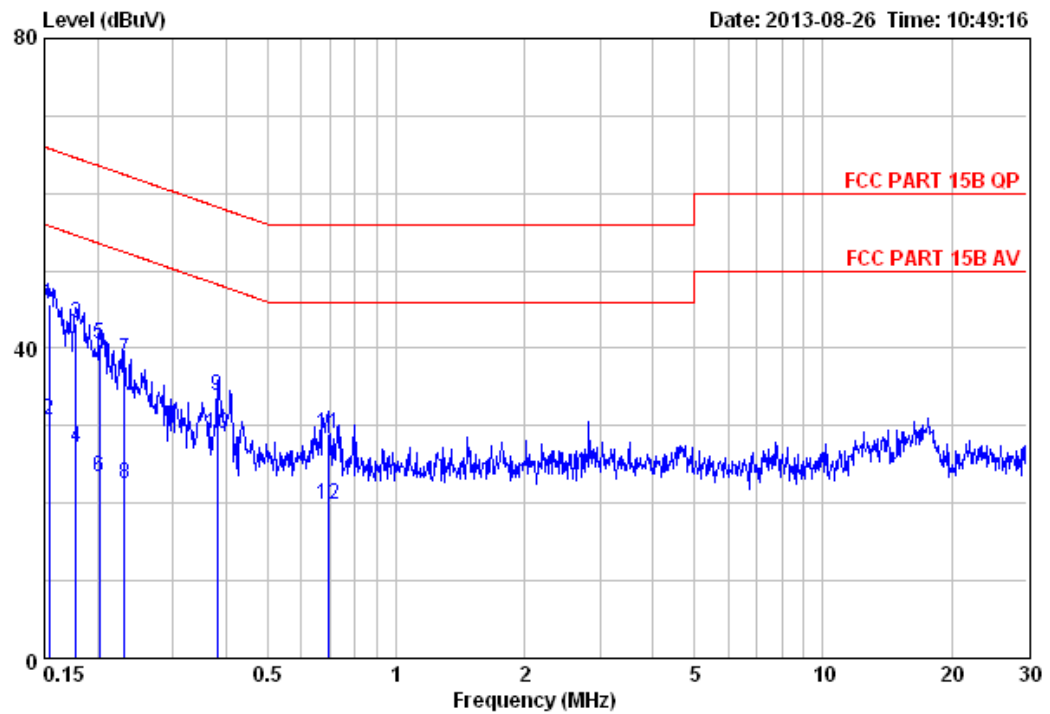

Site no : EST Conduction Shielded Room
 Limit : FCC PART 15B QP LINE Phase:LINE
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.15	9.61	9.81	26.37	45.79	65.78	19.99	QP
2	0.15	9.61	9.81	11.37	30.79	55.78	24.99	Average
3	0.18	9.61	9.80	23.76	43.17	64.59	21.42	QP
4	0.18	9.61	9.80	7.76	27.17	54.59	27.42	Average
5	0.20	9.61	9.80	21.04	40.45	63.54	23.09	QP
6	0.20	9.61	9.80	4.04	23.45	53.54	30.09	Average
7	0.23	9.61	9.80	19.17	38.58	62.39	23.81	QP
8	0.23	9.61	9.80	3.17	22.58	52.39	29.81	Average
9	0.38	9.61	9.82	14.45	33.88	58.25	24.37	QP
10	0.38	9.61	9.82	9.45	28.88	48.25	19.37	Average
11	0.70	9.59	9.81	9.49	28.89	56.00	27.11	QP
12	0.70	9.59	9.81	0.49	19.89	46.00	26.11	Average

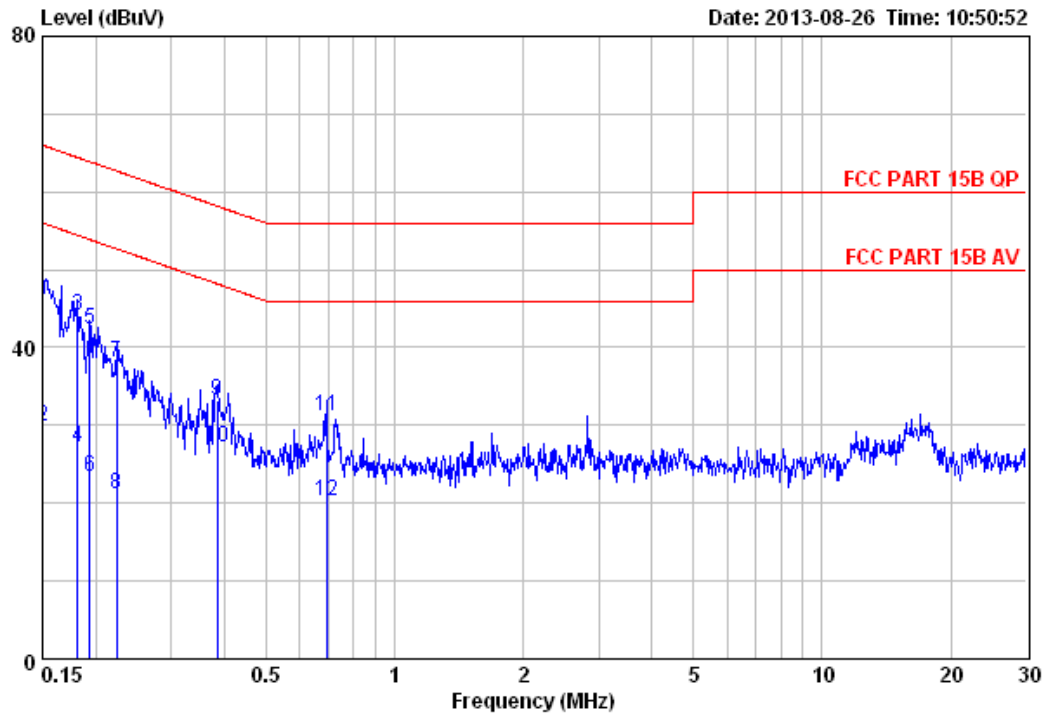

Site no : EST Conduction Shielded Room
 Limit : FCC PART 15B QP LINE Phase: NEUTRAL
 Env. / Ins. : Temp: 25.3°C Humi: 58% Press: 101.50kPa
 Engineer : Tony
 EUT : SURROUNDBAR 6500BT
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SB6500BT SPEAKER
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.15	9.46	9.81	27.51	46.78	66.00	19.22	QP
2	0.15	9.46	9.81	10.51	29.78	56.00	26.22	Average
3	0.18	9.55	9.80	24.77	44.12	64.42	20.30	QP
4	0.18	9.55	9.80	7.77	27.12	54.42	27.30	Average
5	0.19	9.58	9.80	23.02	42.40	63.89	21.49	QP
6	0.19	9.58	9.80	4.02	23.40	53.89	30.49	Average
7	0.22	9.60	9.80	18.80	38.20	62.70	24.50	QP
8	0.22	9.60	9.80	1.80	21.20	52.70	31.50	Average
9	0.39	9.59	9.82	13.84	33.25	58.17	24.92	QP
10	0.39	9.59	9.82	7.84	27.25	48.17	20.92	Average
11	0.69	9.63	9.81	11.81	31.25	56.00	24.75	QP
12	0.69	9.63	9.81	0.81	20.25	46.00	25.75	Average

6. TEST SETUP PHOTO

Conducted Test



Radiated Test (30-1000 MHz)



Radiated Test (1000-25000 MHz)



7. PHOTOS OF EUT

External Photos
M/N: SB6500BT SPEAKER




External Photos
M/N: SB6500BT SPEAKER





External Photos
M/N: SB6500BT SPEAKER




Internal Photos
M/N: SB6500BT SPEAKER

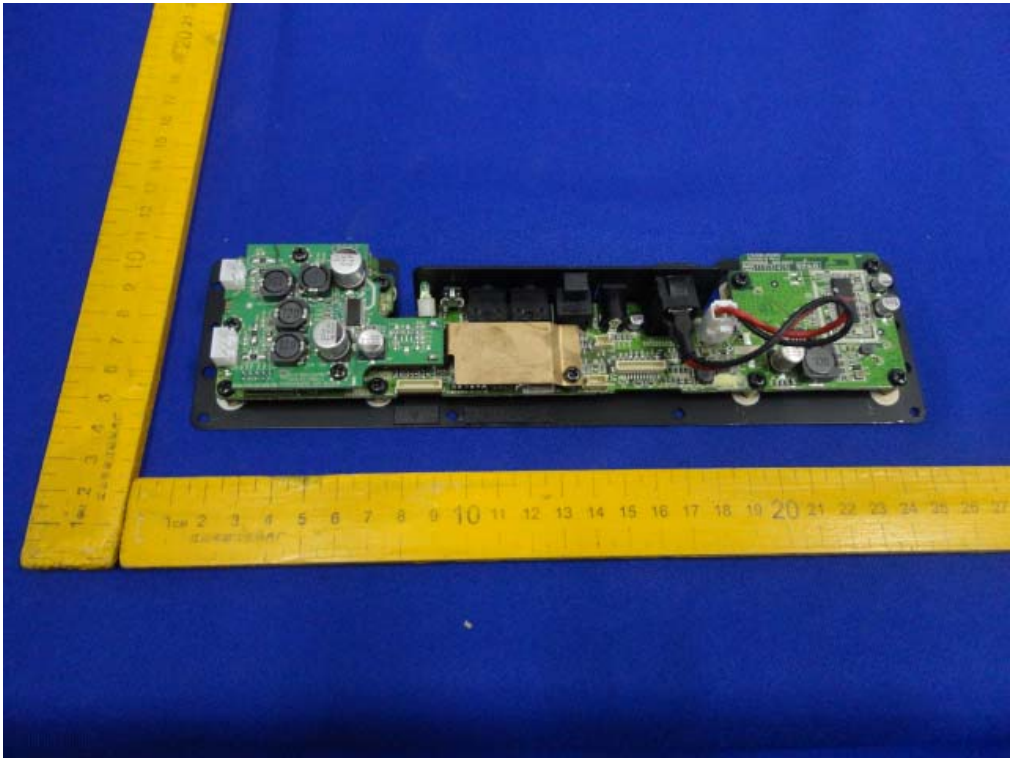

Internal Photos
M/N: SB6500BT SPEAKER

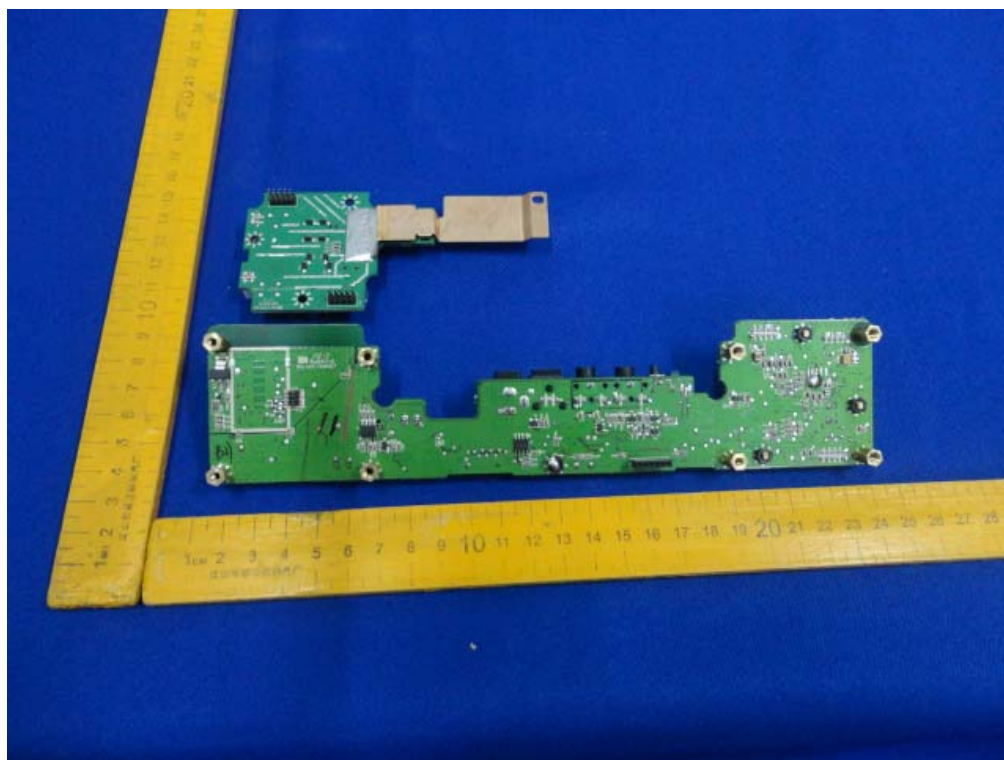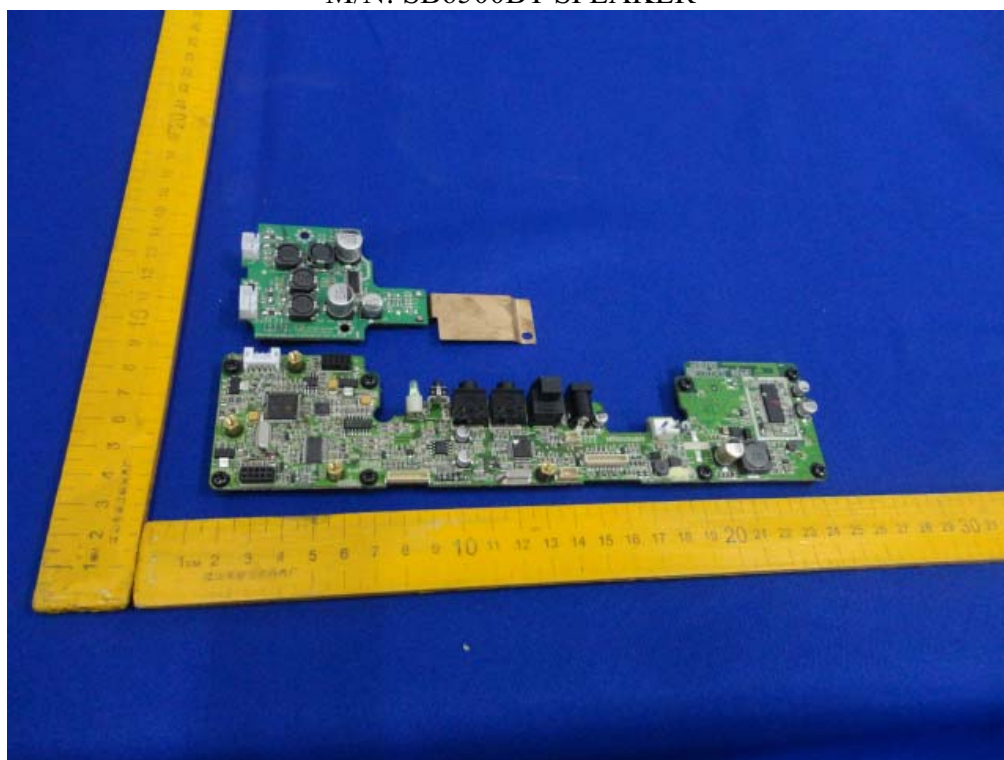


Internal Photos
M/N: SB6500BT SPEAKER

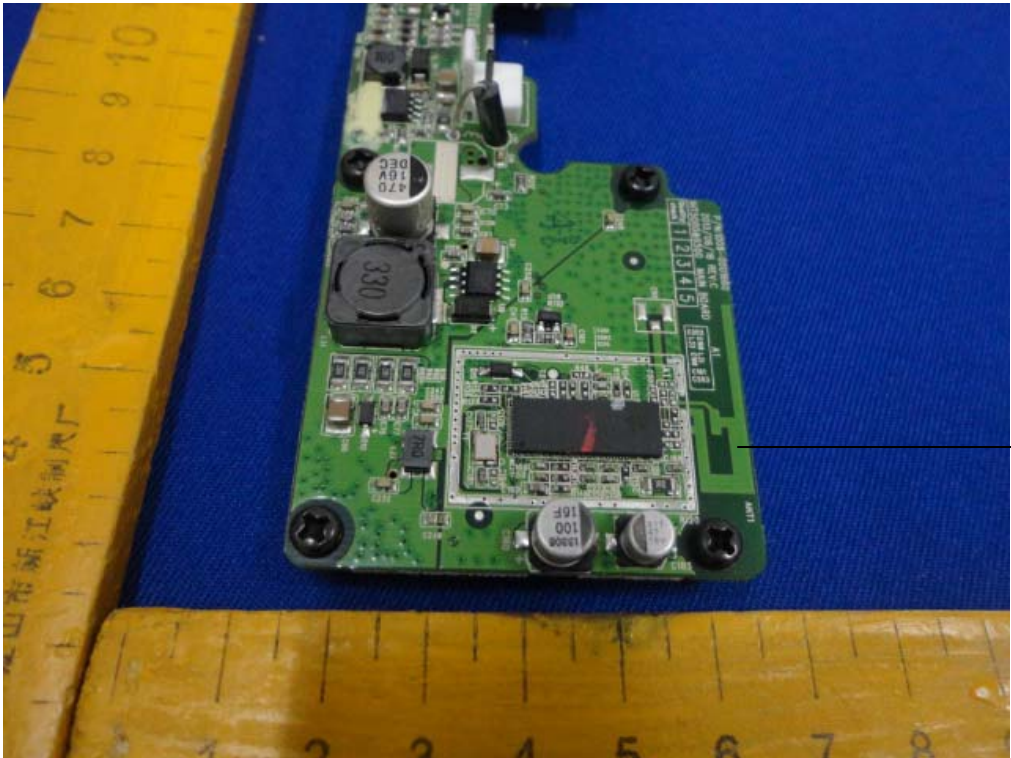


FHSS
Antenna



Internal Photos
M/N: SB6500BT SPEAKER

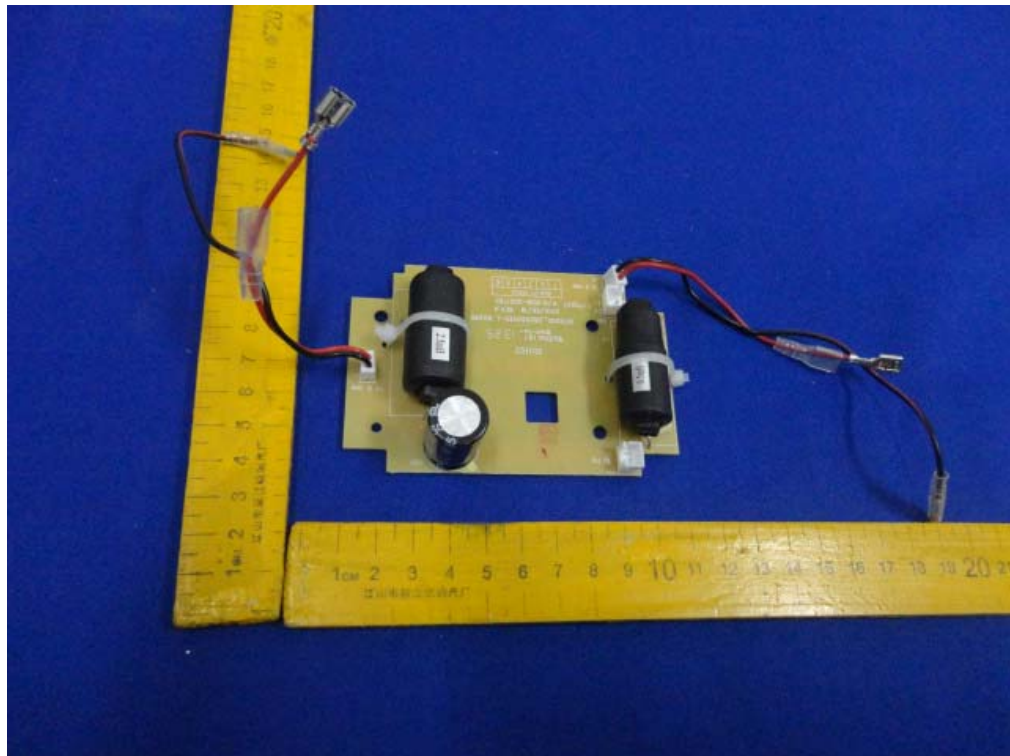


Internal Photos
M/N: SB6500BT SPEAKER

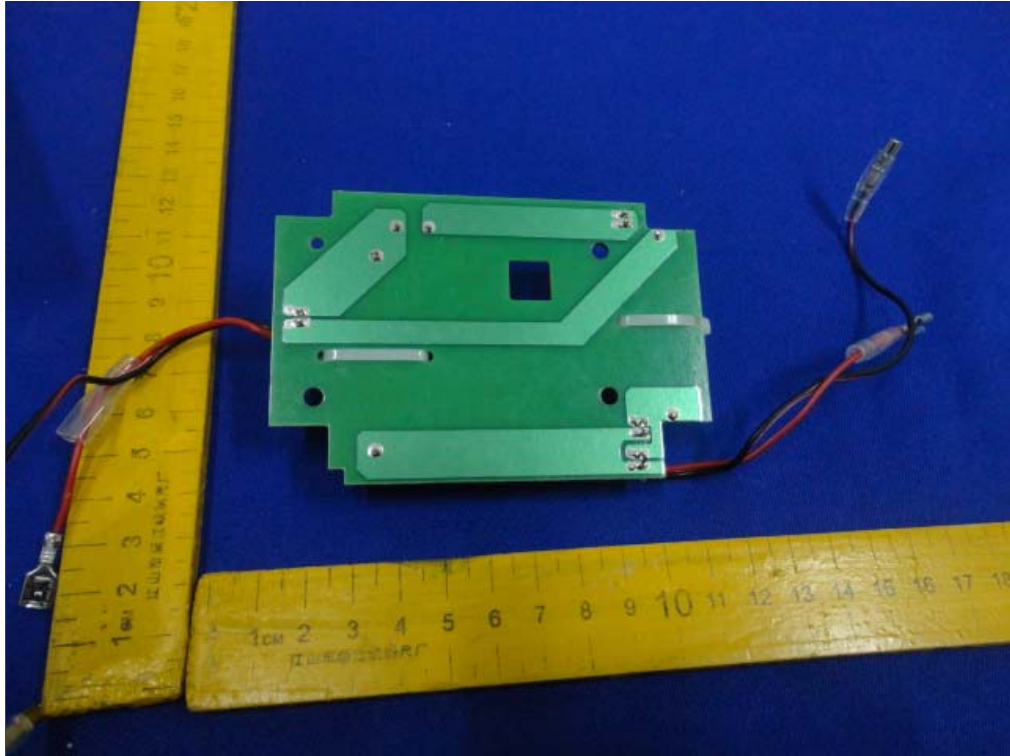


Internal Photos
M/N: SB6500BT SPEAKER

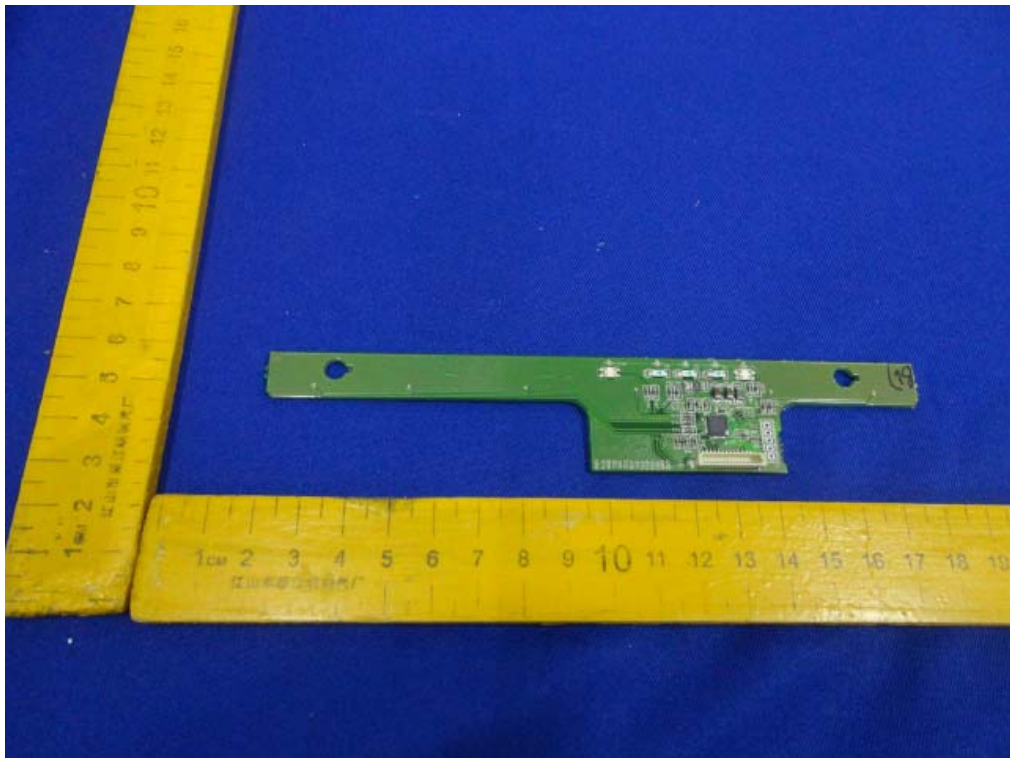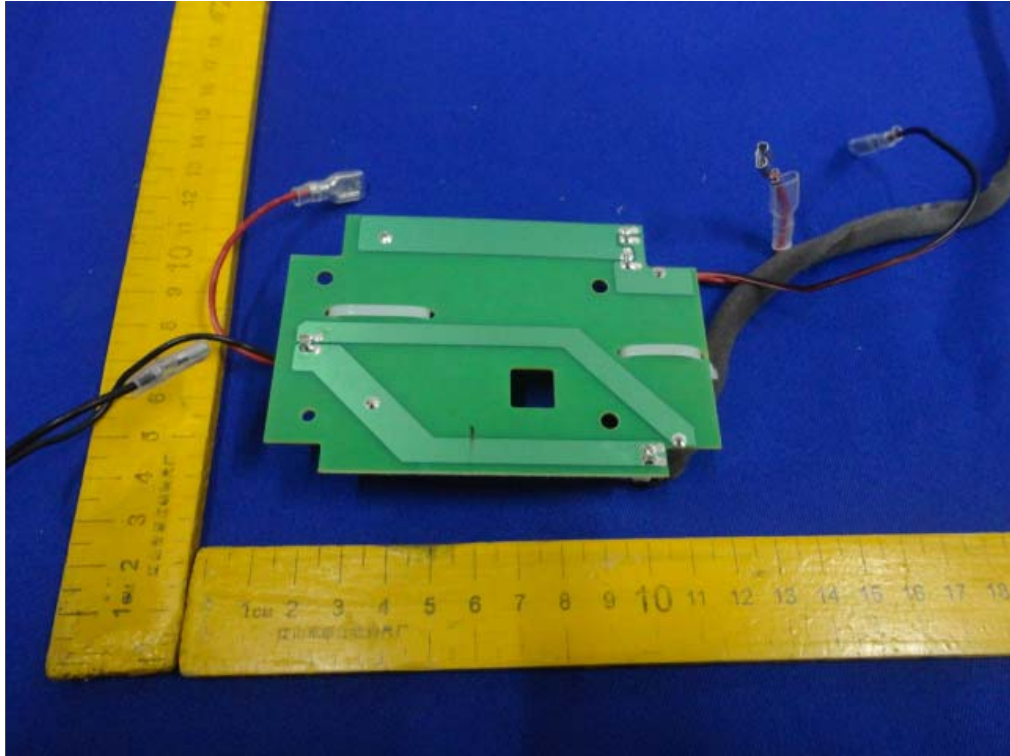


Internal Photos
M/N: SB6500BT SPEAKER

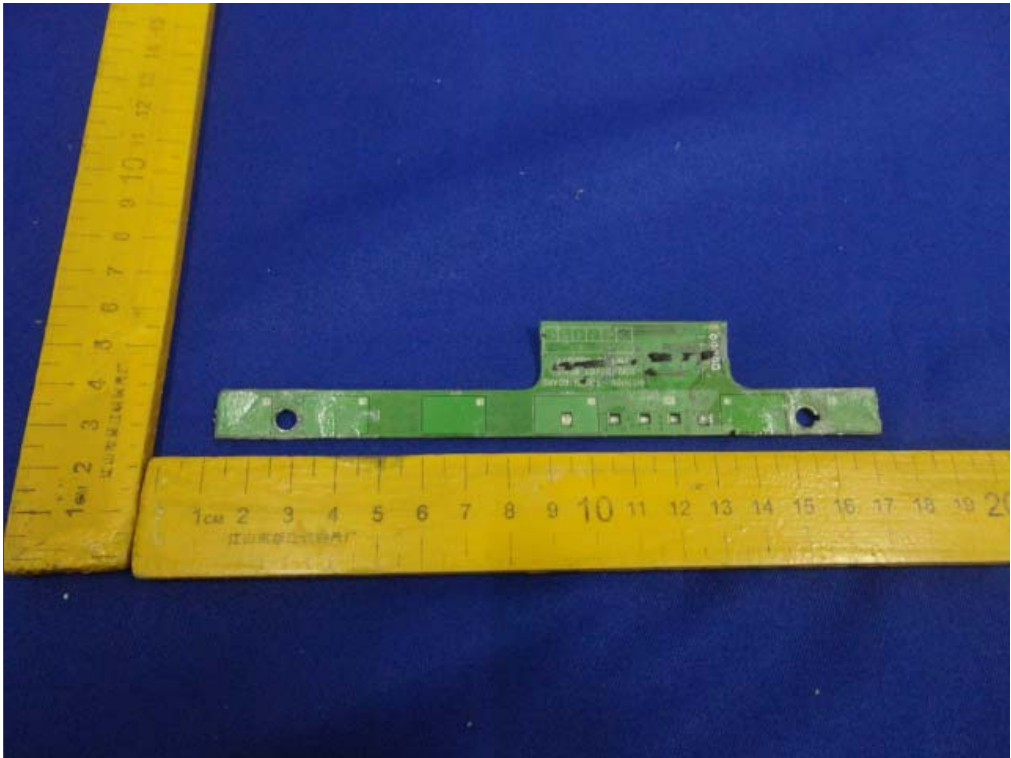

Internal Photos
M/N: SB6500BT SPEAKER

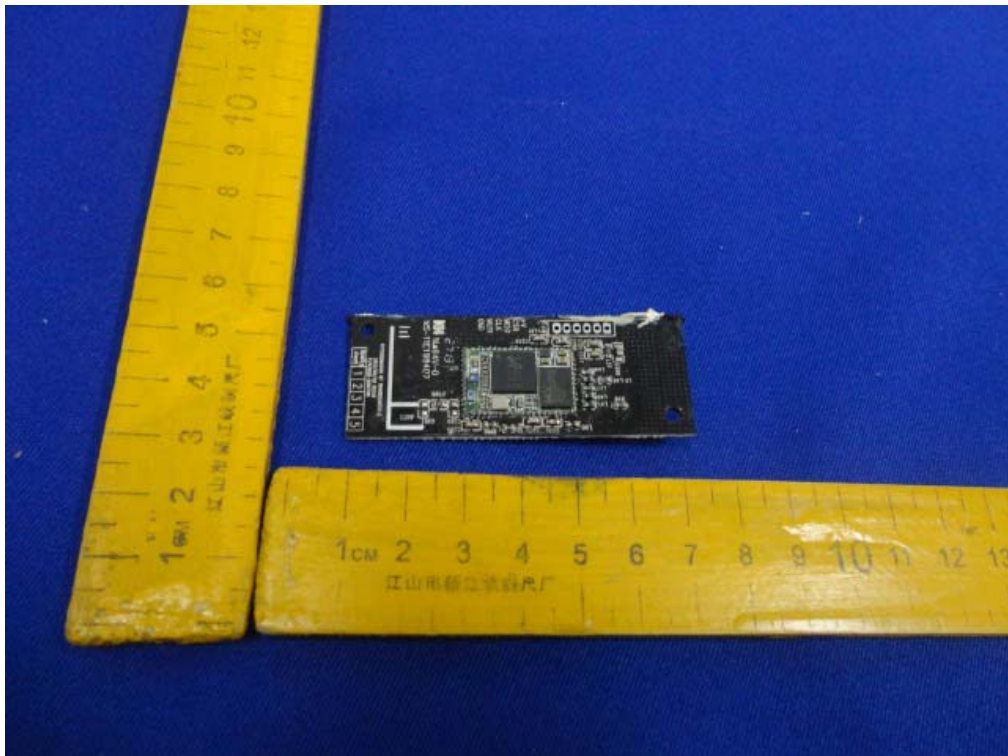


Internal Photos
M/N: SB6500BT SPEAKER

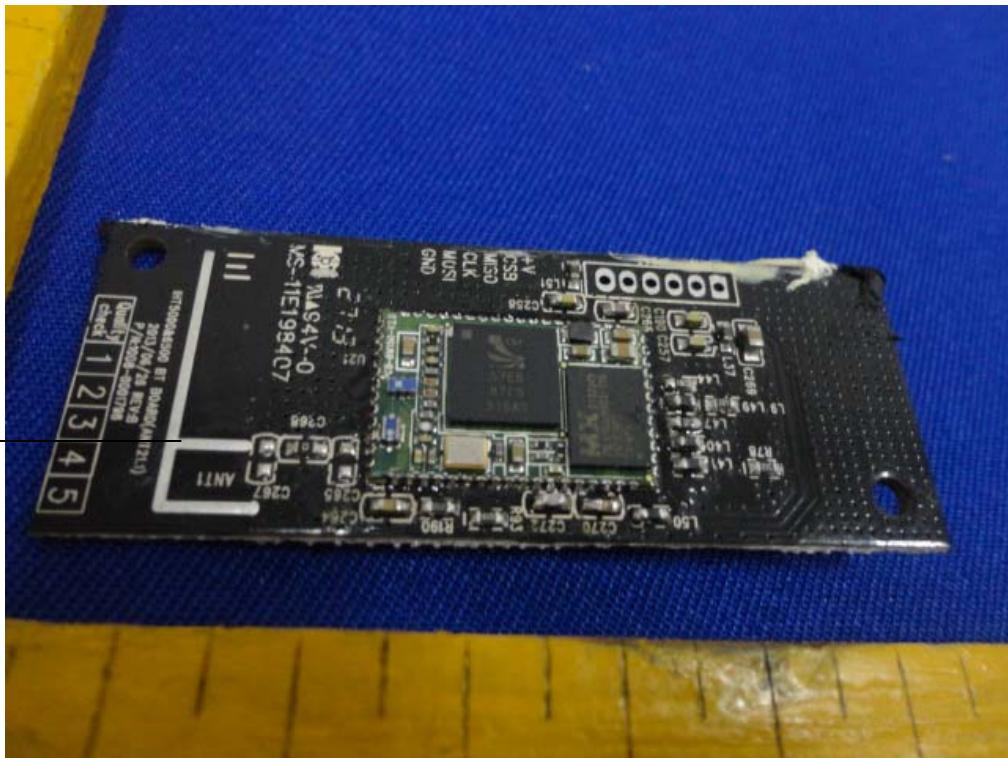


Bluetooth
Antenna

Internal Photos
M/N: SB6500BT SPEAKER

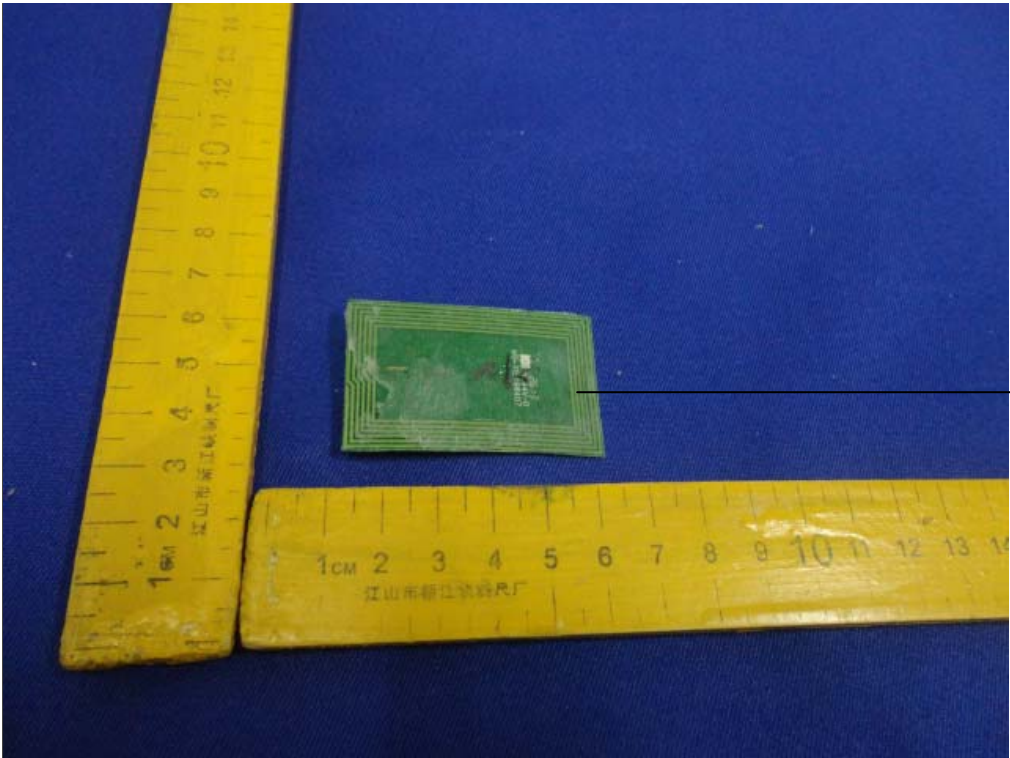

NFC
Antenna

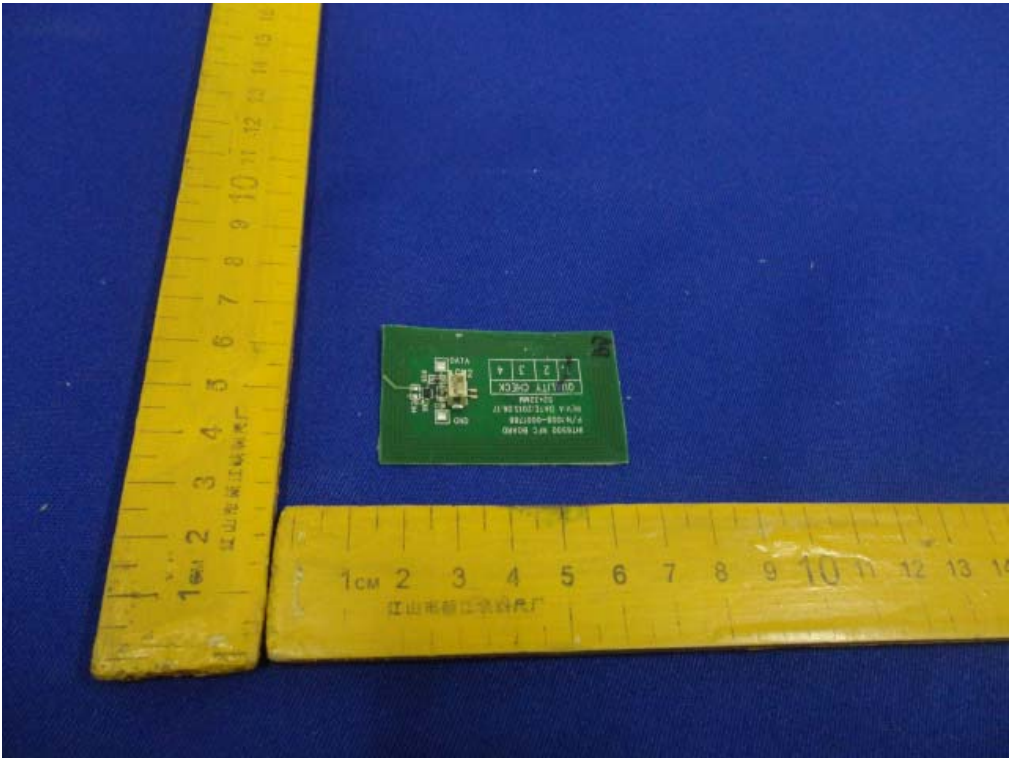

Adapter Photos
M/N: SB6500BT SPEAKER



Remote Control Photos
M/N: SB6500BT SPEAKER

