





Report No: FCC 0808063-01 File reference No: 2009-01-14

Applicant: GaiShan Technology Pte Ltd

Product: Audio Player with Scanner

Brand Name: TellMate

Model No: TM-5801

Test Standards: FCC Part 15 Subpart B: 2006

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: January 14. 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0808063-01 Page 2 of 25

Date: 2009-01-14



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 25

Report No: 0808063-01

Date: 2009-01-14



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment.	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	11
6.0	FCC ID Label	17
7.0	Photo of testing	18

Date: 2009-01-14



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: GaiShan Technology Pte Ltd Address: 1 Goldhill Plaza, #03-35

Telephone: 86-755-82970307 Fax: 86-755-82970571

1.3 Description of EUT

Product: Audio Player with scanner

Brand Name: TellMate
Model Number: TM-5801

Additional Model Name: MM-5801 Rating: 3.7V DC Operation Frequency 13.56MHz

Antenna Designation

1.4 Submitted Sample: 1 Sample

1.5 Test Duration: 2008-12-15 to 2009-01-14

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

lang lang

The sample tested by

Print Name: Terry Tang

Page 5 of 25

Report No: 0808063-01

Date: 2009-01-14



2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2008.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2008.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2008.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer(with					
Tracking Generator)	MS2661C	MT72089	ANRITSU	2008.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2008.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2008.2.23	1Year

2.3 Auxiliary Equipment

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
				Data cable of	
				2m length	
Keyboard	KB-0225	1211815	IBM	unshielded	FCC DOC
				Data cable of	
				2m length	
				unshielded	
				and 1.8m length	
Printer	BOISB-027-00	CNFG029476	EPSON	AC Mains cable	DOC
				Data cable of	
				1.5m length	
				unshielded and	
				1.8m length AC	
Monitor	6331-4CN	23-DNWX3	IBM	Mains cable	FCC ID
				1.8m length	
PC	8434		IBM	AC Mains cable	FCC DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0808063-01 Page 6 of 25

Date: 2009-01-14

		12/			
				Data cable of	
Mouse	OM860XC	HM0509	BIGCOW	1.5m length	FCC DOC

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.

3.2 Test Standards


FCC Part 15 Subpart B: 2006

Date: 2009-01-14



4.0 Conducted Power line Test

4.1 Schematics of the test

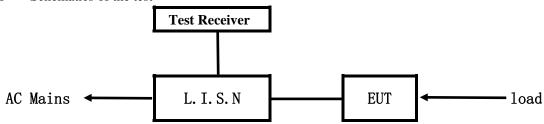


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

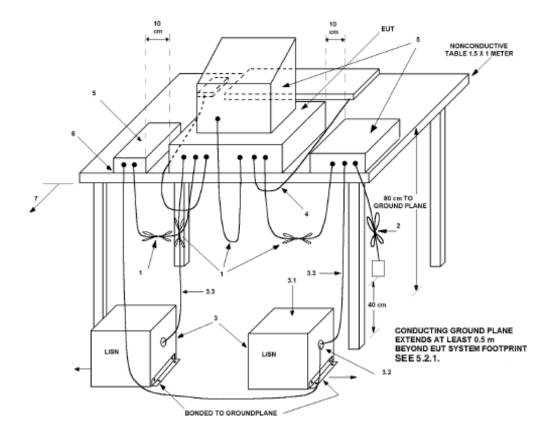

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 8 of 25

Report No: 0808063-01

Date: 2009-01-14



4.3 Power line conducted Emission Limit

Eraguanay (MHz)	Class A Li	mits dB(μV)	Class B Limits dB(μV)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.00	66.00	66.00~56.00*	56.00~46.00*	
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00	
5.00 ~ 30.00	73.00	60.00	60.00	50.00	

Notes:

- 1. *decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.


Date: 2009-01-14

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC
Working Voltage: 120V~ 60Hz
Model: TM-5801
Results: Pass

Please refer to following diagram for individual

File :TM-5801 Data :#3 Date: 2009/01/13 Time: 15:10:14

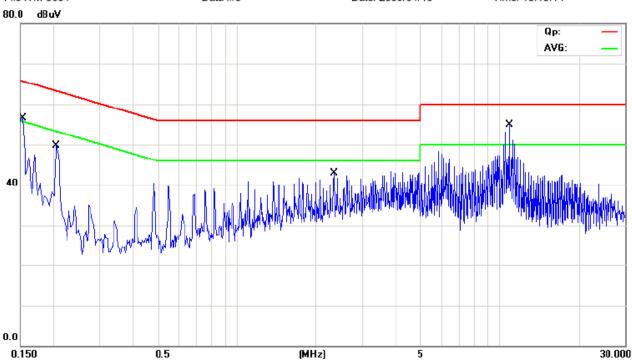

Eraguanav	Reading(dB \(\mu \)				Limit	
Frequency	Live		Neutral		(dB µ	V)
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1533			49.00	43.50	65.82	55.82
0.2054			46.36	44.16	63.39	53.39
2.3488			37.04	35.44	56.00	46.00
10.8833			45.58	37.28	60.00	50.00


Date: 2009-01-14

Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Connected to PC
Working Voltage: 120V~ 60Hz
Model: TM-5801

Results: Pass

Please refer to following diagram for individual

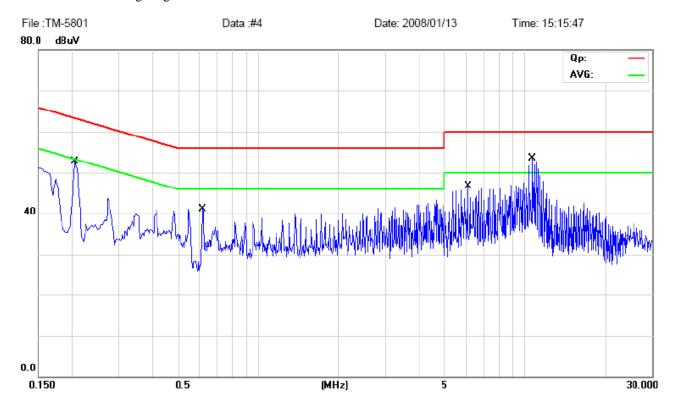

Frequency (MHz)	Reading(dB µ V)				Limit	
	Live	Neutral		(dB µ	V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.2055	47.46	45.86			63.39	53.39
0.6181	37.20	36.40			56.00	46.00
6.1361	34.82	23.62			60.00	50.00
10.7014	52.09	47.99			60.00	50.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 11 of 25

Report No: 0808063-01 Date: 2009-01-14



5.0 Radiated Disturbance Test


5.1 Schematics of the test



5.2 Test Method and test Procedure:


The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Block diagram of Test setup

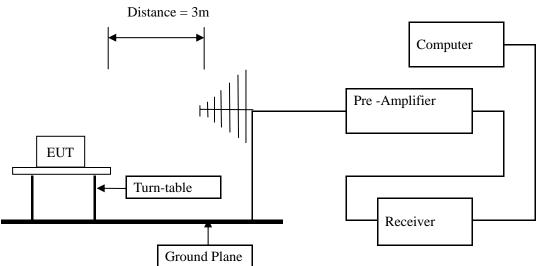

Date: 2009-01-14



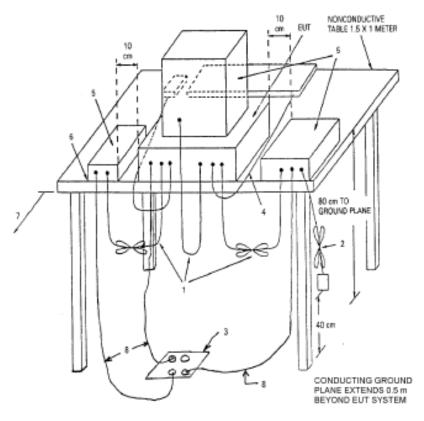

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Date: 2009-01-14

A: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Connected to PC

Level: Class B
Model: TM-5801
Results: PASS

Please refer to following diagram for individual

Picture of the test

File :TM-5801 Data :#1 Date: 2009/01/12 Time: 13:58:36

80.0 dBuV/m

40

30.0 dB uV /m

40

40

50

60

70

(MHz)

300

400

500

600

700

1000.000

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
73.650	33.77	Н	40.00
108.079	38.99	Н	43.50
277.350	37.96	Н	46.00
362.225	38.89	Н	46.00
667.775	40.87	Н	46.00
754.3230	38.81	Н	46.00
891.476	40.59	Н	46.00

Page 14 of 25

Report No: 0808063-01

Date: 2009-01-14

B: Radiated Disturbance In Vertical (30MHz---1000MHz)

EUT set Condition: Connected to PC

Level: Class B **Model:** TM-5801 **Results: PASS**

Please refer to following diagram for individual

Picture of the test

File:TM-5801 Data :#2 Date: 2009/01/12 Time: 14:09:50 80.0 dBuV/m QP: Margin: 40 0.0 30.000 (MHz) 300 400 600 700 1000.000 40 60 70 500

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
301.600	35.62	V	46.00
664.872	39.65	V	46.00
757.500	39.93	V	46.00

Page 15 of 25

Report No: 0808063-01 Date: 2009-01-14




6.0 FCC ID Label

FCC ID: WNITM-5801

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

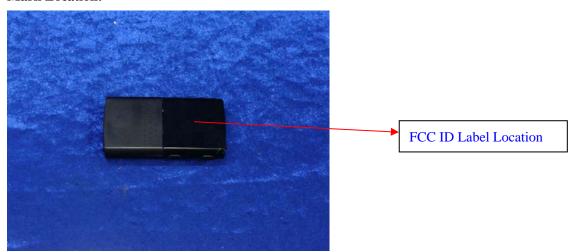

Page 16 of 25

Report No: 0808063-01

Date: 2009-01-14



7.0 Photo of testing

7.1 Conducted test View-




Page 17 of 25

Report No: 0808063-01 Date: 2009-01-14



7.2 Radiated emission test view--

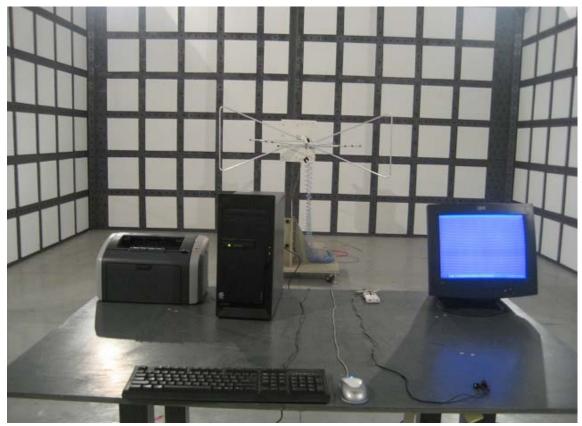

Date: 2009-01-14



7.3 Photo for the EUT



DSCH10F3.51/13: ISO400



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 19 of 25

Report No: 0808063-01





Page 20 of 25

Report No: 0808063-01





DSC-H10 F3.5 1/13s ISO 400

Page 21 of 25

Report No: 0808063-01





DSC-H10 F3.5 1/20s ISO 400

Page 22 of 25

Report No: 0808063-01






DSC-H10 F4.0 1/8s ISO 400

Page 23 of 25

Report No: 0808063-01



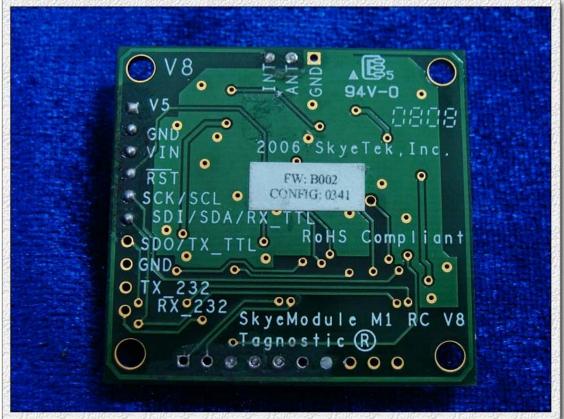

DSC-H10 F4.0 1/8s ISO 400

Page 24 of 25

Report No: 0808063-01





DSC-H10 F3.5 1/10s ISO 400

Page 25 of 25

Report No: 0808063-01

Date: 2009-01-14





DSC-H10 F3.5 1/8s ISO 400

End of the report