

PQ Touch Screen User Manual

Multi Touch Screen For 32" LCD display


MTSIR321 series

Copyright © 2008 PQ Labs. All Rights Reserved.

Disclaimer

The information in this document is subject to change without notice. PQLabs makes no representations or warranties with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. PQLabs reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of PQLabs to notify any person of such revisions or changes.

product appearance

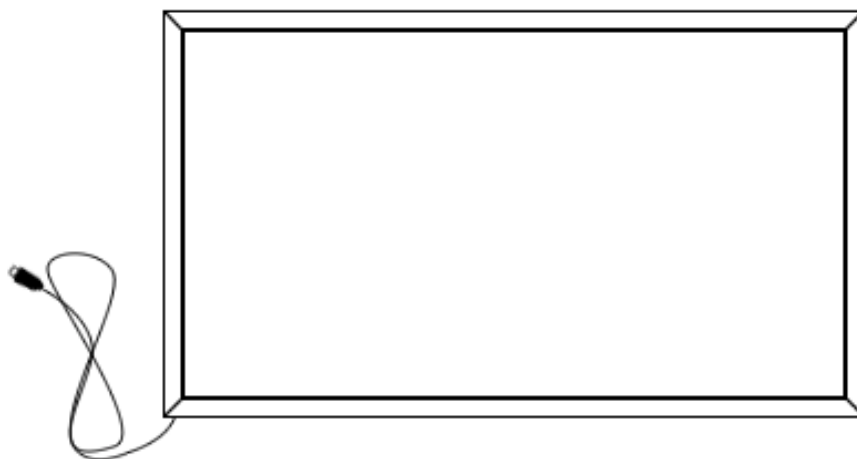

Specification

- Size 32"
- Resolution 4096 x 4096
- Scanning rate 75fps
- Environmental
 - Operating Temp 0 to 40 °C
 - Storage Temp -20 to +60 °C
 - Humidity 80% non-condensing AT
- Electrical
 - Input Power 5V from USB port
200mA

Setup and Usage

For windows system:

- 1, Install driver from CD-Rom.
- 2, Fasten the touch screen in the LCD display. Make sure the screen aligned with LCD display.
- 3, Connect USB cable to USB port on your PC.
- 4, Hardware works.

FCC Compliance Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Federal Communication Commission Interference Statement:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.