

FCC TEST REPORT

For

Autel Intelligent Technology Corp., Ltd.

AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM

Model No.: MaxiSys MS906TS

Prepared For : Autel Intelligent Technology Corp., Ltd.
Address : 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan,
Shenzhen, 518055, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217100093W3
Date of Test : Oct. 11~Nov. 13, 2017
Date of Report : Dec. 02, 2017

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	21
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	22
APPENDIX III -- INTERNAL PHOTOGRAPH.....	23

TEST REPORT

Applicant : Autel Intelligent Technology Corp., Ltd.
Manufacturer : Autel Intelligent Technology Corp., Ltd.
Product Name : AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM
Model No. : MaxiSys MS906TS
Trade Mark : Autel
Rating(s) : Input: DC 12V, 3A (Via adapter Input: AC 100~240V, 50/60Hz, Max: 1.2A; DC 3.7V, 10000 mAh battery inside)

Test Standard(s) : FCC Part15 Subpart C 2017, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Oct. 11~Nov. 13, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Autel Intelligent Technology Corp., Ltd.
Address	:	6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd.,Xili, Nanshan, Shenzhen, 518055, China
Manufacturer	:	Autel Intelligent Technology Corp., Ltd.
Address	:	6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd.,Xili, Nanshan, Shenzhen, 518055, China

1.2. Description of Device (EUT)

Product Name	:	AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM	
Model No.	:	MaxiSys MS906TS	
Trade Mark	:	Autel	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter DC 3.7V Battery inside	
Product Description	:	Operation Frequency:	125 KHz
		Number of Channel:	1 Channels
		Modulation Type:	ASK
		Antenna Type:	cylindrical Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2)This report is for 125KHz			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: GME36A-120300FDS Input: 100-240V~50-60Hz, 1.2A Output: 12V, 3A
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 4	Keeping TX mode



For Conducted Emission	
Final Test Mode	Description
Mode 1	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01

1.5. List of channels

Channel	Freq.
	(MHz)
1	0.125

1.6. Description Of Test Setup

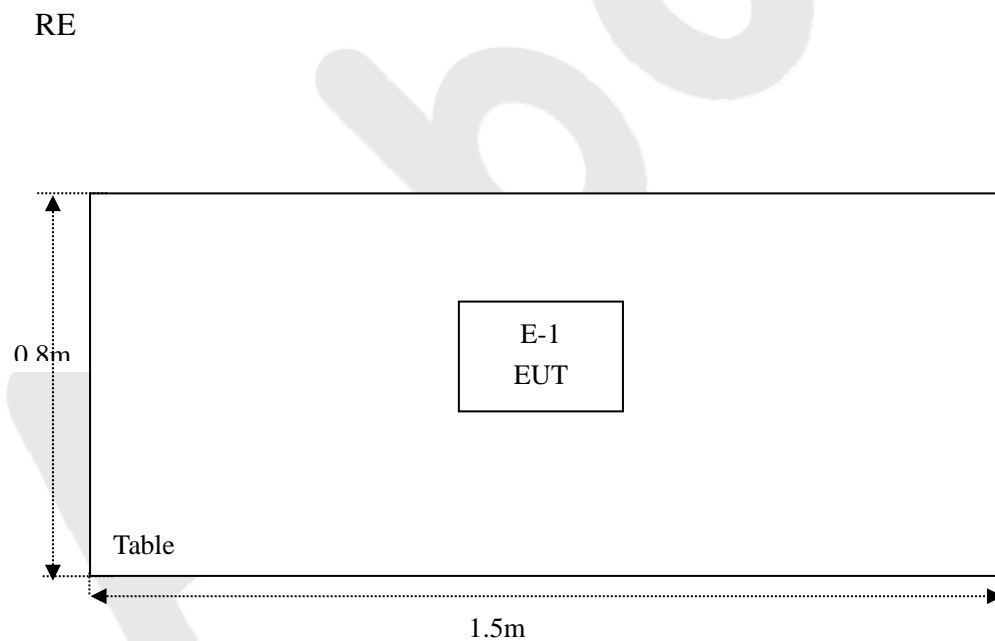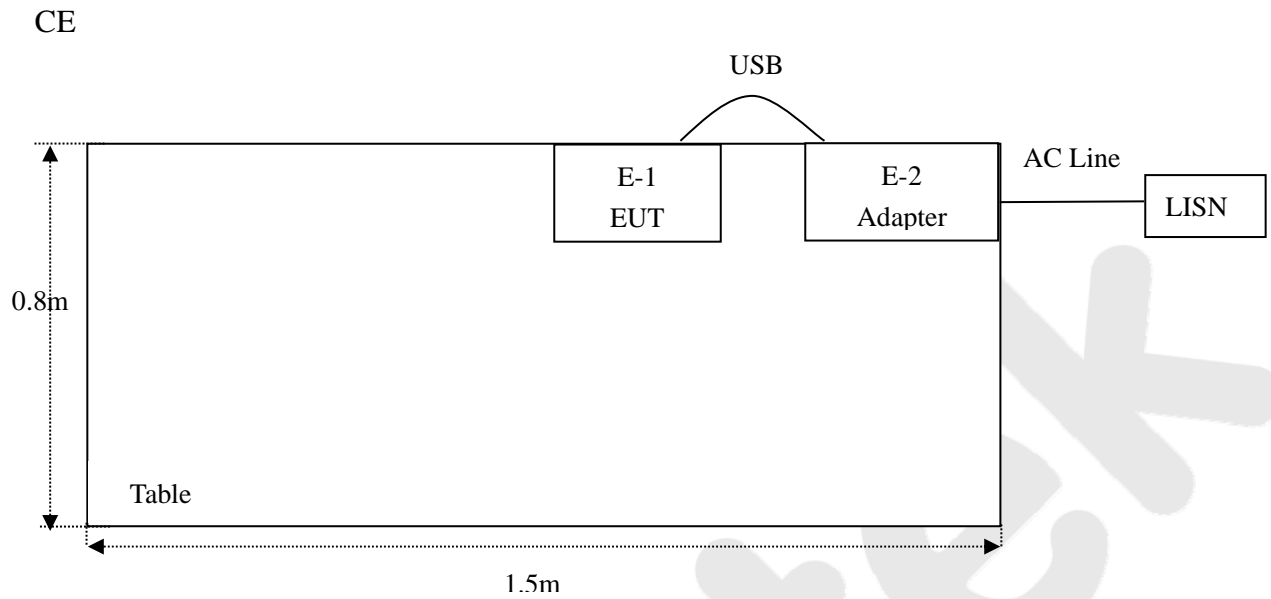

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	May 27, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
10.	cylindrical Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	May 27, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
13.	Pre-amplifier	SKET Electronic	BK1G40G50 A	KD25352	May 27, 2017	1 Year
14.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
20.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
21.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

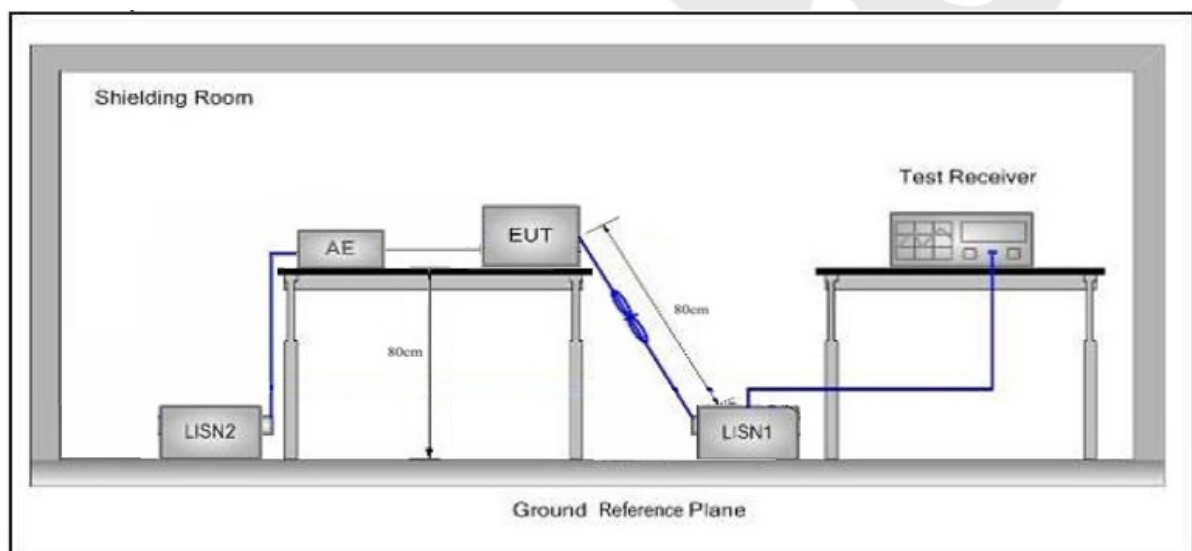

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%

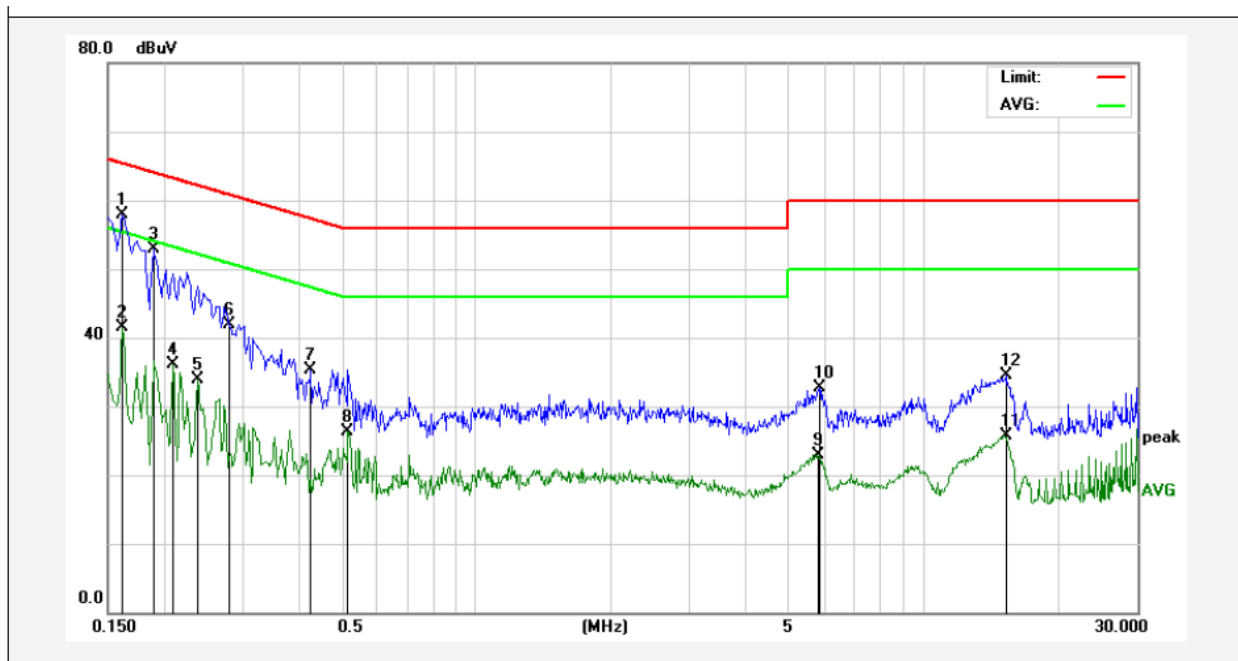

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	38.09	19.90	57.99	65.36	-7.37	QP	
2	0.1620	21.69	19.90	41.59	55.36	-13.77	AVG	
3	0.1900	33.07	19.90	52.97	64.03	-11.06	QP	
4	0.2100	16.29	19.90	36.19	53.20	-17.01	AVG	
5	0.2380	14.00	19.89	33.89	52.16	-18.27	AVG	
6	0.2802	22.07	19.89	41.96	60.81	-18.85	QP	
7	0.4260	15.37	19.95	35.32	57.33	-22.01	QP	
8	0.5180	6.32	19.99	26.31	46.00	-19.69	AVG	
9	5.7779	2.62	20.23	22.85	50.00	-27.15	AVG	
10	5.8619	12.53	20.23	32.76	60.00	-27.24	QP	
11	15.1739	5.50	20.26	25.76	50.00	-24.24	AVG	
12	15.2699	14.19	20.26	34.45	60.00	-25.55	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

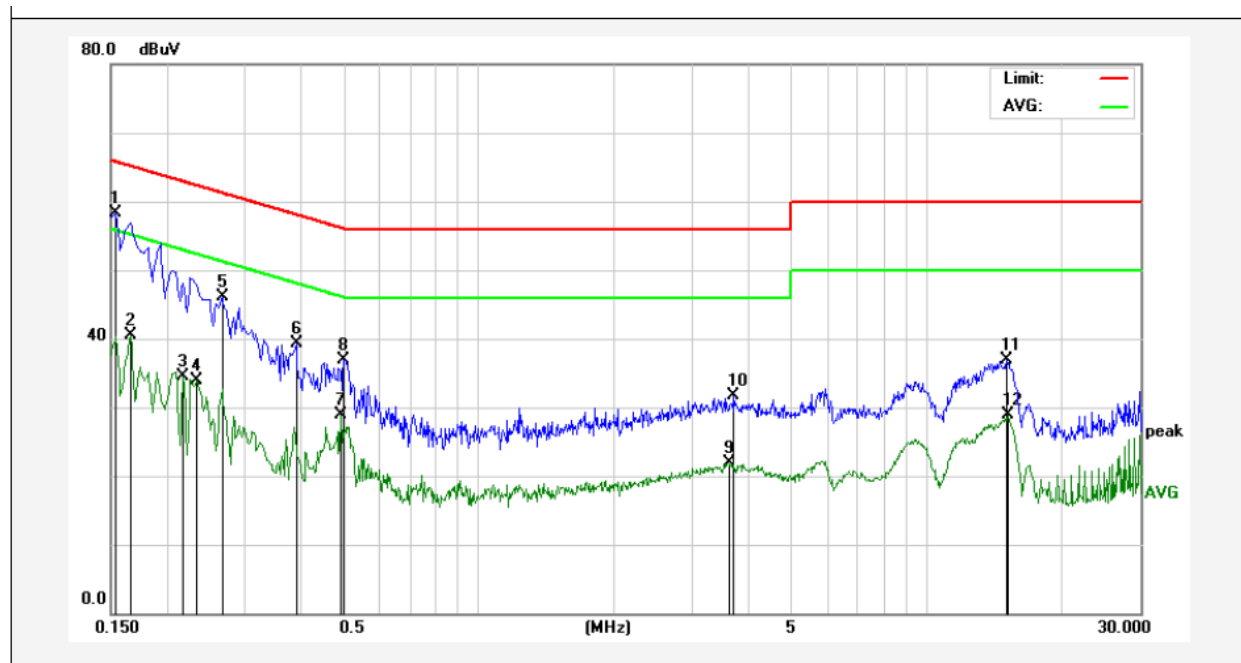

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	38.40	19.90	58.30	65.78	-7.48	QP	
2	0.1660	20.66	19.90	40.56	55.15	-14.59	AVG	
3	0.2180	14.54	19.90	34.44	52.89	-18.45	AVG	
4	0.2340	13.92	19.89	33.81	52.30	-18.49	AVG	
5	0.2660	26.24	19.89	46.13	61.24	-15.11	QP	
6	0.3899	19.42	19.93	39.35	58.06	-18.71	QP	
7	0.4900	8.92	19.98	28.90	46.17	-17.27	AVG	
8	0.4980	16.98	19.98	36.96	56.03	-19.07	QP	
9	3.6020	1.78	20.17	21.95	46.00	-24.05	AVG	
10	3.7140	11.48	20.17	31.65	56.00	-24.35	QP	
11	15.0819	16.69	20.26	36.95	60.00	-23.05	QP	
12	15.1699	8.71	20.26	28.97	50.00	-21.03	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%

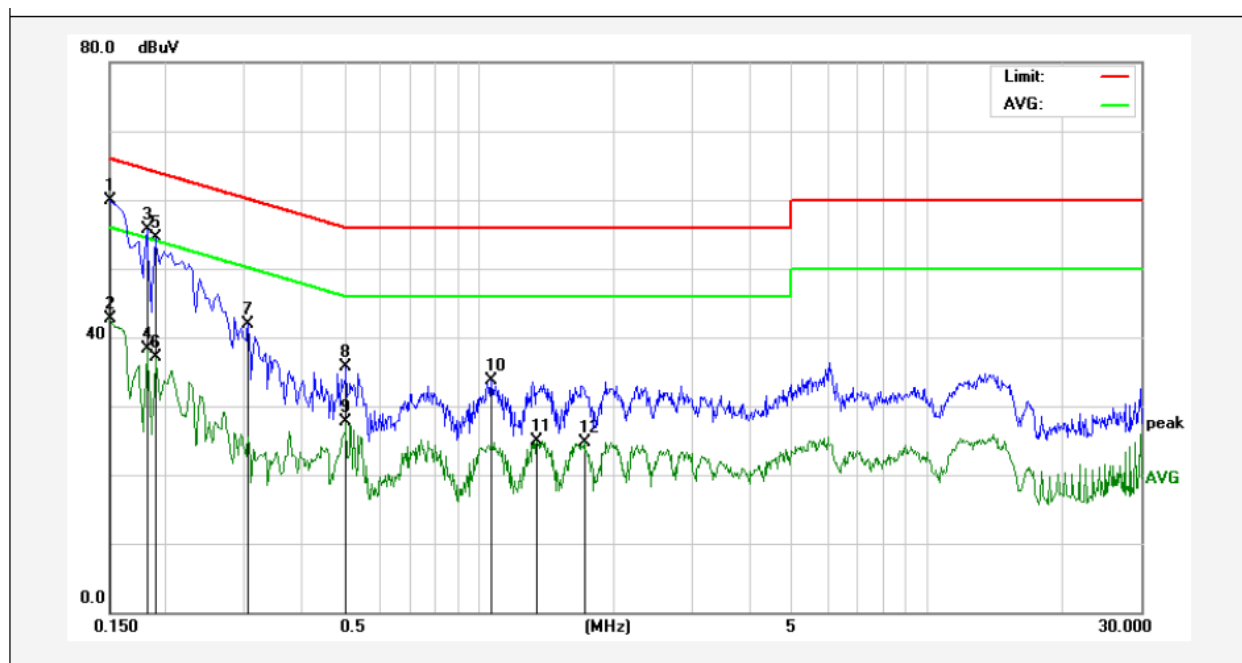

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	39.93	19.90	59.83	66.00	-6.17	QP	
2	0.1499	22.77	19.90	42.67	56.00	-13.33	AVG	
3	0.1819	35.89	19.90	55.79	64.39	-8.60	QP	
4	0.1819	18.38	19.90	38.28	54.39	-16.11	AVG	
5	0.1900	34.55	19.90	54.45	64.03	-9.58	QP	
6	0.1900	17.15	19.90	37.05	54.03	-16.98	AVG	
7	0.3060	21.99	19.89	41.88	60.08	-18.20	QP	
8	0.5060	15.66	19.98	35.64	56.00	-20.36	QP	
9	0.5060	7.81	19.98	27.79	46.00	-18.21	AVG	
10	1.0700	13.65	20.12	33.77	56.00	-22.23	QP	
11	1.3460	4.86	20.13	24.99	46.00	-21.01	AVG	
12	1.7220	4.67	20.13	24.80	46.00	-21.20	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

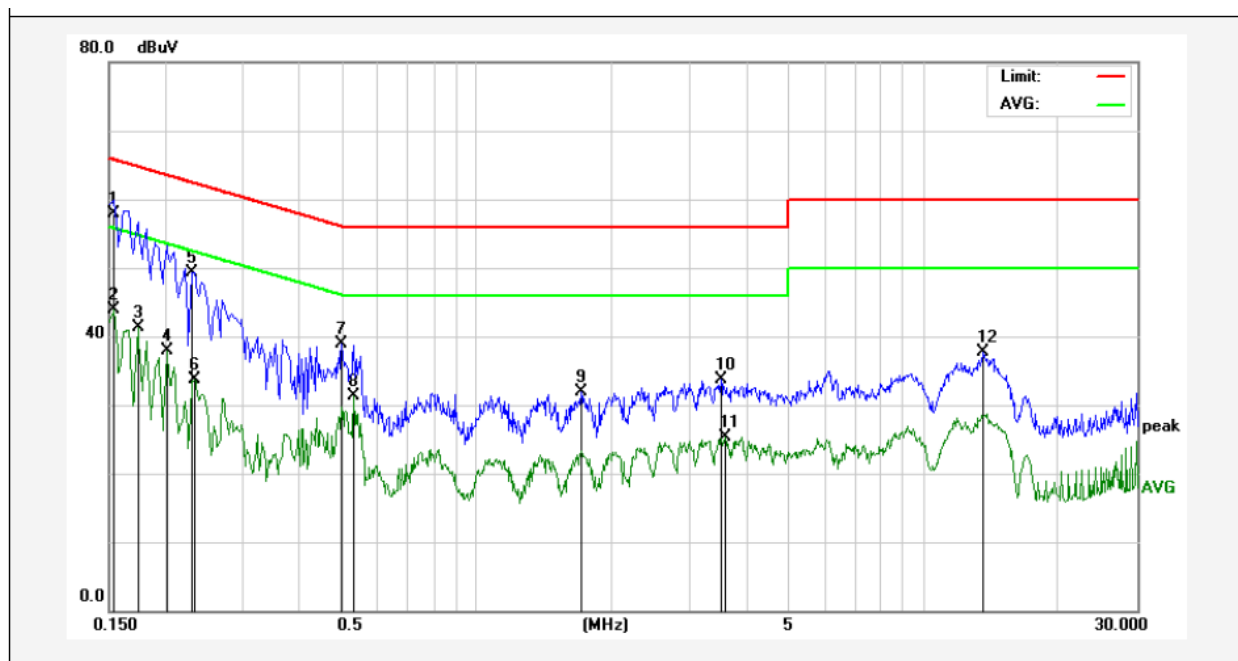

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	38.05	19.90	57.95	65.78	-7.83	QP	
2	0.1539	23.96	19.90	43.86	55.78	-11.92	AVG	
3	0.1740	21.41	19.90	41.31	54.76	-13.45	AVG	
4	0.2020	17.93	19.90	37.83	53.52	-15.69	AVG	
5	0.2300	29.37	19.89	49.26	62.45	-13.19	QP	
6	0.2340	13.74	19.89	33.63	52.30	-18.67	AVG	
7	0.4980	18.83	19.98	38.81	56.03	-17.22	QP	
8	0.5299	11.31	19.99	31.30	46.00	-14.70	AVG	
9	1.7140	11.80	20.13	31.93	56.00	-24.07	QP	
10	3.5140	13.46	20.17	33.63	56.00	-22.37	QP	
11	3.5940	5.11	20.17	25.28	46.00	-20.72	AVG	
12	13.5860	17.48	20.28	37.76	60.00	-22.24	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

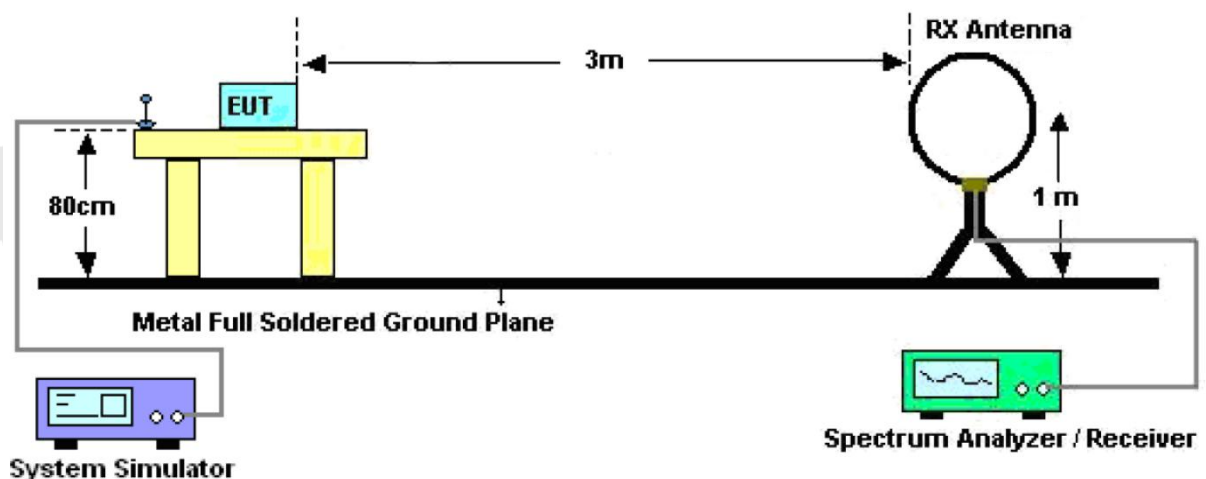


Figure 1. Below 30MHz

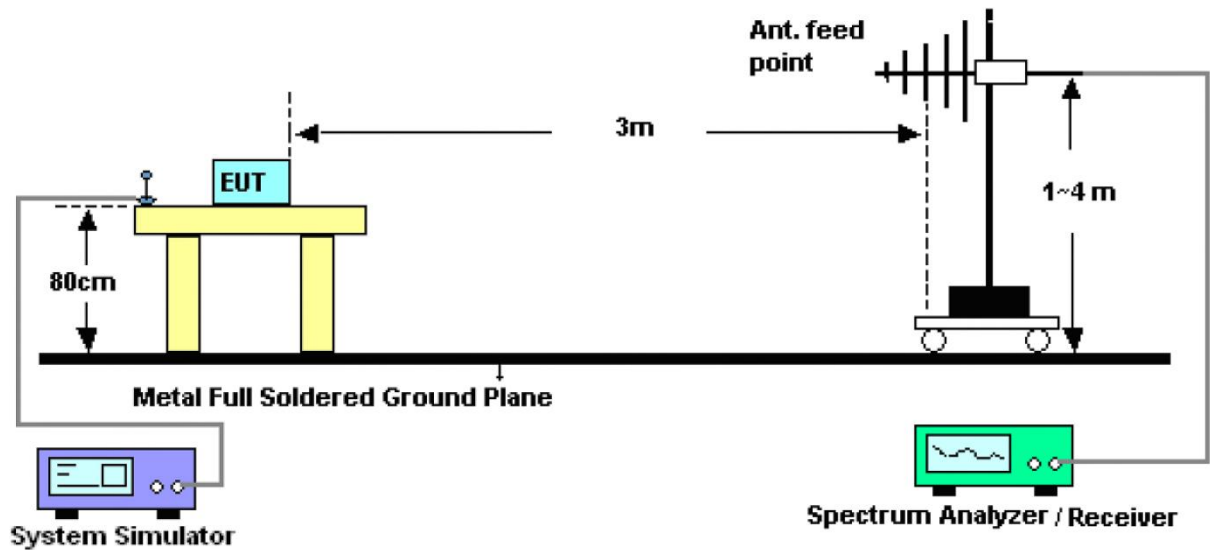


Figure 2. 30MHz to 1GHz

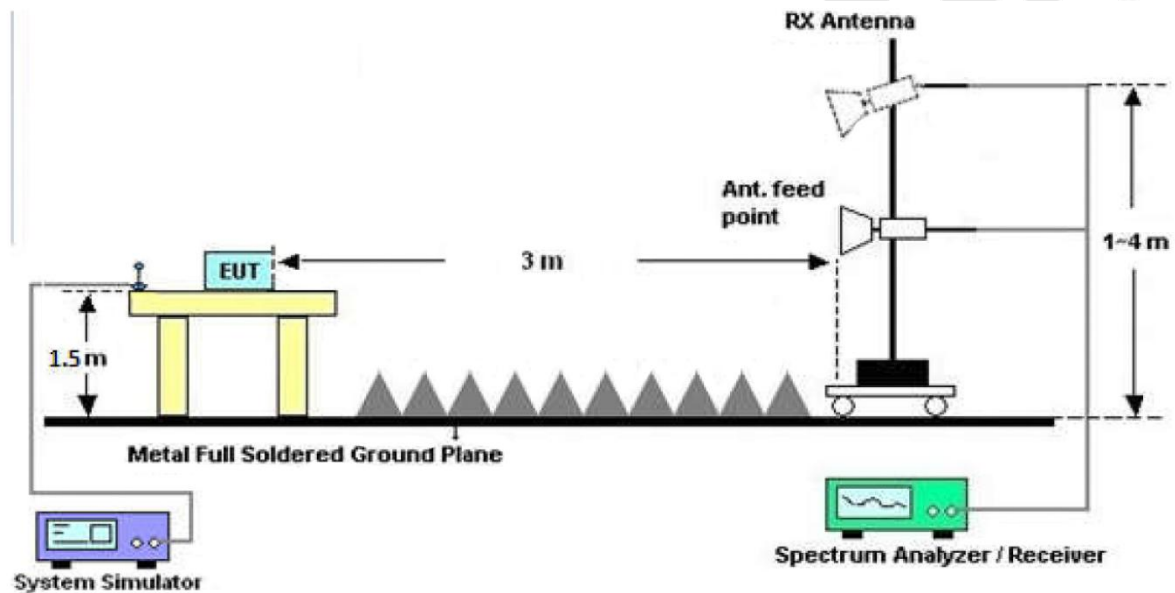


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data


PASS

Anbotek

Test Results

(Between 9KHz – 30MHz)

Job No.:	0217100093W3	Power Source:	AC 120V, 60Hz for adapter
Standard:	FCC PART15 C _3m	Temp.(C)/Hum.(%RH):	24.4(C)/50%RH
Test item:	Radiation Test	Distance:	3m
Test Mode:	TX Mode		

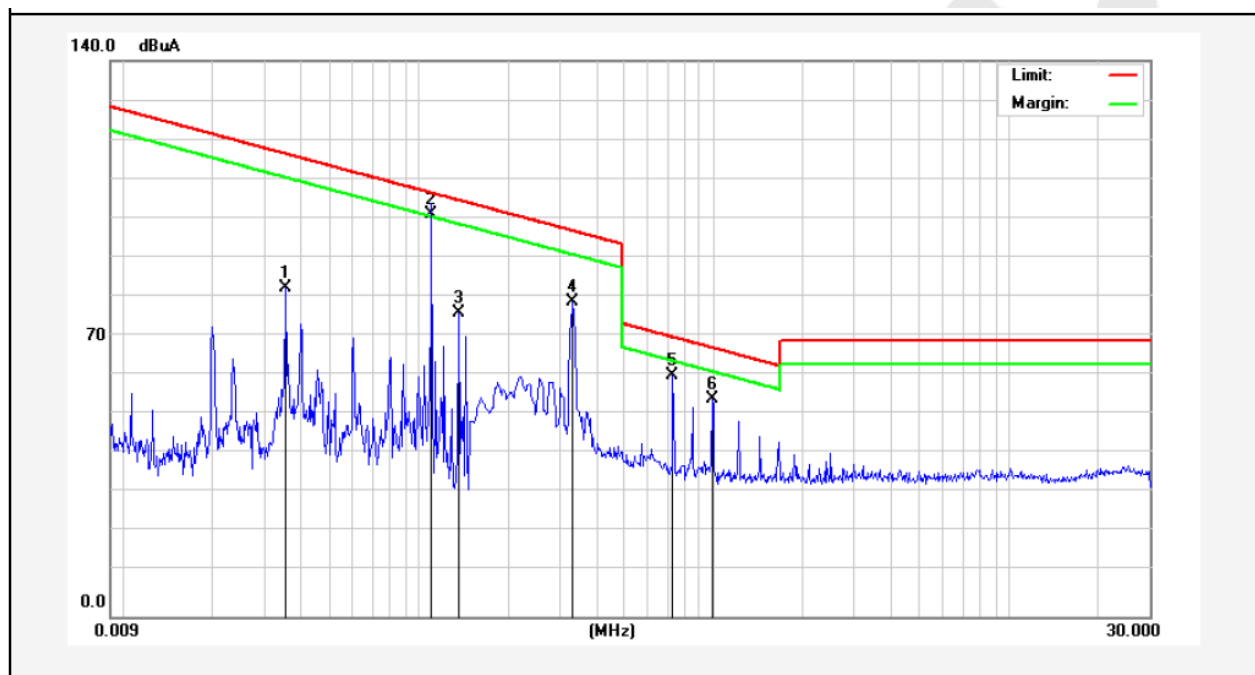


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree (dgc)
0.0355	64.97	19.28	2.53	0	86.78	136.54	-49.76	Peak	84
0.0355	61.03	19.28	2.53	0	82.84	116.54	-33.70	AV	84
0.1106	81.75	19.28	2.53	0	103.56	126.69	-23.13	Peak	120
0.1106	79.43	19.28	2.53	0	101.24	106.69	-5.45	AV	120
0.1372	57.54	19.38	2.55	0	79.47	124.83	-45.36	Peak	320
0.1372	54.38	19.38	2.55	0	76.31	104.83	-28.52	AV	320
0.3339	60.51	19.53	2.59	0	82.63	117.12	-34.49	Peak	90
0.3339	56.22	20.34	2.60	0	79.16	97.12	-17.96	AV	76
0.7300	38.84	19.38	2.55	0	60.77	70.34	-9.57	QP	320
0.9940	31.68	20.34	2.60	0	54.62	67.66	-13.04	QP	76

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.


(Between 30MHz –1000 MHz)

Job No.:	0217100093W3	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.4(C)/50%RH
Test Mode:	TX Mode	Distance:	3m

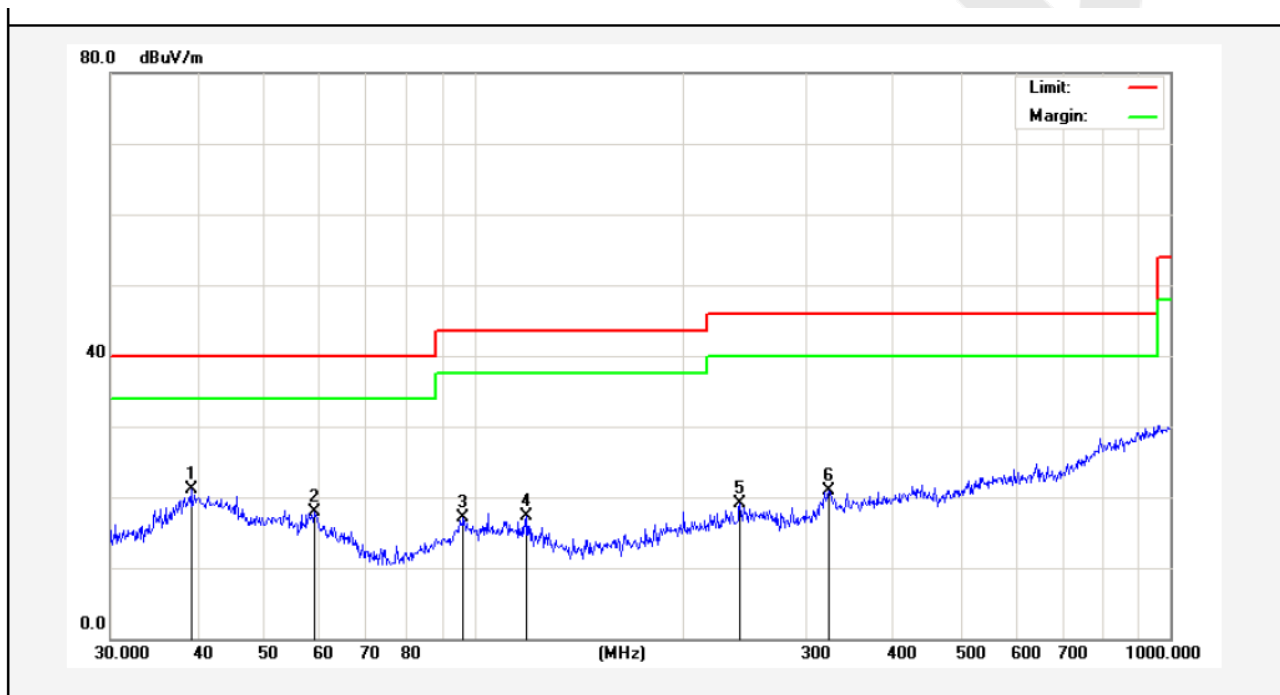

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.1616	32.55	-11.48	21.07	40.00	-18.93	QP	300	17	
2	58.8185	33.20	-15.28	17.92	40.00	-22.08	QP	300	63	
3	96.4362	37.97	-20.95	17.02	43.50	-26.48	QP	300	121	
4	119.0180	38.55	-21.27	17.28	43.50	-26.22	QP	300	174	
5	240.8304	37.15	-18.13	19.02	46.00	-26.98	QP	300	210	
6	323.3204	35.99	-15.10	20.89	46.00	-25.11	QP	300	223	

Job No.:	0217100093W3	Plarization:	Vertical
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.4(C)/50%RH
Test Mode:	TX Mode	Distance:	3m

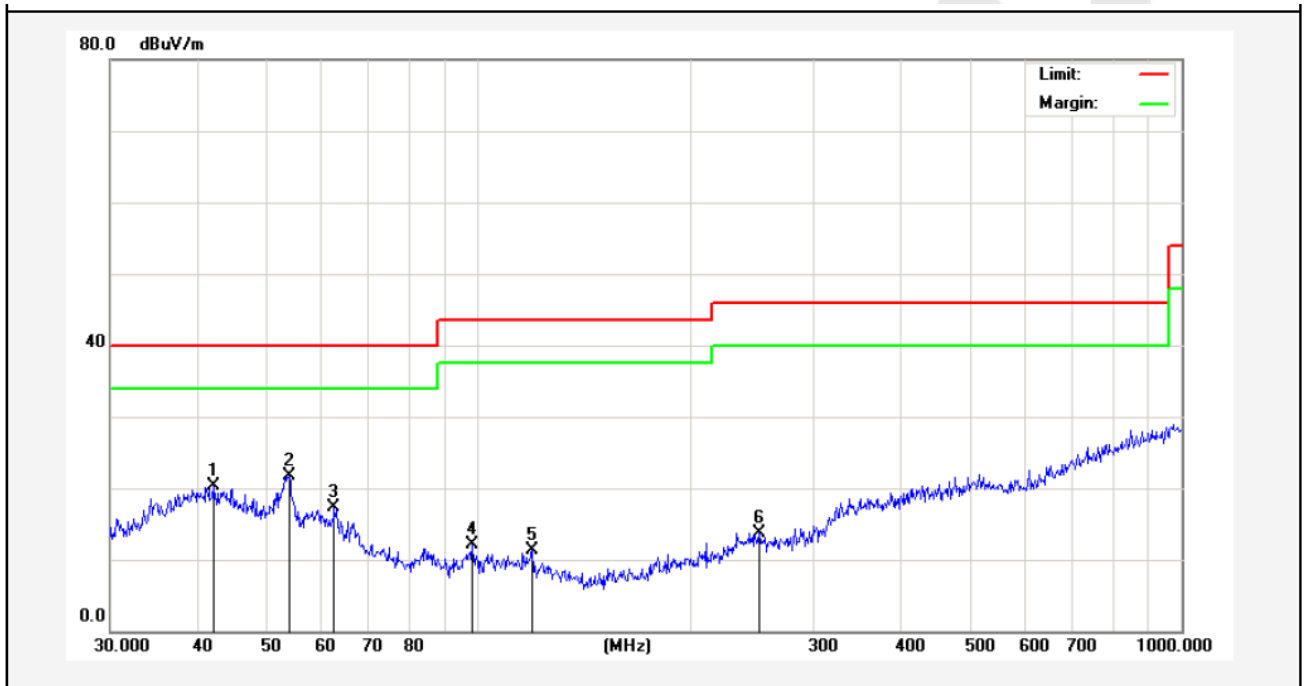


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.0066	31.95	-11.55	20.40	40.00	-19.60	QP	300	67	
2	53.8818	36.60	-14.85	21.75	40.00	-18.25	QP	300	94	
3	62.4314	33.69	-16.40	17.29	40.00	-22.71	QP	300	112	
4	98.1419	27.93	-15.86	12.07	43.50	-31.43	QP	300	147	
5	119.4361	27.65	-16.29	11.36	43.50	-32.14	QP	300	210	
6	251.1804	27.81	-14.03	13.78	46.00	-32.22	QP	300	263	

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

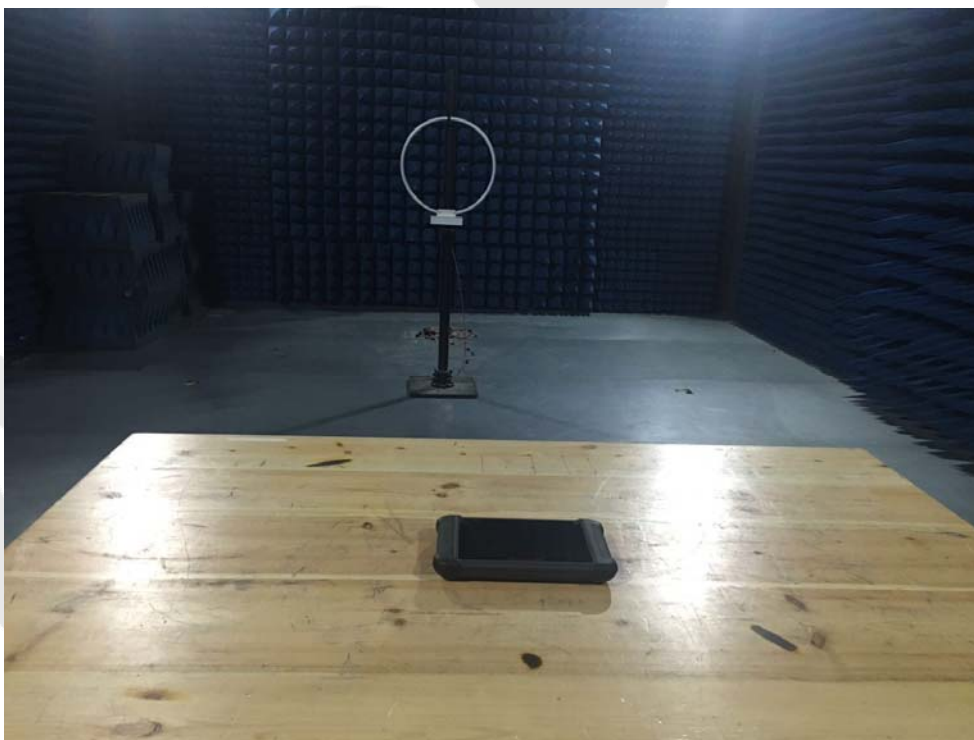

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please see the test report of R0217100093W1

Anbotek

APPENDIX III -- INTERNAL PHOTOGRAPH

Please see the test report of R0217100093W1

Anbotek

End of Report
