



# TEST REPORT

**Report Reference No.**..... : **TRE18070039** R/C.....: 80583

**FCC ID**..... : **WQ81806-808BT**

**Applicant's name**..... : **Autel Intelligent Tech. Corp., Ltd.**

**Address**..... : 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China.

**Manufacturer**..... : Autel Intelligent Tech. Corp., Ltd.

**Address**..... : 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China

**Test item description** ..... : **Professional Scan Tool**

**Trade Mark** ..... : AUTEL

**Model/Type reference**..... : MaxiCOM MK808BT

**Listed Model(s)** ..... : -

**Standard** ..... : **FCC 47 CFR Part2.1093**  
**ANSI/IEEE C95.1: 1999**  
**IEEE 1528: 2013**

**Date of receipt of test sample**..... : Jul.06, 2018

**Date of testing**..... : Jul.09, 2018 - Jul.16, 2018

**Date of issue**..... : Jul.17, 2018

**Result**..... : **PASS**

|  |                      |            |   |
|--|----------------------|------------|---|
| Compiled by<br>( position+printedname+signature)....   | File administrators: | Charley Wu |  |
| Supervised by<br>( position+printedname+signature).... | Test Engineer:       | Charley Wu |  |
| Approved by<br>( position+printedname+signature)....   | Manager:             | Hans Hu    |  |

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd**

**Address**..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

|            |   |           |
|------------|---|-----------|
| <u>1.</u>  | <u>Test Standards and Report version</u>                          | <u>3</u>  |
| 1.1.       | Test Standards  | 3         |
| 1.2.       | Report version  | 3         |
| <u>2.</u>  | <u>Summary</u>  | <u>4</u>  |
| 2.1.       | Client Information  | 4         |
| 2.2.       | Product Description   | 4         |
| <u>3.</u>  | <u>Test Environment</u>   | <u>5</u>  |
| 3.1.       | Test laboratory   | 5         |
| 3.2.       | Test Facility   | 5         |
| <u>4.</u>  | <u>Equipments Used during the Test</u>                            | <u>6</u>  |
| <u>5.</u>  | <u>Measurement Uncertainty</u>                                    | <u>7</u>  |
| <u>6.</u>  | <u>SAR Measurements System Configuration</u>                      | <u>9</u>  |
| 6.1.       | SAR Measurement Set-up  | 9         |
| 6.2.       | DASY5 E-field Probe System  | 10        |
| 6.3.       | Phantoms  | 11        |
| 6.4.       | Device Holder   | 11        |
| <u>7.</u>  | <u>SAR Test Procedure</u>   | <u>12</u> |
| 7.1.       | Scanning Procedure  | 12        |
| 7.2.       | Data Storage and Evaluation                                       | 14        |
| <u>8.</u>  | <u>Position of the wireless device in relation to the phantom</u> | <u>16</u> |
| 8.1.       | Body-supported device   | 16        |
| <u>9.</u>  | <u>System Check</u>   | <u>17</u> |
| 9.1.       | Tissue Dielectric Parameters                                      | 17        |
| 9.2.       | SAR System Check  | 18        |
| <u>10.</u> | <u>SAR Exposure Limits</u>  | <u>21</u> |
| <u>11.</u> | <u>Conducted Power Measurement Results</u>                        | <u>22</u> |
| <u>12.</u> | <u>Maximum Tune-up Limit</u>                                      | <u>23</u> |
| <u>13.</u> | <u>RF Exposure Conditions (Test Configurations)</u>               | <u>24</u> |
| 13.1.      | Antenna Location  | 24        |
| 13.2.      | Standalone SAR test exclusion considerations                      | 25        |
| 13.3.      | Estimated SAR   | 26        |
| <u>14.</u> | <u>SAR Measurement Results</u>                                    | <u>27</u> |
| <u>15.</u> | <u>Simultaneous Transmission analysis</u>                         | <u>29</u> |
| <u>16.</u> | <u>TestSetup Photos</u>   | <u>31</u> |
| <u>17.</u> | <u>External and Photos of the EUT</u>                             | <u>32</u> |

## 1. Test Standards and Report version

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency Radiation Exposure Evaluation:Portable Devices

[IEEE Std C95.1, 1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB 865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB 447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB 248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Proceduresfor802.11 a/b/g Transmitters

[KDB 941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[616217 D04 SAR for laptop and tablets v01r02](#): SAR Evaluation Requirements for Laptop, Notebook, Netbook and Tablet Computers

### 1.2. Report version

| Revision No. | Date of issue | Description |
|--------------|---------------|-------------|
| N/A          | 2018-07-17    | Original    |
|              |               |             |
|              |               |             |
|              |               |             |
|              |               |             |

## 2. Summary

### 2.1. Client Information

|               |   |
|---------------|---|
| Applicant:    | Autel Intelligent Tech. Corp., Ltd.   |
| Address:      | 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China. |
| Manufacturer: | Autel Intelligent Tech. Corp., Ltd.   |
| Address:      | 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China  |

### 2.2. Product Description

|  |  |
|--|--|
| Name of EUT:   | Professional Scan Tool                             |
| Trade Mark:  | AUTEL  |
| Model No.:   | MaxiCOM MK808BT                                    |
| Listed Model(s):   | -  |
| Power supply:  | DC 3.7V  |
| RF Exposure Environment:   | General Population / Uncontrolled                  |
| Hardware version:  | V4   |
| Software version:  | Andriod 4.4.4                                      |
| <b>Maximum SAR Value</b>   |  |
| Separation Distance:   | Body: 0mm  |
| Max Report SAR Value (1g):   | Body: <b>0.923 W/Kg</b>                            |
| <b>WIFI 2.4G</b>   |  |
| Supported type:  | 802.11b/802.11g/802.11n(HT20)                      |
| Modulation:  | DSSS for 802.11b<br>OFDM for 802.11g/802.11n(HT20) |
| Operation frequency:   | 2412MHz~2462MHz                                    |
| Channel number:  | 11   |
| Channel separation:  | 5MHz   |
| Antenna type:  | Integral ANT                                       |
| <b>Bluetooth</b>   |  |
| Version:   | Supported BT2.1+EDR                                |
| Modulation:  | GFSK, $\pi/4$ DQPSK, 8DPSK                         |
| Operation frequency:   | 2402MHz~2480MHz                                    |
| Channel number:  | 79   |
| Channel separation:  | 1MHz   |
| Antenna type:  | Chip ANT   |
| <b>Remark:</b>   |  |
| 1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power |  |

### **3. Test Environment**

#### **3.1. Test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

#### **3.2. Test Facility**

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025:2005 General Requirements) for the Competence of Testing and Calibration Laboratories

##### **A2LA-Lab Cert. No. 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

##### **IC-Registration No.:5377B**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

#### 4. Equipments Used during the Test

| Test Equipment                       | Manufacturer    | Type/Model | Serial Number | Calibration |            |
|--------------------------------------|-----------------|------------|---------------|-------------|------------|
|                                      |                 |            |               | Last Cal.   | Due Date   |
| Data Acquisition Electronics DAEx    | SPEAG           | DAE4       | 1549          | 2018/04/25  | 2019/04/24 |
| E-field Probe                        | SPEAG           | EX3DV4     | 7494          | 2018/02/26  | 2019/02/25 |
| System Validation Dipole             | SPEAG           | D2450V2    | 1009          | 2018/02/05  | 2021/02/04 |
| Dielectric Assessment Kit            | SPEAG           | DAK-3.5    | 1267          | 2018/03/01  | 2019/02/28 |
| Dielectric Assessment Kit            | SPEAG           | DAK-12     | 1130          | 2018/03/01  | 2019/02/28 |
| Network analyzer                     | Agilent         | N9923A     | MY51491493    | 2017/09/05  | 2018/09/04 |
| Universal Radio Communication Tester | ROHDE & SCHWARZ | CMU200     | 112012        | 2017/11/27  | 2018/11/26 |
| Signal Generator                     | ROHDE & SCHWARZ | SMB100A    | 175248        | 2017/09/02  | 2018/09/01 |
| Power meter                          | Agilent         | N1914A     | MY52090010    | 2018/03/22  | 2019/03/21 |
| Power sensor                         | Agilent         | E9304A     | MY52140008    | 2018/03/22  | 2019/03/21 |
| Power sensor                         | Agilent         | E9301H     | MY54470001    | 2018/03/22  | 2019/03/21 |
| Power Amplifier                      | Mini-Circuits   | ZHL-42W    | QA1202003     | 2017/11/27  | 2018/11/26 |
| Dual Directional Coupler             | Agilent         | 778D       | MY48220612    | 2018/03/22  | 2019/03/21 |

Note:

The DAE ,Probe and Dipole calibration reference to the Appendix A and Appendix B.

## 5. Measurement Uncertainty

| Measurement Uncertainty                            |   |  |                   |                       |            |         |          |                |                 |                   |
|--|---|--|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| No.  | Error Description                               | Type                                       | Uncertainty Value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
| Measurement System                                 |   |  |                   |                       |            |         |          |                |                 |                   |
| 1  | Probe calibration                               | B  | 6.0%              | N                     | 1          | 1       | 1        | 6.0%           | 6.0%            | ∞                 |
| 2  | Axial isotropy                                  | B  | 4.70%             | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 1.90%          | 1.90%           | ∞                 |
| 3  | Hemispherical isotropy                          | B  | 9.60%             | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 3.90%          | 3.90%           | ∞                 |
| 4  | Boundary Effects                                | B  | 1.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.60%          | 0.60%           | ∞                 |
| 5  | Probe Linearity                                 | B  | 4.70%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.70%          | 2.70%           | ∞                 |
| 6  | Detection limit                                 | B  | 1.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.60%          | 0.60%           | ∞                 |
| 7  | RF ambient conditions-noise                     | B  | 0.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.00%          | 0.00%           | ∞                 |
| 8  | RF ambient conditions-reflection                | B  | 0.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.00%          | 0.00%           | ∞                 |
| 9  | Response time                                   | B  | 0.80%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.50%          | 0.50%           | ∞                 |
| 10   | Integration time                                | B  | 5.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.90%          | 2.90%           | ∞                 |
| 11   | RF ambient                                      | B  | 3.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 1.70%          | 1.70%           | ∞                 |
| 12   | Probe positioned mech. restrictions             | B  | 0.40%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.20%          | 0.20%           | ∞                 |
| 13   | Probe positioning with respect to phantom shell | B  | 2.90%             | R                     | $\sqrt{3}$ | 1       | 1        | 1.70%          | 1.70%           | ∞                 |
| 14   | Max.SAR evaluation                              | B  | 3.90%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.30%          | 2.30%           | ∞                 |
| Test Sample Related                                |   |  |                   |                       |            |         |          |                |                 |                   |
| 15   | Test sample positioning                         | A  | 1.86%             | N                     | 1          | 1       | 1        | 1.86%          | 1.86%           | ∞                 |
| 16   | Device holder uncertainty                       | A  | 1.70%             | N                     | 1          | 1       | 1        | 1.70%          | 1.70%           | ∞                 |
| 17   | Drift of output power                           | B  | 5.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.90%          | 2.90%           | ∞                 |
| Phantom and Set-up                                 |   |  |                   |                       |            |         |          |                |                 |                   |
| 18   | Phantom uncertainty                             | B  | 4.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.30%          | 2.30%           | ∞                 |
| 19   | Liquid conductivity (target)                    | B  | 5.00%             | R                     | $\sqrt{3}$ | 0.64    | 0.43     | 1.80%          | 1.20%           | ∞                 |
| 20   | Liquid conductivity (meas.)                     | A  | 0.50%             | N                     | 1          | 0.64    | 0.43     | 0.32%          | 0.26%           | ∞                 |
| 21   | Liquid permittivity (target)                    | B  | 5.00%             | R                     | $\sqrt{3}$ | 0.64    | 0.43     | 1.80%          | 1.20%           | ∞                 |
| 22   | Liquid permittivity (meas.)                     | A  | 0.16%             | N                     | 1          | 0.64    | 0.43     | 0.10%          | 0.07%           | ∞                 |
| Combined standard uncertainty                      |   | $u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$ |                   | /                     | /          | /       | /        | 9.79%          | 9.67%           | ∞                 |
| Expanded uncertainty (confidence interval of 95 %) |   | $u_e = 2u_c$                               |                   | R                     | K=2        | /       | /        | 19.57%         | 19.34%          | ∞                 |

| System Check Uncertainty                           |  |  |                   |                       |            |         |          |                |                 |                   |
|--|--|--|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| No.  | Error Description                                      | Type                                       | Uncertainty Value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
| Measurement System                                 |  |  |                   |                       |            |         |          |                |                 |                   |
| 1  | Probe calibration                                      | B  | 6.0%              | N                     | 1          | 1       | 1        | 6.0%           | 6.0%            | ∞                 |
| 2  | Axial isotropy   | B  | 4.70%             | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 1.90%          | 1.90%           | ∞                 |
| 3  | Hemispherical isotropy                                 | B  | 9.60%             | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 3.90%          | 3.90%           | ∞                 |
| 4  | Boundary Effects                                       | B  | 1.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.60%          | 0.60%           | ∞                 |
| 5  | Probe Linearity  | B  | 4.70%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.70%          | 2.70%           | ∞                 |
| 6  | Detection limit  | B  | 1.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.60%          | 0.60%           | ∞                 |
| 7  | RF ambient conditions-noise                            | B  | 0.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.00%          | 0.00%           | ∞                 |
| 8  | RF ambient conditions-reflection                       | B  | 0.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.00%          | 0.00%           | ∞                 |
| 9  | Response time  | B  | 0.80%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.50%          | 0.50%           | ∞                 |
| 10   | Integration time                                       | B  | 5.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.90%          | 2.90%           | ∞                 |
| 11   | RF ambient   | B  | 3.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 1.70%          | 1.70%           | ∞                 |
| 12   | Probe positioned mech. restrictions                    | B  | 0.40%             | R                     | $\sqrt{3}$ | 1       | 1        | 0.20%          | 0.20%           | ∞                 |
| 13   | Probe positioning with respect to phantom shell        | B  | 2.90%             | R                     | $\sqrt{3}$ | 1       | 1        | 1.70%          | 1.70%           | ∞                 |
| 14   | Max.SAR evaluation                                     | B  | 3.90%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.30%          | 2.30%           | ∞                 |
| System validation source-dipole                    |  |  |                   |                       |            |         |          |                |                 |                   |
| 15   | Deviation of experimental dipole from numerical dipole | A  | 1.58%             | N                     | 1          | 1       | 1        | 1.58%          | 1.58%           | ∞                 |
| 16   | Dipole axis to liquid distance                         | A  | 1.35%             | N                     | 1          | 1       | 1        | 1.35%          | 1.35%           | ∞                 |
| 17   | Input power and SAR drift                              | B  | 4.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.30%          | 2.30%           | ∞                 |
| Phantom and Set-up                                 |  |  |                   |                       |            |         |          |                |                 |                   |
| 18   | Phantom uncertainty                                    | B  | 4.00%             | R                     | $\sqrt{3}$ | 1       | 1        | 2.30%          | 2.30%           | ∞                 |
| 20   | Liquid conductivity (meas.)                            | A  | 0.50%             | N                     | 1          | 0.64    | 0.43     | 0.32%          | 0.26%           | ∞                 |
| 22   | Liquid cpermittivity (meas.)                           | A  | 0.16%             | N                     | 1          | 0.64    | 0.43     | 0.10%          | 0.07%           | ∞                 |
| Combined standard uncertainty                      |  | $u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$ |                   | /                     | /          | /       | /        | 8.80%          | 8.79%           | ∞                 |
| Expanded uncertainty (confidence interval of 95 %) |  | $u_e = 2u_c$                               |                   | R                     | K=2        | /       | /        | 17.59%         | 17.58%          | ∞                 |



## 6. SAR Measurements System Configuration

### 6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

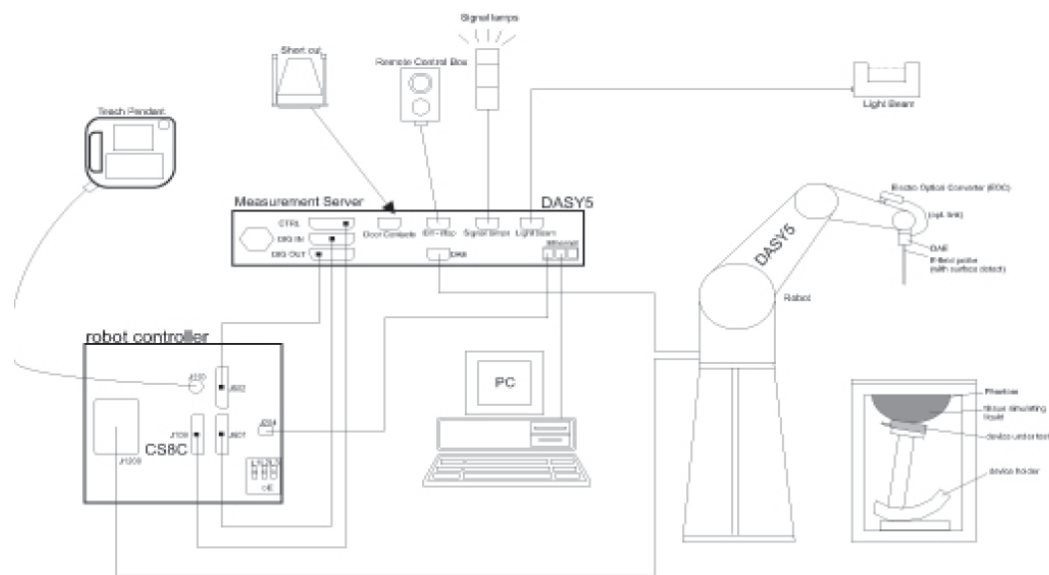

## 6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### ● Probe Specification


|               |  |
|---------------|--|
| Construction  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration   | ISO/IEC 17025 calibration service available.   |
| Frequency     | 10 MHz to 6 GHz;<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)  |
| Directivity   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)  |
| Dynamic Range | 10 $\mu$ W/g to > 100 W/kg;<br>Linearity: $\pm 0.2$ dB   |
| Dimensions    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 1.0 mm   |
| Application   | General dosimetry up to 6 GHz<br>Dosimetry in strong gradient fields<br>Compliance tests of Mobile Phones  |
| Compatibility | DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI   |



### ● Isotropic E-Field Probe


The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

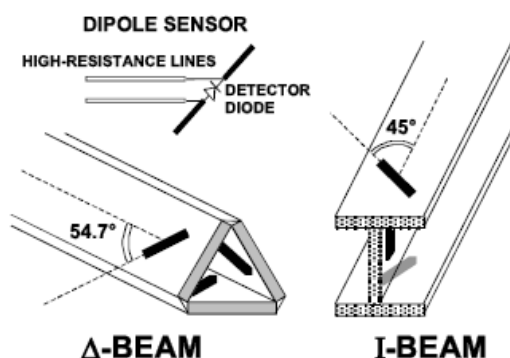

### 6.3. Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with standard and all known tissue-simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

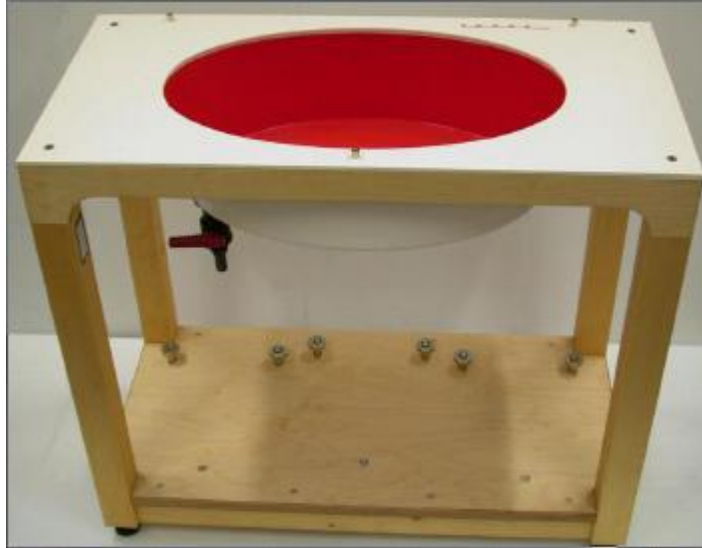

ELI4 Phantom

### 6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

## **7. SAR Test Procedure**

### **7.1. Scanning Procedure**

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5\%$ .

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

#### **Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

#### **Zoom Scan**

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

#### **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

**Table 1: Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04**

|   |   |   | $\leq 3$ GHz   | $> 3$ GHz   |
|---|---|---|--|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface  |   |   | 5 mm $\pm$ 1 mm  | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm                       |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location   |   |   | $30^{\circ} \pm 1^{\circ}$   | $20^{\circ} \pm 1^{\circ}$  |
| Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$  |   |   | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm  | 3 – 4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm                            |
|   |   |   | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |   |
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$  |   |   | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*   | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface   | uniform grid: $\Delta z_{\text{Zoom}}(n)$ |   | $\leq 5$ mm  | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|   | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm  | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|   |   | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$ mm  |   |
| Minimum zoom scan volume  | x, y, z                                   |   | $\geq 30$ mm   | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.   |   |   |  |   |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |   |   |  |   |

## 7.2. Data Storage and Evaluation

### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                          |                      |
|--------------------|--------------------------|----------------------|
| Probe parameters:  | Sensitivity:             | Normi, ai0, ai1, ai2 |
|                    | Conversion factor:       | ConvFi               |
|                    | Diode compression point: | Dcpi                 |
| Device parameters: | Frequency:               | f                    |
|                    | Crest factor:            | cf                   |
| Media parameters:  | Conductivity:            | σ                    |
|                    | Density:                 | ρ                    |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

|                    |   |
|--------------------|---|
| Vi:                | compensated signal of channel ( i = x, y, z )   |
| Ui:                | input signal of channel ( i = x, y, z )         |
| cf:                | crest factor of exciting field (DASY parameter) |
| dcp <sub>i</sub> : | diode compression point (DASY parameter)        |

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

|        |  |
|--------|--|
| Vi:    | compensated signal of channel ( i = x, y, z )                                    |
| Normi: | sensor sensitivity of channel ( i = x, y, z ),<br>[mV/(V/m)²] for E-field Probes |
| ConvF: | sensitivity enhancement in solution  |
| aij:   | sensor sensitivity factors for H-field probes                                    |
| f:     | carrier frequency [GHz]  |
| Ei:    | electric field strength of channel i in V/m                                      |
| Hi:    | magnetic field strength of channel i in A/m                                      |

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$


SAR: local specific absorption rate in W/kg  
Etot: total field strength in V/m  
 $\sigma$ : conductivity in [mho/m] or [Siemens/m]  
 $\rho$ : equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

## 8. Position of the wireless device in relation to the phantom

### 8.1. Body-supported device

Other devices that fall into this category include tablet type portable computers and credit card transaction authorisation terminals, point-of-sale and/or inventory terminals. Where these devices may be torso or limb-supported, the same principles for body-supported devices are applied.

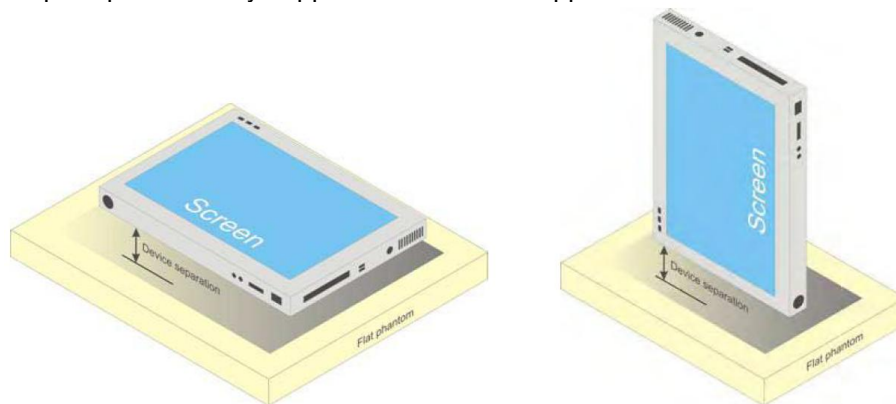

b) Tablet form factor portable computer



## 9. System Check

### 9.1. Tissue Dielectric Parameters

.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

| Tissue dielectric parameters for body phantoms |              |                      |
|--|--------------|----------------------|
| Target Frequency                               | Body         |                      |
| (MHz)  | $\epsilon_r$ | $\sigma(\text{s/m})$ |
| 2450   | 52.7         | 1.95                 |

#### Check Result:

| Dielectric performance of Body tissue simulating liquid |              |          |                      |          |                           |                       |       |              |            |
|---|--------------|----------|----------------------|----------|---------------------------|-----------------------|-------|--------------|------------|
| Frequency<br>(MHz)                                      | $\epsilon_r$ |          | $\sigma(\text{s/m})$ |          | Delta<br>( $\epsilon_r$ ) | Delta<br>( $\sigma$ ) | Limit | Temp<br>(°C) | Date       |
|   | Target       | Measured | Target               | Measured |                           |                       |       |              |            |
| 2450  | 52.70        | 53.03    | 1.95                 | 2.00     | 0.63%                     | 2.56%                 | ±5%   | 22           | 2018-07-10 |

## 9.2. SAR System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is a simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

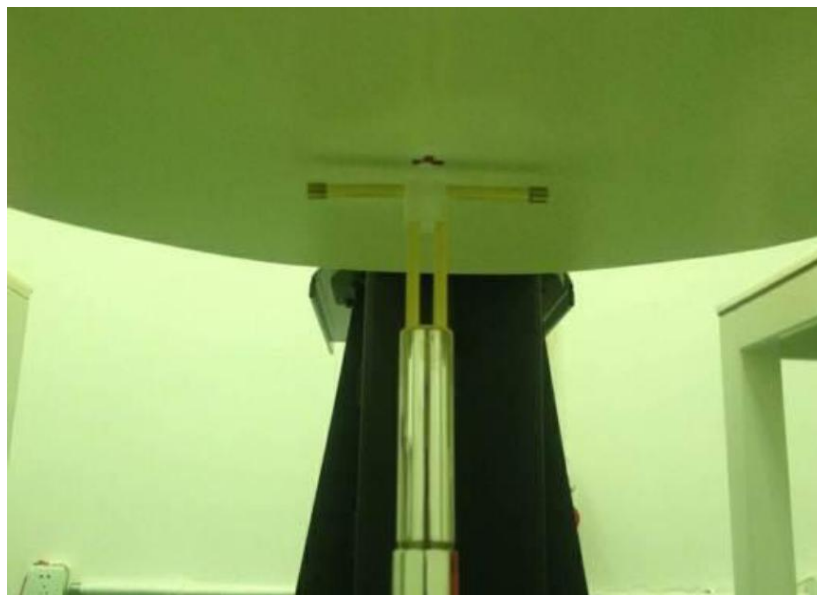
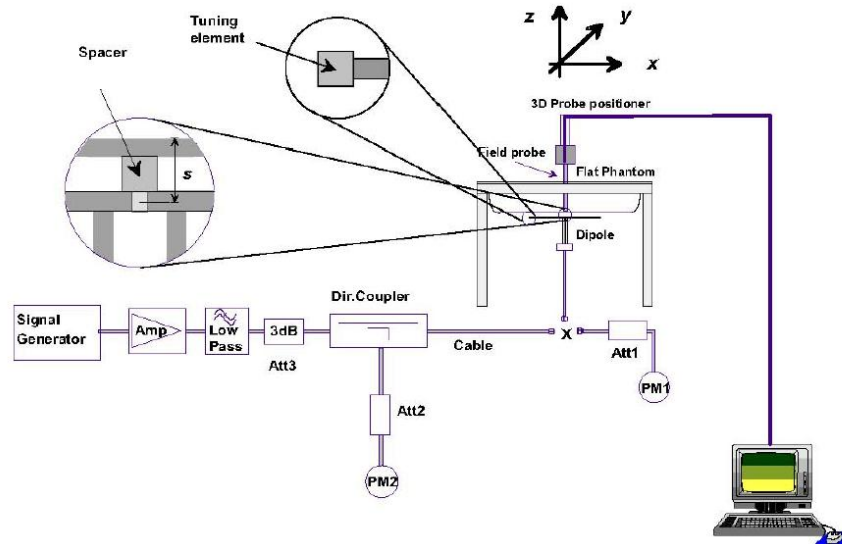


Photo of Dipole Setup

**Check Result:**

| Body               |        |          |         |          |               |                |       |              |            |
|--------------------|--------|----------|---------|----------|---------------|----------------|-------|--------------|------------|
| Frequency<br>(MHz) | 1g SAR |          | 10g SAR |          | Delta<br>(1g) | Delta<br>(10g) | Limit | Temp<br>(°C) | Date       |
|                    | Target | Measured | Target  | Measured |               |                |       |              |            |
| 2450               | 49.40  | 50.00    | 23.30   | 23.32    | 1.21%         | 0.09%          | ±10%  | 22           | 2018-07-10 |

**SystemPerformanceCheck-Body 2450MHz****DUT: D2450V2; Type: D2450V2; Serial: 1009**

Date:2018-07-10

Communication System: UID 0, CW (0); Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.001$  S/m;  $\epsilon_r = 53.03$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7494; ConvF(8.08, 8.08, 8.08); Calibrated: 2/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Body/d=10mm,Pin=250mW/Area Scan (41x61x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 21.1 W/kg


**Body/d=10mm,Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 105.6 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 25.7 W/kg

**SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.83 W/kg**

Maximum value of SAR (measured) = 20.7 W/kg

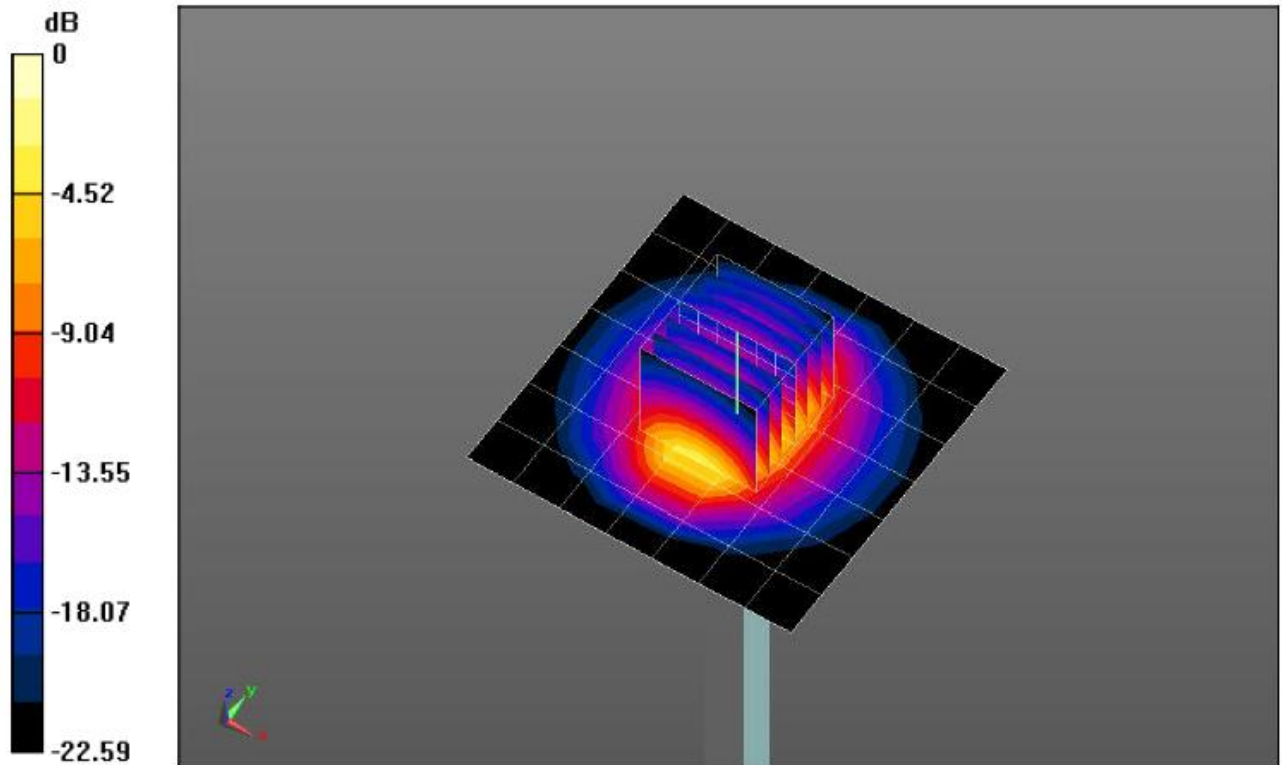

System Performance Check 2450MHz 250mW

## 10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of ANSI/IEEE C95.1-1992

| Type Exposure   | Limit (W/kg)  |   |
|---|---|---|
|   | General Population /<br>Uncontrolled Exposure Environment | Occupational /<br>Controlled Exposure Environment |
| Spatial Average SAR<br>(whole body)                     | 0.08  | 0.4   |
| Spatial Peak SAR<br>(1g cube tissue for head and trunk) | 1.6   | 8.0   |
| Spatial Peak SAR<br>(10g for limb)                      | 4.0   | 20.0  |

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

## 11. Conducted Power Measurement Results

### WLAN Conducted Power

For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation. 802.11g/n were not investigated since the average putput powers over all channels and data rates were not more than 0.25dB higher than the tested channel in the lowest data rate of 802.11b mode.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures

| WIFI 2.4G     |         |                 |                               |
|---------------|---------|-----------------|-------------------------------|
| Mode          | Channel | Frequency (MHz) | Conducted Average Power (dBm) |
| 802.11b       | 01      | 2412            | 18.21                         |
|               | 06      | 2437            | 18.13                         |
|               | 11      | 2462            | 18.25                         |
| 802.11g       | 01      | 2412            | 17.32                         |
|               | 06      | 2437            | 17.45                         |
|               | 11      | 2462            | 17.39                         |
| 802.11n(HT20) | 01      | 2412            | 16.84                         |
|               | 06      | 2437            | 16.79                         |
|               | 11      | 2462            | 16.71                         |

| Bluetooth    |         |                 |                       |
|--------------|---------|-----------------|-----------------------|
| Mode         | Channel | Frequency (MHz) | Conducted power (dBm) |
| GFSK         | 0       | 2402            | 11.32                 |
|              | 39      | 2441            | 11.14                 |
|              | 78      | 2480            | 10.64                 |
| $\pi/4$ QPSK | 0       | 2402            | 10.69                 |
|              | 39      | 2441            | 10.06                 |
|              | 78      | 2480            | 10.39                 |
| 8DPSK        | 0       | 2402            | 10.74                 |
|              | 39      | 2441            | 10.72                 |
|              | 78      | 2480            | 10.19                 |


**12. Maximum Tune-up Limit**

| <b>WLAN 2.4G</b> |  |
|------------------|--|
| Mode             | Maximum Tune-up (dBm)<br>Burst Average Power |
| 802.11b          | 18.50  |
| 802.11g          | 17.50  |
| 802.11n(HT20)    | 17.00  |

| <b>Bluetooth</b> |         |                 |                       |
|------------------|---------|-----------------|-----------------------|
| Mode             | Channel | Frequency (MHz) | Maximum Tune-up (dBm) |
| GFSK             | 0       | 2402            | 11.50                 |
|                  | 39      | 2441            |                       |
|                  | 78      | 2480            |                       |
| $\pi/4$ QPSK     | 0       | 2402            | 11.00                 |
|                  | 39      | 2441            |                       |
|                  | 78      | 2480            |                       |
| 8DPSK            | 0       | 2402            | 11.00                 |
|                  | 39      | 2441            |                       |
|                  | 78      | 2480            |                       |

### 13. RF Exposure Conditions (Test Configurations)

#### 13.1. Antenna Location

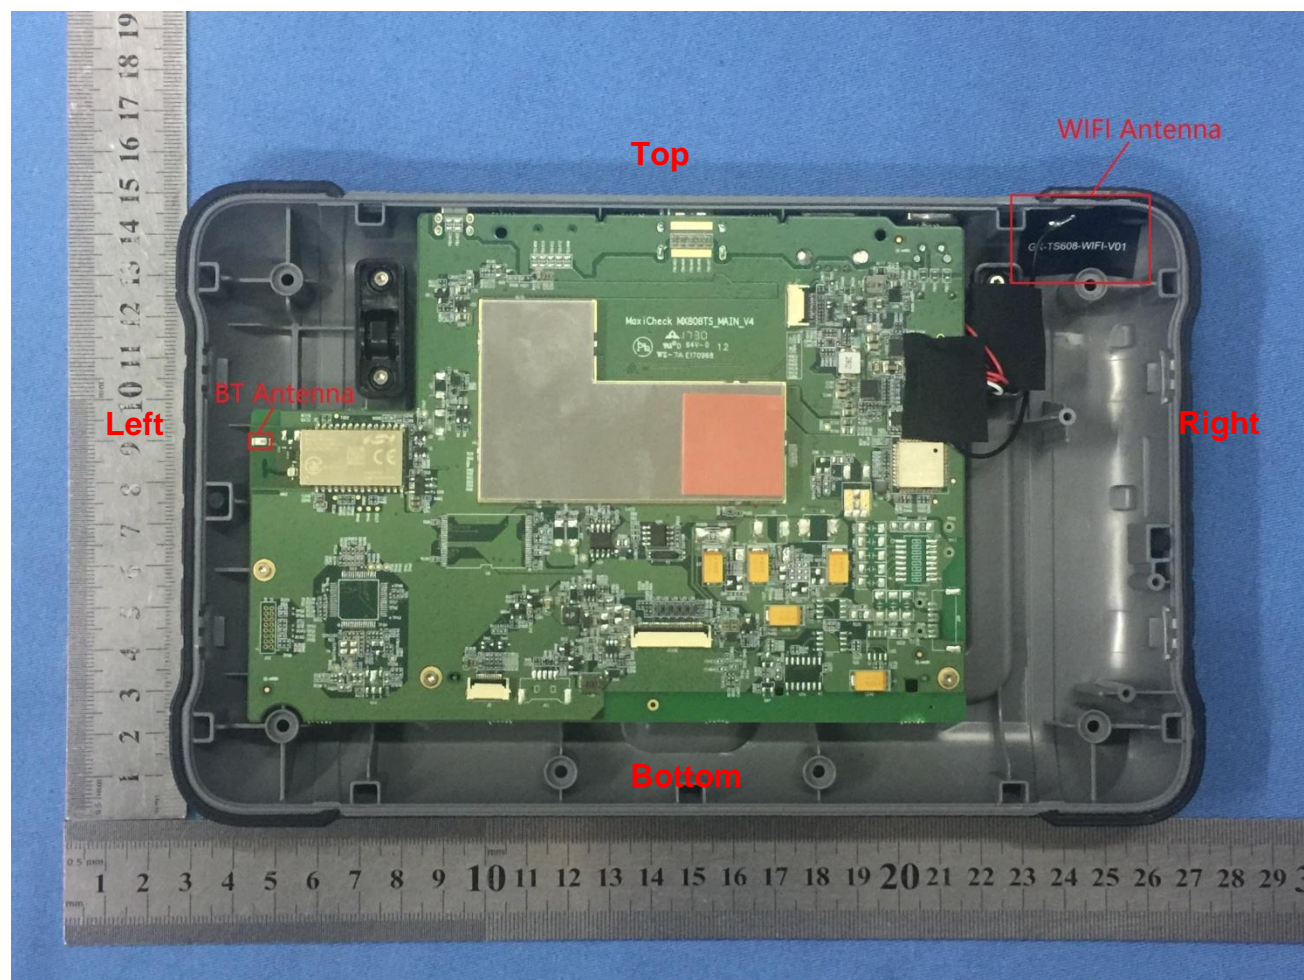



### 13.2. Standalone SAR test exclusion considerations

KDB 447498 with KDB 616217:

a) For 100 MHz to 6 GHz and *test separation distances* ≤ 50 mm, the 1-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR

When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine SAR test exclusion.

b) For 100 MHz to 6 GHz and *test separation distances* > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following :

1) {[Power allowed at *numeric threshold* for 50 mm in step a)] + [(test separation distance - 50 mm)·(f(MHz)/150)]} mW, for 100 MHz to 1500 MHz

2) {[Power allowed at *numeric threshold* for 50 mm in step a)] + [(test separation distance - 50 mm)·10]} mW, for > 1500 MHz and ≤6 GHz

#### Antennas < 50mm to adjacent edges

| Tx Interface | Frequency (MHz) | Output Power |    | Separation Distances (mm) |           |            |          |             | Calculated Threshold Value |           |            |            |             |
|--------------|-----------------|--------------|----|---------------------------|-----------|------------|----------|-------------|----------------------------|-----------|------------|------------|-------------|
|              |                 |              |    | Rear Face                 | Left Side | Right Side | Top Side | Bottom Side | Rear Face                  | Left Side | Right Side | Top Side   | Bottom Side |
|              |                 | dBm          | mW |                           |           |            |          |             |                            |           |            |            |             |
| WIFI 2.4G    | 2462            | 18.5         | 71 | 5                         | 200       | 10         | 5        | 125         | 22 MEASURE                 | > 50 mm   | 11 MEASURE | 22 MEASURE | > 50 mm     |
| Bluetooth    | 2402            | 11.5         | 14 | 20                        | 15        | 220        | 60       | 90          | 1 EXEMPT                   | 1 EXEMPT  | > 50 mm    | > 50 mm    | > 50 mm     |

#### Antennas > 50mm to adjacent edges

| Tx Interface | Frequency (MHz) | Output Power |    | Separation Distances (mm) |           |            |          |             | Calculated Threshold Value |               |               |              |              |
|--------------|-----------------|--------------|----|---------------------------|-----------|------------|----------|-------------|----------------------------|---------------|---------------|--------------|--------------|
|              |                 |              |    | Rear Face                 | Left Side | Right Side | Top Side | Bottom Side | Rear Face                  | Left Side     | Right Side    | Top Side     | Bottom Side  |
|              |                 | dBm          | mW |                           |           |            |          |             |                            |               |               |              |              |
| WIFI 2.4G    | 2462            | 18.5         | 71 | 5                         | 200       | 10         | 5        | 125         | < 50 mm                    | 1596mW EXEMPT | < 50 mm       | < 50 mm      | 846mW EXEMPT |
| Bluetooth    | 2402            | 11.5         | 14 | 20                        | 15        | 220        | 60       | 90          | < 50 mm                    | < 50 mm       | 1797mW EXEMPT | 197mW EXEMPT | 497mW EXEMPT |

#### Positions for SAR tests

| Test Configurations | Rear Face | Left Side | Right Side | Top Side | Bottom Side |
|---------------------|-----------|-----------|------------|----------|-------------|
| WIFI 2.4G           | Yes       | No        | Yes        | Yes      | No          |
| Bluetooth           | No        | No        | No         | No       | No          |

### 13.3. Estimated SAR

Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below:

- a)  $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$  for test separation distances  $\leq 50\text{mm}$ ; when  $x=7.5$  for 1-g SAR, and  $x=18.75$  for 10-g SAR.
- b) When the minimum separation distance is  $< 5\text{mm}$ , the distance is used 5mm to determine SAR test exclusion
- c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is  $> 50\text{mm}$ .

| Estimated SAR(W/kg) |           |           |            |          |             |
|---------------------|-----------|-----------|------------|----------|-------------|
| Test Configurations | Rear Face | Left Side | Right Side | Top Side | Bottom Side |
| WIFI 2.4G           | -         | 0.400     | -          | -        | 0.400       |
| Bluetooth           | 0.148     | 0.198     | 0.400      | 0.400    | 0.400       |

## 14. SAR Measurement Results

| WLAN 2.4G     |               |           |      |                       |                     |                        |                 |                         |                       |           |
|---------------|---------------|-----------|------|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|-----------|
| Mode          | Test Position | Frequency |      | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Test Plot |
|               |               | CH        | MHz  |                       |                     |                        |                 |                         |                       |           |
| 802.11b 1Mbps | Back          | 1         | 2412 | 18.21                 | 18.50               | 1.07                   |                 |                         |                       | -         |
|               |               | 6         | 2437 | 18.13                 | 18.50               | 1.09                   |                 |                         |                       | -         |
|               |               | 11        | 2462 | 18.25                 | 18.50               | 1.06                   | 0.17            | 0.222                   | 0.235                 | -         |
|               | Right         | 1         | 2412 | 18.21                 | 18.50               | 1.07                   |                 |                         |                       | -         |
|               |               | 6         | 2437 | 18.13                 | 18.50               | 1.09                   |                 |                         |                       |           |
|               |               | 11        | 2462 | 18.25                 | 18.50               | 1.06                   | 0.00            | 0.161                   | 0.171                 |           |
|               | Top           | 1         | 2412 | 18.21                 | 18.50               | 1.07                   |                 |                         |                       |           |
|               |               | 6         | 2437 | 18.13                 | 18.50               | 1.09                   |                 |                         |                       |           |
|               |               | 11        | 2462 | 18.25                 | 18.50               | 1.06                   | 0.18            | 0.485                   | 0.514                 | B1        |

Note:

- According to the above table, the initial test position for body is "Back", and its reported SAR is  $\leq 0.4$ W/kg. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$ W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
  - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, the 802.11g/n is not required

| WLAN 2.4G- Scaled Reported SAR |               |           |      |                    |                     |                         |                                |
|--------------------------------|---------------|-----------|------|--------------------|---------------------|-------------------------|--------------------------------|
| Mode                           | Test Position | Frequency |      | Actual duty factor | maximum duty factor | Reported SAR (1g)(W/kg) | Scaled reported SAR (1g)(W/kg) |
|                                |               | CH        | MHz  |                    |                     |                         |                                |
| 802.11b 1Mbps                  | Back          | 11        | 2462 | 98.23%             | 100%                | 0.235                   | 0.239                          |
|                                | Right         | 11        | 2462 | 98.23%             | 100%                | 0.171                   | 0.174                          |
|                                | Top           | 11        | 2462 | 98.23%             | 100%                | 0.514                   | 0.523                          |

Note:

- According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 98.23% is achievable for WLAN in this project.

**SAR Test Data Plots**

Test mode: WLAN 802.11b

Test Position: Top Side

Test Plot: B1

Date: 2018-07-10

Communication System: UID 0, Generic WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 2.012$  S/m;  $\epsilon_r = 52.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7494; ConvF(8.08, 8.08, 8.08) @ 2462 MHz; Calibrated: 2/26/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/25/2018
- Phantom: ELI V8.0 ; Type: QD OVA 004 AA ; Serial: 2078
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Top/Procedure/Area Scan (51x211x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.06 W/kg


**Top/Procedure/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 1.564 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.214 W/kg**[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.860 W/kg

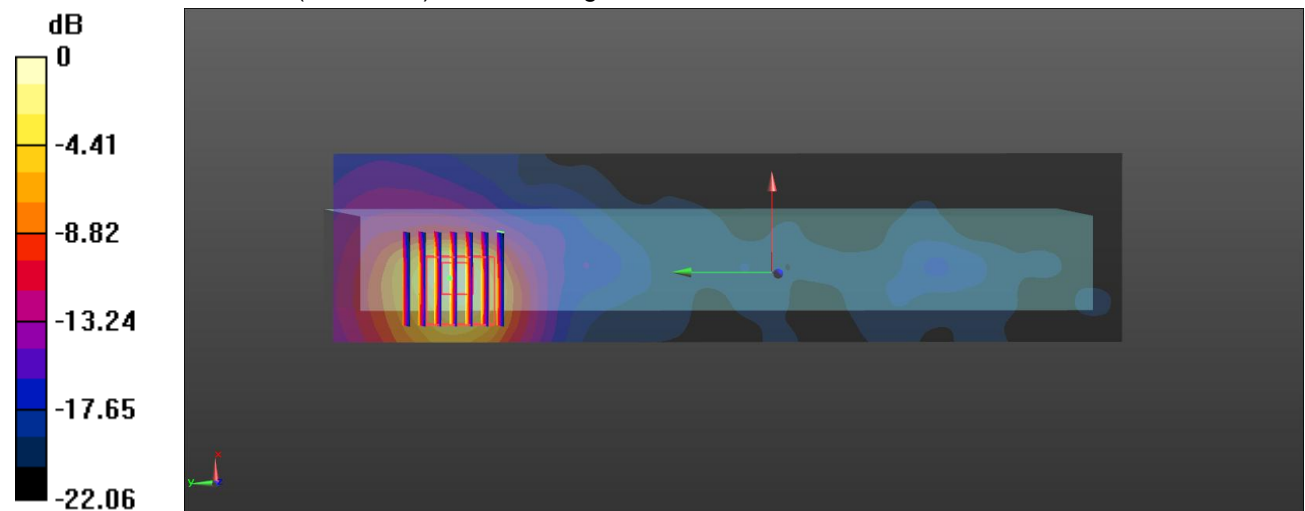

0 dB = 0.860 W/kg = -0.66 dBW/kg

## 15. Simultaneous Transmission analysis

| No. | Simultaneous Transmission Configurations | Body | Note |
|-----|--|------|------|
| 5   | Bluetooth (data) + WIFI (data)           | Yes  | -    |

General note:


2. The reported SAR summation is calculated based on the same configuration and test position
3. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
  - a)  $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$  for test separation distances  $\leq 50\text{mm}$ ; when  $x=7.5$  for 1-g SAR, and  $x=18.75$  for 10-g SAR.
  - b) When the minimum separation distance is  $<5\text{mm}$ , the distance is used  $5\text{mm}$  to determine SAR test exclusion
  - c)  $0.4 \text{ W/kg}$  for 1-g SAR and  $1.0 \text{ W/kg}$  for 10-g SAR, when the test separation distances is  $>50\text{mm}$ .

| Bluetooth Max power | Exposure position | Test separation (mm) | Estimated SAR (W/kg) |
|---------------------|-------------------|----------------------|----------------------|
| 11.5 dBm            | Rear Face         | 20                   | 0.148                |
|                     | Left Side         | 15                   | 0.198                |
|                     | Right Side        | $>50$                | 0.400                |
|                     | Top Side          | $>50$                | 0.400                |
|                     | Bottom Side       | $>50$                | 0.400                |


**Maximum reported SAR value for Body**

| WWAN PCE + Bluetooth |                   |                |           |            |
|----------------------|-------------------|----------------|-----------|------------|
| WWAN Band            | Exposure Position | Max SAR (W/kg) |           | Summed SAR |
|                      |                   | WWAN PCE       | Bluetooth | (W/kg)     |
| WiFi<br>802.11b      | Rear Face         | 0.239          | 0.148     | 0.387      |
|                      | Left Side         | 0.400          | 0.198     | 0.598      |
|                      | Right Side        | 0.174          | 0.400     | 0.574      |
|                      | Top Side          | 0.523          | 0.400     | 0.923      |
|                      | Bottom Side       | 0.400          | 0.400     | 0.800      |


## 16. TestSetup Photos

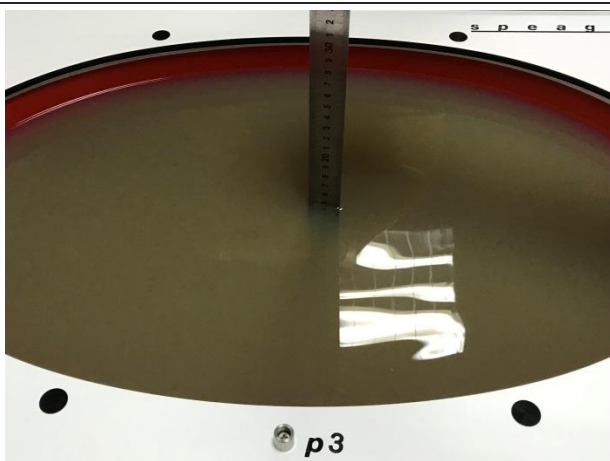


Liquid depth in the Body Phantom

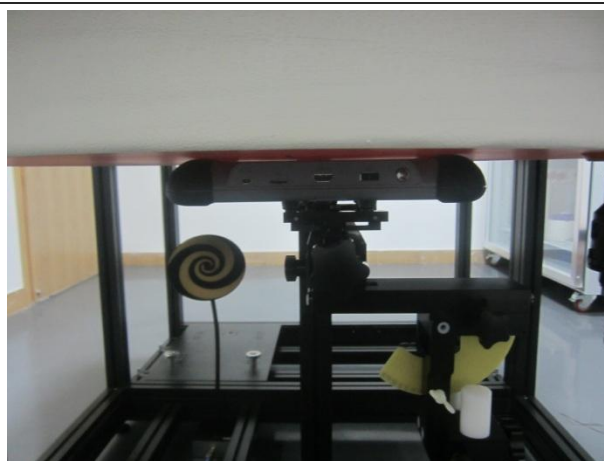

Rear side(0mm)


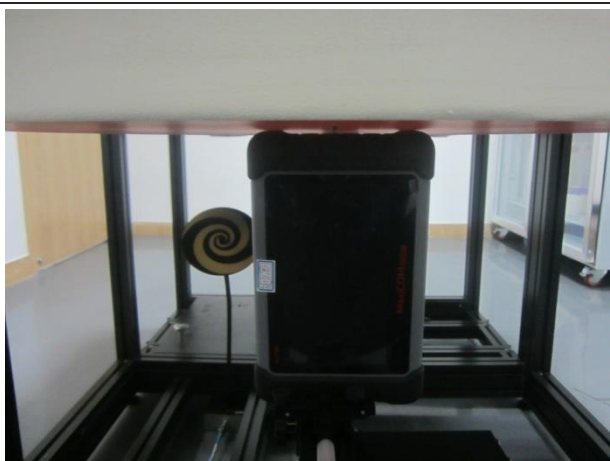


Right side(0mm)



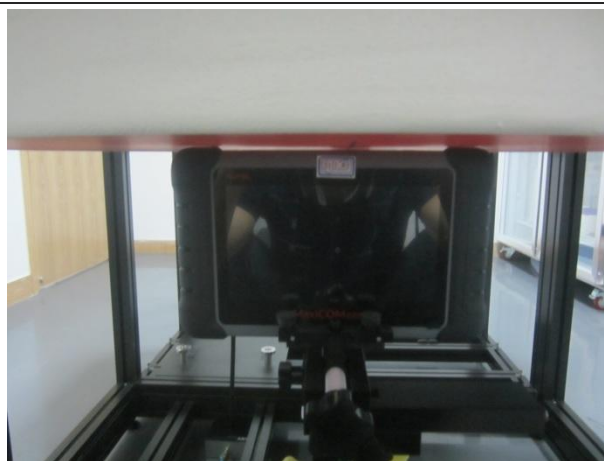


Top side(0mm)

## 17. External and Photos of the EUT

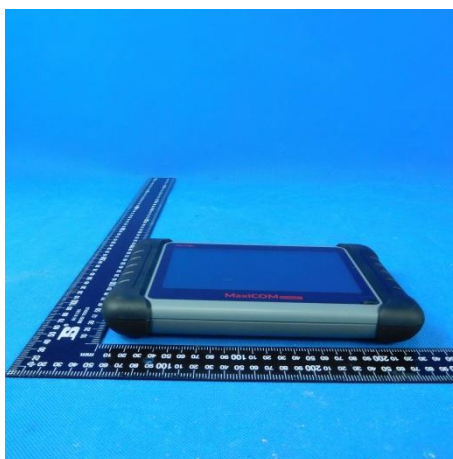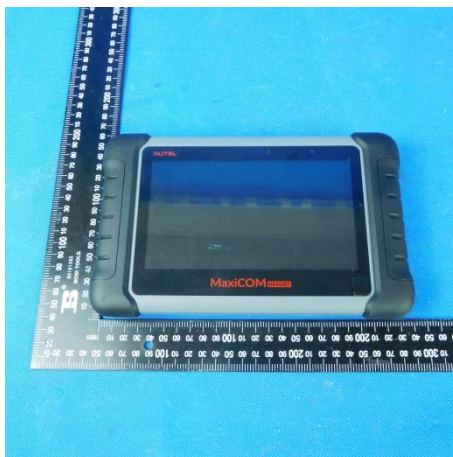



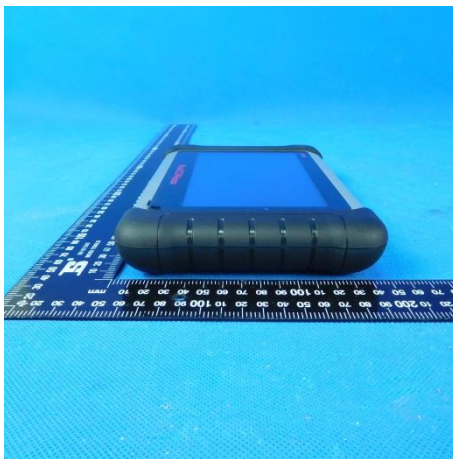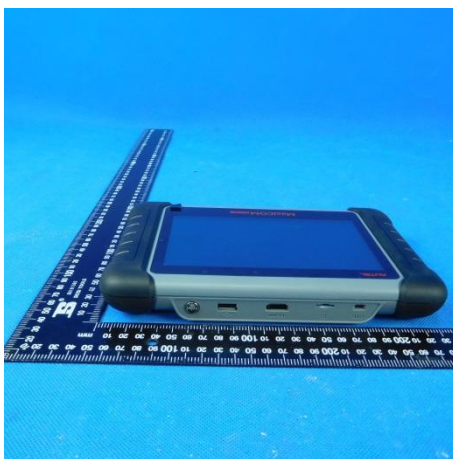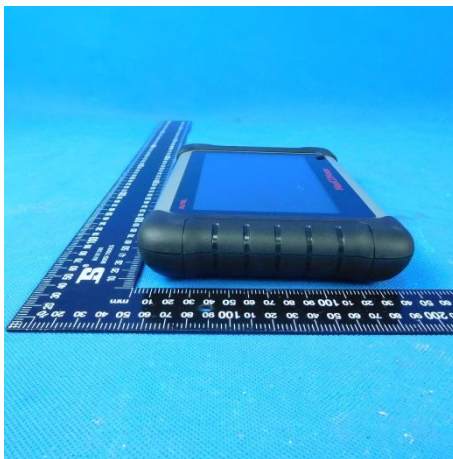

-----End of Report-----