

Page: 1 of 35

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: RFID reader

Brand Name: ID TECH

Model No.: ViVOPay Kiosk II

Model Difference N/A

FCC ID: WQJVIVOPAYKIOSKII

Report No.: E2/2015/B0028

Issue Date: Dec. 07, 2015

§15.225 **FCC Rule**

ID TECH **Prepared for:**

10721 Walker St. Cypress, CA 90630

SGS Taiwan Ltd.

Electronics & Communication Laboratory Prepared by:

No.2, Keji 1st Rd., Guishan District, Taoyuan

City, Taiwan 333





0513

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 2 of 35

VERIFICATION OF COMPLIANCE

ID TECH

Applicant: 10721 Walker St. Cypress, CA 90630

Product Name: RFID reader

Brand Name: ID TECH

Model No.: ViVOPay Kiosk II

Model Difference: N/A

FCC ID: WQJVIVOPAYKIOSKII

File Number: E2/2015/B0028

Date of test: Nov. 16, 2015 ~ Nov. 30, 2015

Date of EUT Received: Nov. 16, 2015

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Aken Huang	Date:	Dec. 07, 2015
Prepared By:	Aken Huang/Engineer Utoletta Tang	Date:	Dec. 07, 2015
Approved By	Violetta Tang / Clerk Jim Chang / Asst. Manager	Date:	Dec. 07, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Page: 3 of 35

Revision History

Report Number	Revision	Description	Issue Date
E2/2015/B0028	Rev.00	Initial creation of document	Dec. 07, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

f (886-2) 2298-0488 www.tw.sgs.com



Page: 4 of 35

Contents

1	GE	ENERAL INFORMATION	6
	1.1	PRODUCT DESCRIPTION	6
	1.2	TEST METHODOLOGY OF APPLIED STANDARDS	7
	1.3	TEST FACILITY	7
	1.4	SPECIAL ACCESSORIES	7
	1.5	EQUIPMENT MODIFICATIONS	7
2	SY	STEM TEST CONFIGURATION	8
	2.1	EUT CONFIGURATION	8
	2.2	EUT EXERCISE	8
	2.3	TEST PROCEDURE	8
	2.4	MEASUREMENT RESULTS EXPLANATION EXAMPLE	8
	2.5	CONFIGURATION OF TESTED SYSTEM	9
3	SU	JMMARY OF TEST RESULTS	11
4	DE	ESCRIPTION OF TEST MODES	11
	4.1	THE WORST TEST MODES AND CHANNEL DETAILS	11
5	M	EASUREMENT UNCERTAINTY	12
6	C	ONDUCTED EMISSION TEST	13
	6.1	STANDARD APPLICABLE:	13
	6.2	MEASUREMENT EQUIPMENT USED:	13
	6.3	EUT SETUP:	13
	6.4	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
	6.5	MEASUREMENT PROCEDURE:	14
	6.6	MEASUREMENT RESULT:	14
7	R/	ADIATED TEST ITEMS	19
	7.1	MEASUREMENT PROCEDURE	19
	7.2	TEST SET-UP	19
	7.3	MEASUREMENT EQUIPMENT USED	20
	7.4	FIELD STRENGTH CALCULATION	20
	7.5	FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	21
	7.6	RADIATED EMISSION MEASUREMENT	26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 5 of 35

8 F	REQUENCY STABILITY	31
8.1	STANDARD APPLICABLE	31
8.2	MEASUREMENT PROCEDURE	31
8.3	TEST SET-UP	31
8.4	MEASUREMENT EQUIPMENT USED	32
8.5	MEASUREMENT RESULTS	32
9 2	0 DB OCCUPIED BANDWIDTH MEASUREMENT	33
9.1	STANDARD APPLICABLE:	33
9.2	LIMIT:	33
9.3	TEST SET-UP	
9.4	MEASUREMENT PROCEDURE	
9.5	MEASUREMENT EQUIPMENT USED	33
9.6	20dB Bandwidth Measurement Result	34
10 A	ANTENNA REQUIREMENT	35
10.1.	. STANDARD APPLICABLE	35
10.2.	. ANTENNA CONNECTED CONSTRUCTION	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 6 of 35

GENERAL INFORMATION

1.1 Product Description

General:

Product Name:	RFID reader
Brand Name:	ID TECH
Model No.:	ViVOPay Kiosk II
Model Difference:	N/A
Software version:	N/A
Hardware version:	900-005-00
Power Supply:	9V

NFC:

Operating Frequency:	13.56MHz
Transmit Power:	< 123.90dBuV/m at 3m.
Number of Channels:	1
Antenna Type:	Loop Antenna
Modulation Type:	ASK

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrial Park, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號



Page: 7 of 35

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.225

ANSI C63.10:2013

All test items have been performed and record as per the above standards.

The composite system (digital device) is compliance with FCC Subpart B is authorized under the certification procedure.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Numbers are: 628985 (Wugu)

Canada Registration Number: 4620A-5.

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 8 of 35

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.27. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 9 of 35

2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission


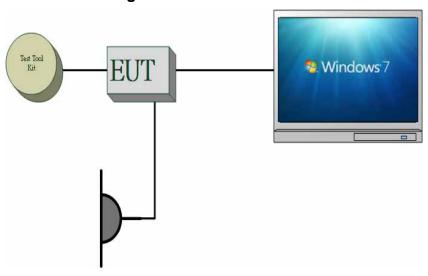


Fig. 2-2 Conducted Emission



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

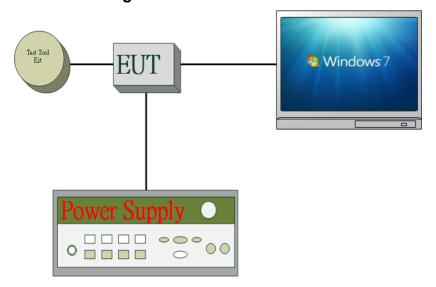

Page: 10 of 35

Fig. 2-3 AC Power Line Conducted Emission




Table 2-1 Equipment Used in Tested System

	rable 2-1 Equipment Osea in restea Oystem					
Item	Equipment	Mfr/Brand	Model / Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test Software	TS146 V1.00.003 For UnipayIII	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	MY53140006	N/A	Un-shielded
3.	Notebook	Lenovo	L420	LR-6MEX0	N/A	Un-shielded
4.	Test Tool Kit	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New Taipeilndustrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號

f (886-2) 2298-0488

www.tw.sgs.com



Page: 11 of 35

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	Radiated Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant
§2.1049 §15.215 (c)	20 dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES

4.1 The Worst Test Modes and Channel Details

- 1. The EUT stay in continuous transmitting mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	
NFC	1 1 ASK		ASK	
FREQUENCY STABILITY				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	
NFC	1	1	ASK	
20dB BANDWIDTH				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	
NFC	1	1	ASK	

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for NFC Transmitter for channel the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 12 of 35

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 51.33 Hz
20 dB OCCUPIED BANDWIDTH	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB

Measurement uncertainty	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 35

CONDUCTED EMISSION TEST

6.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range		nits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2014	12/11/2015					
Coaxial Cables N/A		N30N30-1042-150cm	N/A	01/06/2015	01/07/2016					
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016					
LISN Rolf-Heine		NNB-2/16Z	99012	03/04/2015	03/03/2016					
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.					

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for

electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Page: 14 of 35

6.4 Test SET-UP (Block Diagram of Configuration)

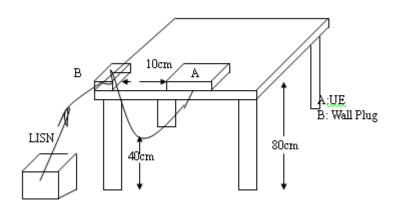

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 15 of 35

Humidity: 70 %

AC POWER LINE CONDUCTED EMISSION TEST DATA


Operation Mode:	Operation mode		Test Date:	Nov. 18, 2015	
Temperature:	23.8	Humidity:	70 %	Test By:	Aken
Note:	10 Pin			Phase:	L1

Conduction Room Phase: L1 Temperature: AC 120V/60Hz Power:

Limit: CISPR 13 / CISPR 22 Conduction(QP)

Mode:

Note: Adapter: 3A-066W P09

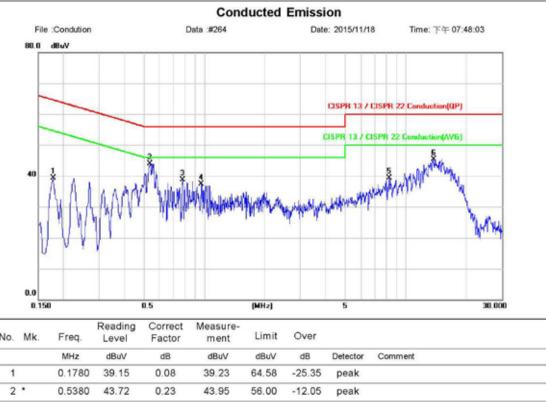

No.	Mk.	Freq.	Reading Level	Correct	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1780	39.15	0.08	39.23	64.58	-25.35	peak	
2	*	0.5380	43.72	0.23	43.95	56.00	-12.05	peak	
3		0.7820	38.45	0.34	38.79	56.00	-17.21	peak	
4		0.9660	36.88	0.41	37.29	56.00	-18.71	peak	
5		8.2820	38.63	0.68	39.31	60.00	-20.69	peak	
6		13.7140	44.74	0.64	45.38	60.00	-14.62	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




Page: 16 of 35

Temperature: Phase: Site: Conduction Room N AC 120V/60Hz Humidity: 70 % Limit: CISPR 13 / CISPR 22 Conduction(QP) Power:

Mode:

Note: Adapter:3A-066WP09

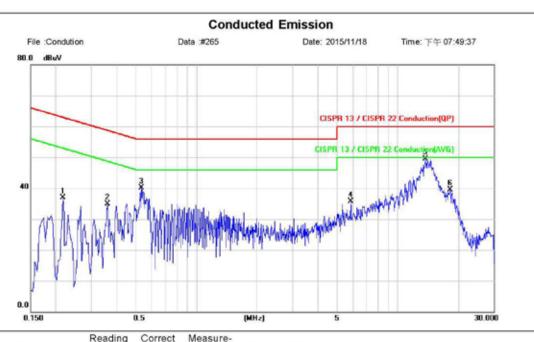

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.2180	36.77	0.14	36.91	62.89	-25.98	peak		
2	0.3620	34.69	0.20	34.89	58.68	-23.79	peak		
3	0.5340	39.90	0.28	40.18	56.00	-15.82	peak		
4	5.8540	35.12	0.68	35.80	60.00	-24.20	peak		
5 *	13.7460	48.77	0.67	49.44	60.00	-10.56	peak		
6	18.3140	38.81	0.61	39.42	60.00	-20.58	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 17 of 35

23 %

Humidity: 60 %

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode		Test Date:	Nov. 18, 2015	
Temperature:	23.8	Humidity:	70 %	Test By:	Aken
Note:	2 Pin			Phase:	L1

Power:

AC 120V/60Hz


Phase: Temperature: Site: Conduction Room L1

Mode:

Note: Adapter:3A-066WP09

Limit: CISPR 13 / CISPR 22 Conduction(QP)

Conducted Emission

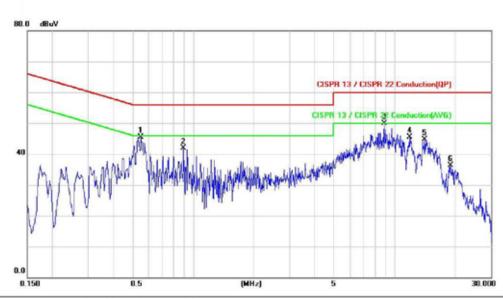

٨k.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
	0.5500	45.17	0.24	45.41	56.00	-10.59	peak	
	0.8980	41.43	0.38	41.81	56.00	-14.19	peak	
	8.8820	49.12	0.69	49.81	60.00	-10.19	peak	
	11.8420	44.81	0.68	45.49	60.00	-14.51	peak	
	14.0700	44.15	0.64	44.79	60.00	-15.21	peak	
	18.8980	35.83	0.57	36.40	60.00	-23.60	peak	
	1k.	MHz 0.5500 0.8980 8.8820 11.8420 14.0700	MHz dBuV 0.5500 45.17 0.8980 41.43 8.8820 49.12 11.8420 44.81 14.0700 44.15	MHz dBuV dB 0.5500 45.17 0.24 0.8980 41.43 0.38 8.8820 49.12 0.69 11.8420 44.81 0.68 14.0700 44.15 0.64	MHz dBuV dB dBuV 0.5500 45.17 0.24 45.41 0.8980 41.43 0.38 41.81 8.8820 49.12 0.69 49.81 11.8420 44.81 0.68 45.49 14.0700 44.15 0.64 44.79	MHz dBuV dB dBuV dBuV 0.5500 45.17 0.24 45.41 56.00 0.8980 41.43 0.38 41.81 56.00 8.8820 49.12 0.69 49.81 60.00 11.8420 44.81 0.68 45.49 60.00 14.0700 44.15 0.64 44.79 60.00	MHz dBuV dB dBuV dBuV dB 0.5500 45.17 0.24 45.41 56.00 -10.59 0.8980 41.43 0.38 41.81 56.00 -14.19 8.8820 49.12 0.69 49.81 60.00 -10.19 11.8420 44.81 0.68 45.49 60.00 -14.51 14.0700 44.15 0.64 44.79 60.00 -15.21	MHz dBuV dB dBuV dBuV dB Detector 0.5500 45.17 0.24 45.41 56.00 -10.59 peak 0.8980 41.43 0.38 41.81 56.00 -14.19 peak 8.8820 49.12 0.69 49.81 60.00 -10.19 peak 11.8420 44.81 0.68 45.49 60.00 -14.51 peak 14.0700 44.15 0.64 44.79 60.00 -15.21 peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




Page: 18 of 35

Temperature: Phase: Site: Conduction Room N AC 120V/60Hz Humidity: 60 % Limit: CISPR 13 / CISPR 22 Conduction(QP) Power:

Mode:

Note: Adapter:3A-066WP09

Conducted Emission

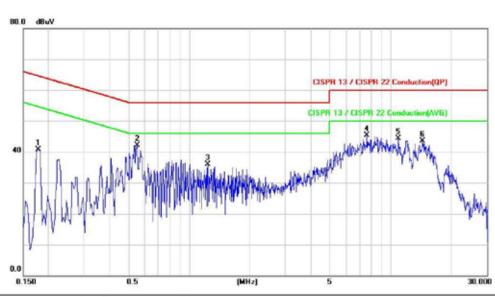

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1780	40.53	0.14	40.67	64.58	-23.91	peak	
2	*	0.5540	41.89	0.29	42.18	56.00	-13.82	peak	
3		1.2380	35.39	0.50	35.89	56.00	-20.11	peak	
4		7.6100	44.54	0.72	45.26	60.00	-14.74	peak	
5		10.9420	43.60	0.73	44.33	60.00	-15.67	peak	
6		14.4060	42.82	0.67	43.49	60.00	-16.51	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 19 of 35


RADIATED TEST ITEMS

7.1 Measurement Procedure


- 1. Configure the EUT according to ANSI C63.4.
- 2. The EUT was placed on a turn table which is 0.8m above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete

7.2 Test SET-UP

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

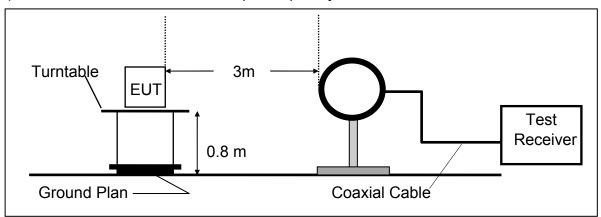

Radiated Emission Test Set-Up, Frequency Below 1000MHz

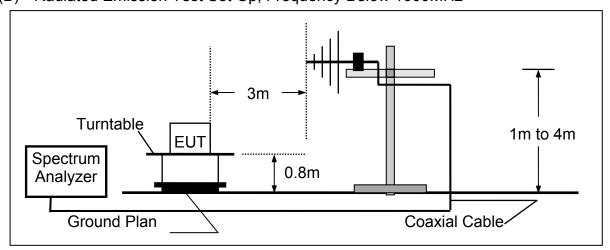

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 20 of 35

7.3 Measurement Equipment Used

	966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016					
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015					
Broadband Antenna	TESEQ	CBL 6112D	35240	12/05/2014	12/04/2015					
Pre Amplifier	EMC Instruments	EMC330	980096	12/19/2014	12/18/2015					
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/19/2014	12/18/2015					
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/19/2014	12/18/2015					
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016					
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016					
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016					
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.					
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.					
Turn Table MF		N/A	N/A	N.C.R.	N.C.R.					
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.					

7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Where	G	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m) Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB) Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note:

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 21 of 35

7.5 Field Strength of Fundamental Emissions and Mask Measurement

7.5.1 Standard Applicable

I imit:

Rules and specifiactions	CFR 47 Part 15 section 15.225(a)-(d)						
Frequency of Emission (MHz)	Field Strength (μV/m)at 30m	Field Strength (dBµV/m)at 30m	Field Strength (dBµV/m)at 3m				
1.705~13.110	30	29.5	69.5				
13.110~13.410	106	40.5	80.5				
13.410~13.553	334	50.5	90.47				
13.553~13.567	15848	84	123.9				
13.567~13.710	334	50.5	90.47				
13.710~14.010	106	40.5	80.5				
14.010~30.00	30	29.5	69.5				

Note:

- Emission level in dBuV/m=20 log (μV/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrial Park, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路134號




Page: 22 of 35

7.5.2 Field Strength of Fundamental Emission Measurement Result

Operation Mode: **RFID** Test Date: 2015/11/16

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Vito Main EUT Pol.: Н Measurement Antenna Pol. : Vertical

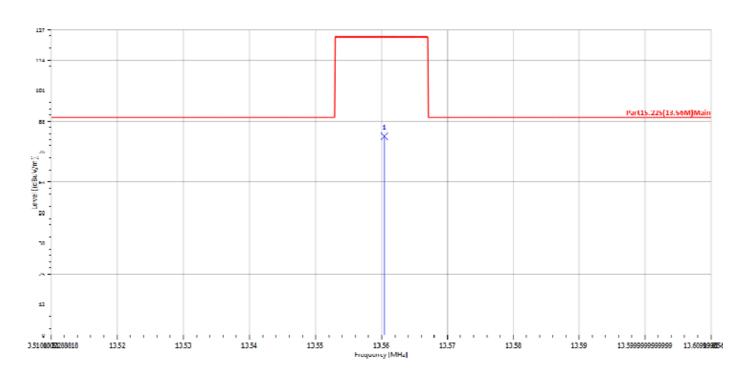

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
13.56	F	Peak	71.36	11.27	82.63	123.9	-41.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




Page: 23 of 35

Operation Mode: **RFID** Test Date: 2015/11/16

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Main Vito

EUT Pol.: Measurement Antenna Pol.: Horizontal Η

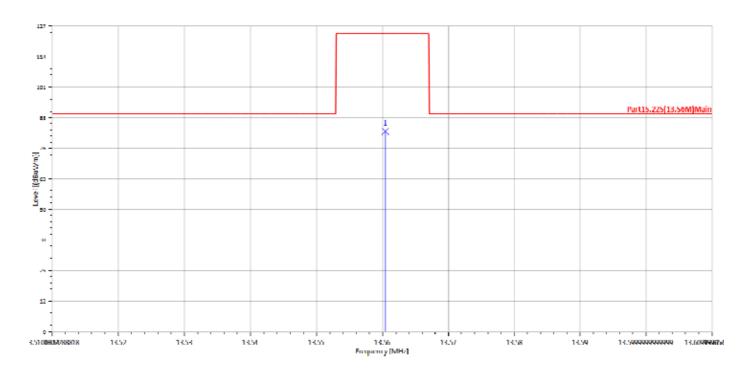

	Freq.	Note	Detector 5 ct or 5 ct of 5 ct	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@ 3m	
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
ų.	13.56	F	Peak	71.96	11.27	83.23	123.9	-40.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 24 of 35

7.5.3 Mask Measurement Result

Operation Mode: Test Date: 2015/11/16

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Mask Vito EUT Pol.: Н Measurement Antenna Pol.: Vertical

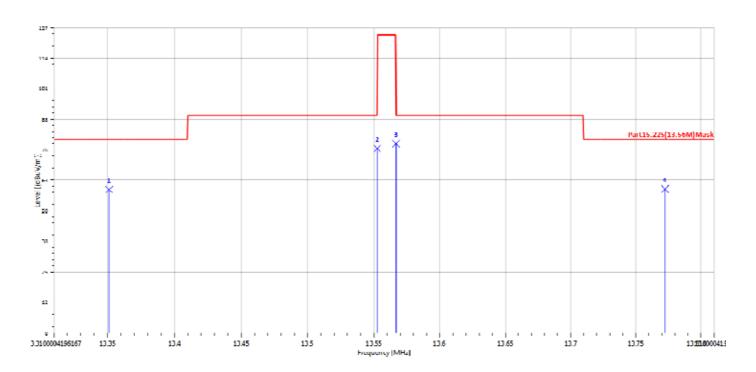

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@ 3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
13.35	S	Peak	48.36	11.27	59.63	80.5	-20.87
13.55	S	Peak	65.49	11.27	76.76	90.47	-13.71
13.57	S	Peak	67.49	11.27	78.75	123.9	-45.15
13.77	S	Peak	48.57	11.26	59.83	80.5	-20.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New Taipeilndustrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號




Page: 25 of 35

Operation Mode: **RFID** Test Date: 2015/11/16

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Mask Vito EUT Pol.: Measurement Antenna Pol.: Horizontal Η

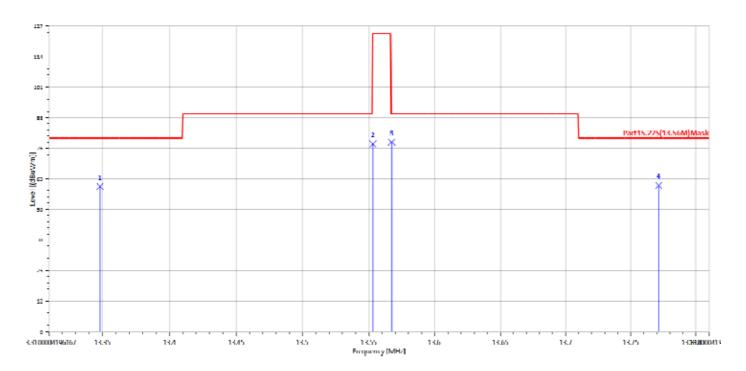

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
13.35	S	Peak	49.05	11.27	60.32	80.5	-20.18
13.55	S	Peak	66.70	11.27	77.97	123.9	-45.93
13.57	S	Peak	67.51	11.27	78.77	90.47	-11.70
13.77	S	Peak	49.48	11.26	60.74	80.5	-19.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 26 of 35

7.6 Radiated Emission Measurement

7.6.1 Standard Applicable

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- Emission level in dB_μV/m=20 log (μV/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 27 of 35

7.6.2 Radiated Emission Measurement Result

Operation Mode: **RFID** Test Date: 2015/11/16

13.56 MHz Fundamental Frequency: Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Vito Tx EUT Pol.: Н Measurement Antenna Pol.: Vertical

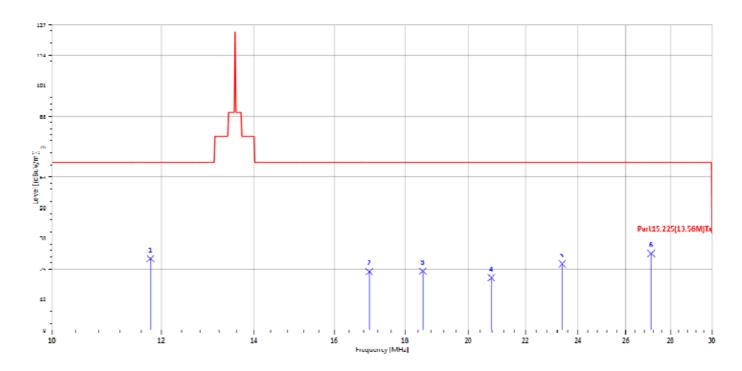

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
11.78	S	Peak	18.27	11.30	29.58	69.54	-39.96
16.96	S	Peak	12.97	11.19	24.17	69.54	-45.37
18.54	S	Peak	13.30	11.16	24.46	69.54	-45.08
20.78	S	Peak	10.69	10.99	21.68	69.54	-47.86
23.38	S	Peak	16.94	10.52	27.47	69.54	-42.07
27.12	Н	Peak	21.93	9.85	31.78	69.54	-37.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號




Page: 28 of 35

Operation Mode: **RFID** Test Date: 2015/11/16

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Tx Vito

EUT Pol.: Н Measurement Antenna Pol.: Horizontal

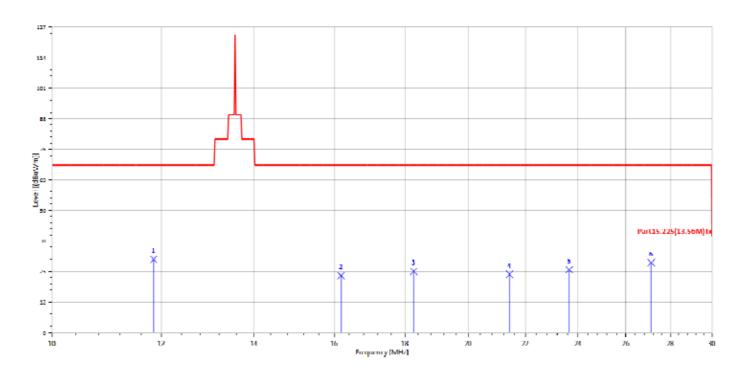

Freq.	Note	Detector	Spectum	Factor	Actual	Lim it	Margin
		Mode	Reading Level		FS	@ 3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
11.84	S	Peak	19.17	11.30	30.47	69.54	-39.07
16.18	S	Peak	12.45	11.21	23.66	69.54	-45.88
18.26	S	Peak	14.25	11.17	25.42	69.54	-44.12
21.42	S	Peak	13.34	10.87	24.21	69.54	-45.33
23.66	S	Peak	15.64	10.47	26.11	69.54	-43.43
27.12	Н	Peak	19.27	9.85	29.11	69.54	-40.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




Page: 29 of 35

Operation Mode: **RFID** Test Date: 2015/11/16

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Vito Tx EUT Pol.: Measurement Antenna Pol.: Н Vertical

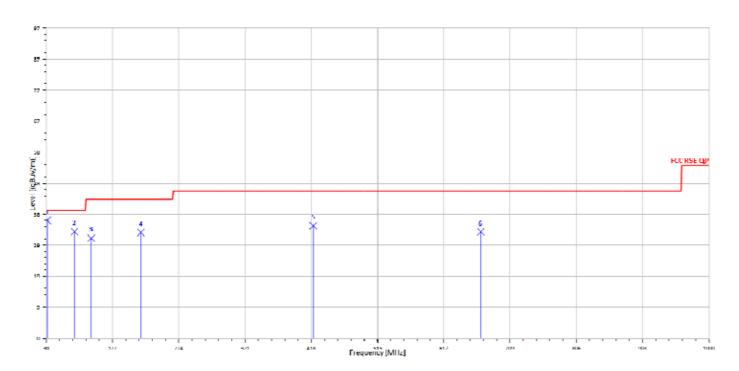

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
31.94	S	Peak	61.34	-24.47	36.86	40	-3.14
71.71	S	Peak	59.09	-25.78	33.32	40	-6.68
95.96	S	Peak	58.49	-27.19	31.30	43.5	-12.20
168.71	S	Peak	56.33	-23.26	33.07	43.5	-10.43
420.91	S	Peak	53.29	-18.11	35.18	46	-10.82
666.32	S	Peak	47.27	-14.00	33.27	46	-12.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 30 of 35

Operation Mode: **RFID** Test Date: 2015/11/16

Fundamental Frequency: 13.56 MHz Temp. / Humi.: 22.7deg_C/57RH

Operation Band: Test Engineer: Tx Vito

EUT Pol.: Measurement Antenna Pol.: Н Horizontal

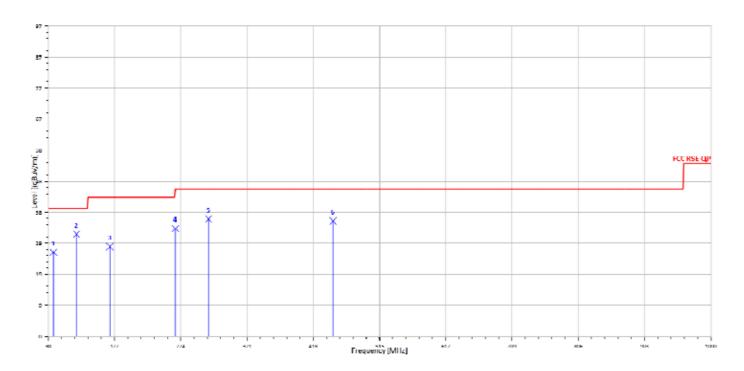

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
37.76	S	Peak	49.78	-23.49	26.29	40	-13.71
71.71	S	Peak	57.72	-25.78	31.94	40	-8.06
120.21	S	Peak	52.72	-24.70	28.02	43.5	-15.48
216.24	S	Peak	58.58	-24.92	33.65	46	-12.35
264.74	S	Peak	59.60	-22.93	36.67	46	-9.33
447.10	S	Peak	54.03	-18.00	36.02	46	-9.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 31 of 35

FREQUENCY STABILITY


8.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.2 **Measurement Procedure**

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
- 6. Repeat step with the temperature chamber set to the lowest temperature.
- 7. Set spectrum Center Frequency = fundamental frequency, RBW, VBW= 10 kHz, Span =100 kHz, Detector =Max hold, Mark peak.

8.3 **Test SET-UP**

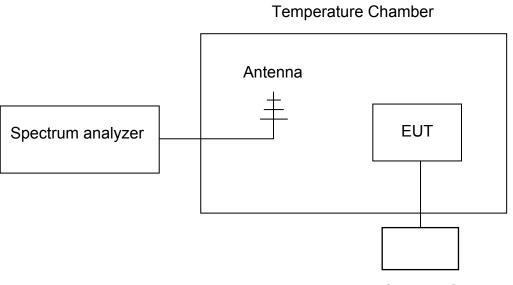

Variable AC Power Supply

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

f (886-2) 2298-0488

www.tw.sqs.com



Page: 32 of 35

8.4 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL LAST		CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016				
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/19/2014	12/18/2015				
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015				
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015				
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2015	05/03/2016				
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015				

8.5 Measurement Results

Refer to attached data chart.

A. Temperature Variation

Power Supply	Environment	Frequency		
Vdc	Temperature ()	(MHz)	Delta (Hz)	Limit (KHz)
9	-20	13.56033333	166.67	+/- 1.356
9	-10	13.5605	0.00	+/- 1.356
9	0	13.56033333	166.67	+/- 1.356
9	10	13.56033333	166.67	+/- 1.356
9	20	13.5605	0.00	+/- 1.356
9	30	13.56033333	166.67	+/- 1.356
9	40	13.5605	0.00	+/- 1.356
9	50	13.5605	0.00	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency			
Vdc	Temperature ()	(MHz) Delta (Hz)		Limit (KHz)	
10.35	20	13.5605	0.00	+/- 1.356	
9	20	13.5605	0.00	+/- 1.356	
7.36	20	13.56033333	166.67	+/- 1.356	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 33 of 35

20 dB OCCUPIED BANDWIDTH MEASUREMENT

Standard Applicable:

The 20 dB bandwidth shall be specified in operating frequency band.

Limit: 9.2

None

Test Set-up 9.3



Measurement Procedure

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016			
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/19/2014	12/18/2015			
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015			
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015			
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2015	05/03/2016			
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

f (886-2) 2298-0488 www.tw.sgs.com



Page: 34 of 35

9.6 20dB Bandwidth Measurement Result

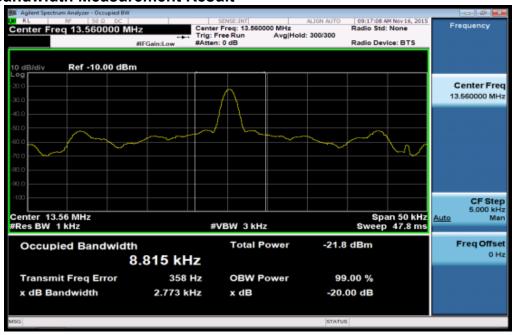

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

防非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Page: 35 of 35

10 ANTENNA REQUIREMENT

10.1. Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

10.2. Antenna Connected Construction

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

f (886-2) 2298-0488 www.tw.sqs.com