TEST REPORT



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (1) / (77) Pages

1. Client

∘ Name : KAONMEDIA Co., Ltd.

• Address: KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si,

Gyeonggi-do, Korea

Date of Receipt: 2018-02-14

2. Manufacturer

• Name: KAONMEDIA Co., Ltd.

· Address: KAONMEDIA Building, 884-3, Seongnam-daero, Bundang-gu, Seongnam-si,

Gyeonggi-do, Korea

3. Use of Report: For FCC Certification

4. Test Sample / Model: Layer3 TV / Client VM3000C

5. Date of Test: 2018-04-24 to 2018-05-16

6. Test Standard(method) used: FCC 47 CFR part 15 subpart C 15.247

7. Testing Environment: Temp.: $(23 \pm 5) \, ^{\circ}$, Humidity: $(50 \pm 3) \, ^{\circ}$ R.H.

8. Test Results: Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

	Tested by	Technical Manager
Affirmation	Ji-Hye, Kim: (Signatura)	Won-Jae, Hwang: (Signature)
	• •	

2018-05-18

Republic of KOREA CTK Co., Ltd.



Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (2) / (77)Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2018-05-18	Issued (CTK-2018-01333)	all
	<u> </u>	

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (3) / (77)Pages

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information	4
1.3 Peripheral Devices	4
2. Facility and Accreditations	5
2.1 Test Facility	5
2.2 Laboratory Accreditations and Listings	5
2.3 Calibration Details of Equipment Used for Measurement	5
3. Test Specifications	6
3.1 Standards	6
3.2 Mode of operation during the test	7
3.3 Maximum Measurement Uncertainty	8
3.4 Test Software	8
4. Technical Characteristic Test	9
4.1 6dB Bandwidth	9
4.2 OUTPUT POWER	20
4.3 Power Spectral Density	37
4.4 Band Edge & Conducted Spurious emission	49
4.5 Radiated Emission	62
4.6 AC Power Line Conducted Emissions	74
APPENDIX A – Test Equipment Used For Tests	77



Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (4) / (77)Pages

1. General Product Description

1.1 Client Information

Company	KAONMEDIA Co., Ltd.	
Contact Point	KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea	
Contact Person	Name : Kim tae-Sung E-mail : kkam@kaonmedia.com Tel : +82-31-724-8861	

1.2 Product Information

FCC ID	WQTVM3000C
Product Description	Layer3 TV
Model name	Client VM3000C
Variant Model name	-
Operating Frequency	2 412 MHz – 2 462 MHz
RF Output Power	802.11b : 23.57 dBm (227.51 mW) 802.11g : 15.87 dBm (38.62 mW) CDD Mode_802.11n_HT20 : 14.57 dBm (28.61 mW) CDD Mode_802.11n_HT40 : 10.89 dBm (12.27 mW) SDM Mode_802.11n_HT20 : 14.84 dBm (30.47 mW) SDM Mode_802.11n_HT40 : 11.40 dBm (13.80 mW)
Antenna Specification	Antenna type : PCB Antenna Peak Gain : 2 dBi
Number of channels	11
Type of Modulation	802.11b : DSSS 802.11g/n : OFDM
Data Rate	802.11b : 11 / 5.5 / 2 / 1 Mbps 802.11g : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n: MCS0-7, up to 450 Mbps
Power Source	DC 12 V(Adapter)
Hardware Rev	V1.0
Software Rev	V1.0

1.3 Peripheral Devices

Device Manufacturer		Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R6N
AC/DC Adapter	HP	HSTNN-CA40	-
AD/DC Adapter	I.T.E POWER SUPPLY ALSO LISTED	SQUS50-120333	-



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (5) / (77)Pages

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

2.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	P
CANADA	ISED	ISED EMI (3/10m test site)	8737A-2	*
JAPAN	vccı	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



Report No.: CTK-2018-01333 Page (6) / (77)Pages

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition	
15.247(a)	6 dB Bandwidth	С		
15.247(b)	Maximum Output Power	С		
15.247(d)	Conducted Spurious emission	С	Conducted	
15.247(d)	Unwanted Emission(Conducted)	С		
15.247(e)	Power Spectral Density	С		
15.209	Radiated Emissions	С	Radiated	
15.207	AC Conducted Emission	С	Line Conducted	
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				
Note 2: The data in this test report are traceable to the national or international standards.				
Note 3: The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013				
<u>Note 4</u> : The tests were performed according to the method of measurements prescribed in KDB No.558074.				



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (7) / (77)Pages

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.

During at testing, system components were manipulated within the confines of typical usage to maximize each emission.

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit.

All modulation modes were tests. The results are only attached worst cases.

Test Frequency

- 802.11b, 802.11g, 802.11n_HT20

Lowest channel	Middle channel	Highest channel
2 412 MHz	2 437 MHz	2 462 MHz

- 802.11n HT40

Lowest channel	Middle channel	Highest channel	
2 422 MHz	2 437 MHz	2 452 MHz	

Test mode

- CDD mode

Test mode	Modulation	Data rate	Duty Cycle	Duty Cycle Factor
802.11b	DSSS	1 Mbps	95.2%	0.21 dB
802.11g	OFDM	6 Mbps	95.3%	0.21 dB
802.11n_HT20	OFDM	MCS 0	95.2%	0.21 dB
802.11n_HT40	OFDM	MCS 0	90.6%	0.43 dB

- SDM mode

Test mode	Modulation	Data rate	Duty Cycle	Duty Cycle Factor
802.11n_HT20	OFDM	MCS 16	87.3%	0.59 dB
802.11n_HT40	OFDM	MCS 16	78.0%	1.08 dB

3.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable



Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (8) / (77)Pages

3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter. Coverage factor k = 2, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	± 1.5 dB
Power Spectral Density	± 1.5 dB
Occupied Bandwidth	± 0.1 MHz
Unwanted Emission(conducted)	± 3.0 dB
Radiated Emissions ($f \le 1$ GHz)	± 4.0 dB
Radiated Emissions (f > 1 GHz)	± 5.0 dB

3.5 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	TOYO EMI software EP5RE Ver. 5.1.0
Line Conducted Test	ESCI7, ESCI3: EMC32 Ver. 8.50.0
Line Conducted Test	ESR7: EMC32 Ver. 8.53.0



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (9) / (77)Pages

4. Technical Characteristic Test

4.1 6dB Bandwidth

Test Procedures

ANSI C63.10-2013 6.9.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

ANSI C63.10-2013 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

<u>Test Settings</u>:

Center frequency = the highest, middle and the lowest channels

a) RBW = 100 kHz

b) $VBW \ge 3 \times RBW$

c) Detector = peak

d) Trace mode = Max hold

- e) Sweep = auto couple
- f) Allow trace to fully stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Limit

6 dB Bandwidth > 500kHz



Report No.: CTK-2018-01333 Page (10) / (77)Pages

Test Data:

CDD Mode_ANTO

		6 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802	802.11b 802.11g 802.11n_HT20					
Frequency	6dB	99%	6dB	99%	6dB 99%		
2 412 MHz	8.66	11.41	16.16	16.50	17.26	17.68	
2 437 MHz	9.10	11.54	16.40	16.52	17.39	17.71	
2 462 MHz	9.09	11.88	16.13	16.46	17.31	17.64	

	6 dB Bandwidth and 99% Bandwidth (MHz)				
Mode	802.11n HT40				
Frequency	6dB 99%				
2 422 MHz	36.36 36.24				
2 437 MHz	35.81 36.19				
2 452 MHz	35.51	35.94			

CDD Mode_ANT1

	6 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802	802.11b 802.11g 802.11n_HT20				
Frequency	6dB	99%	6dB	99%	6dB 99%	
2 412 MHz	8.64	11.48	16.36	16.48	17.34	17.67
2 437 MHz	9.08	11.69	16.40	16.52	17.61	17.72
2 462 MHz	9.11	11.95	16.10	16.46	17.20	17.65

	6 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n HT40			
Frequency	6dB 99%			
2 422 MHz	36.38 36.20			
2 437 MHz	36.00 36.20			
2 452 MHz	35.49 35.98			



Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (11) / (77)Pages

CDD Mode_ANT2

	6 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802	802.11b 802.11g 802.11n_HT20				
Frequency	6dB	99%	6dB	99%	6dB 99%	
2 412 MHz	9.09	11.50	16.38	16.51	17.27	17.70
2 437 MHz	8.65	11.52	16.39	16.52	17.41	17.72
2 462 MHz	8.65	11.76	16.14	16.48	17.39	17.67

_					
	6 dB Bandwidth and 99% Bandwidth (MHz)				
Mode	802.11n HT40				
Frequency	6dB 99%				
2 422 MHz	36.39 36.24				
2 437 MHz	35.80 36.14				
2 452 MHz	35.44 35.98				


See next pages for actual measured spectrum plots.



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (12) / (77)Pages

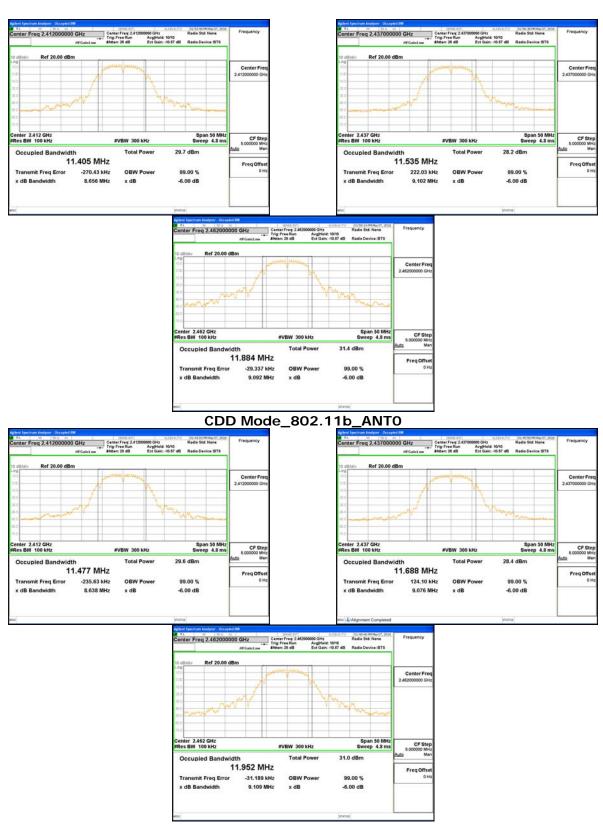


CDD Mode_802.11b_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (13) / (77)Pages

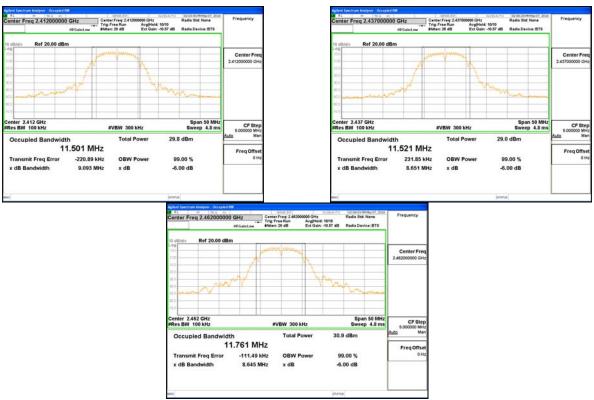

CDD Mode_802.11b_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (14) / (77)Pages



CDD Mode_802.11g_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (15) / (77)Pages



CDD Mode_802.11g_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (16) / (77)Pages




CDD Mode_802.11n_HT20_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (17) / (77)Pages

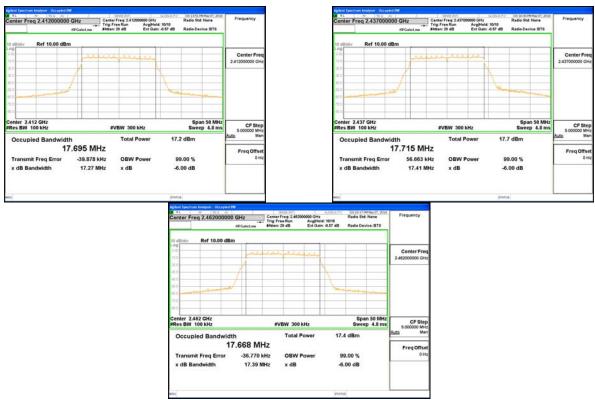

CDD Mode_802.11n_HT20_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (18) / (77)Pages



CDD Mode_802.11n_HT40_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (19) / (77)Pages



CDD Mode_802.11n_HT40_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501


Report No.: CTK-2018-01333 Page (20) / (77)Pages

4.2 OUTPUT POWER

Test Procedures

Average Power(Procedure 9.2.2.2 in KDB 558074, Method AVGSA-2)

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



<u>Test Settings:</u>

Center frequency = the highest, middle and the lowest channels

a) span \geq 1.5 x OBW

b) RBW = 1 MHz

c) VBW \geq 3 x RBW

d) Sweep time = auto

e) Detector = RMS

f) average at least 100

g) Duty cycle factor = $10\log(1/x)$

CDD Mode	802.11b	0.21 dB
	802.11g	0.21 dB
	802.11n_HT20	0.21 dB
	802.11n_HT40	0.43 dB
SDM Mode	802.11n_HT20	0.59 dB
	802.11n_HT40	1.08 dB

Limit

Operating Mode	Mode	ANT Configuration	ANT Gain (dBi)	Limit (dBm)
SISO	802.11b/g/n	ANT0	2.00	30.00
SISO	802.11b/g/n	ANT1	2.00	30.00
SISO	802.11b/g/n	ANT2	2.00	30.00
MIMO (2Tx)	802.11g/n	ANTO + ANT1	5.01	30.00
MIMO (3Tx)	802.11g/n	ANTO + ANT1 + ANT2	6.77	29.23



Report No.: CTK-2018-01333 Page (21) / (77)Pages

Test Data

CDD Mode_ANTO

ODD WOOL			-			
Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
	2 412	21.57	0.21	21.78	30.00	8.22
802.11b	2 437	20.13	0.21	20.34	30.00	9.66
	2 462	23.36	0.21	23.57	30.00	6.43
	2 412	10.00	0.21	10.21	30.00	19.79
802.11g	2 437	11.02	0.21	11.23	30.00	18.77
	2 462	10.89	0.21	11.10	30.00	18.90
	2 412	9.29	0.21	9.50	30.00	20.50
802.11n HT20	2 437	9.99	0.21	10.20	30.00	19.80
_11120	2 462	10.01	0.21	10.22	30.00	19.78
	2 422	5.34	0.43	5.77	30.00	24.23
802.11n HT40	2 437	5.71	0.43	6.14	30.00	23.86
_11140	2 452	5.81	0.43	6.24	30.00	23.76

CDD Mode_ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
	2 412	21.58	0.21	21.79	30.00	8.21
802.11b	2 437	20.46	0.21	20.67	30.00	9.33
	2 462	22.93	0.21	23.14	30.00	6.86
	2 412	10.15	0.21	10.36	30.00	19.64
802.11g	2 437	10.34	0.21	10.55	30.00	19.45
	2 462	10.46	0.21	10.67	30.00	19.33
	2 412	8.72	0.21	8.93	30.00	21.07
802.11n HT20	2 437	8.97	0.21	9.18	30.00	20.82
	2 462	9.10	0.21	9.31	30.00	20.69
	2 422	5.13	0.43	5.56	30.00	24.44
802.11n _HT40	2 437	5.64	0.43	6.07	30.00	23.93
	2 452	5.77	0.43	6.2	30.00	23.80



Report No.: CTK-2018-01333 Page (22) / (77)Pages

CDD Mode_ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
	2 412	21.44	0.21	21.65	30.00	8.35
802.11b	2 437	20.91	0.21	21.12	30.00	8.88
	2 462	22.71	0.21	22.92	30.00	7.08
	2 412	10.49	0.21	10.70	30.00	19.30
802.11g	2 437	11.25	0.21	11.46	30.00	18.54
	2 462	10.78	0.21	10.99	30.00	19.01
	2 412	9.13	0.21	9.34	30.00	20.66
802.11n _HT20	2 437	9.73	0.21	9.94	30.00	20.06
_11120	2 462	9.46	0.21	9.67	30.00	20.33
802.11n HT40	2 422	4.62	0.43	5.05	30.00	24.95
	2 437	5.10	0.43	5.53	30.00	24.47
_11140	2 452	5.47	0.43	5.90	30.00	24.10

CDD Mode_ANTO + ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
	2 412	13.09	0.21	13.30	30.00	16.70
802.11g	2 437	13.70	0.21	13.91	30.00	16.09
	2 462	13.69	0.21	13.90	30.00	16.10
000.44	2 412	12.02	0.21	12.23	30.00	17.77
802.11n HT20	2 437	12.52	0.21	12.73	30.00	17.27
	2 462	12.59	0.21	12.80	30.00	17.20
802.11n HT40	2 422	8.25	0.43	8.68	30.00	21.32
	2 437	8.69	0.43	9.12	30.00	20.88
	2 452	8.80	0.43	9.23	30.00	20.77



Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (23) / (77)Pages

CDD Mode_ANTO + ANT1 + ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
	2 412	14.99	0.21	15.20	29.23	14.03
802.11g	2 437	15.66	0.21	15.87	29.23	13.36
	2 462	15.49	0.21	15.70	29.23	13.53
000.11	2 412	13.82	0.21	14.03	29.23	15.20
802.11n HT20	2 437	14.36	0.21	14.57	29.23	14.66
	2 462	14.31	0.21	14.52	29.23	14.71
802.11n HT40	2 422	9.81	0.43	10.24	29.23	18.99
	2 437	10.26	0.43	10.69	29.23	18.54
	2 452	10.46	0.43	10.89	29.23	18.34

SDM Mode_ANTO

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
000.11	2 412	9.16	0.59	9.75	30.00	20.25
802.11n _HT20	2 437	9.89	0.59	10.48	30.00	19.52
	2 462	9.53	0.59	10.12	30.00	19.88
	2 422	4.66	1.08	5.74	30.00	24.26
802.11n HT40	2 437	5.63	1.08	6.71	30.00	23.29
	2 452	5.70	1.08	6.78	30.00	23.22

SDM Mode_ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n _HT20	2 412	8.04	0.59	8.63	30.00	21.37
	2 437	8.93	0.59	9.52	30.00	20.48
	2 462	8.92	0.59	9.51	30.00	20.49
	2 422	4.55	1.08	5.63	30.00	24.37
802.11n HT40	2 437	5.34	1.08	6.42	30.00	23.58
	2 452	5.47	1.08	6.55	30.00	23.45



Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (24) / (77)Pages

SDM Mode_ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
	2 412	9.15	0.59	9.74	30.00	20.26
802.11n HT20	2 437	9.56	0.59	10.15	30.00	19.85
_11120	2 462	9.20	0.59	9.79	30.00	20.21
	2 422	5.05	1.08	6.13	30.00	23.87
802.11n HT40	2 437	5.28	1.08	6.36	30.00	23.64
_11140	2 452	5.47	1.08	6.55	30.00	23.45

SDM Mode_ANTO + ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
	2 412	11.65	0.59	12.24	30.00	17.76
802.11n HT20	2 437	12.45	0.59	13.04	30.00	16.96
_11120	2 462	12.25	0.59	12.84	30.00	17.16
	2 422	7.62	1.08	8.70	30.00	21.30
802.11n HT40	2 437	8.50	1.08	9.58	30.00	20.42
_11140	2 452	8.60	1.08	9.68	30.00	20.32

SDM Mode_ANTO + ANT1 + ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin(dB)
	2 412	13.59	0.59	14.18	29.23	15.05
802.11n _HT20	2 437	14.25	0.59	14.84	29.23	14.39
	2 462	14.00	0.59	14.59	29.23	14.64
	2 422	9.53	1.08	10.61	29.23	18.62
802.11n HT40	2 437	10.19	1.08	11.27	29.23	17.96
_11140	2 452	10.32	1.08	11.40	29.23	17.83

See next pages for actual measured spectrum plots.



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (25) / (77)Pages




CDD Mode_802.11b_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (26) / (77)Pages

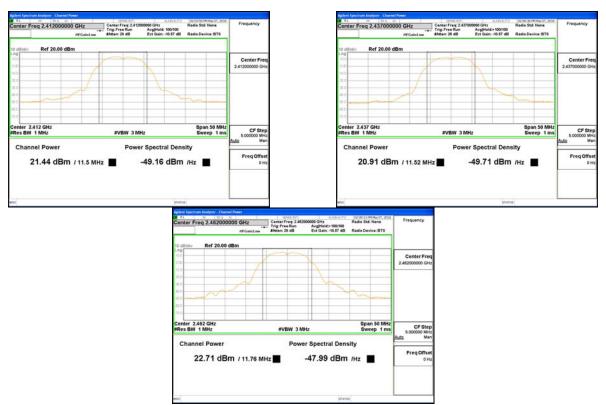


CDD Mode_802.11b_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (27) / (77)Pages

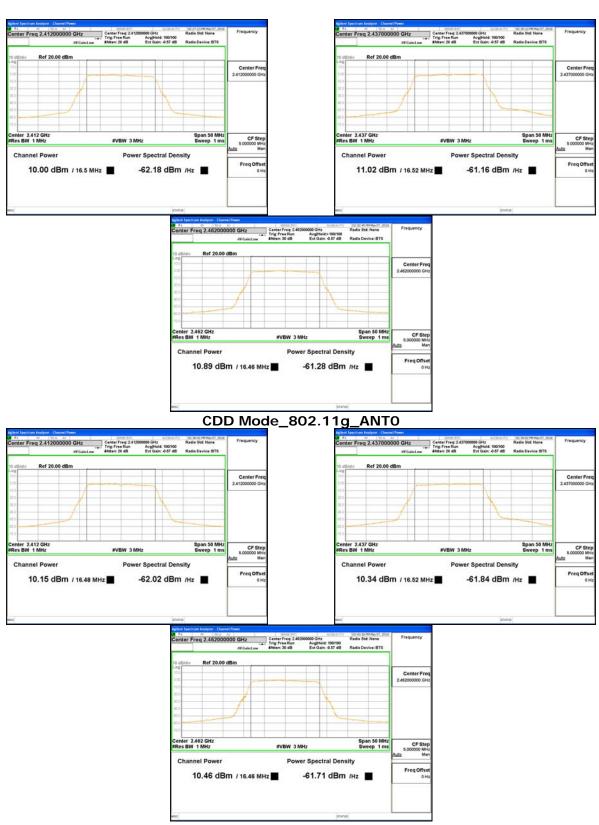


CDD Mode_802.11g_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (28) / (77)Pages

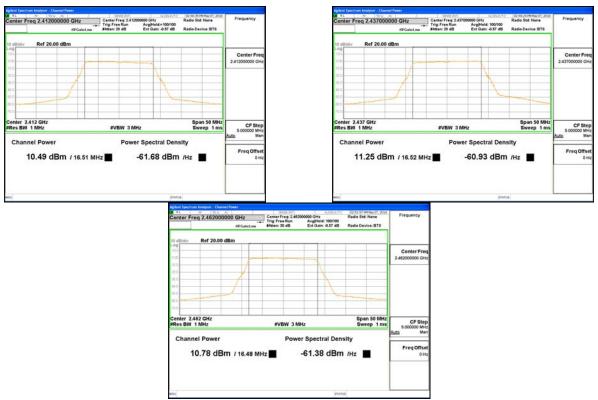


CDD Mode_802.11g_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (29) / (77)Pages

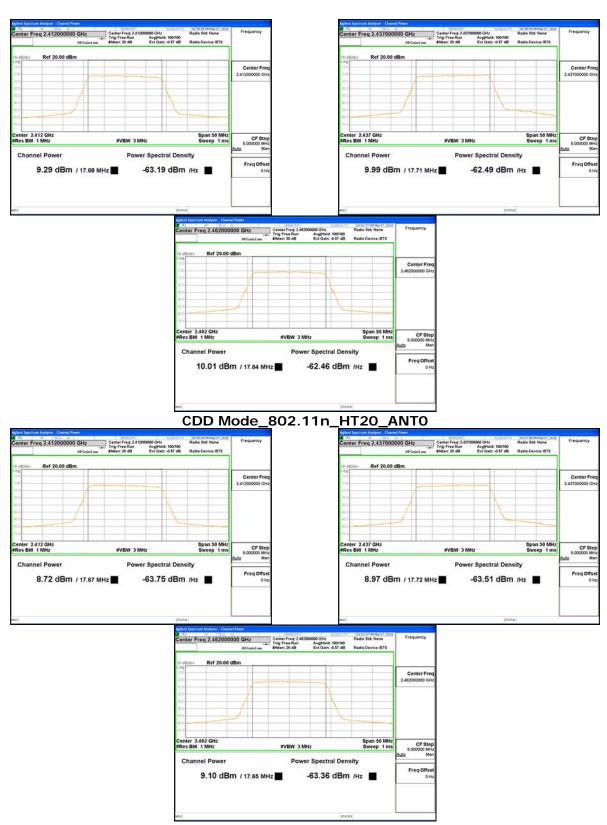


CDD Mode_802.11n_HT20_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (30) / (77)Pages

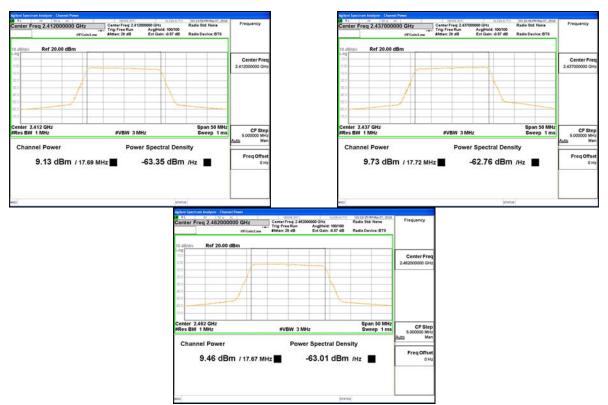


CDD Mode_802.11n_HT20_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (31) / (77)Pages

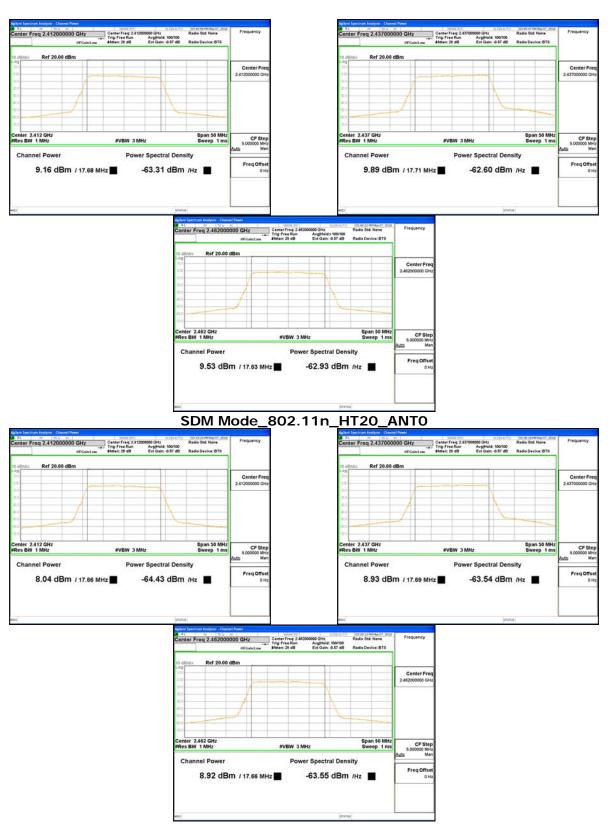


SDM Mode_802.11n_HT20_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (32) / (77)Pages

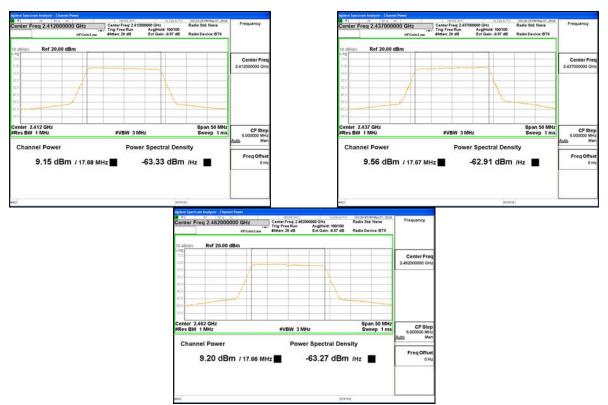


SDM Mode_802.11n_HT20_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (33) / (77)Pages

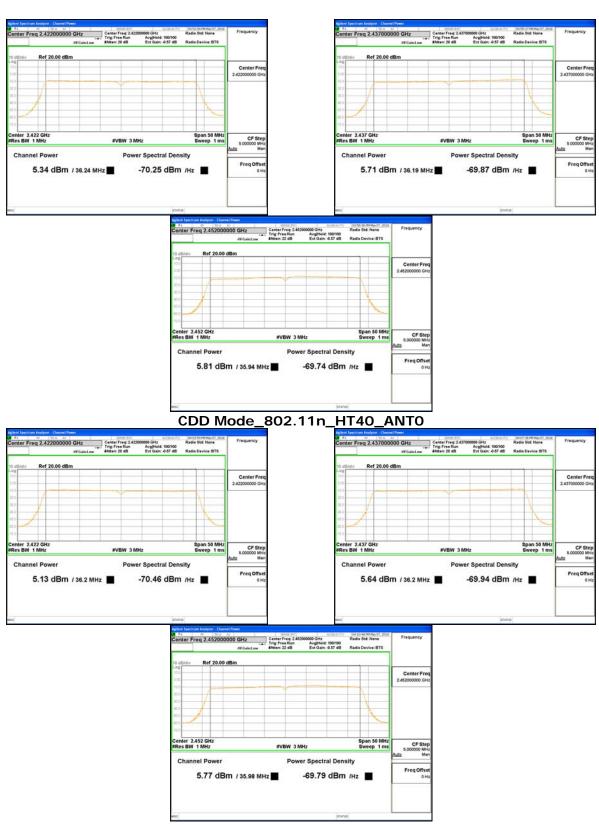


CDD Mode_802.11n_HT40_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (34) / (77)Pages

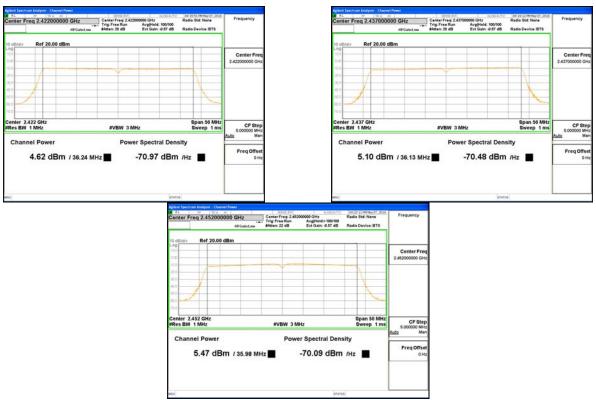


CDD Mode_802.11n_HT40_ANT2



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (35) / (77)Pages

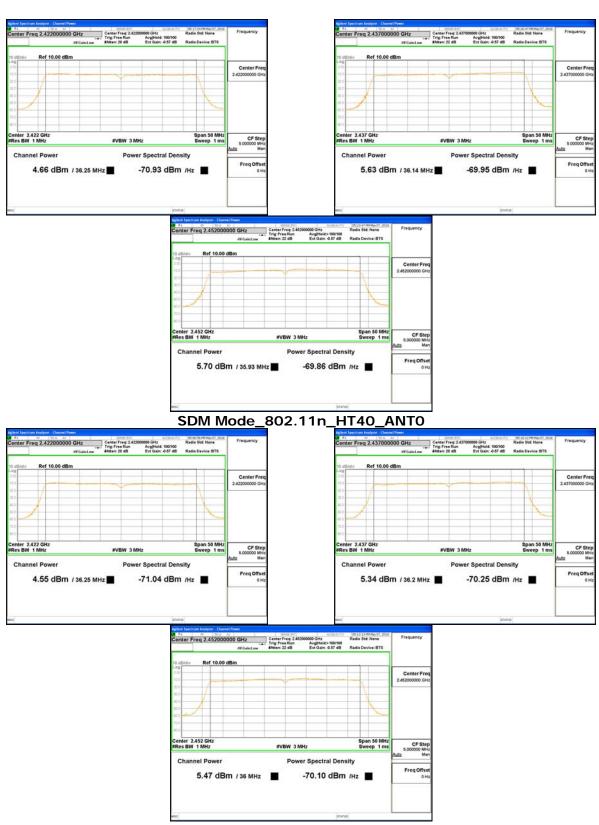


SDM Mode_802.11n_HT40_ANT1



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970

Fax: +82-31-624-9501

Report No.: CTK-2018-01333 Page (36) / (77)Pages

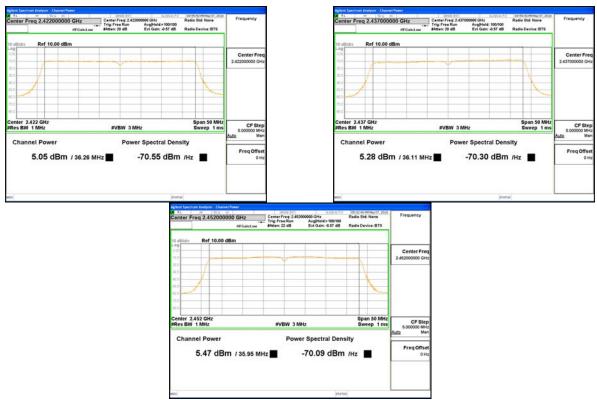

SDM Mode_802.11n_HT40_ANT2