

FCC Test Report

for

Bluetooth to serial

Trade Name : CSR
Model Number : E-P132-B, BS-101
FCC ID : WREBS101IEP132B12
Report Number : RF-K150-0805-218
Date of Receipt : Aug. 12, 2008
Date of Report : Sept. 24,2008

Prepared for

KSH International Co.,Ltd

14F-1, No.89, Sec 1,Beisin Rd., Sindian City Taipei County 231, Taiwan

Prepared by



Central Research Technology Co.

EMC Test Laboratory

No.11, Lane41, Fushuen St., Jungshan Chiu, Taipei, Taiwan, 104, R.O.C.



NVLAP LAB CODE 200575-0

This report shall not be reproduced, except in full, without the written approval of Central Research Technology Co.. It may be duplicated completely in its entirety for legal use with the permission of the applicant. It should not be used to claim product endorsement by NVLAP, NIST or any U.S. government agency. The test result in the report applies only to the sample tested.

Certification of Compliance

Equipment under Test : Bluetooth to serial
Trade Name : CSR
Model No. : E-P132-B, BS-101
FCC ID : WREBS101IEP132B12
Manufacturer : KSH International Co.,Ltd
Applicant : KSH International Co.,Ltd
Address : 14F-1, No.89, Sec 1,Beisin Rd., Sindian City Taipei County
231, Taiwan
Applicable Standards : 47 CFR part 15, Subpart C
Date of Testing : Aug. 19~22, 2008
Deviation : N/A
Condition of Test Sample : Prototype

We, **Central Research Technology Co.**, hereby certify that one sample of the designated product was tested in our facility during the period mentioned above. The test records, data evaluation and Equipment Under Test (EUT) configurations shown in the present report are true and accurate representation of the measurements of the sample's RF characteristics under the conditions herein specified.

The test results show that the EUT as described in the present report is in compliance with the requirements set forth in the standards mentioned above and apply to the tested sample identified in the present report only. The test report shall not be reproduced, except in its entirety, without the written approval of Central Research Technology Co.

PREPARED BY : Cathy Chen , DATE : Sept. 24, 2008
(Cathy Chen/Technical Manager)

APPROVED BY : J. Y. Shih , DATE : Sept. 24, 2008
(Tsun-Yu Shih/Laboratory Head)

Contents

1	General Description	5
1.1	General Description of EUT	5
1.2	Test Methodology	5
1.3	Applied standards	6
1.4	The Support Units :	9
1.5	Layout of Setup	9
1.6	Test Capability	10
1.7	Measurement Uncertainty	12
2	Maximum Peak Output Power	13
2.1	Applied standard	13
2.2	Test Instruments	13
2.3	Measurement Procedure	14
2.4	Test configuration	14
2.5	Test Data	15
3	Band Edge	17
3.1	Applied standard	17
3.2	Test Instruments	17
3.3	Measurement Procedure	18
3.4	Test configuration	19
3.5	Test Data	20
4	Hopping Channel Carrier Frequencies Spacing	27
4.1	Applied standard	27
4.2	Test Instruments	27
4.3	Measurement Procedure	28
4.4	Test configuration	28
4.5	Test Data	29
5	Number of Hopping Channels.....	33
5.1	Applied standard	33
5.2	Test Instruments	33
5.3	Measurement Procedure	33
5.4	Test configuration	34
5.5	Test Data	34
6	Radiated Emission	35

6.1	Applied standard	35
6.2	Test Instruments	36
6.3	Measurement Procedure	37
6.4	Test configuration	38
6.5	Test Data	39
7	Dwell Time	63
7.1	Applied standard	63
7.2	Test Instruments	63
7.3	Measurement Procedure	64
7.4	Test configuration	64
7.5	Test Data	65
8	Conducted Emission Measurement	68
8.1	Applied standard	68
8.2	Test Instruments	68
8.3	Measurement Procedure	69
8.4	Test configuration	70
8.5	Test Data	71
9	Antenna Requirement	73
9.1	Applied standard	73
9.2	Antenna Information	73
9.3	Result	73

Attachment 1 – Photographs of the Test Configurations

Attachment 2 –External Photographs of EUT

Attachment 3 –Internal Photographs of EUT

Attachment 4 –Maximum Permissible Exposure Evaluation

1.3 Applied standards

(1) Conduction Emission Requirement

For intentional device, according to §15.207(a) line conduction emission limit is as below table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

(2) Radiated Emission Requirement

For intentional device, according to §15.209, the general requirement of field strength of radiated emissions from intentional radiator at a distance of 3 meters shall not exceed the below table.

Frequency (MHz)	Measurement Distance (m)	Field Strength (uV/m)	Field Strength (dBuV/m)
30 – 88	3	100	40.0
88 – 216	3	150	43.5
216 – 960	3	200	46.0
960 – 1610	3	500	54.0
above 1610	3	500	54.0

Note 1- The lower limit shall apply at the transition frequency.

(3) Hopping Channel Carrier Frequencies Separation and 20dB Bandwidth

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

(4) Dwell Time on Each Channel

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(5) Maximun Peak Output Power

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(6) 100kHz Bandedge

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

(7) Restricted Band

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
² 1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			


¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

1.4 The Support Units :

No.	Unit	Model No./ Serial No.	Trade Name	Power Code	Supported by lab.
1	Notebook	LATITUDE D400/ 34590451312	0.8m	✓	✓

1.5 Layout of Setup

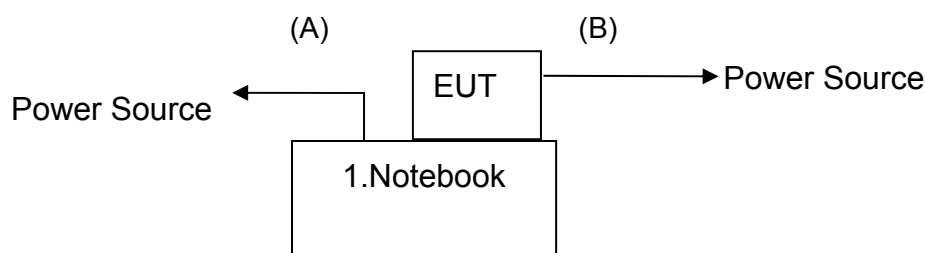

Connecting Cables :

No.	Cable	Length	Shielded	Core	Shielded Backshell	Supported by lab.	Note
A	Power cord	0.8m		✓		✓	
B	Power cord	1.8m					

Justification :

For both conducted and radiated emission below 1GHz, the system was configured for typical fashion as a customer could normal use it. The peripherals other than EUT was connected in normally standing by situation. Measurement was performed under the conduction that a computer program was excited to simulate data communication of EUT, and the transmission rate was setup maximum allowed by EUT.

For line conducted emission, only measurement of TX/RX operated, for the digital circuits portion also function normally whenever TX or RX is operated. For radiated emission, measurement of radiated emission from digital circuit is performed with channel 0, Channel 39 and channel 78 by transmitting mode.

1.6 Test Capability

Test Facility

The test facility used for evaluating the conformance of the EUT with each standard in the present report meets what required in CISPR16-1-4, CISPR16-2-3 and ANSI C63.4.

Test Room	Type of Test Room	Descriptions
TR1	10m semi-anechoic chamber (23m×14m×9m)	Complying with the NSA requirements in documents CISPR 22 and ANSI C63.4. For the radiated emission measurement.
TR10	3m semi-anechoic chamber (9m × 6m × 6m)	
TR11	3m semi-anechoic chamber (9m × 6m × 6m)	
TR4	Shielding Room (5m×3m×3m)	For the RF conducted emission measurement.
TR5	Shielding Room (8m×5m×4m)	For the conducted emission measurement.

Test Laboratory Competence Information

Central Research Technology Co. has been accredited / filed / authorized by the agencies listed in the following table.

Certificate	Nation	Agency	Code	Mark
Accreditation Certificate	USA	NVLAP	200575-0	ISO/IEC 17025
	R.O.C. (Taiwan)	TAF	0905	ISO/IEC 17025
	R.O.C. (Taiwan)	BSMI	SL2-IN-E-0033, SL2-IS-E-0033, SL2-R1/R2-E-0033, SL2-A1-E-0033	ISO/IEC 17025
Site Filing Document	USA	FCC	474046, TW1021	Test facility list & NSA Data
	Canada	IC	4699A-1,-2,-3	Test facility list & NSA Data
	Japan	VCCI	R-1527,C-1609,T-131,T-1441	Test facility list & NSA Data
Authorization Certificate	Germany	TUV	10021687-2007	ISO/IEC 17025
	Norway	Nemko	ELA212	ISO/IEC 17025

The copy of each certificate can be downloaded from our web site: www.crc-lab.com

1.7 Measurement Uncertainty

The assessed measurement uncertainty with a suitable coverage factor K to ensure 95% confidence level for the normal distribution are shown as below, the values are less than $U_{cisp\text{r}}$ in table 1 of CISPR 16-4-2.

Test Item	Measurement Uncertainty	
Peak Output Power	1.1dB	
Radiated Emission: (30MHz~200MHz)	Horizontal 2.8dB ; Vertical 3.5 dB	
Radiated Emission: (200MHz~1GHz)	Horizontal 3.4dB ; Vertical 2.8dB	
Radiated Emission: (1GHz~18GHz)	Horizontal 2.5dB ; Vertical 2.4dB	
Radiated Emission: (18GHz~26.5GHz)	Horizontal 4.0dB ; Vertical 3.9dB	
Line Conducted Emission	ESH2-Z5	3.1dB
	ENV 4200	3.8dB

2 Maximum Peak Output Power

Result: Pass

2.1 Applied standard

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

2.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Shielded Room	ETS.LINDGREN	TR4/ 15353-E	NCR	NCR
Spectrum Analyzer	Agilent	E4405B/ MY45106706	2008/3/25	2009/3/24

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
1MHz	3MHz	Peak	Maxhold	

Climatic Condition


Ambient Temperature : 28°C ;

Relative Humidity : 64%

2.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data at low, middle and high channel frequencies individually.
- c. According to FCC Public Notice DA00-705, Span = approximately 5 times the 20 dB bandwidth
 $RBW > \text{the 20 dB bandwidth}$, $VBW \geq RBW$ to measure the peak output power and compare with the required limit.

2.4 Test configuration

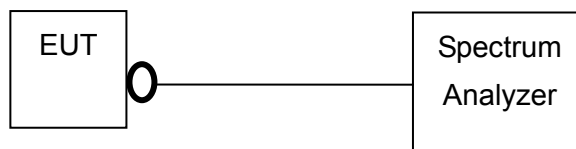

2.5 Test Data

Test Mode : Continuous Transmitting


Tester : Bill

Operating Frequency (MHz)	Reading Data (dBm)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
2402	0.85	0.97	1.82	30	28.18
2441	1.46	0.98	2.44	30	27.56
2480	0.80	0.99	1.79	30	28.21


Note:

1. Correction Factor (dB) = Cable Loss
2. Emission (dBm) = Reading Data + Correction Factor
3. Margin (dB) = Limit – Emission


Low Channel (2402MHz)

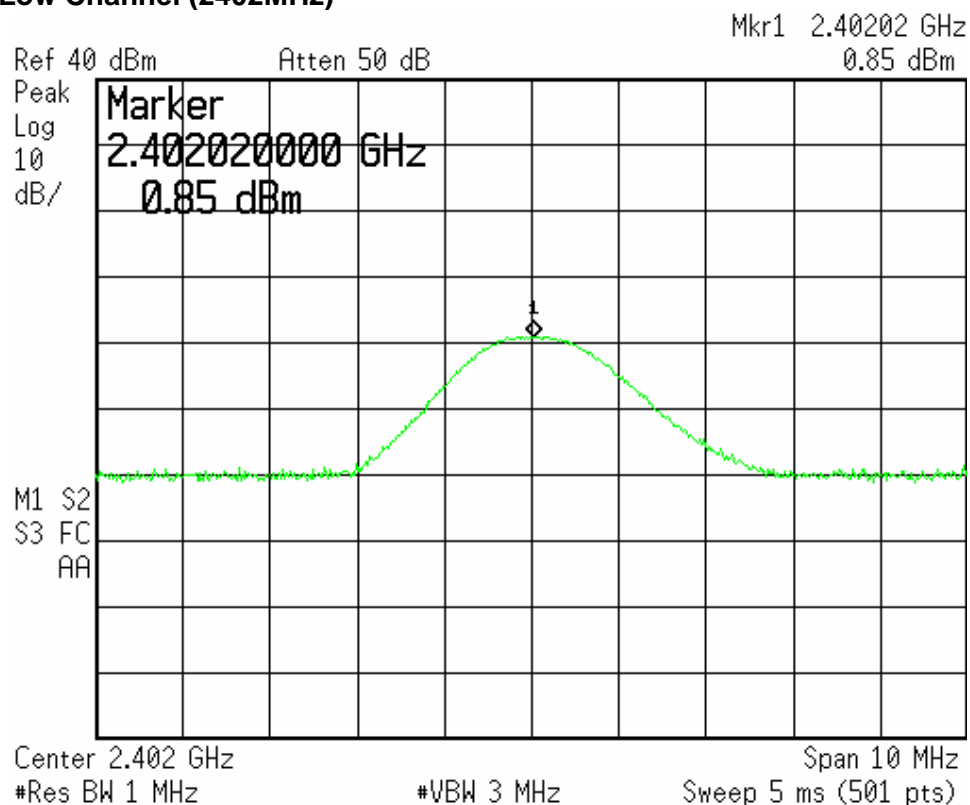

MiddleChannel (2441MHz)

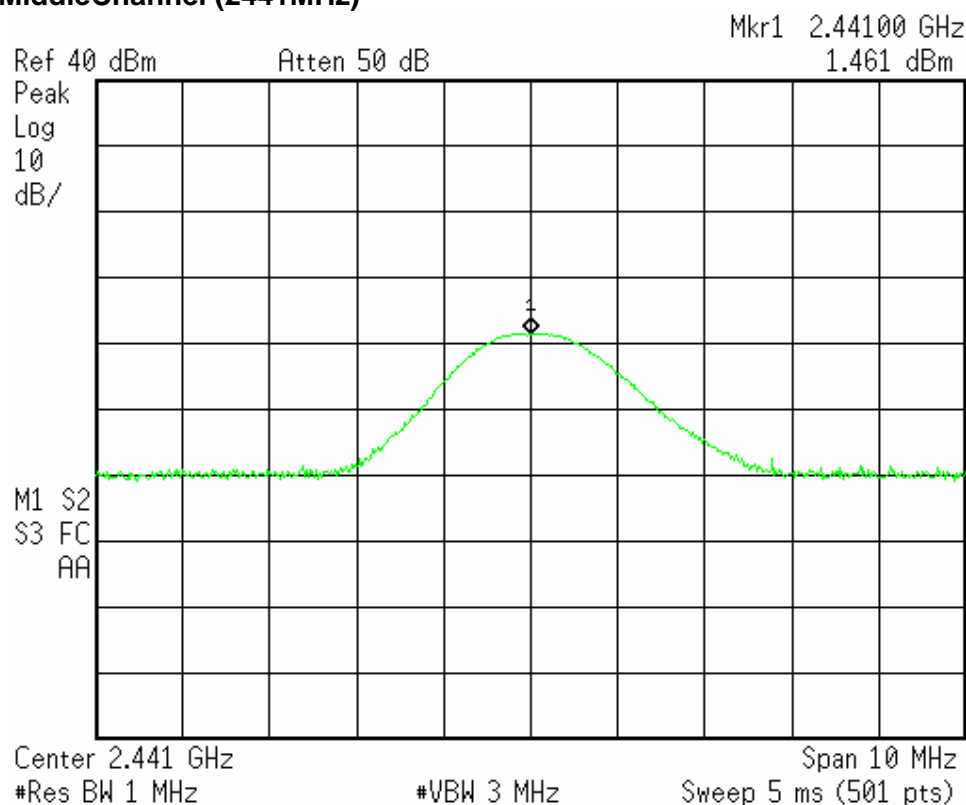

High Channel (2480MHz)

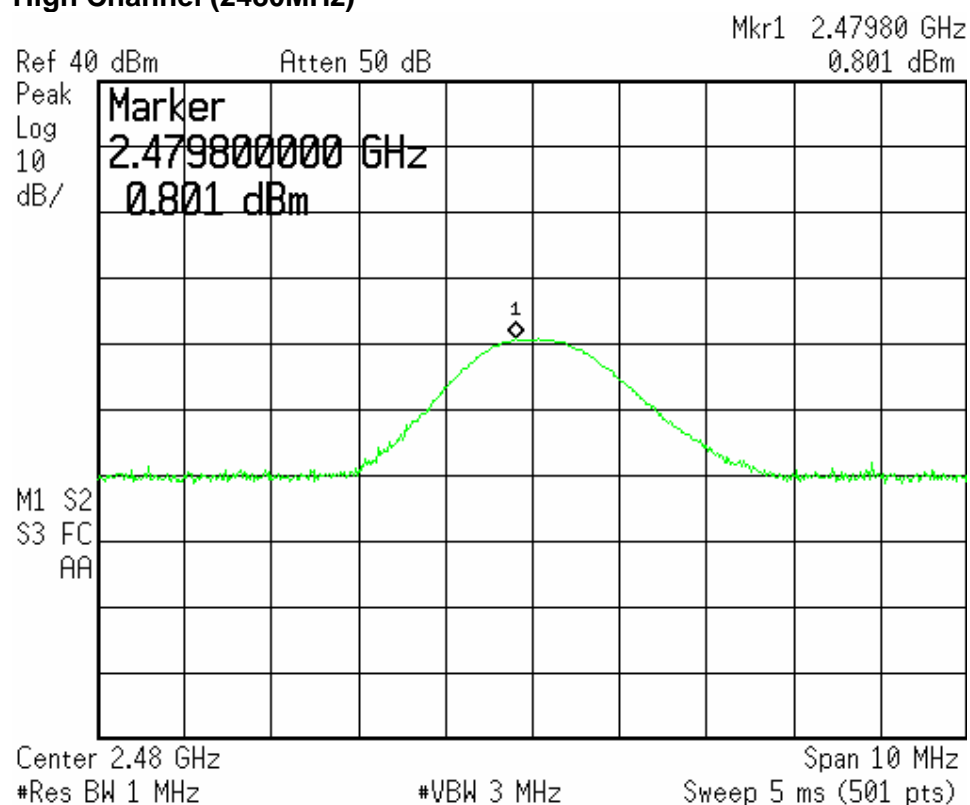

3 Band Edge

Result: Pass

3.1 Applied standard

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

3.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Semi-anechoic Chamber	ETS.LINDGREN	TR11/906-A	2008/6/30	2009/6/29
Shielded Room	ETS.LINDGREN	TR4/ 15353-E	NCR	NCR
Spectrum Analyzer	Agilent	E4405B/ MY45106706	2008/3/25	2009/3/24
Spectrum Analyzer	Agilent	E4407B/ MY45106795	2008/3/19	2009/3/18
Antenna	EMCO	3117/57408	2008/2/25	2009/2/24
Pre-amplifier	MITEQ	AFS6-02001800-35- 10P-6/ 866643	2007/12/19	2008/12/18

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.
3. The calibration date of the semi-anechoic chamber listed above is the date of NSA measurement.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
100kHz	100kHz	Peak	Maxhold	Conducted Measurement
1MHz	3MHz	Peak	Maxhold	Radiated Measurement Peak
1MHz	10Hz	Peak	Maxhold	Radiated Measurement Average

Climatic Condition


Ambient Temperature : 28°C ; Relative Humidity : 64%

3.3 Measurement Procedure


- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data at at lowest and highest channel frequencies individually.
- c. According FCC Public Notice DA00-705, Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, $RBW \geq 1\%$ of the span , $VBW \geq RBW$, to measure the band edge and compare with the required limit.

3.4 Test configuration

Conducted Measurement

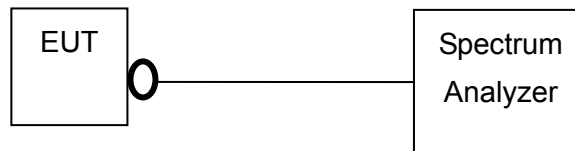

Radiated Measurement

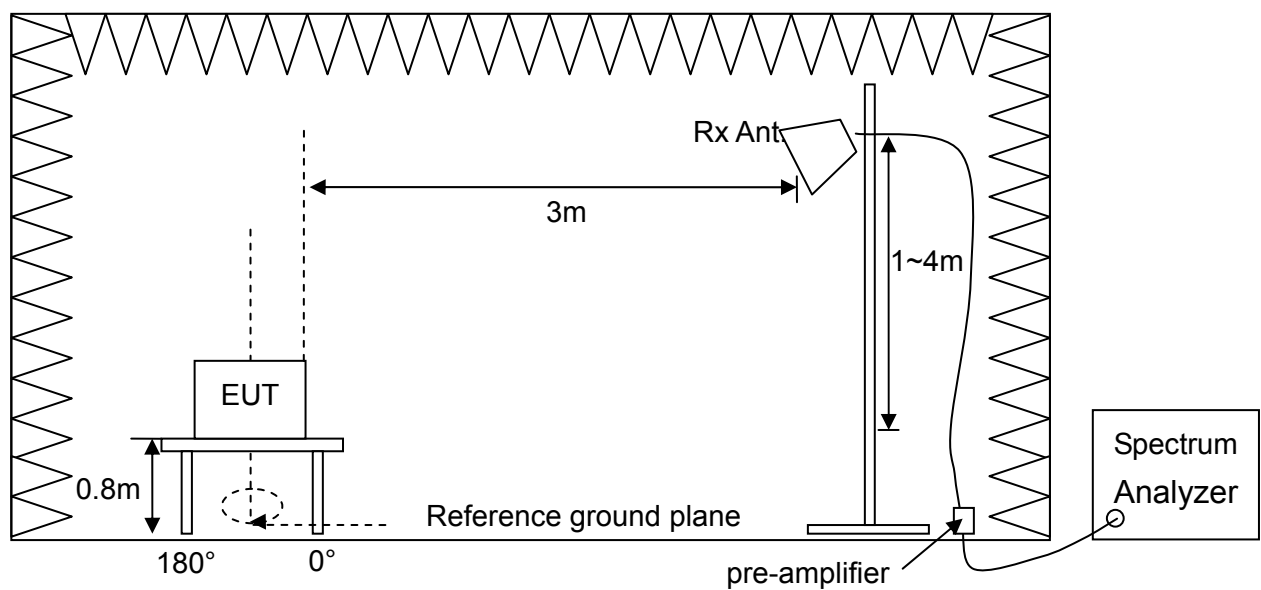

3.5 Test Data

Conducted Measurement

Test Mode : Continuous Transmitting

Tester : Bill


Operating Frequency (MHz)	Maximum Emission Level (dBm)	Emission Frequency (MHz)	Emission Outside of the band (dBm)	Attenuation (dB)	Limit (dB)	Margin (dB)
2402	-1.58	2400.00	-48.83	47.25	20	27.25
2480	-3.08	2483.50	-48.80	45.72	20	25.72

Note:

1. Attenuation (dB) = Maximum Emission Level - Emission Outside of the band
2. Margin (dB) = Attenuation – Limit

Low Channel (2402MHz)

Ref 20 dBm Atten 30 dB

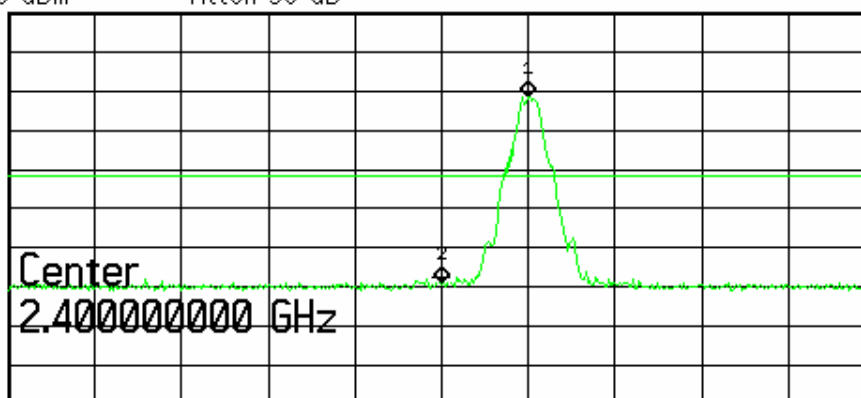Peak
Log
10
dB/DI
-21.6
dBm

Center 2.4 GHz

Span 20 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 5 ms (501 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.40200 GHz	-1.585 dBm
2	(1)	Freq	2.40000 GHz	-48.83 dBm

High Channel (2480MHz)

Ref 20 dBm

Atten 30 dB

Peak

Log


10

dB/

DI

-23.1

dBm

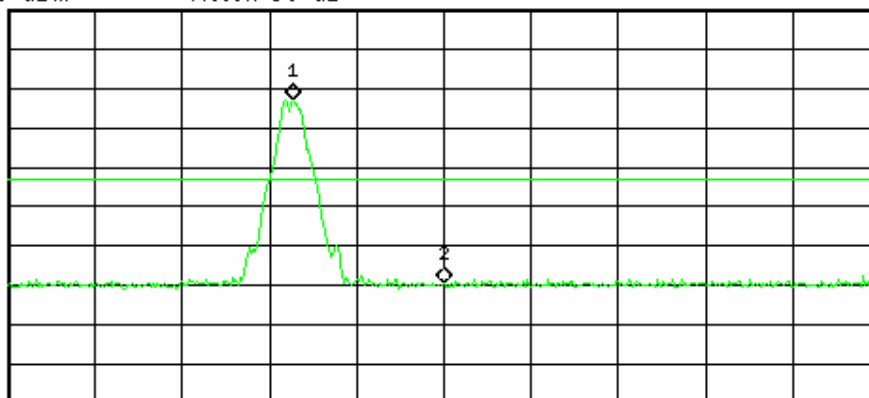

Center 2.483 GHz

Span 20 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 5 ms (501 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.48002 GHz	-3.083 dBm
2	(1)	Freq	2.48350 GHz	-48.8 dBm

Radiated Measurement

Test Mode : Continuous Transmitting


Tester : Bill

Operating Frequency (MHz)	Antenna Polarization	Frequency (MHz)	Reading Data (dBuV)		Correction Factor (dB/m)	Emission (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
			PK.	AV.		PK.	AV.	PK.	AV.	PK.	AV.
2402	V	2386.25	74.88	62.59	-27.64	47.24	34.95	74.00	54.00	26.76	19.05
2402	H	2389.25	74.42	62.73	-27.63	46.79	35.1	74.00	54.00	27.21	18.9
2480	V	2483.5	86.82	80.59	-27.55	59.27	53.04	74.00	54.00	14.73	0.96
2480	H	2483.5	84.38	78.25	-27.55	56.83	50.7	74.00	54.00	17.17	3.30


Note:

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier
2. Emission (dBuV/m) = Reading Data + Correction Factor
3. Margin(dB) = Limit – Emission
4. “*” : The emission is too low to be measured.


Low Channel (2402MHz), V Polarization – PK.

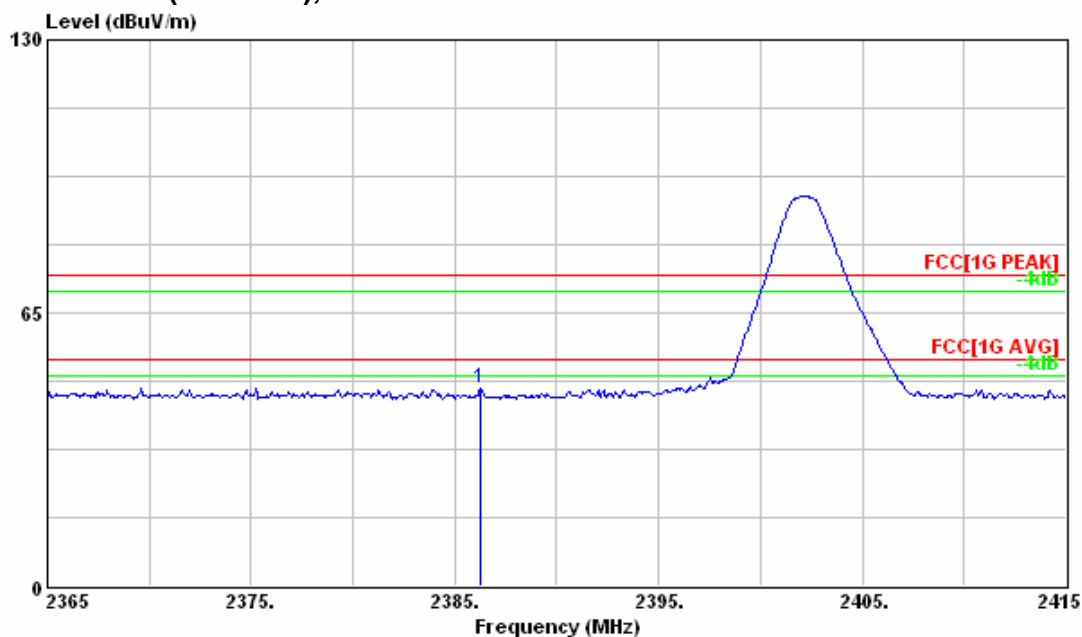


Low Channel (2402MHz), V Polarization – AV.

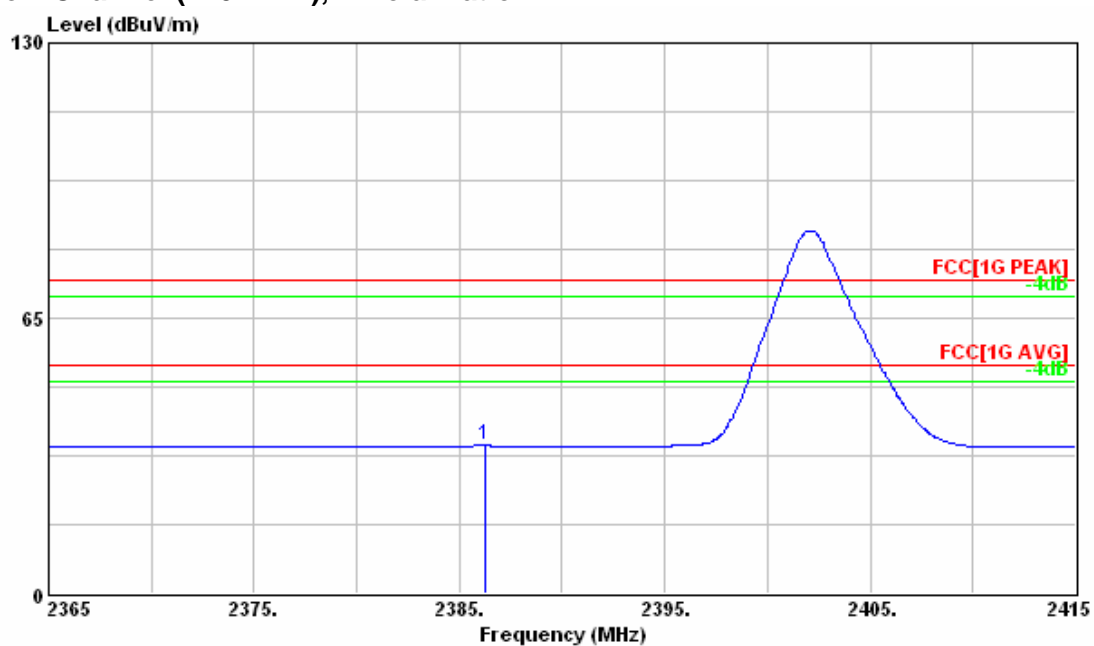


Low Channel (2402MHz), H Polarization – PK.

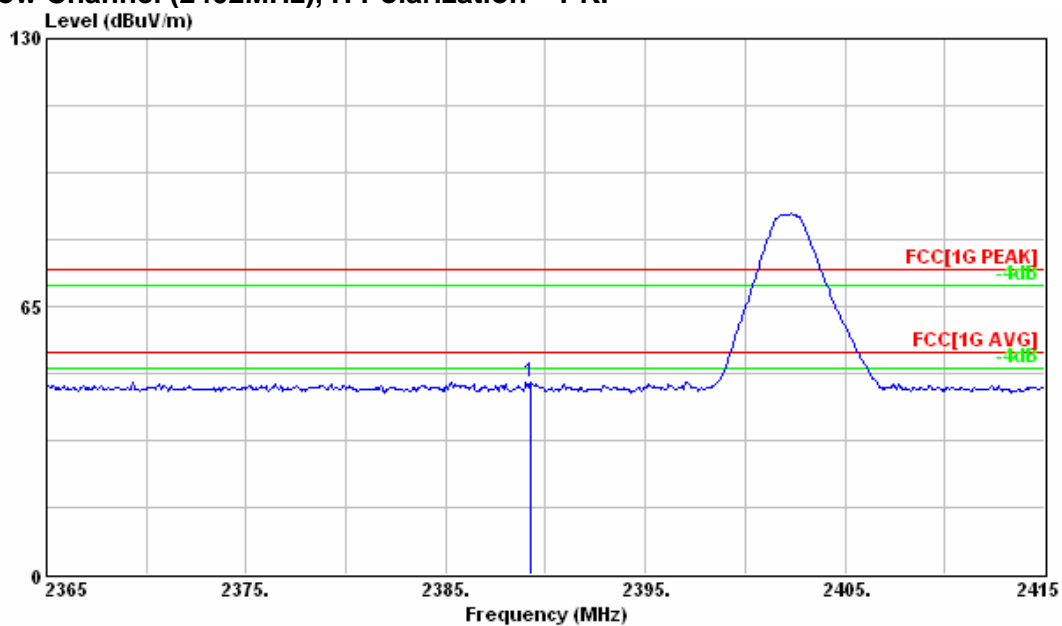


Low Channel (2402MHz), H Polarization – AV.

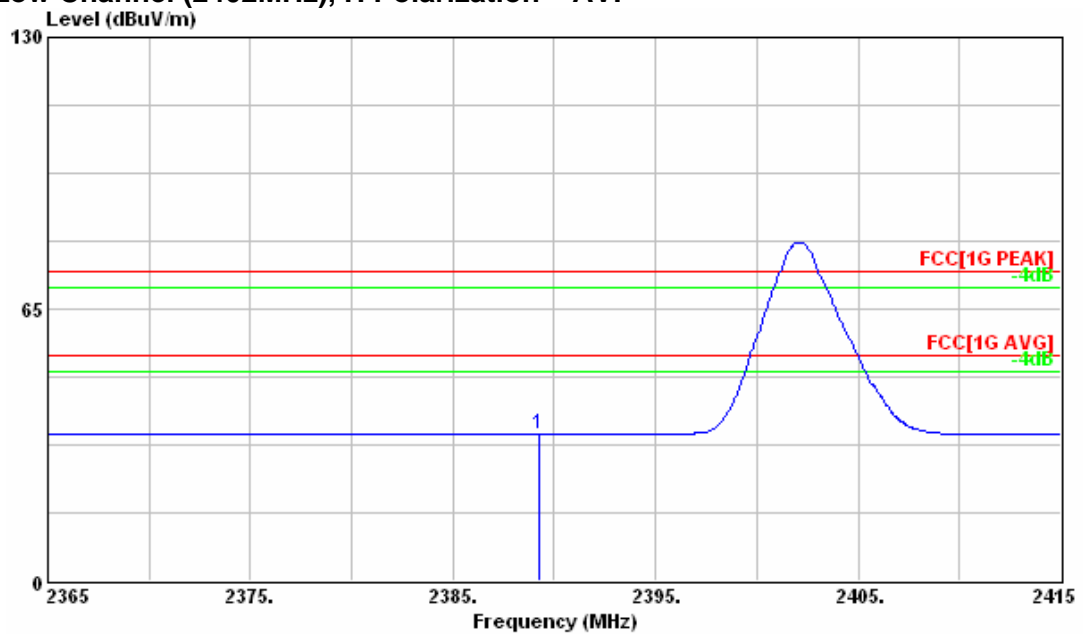


High Channel (2480MHz), V Polarization – PK.

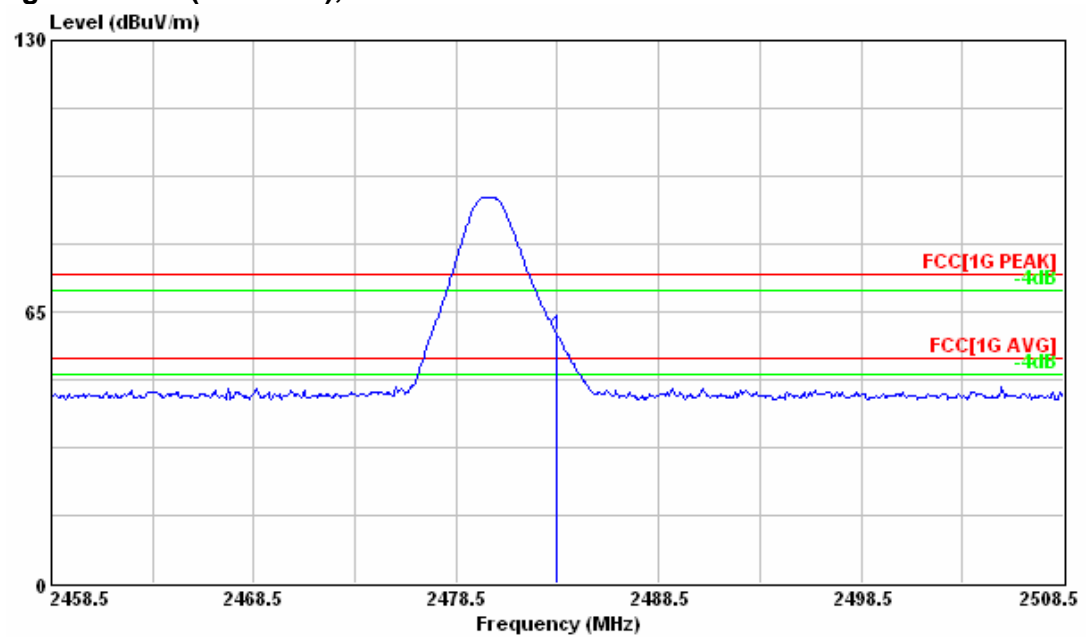


High Channel (2480MHz), V Polarization – AV.

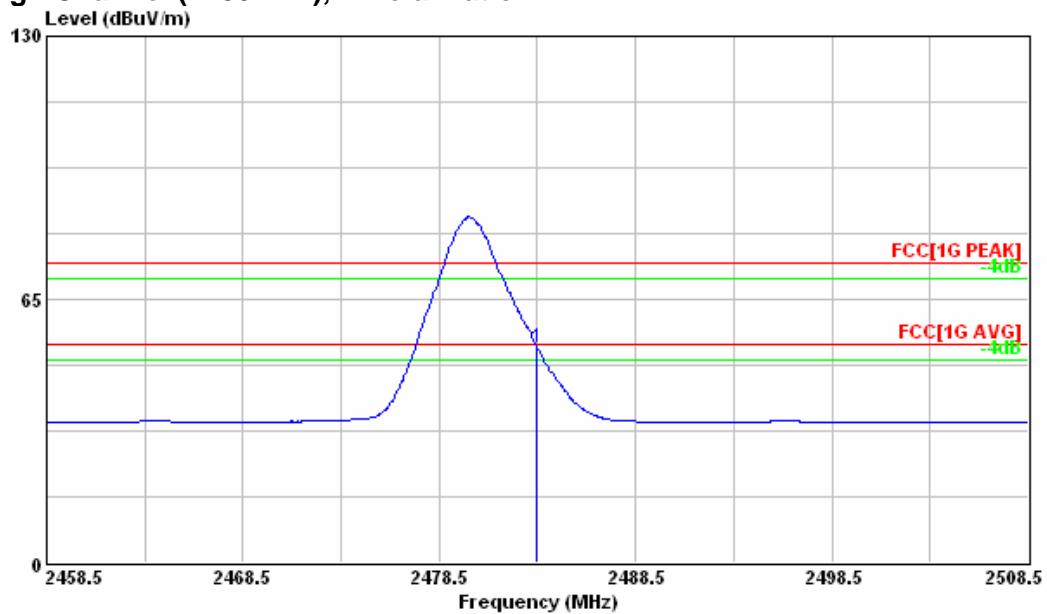

High Channel (2480MHz), H Polarization – PK.

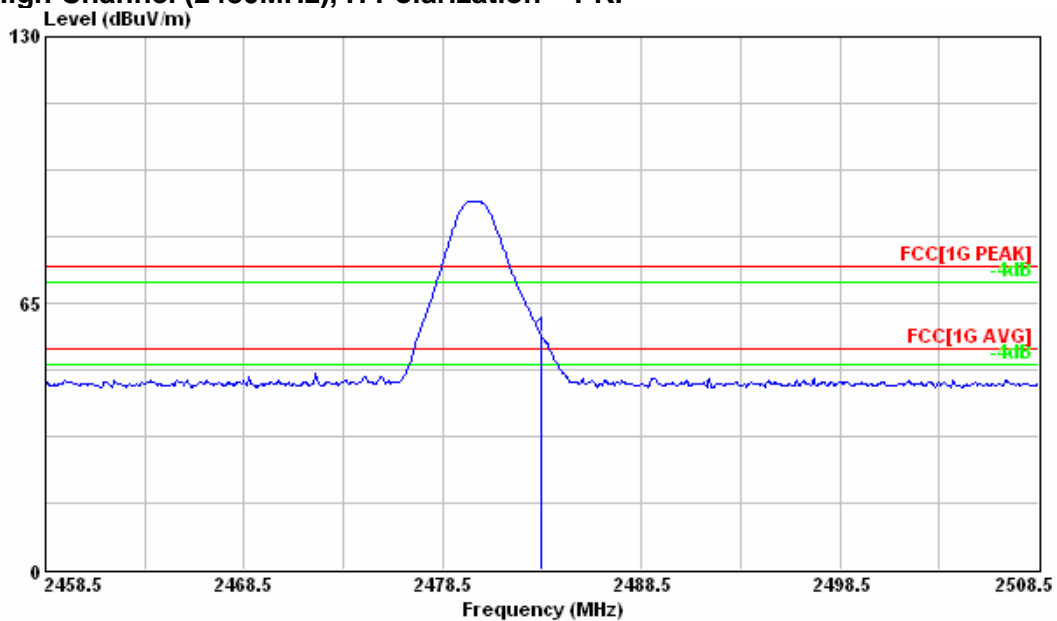

High Channel (2480MHz), H Polarization – AV.

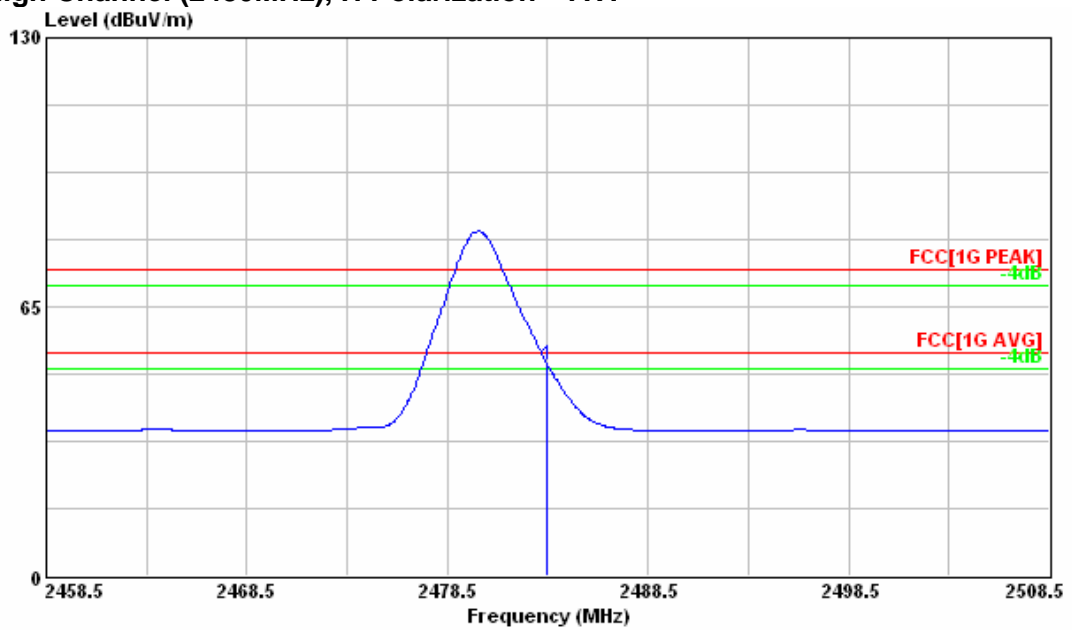

4 Hopping Channel Carrier Frequencies Spacing

Result: Pass

4.1 Applied standard

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

4.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No. /Serial No.	Last Calibration Date	Calibration Due Date
Shielded Room	ETS.LINDGREN	TR4/ 15353-E	NCR	NCR
Spectrum Analyzer	Agilent	E4405B/ MY45106706	2008/3/25	2009/3/24

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
10kHz	30kHz	Peak	Maxhold	20dB Bandwidth
100kHz	300kHz	Peak	Maxhold	Carrier Spacing


Climatic Condition

Ambient Temperature : 28°C ; Relative Humidity : 64%

4.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data at lowest, middle and highest channel frequencies individually.
- c. Measurement the 20dB bandwidth and compare with 25kHz to determine the required carrier frequency spacing.
- d. According to FCC Public Notice DA00-705, Span = approximately 2 to 3 times the 20 dB bandwidth, $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$ to measure 20dB bandwidth
- e. According to FCC Public Notice DA00-705, Span = wide enough to capture the peaks of two adjacent channels , Resolution Bandwidth (RBW) $\geq 1\%$ of the span, Video Bandwidth (VBW) $\geq RBW$ to measure frequency spacing and compare with the required limit.

4.4 Test configuration

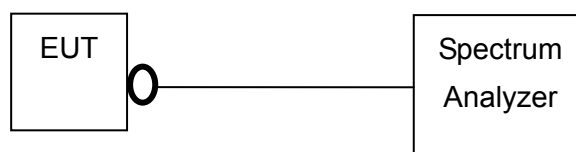

4.5 Test Data

20dB bandwidth


Test Mode : Continuous Transmitting

Tester : Bill


Operating Frequency (MHz)	20dB Bandwidth (kHz)
2402	920
2441	910
2480	910

Measured 20dB bandwidth is 920 KHz. According to 15.247(a)(1), hopping channel carrier frequencies spacing should be greater than 920kHz.


Low Channel (2402MHz)

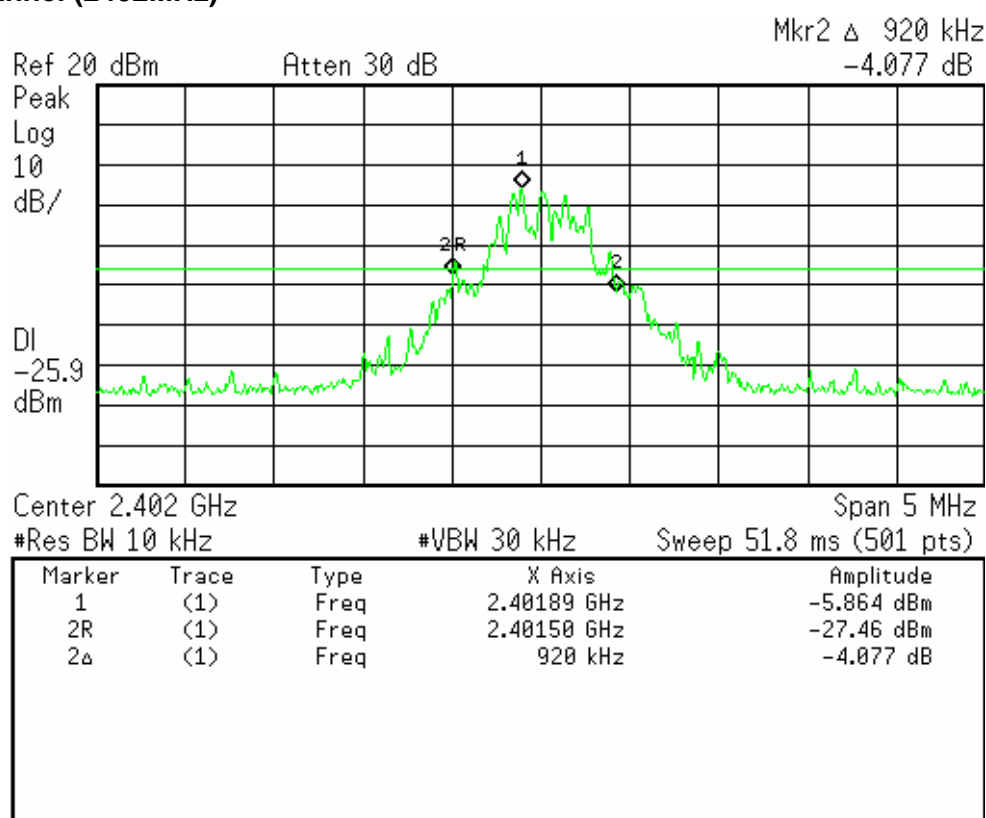

Middle Channel (2441MHz)

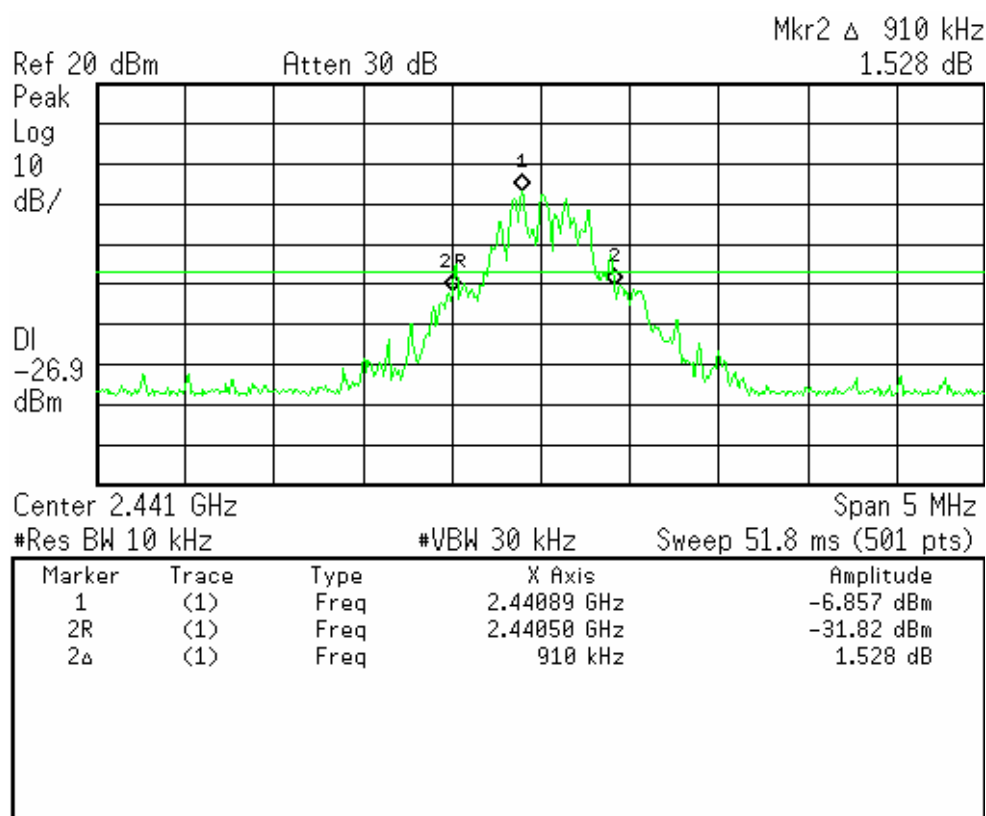

High Channel (2480MHz)

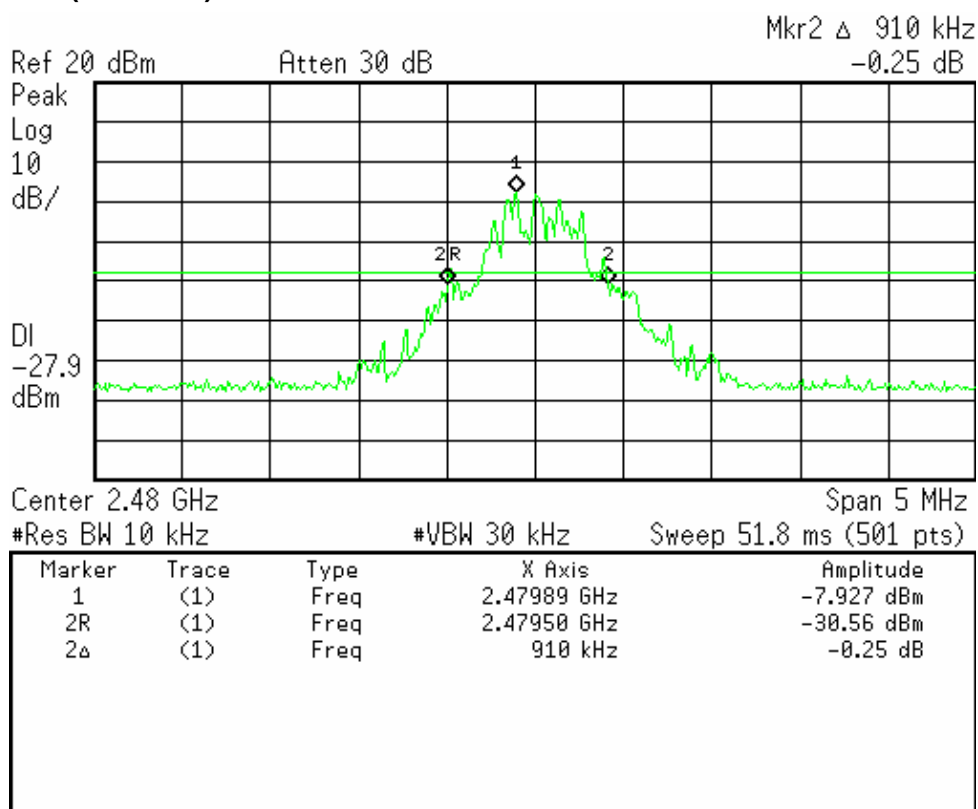


Hopping Channel Carrier Frequencies spacing



Test Mode : Continuous Transmitting

Tester : Bill

Operating Frequency (MHz)	Carrier Spacing (kHz)	Limit (kHz)	Margin (kHz)
2402	1002	920	82
2441	1002	920	82
2480	1002	920	82

Low Channel (2402MHz)

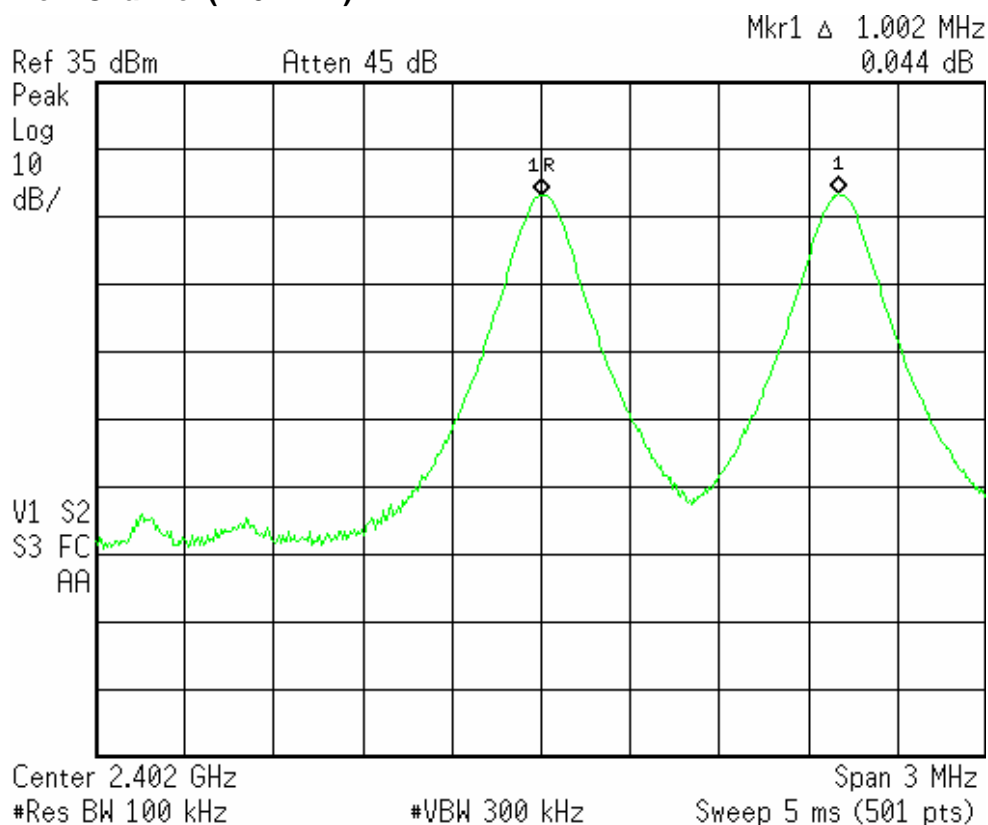

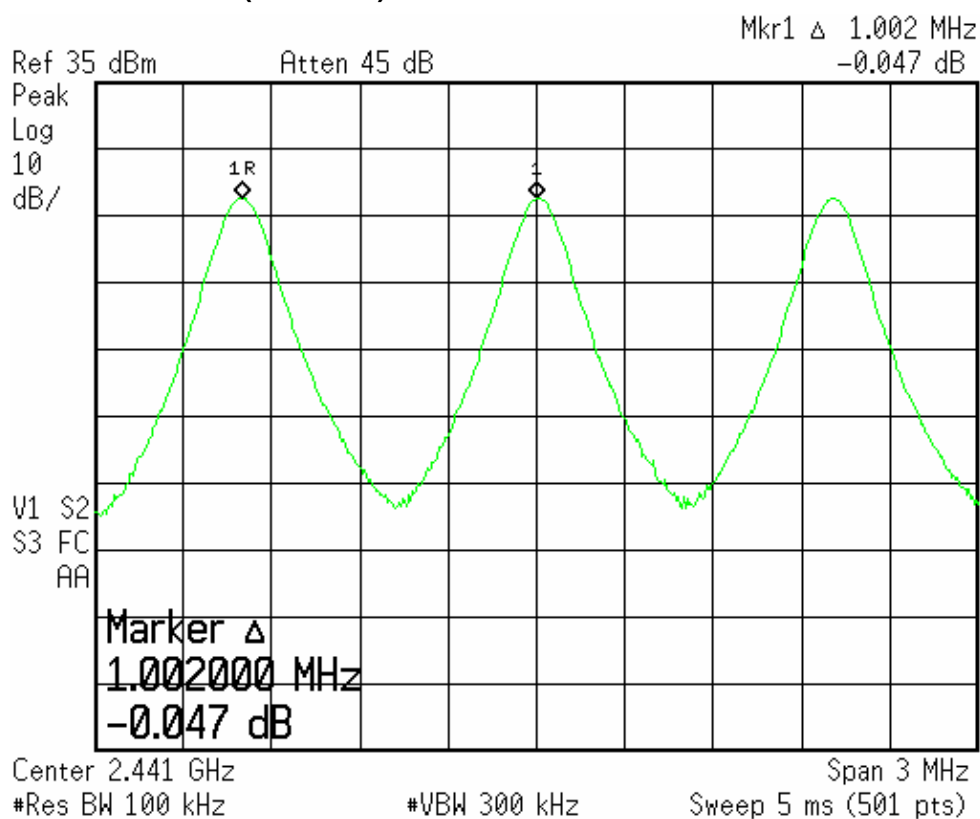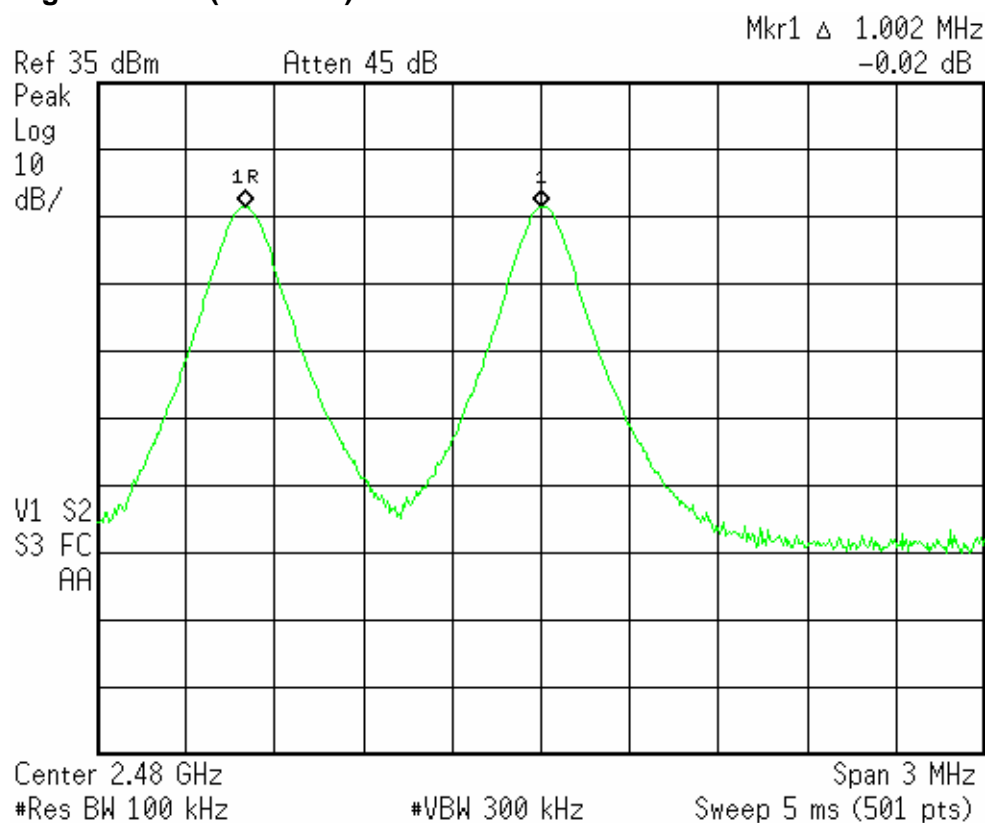Middle Channel (2441MHz)**High Channel (2480MHz)**

5 Number of Hopping Channels

Result: 79 Hopping Channels

5.1 Applied standard

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.2 Test Instruments

See section 4.2

Instrument Setting

RBW	VBW	Detector	Trace	Comment
100kHz	300kHz	Peak	Maxhold	

Climatic Condition

Ambient Temperature : 28°C ;

Relative Humidity : 64%

5.3 Measurement Procedure

- The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- A software provided by client enabled the EUT to transmit data at all channels.
- According to FCC Public Notice DA00-705, Span = the frequency band of operation , $RBW \geq 1\%$ of the span , $VBW \geq RBW$ to measure number of hopping channels and compare with the required limit.


5.4 Test configuration

See section 4.4.

5.5 Test Data

Test Mode : Continuous Transmitting

Tester : Bill

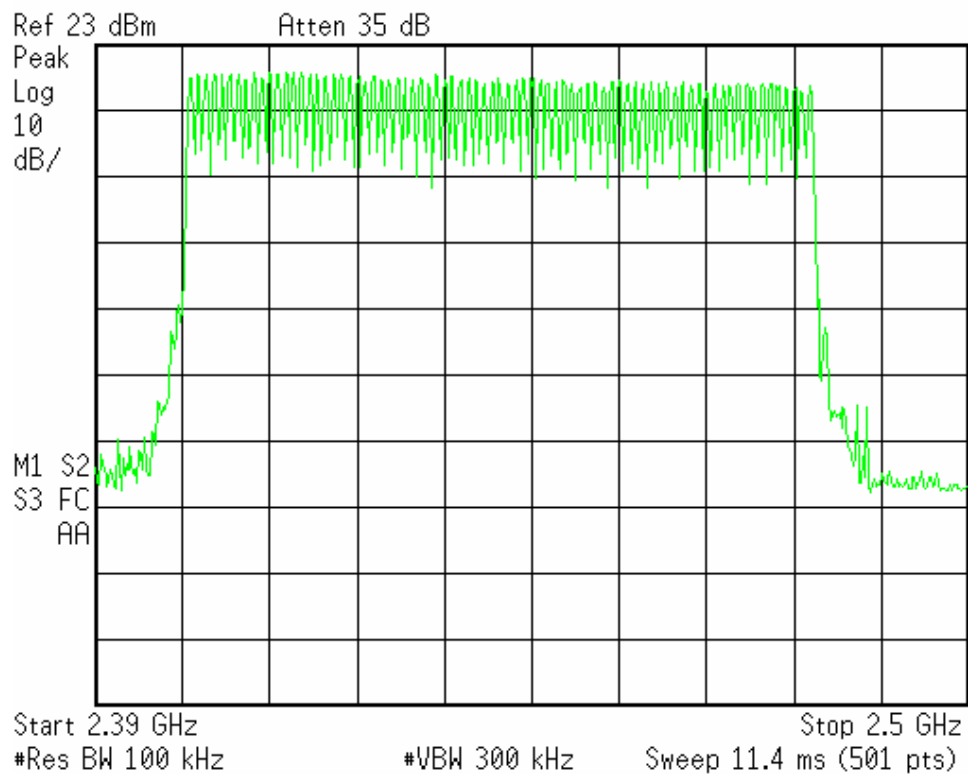

6 Radiated Emission

Result: Pass

6.1 Applied standard

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

6.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Semi-anechoic Chamber	ETS.LINDGREN	TR11/906-A	2008/6/30	2009/6/29
Test Receiver	R&S	ESI26/837491/015	2008/5/5	2009/5/4
Spectrum Analyzer*	Agilent	E4407B/ MY45106795	2008/3/19	2009/3/18
Antenna	EMCO	3142C/52088	2008/7/27	2009/7/26
Antenna*	EMCO	3117/57408	2008/2/25	2009/2/24
Antenna*	EMCO	3116/58959	2008/2/14	2009/2/13
Pre-amplifier*	MITEQ	AFS6-02001800-35- 10P-6/866643	2007/12/19	2008/12/18
Pre-amplifier*	MITEQ	JS4-18002600-30-5 A/ 741923	2008/7/29	2009/7/28
Pre-amplifier	Mini Circuit	ZKL-2/004	2008/2/12	2009/2/12

Note:

1. "*" : These instruments are used only for the measurement of emission frequency above 1000MHz.
2. The calibrations are traceable to NML/ROC.
3. NCR : No Calibration Required.
4. The calibration date of the semi-anechoic chamber listed above is the date of NSA measurement.

Instrument Setting

RBW	VBW	Detector	Trace	Comment
120kHz	N/A	Quasi-Peak	Maxhold	Below 1GHz
1MHz	3MHz	Peak	Maxhold	Above 1GHz, Average
1MHz	10Hz	Peak	Maxhold	Above 1GHz, Peak



Climatic Condition

Ambient Temperature : 28°C ; Relative Humidity : 64%

6.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.
- c. If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 meters above the reference ground plane in the semi-anechoic chamber. If the EUT is floor-standing equipment, it was placed on a non-conducted support with a height of 12 millimeters above the reference ground plane in the semi-anechoic chamber.
- d. The EUT was set 3m away from the interference receiving antenna.
- e. Rapidly sweep the signal in the test frequency range by using the spectrum through the Maximum-peak detector.
- f. According to FCC Public Notice DA00-705 to set the spectrum analyzer.
- g. Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4 meters above the reference ground plane continuously to determine at least six frequencies associated with higher emission levels and record them.
- h. The beamwidth of receiving horn antenna should keep covering EUT when the receiving horn antenna height varied.
- i. Then measure each frequency found from step f. by using the spectrum with rotating the EUT and positioning the receiving antenna height to determine the maximum level.
- j. For measurement of frequency below 1000MHz, set the receiver detector to be Quasi-Peak per CISPR 16-1 to find out the maximum level occurred.
- k. For measurement of frequency above 1000MHz, set the spectrum detector to be Peak or Average to find out the maximum level occurred, if any.
- l. Record frequency, azimuth angle of the turntable, height, and polarization of the receiving antenna and compare the maximum level with the required limit.
- m. Change the receiving antenna to another polarization to measure radiated emission by following step e. to k. again.
- n. If the peak emission level below 1000MHz measured from step f. is 4dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate Q.P. value will be measured and presented.
- o. If the peak emission level above 1000MHz measured from step f. is 20dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate A.V. value will be measured and presented.

6.4 Test configuration

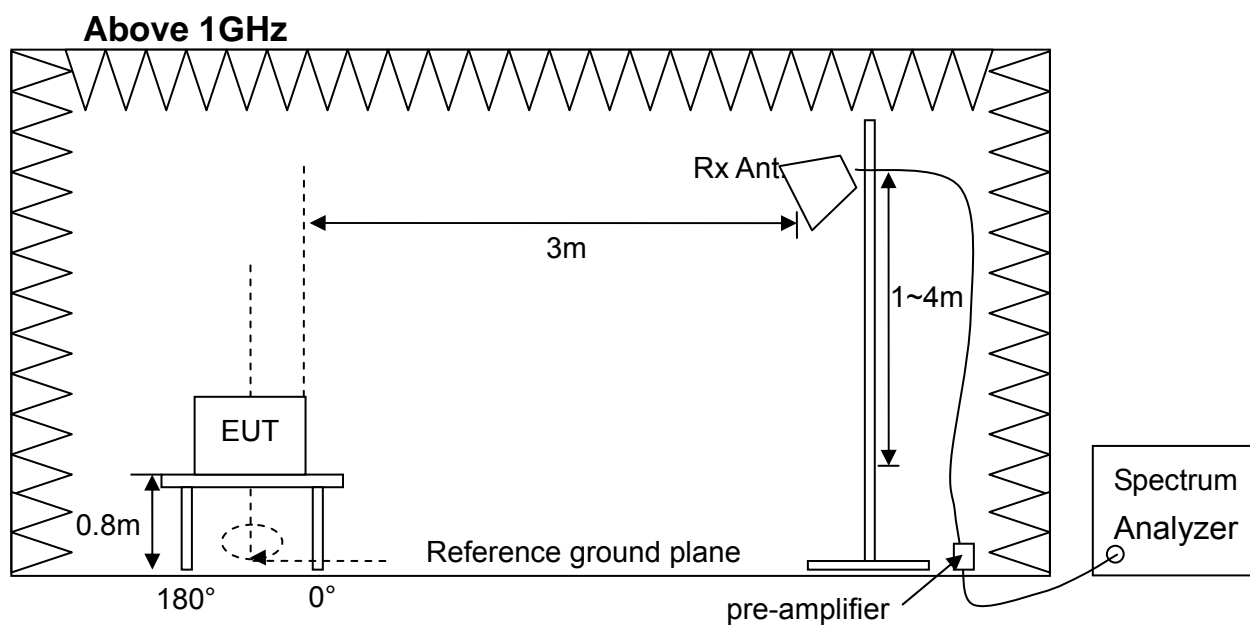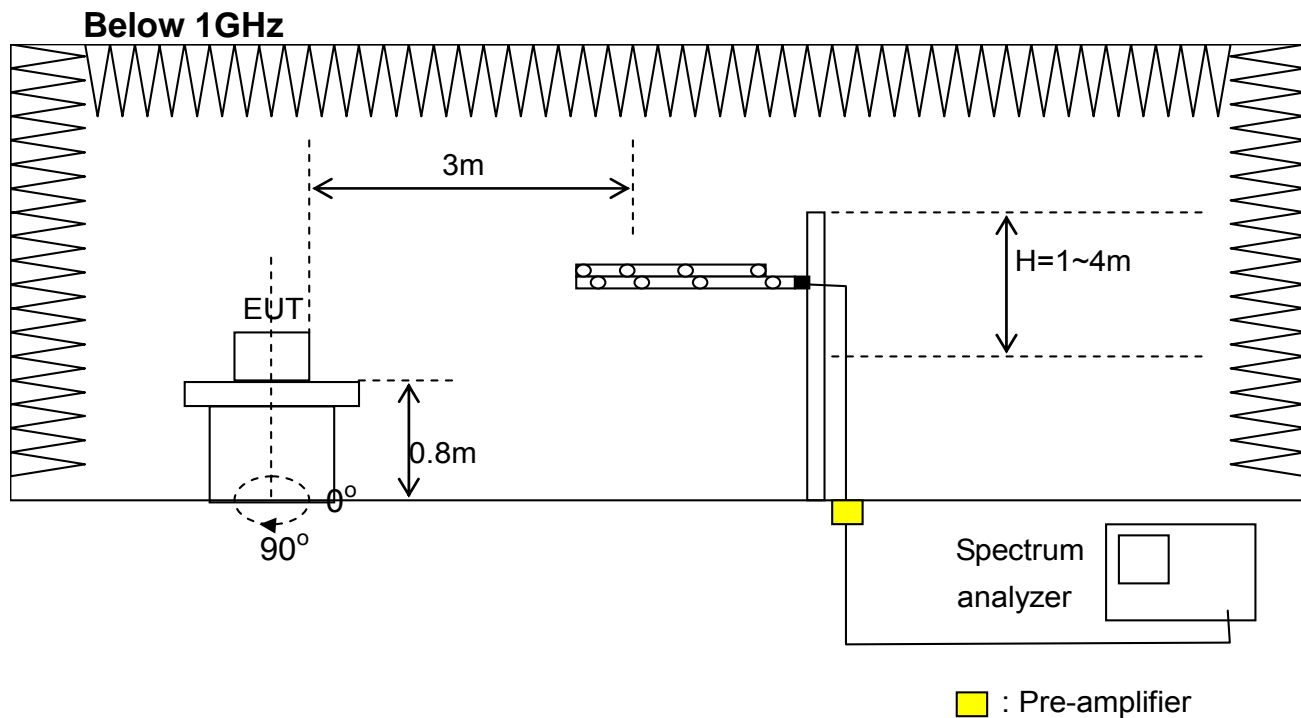

6.5 Test Data

Radiated Emission Measurement below 1000MHz


Test Mode : Channel 0(2402MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Polarization : Vertical

Frequency Range : 30MHz~1000MHz

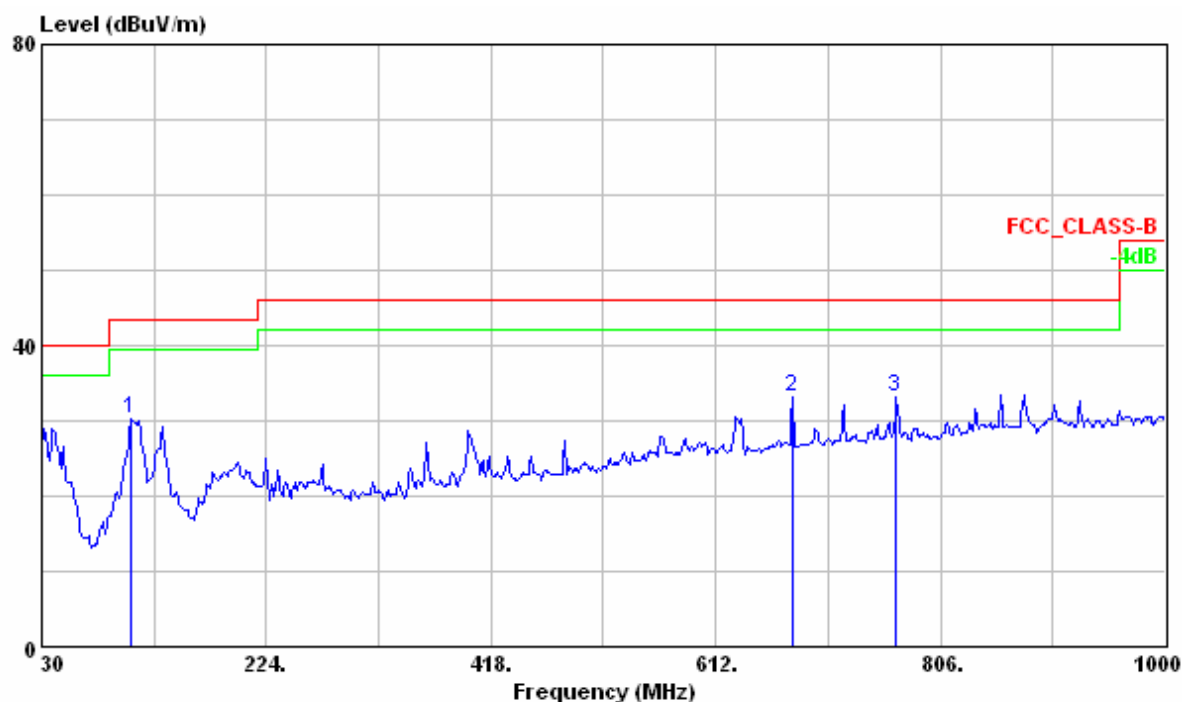

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Factor	Line	Limit	Pos	Pos	Pol/Phase
			dBuV	dB/m	dBuV/m	dB	cm	deg	Remark
1	106.630	30.36	49.43	-19.07	43.50	-13.14	---	---	VERTICAL
2	677.960	33.10	36.92	-3.82	46.00	-12.90	---	---	VERTICAL
3	768.170	33.10	35.85	-2.75	46.00	-12.90	---	---	VERTICAL

Note :

- Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
- Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Mode : Channel 0(2402MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Polarization : Horizontal

Frequency Range : 30MHz~1000MHz

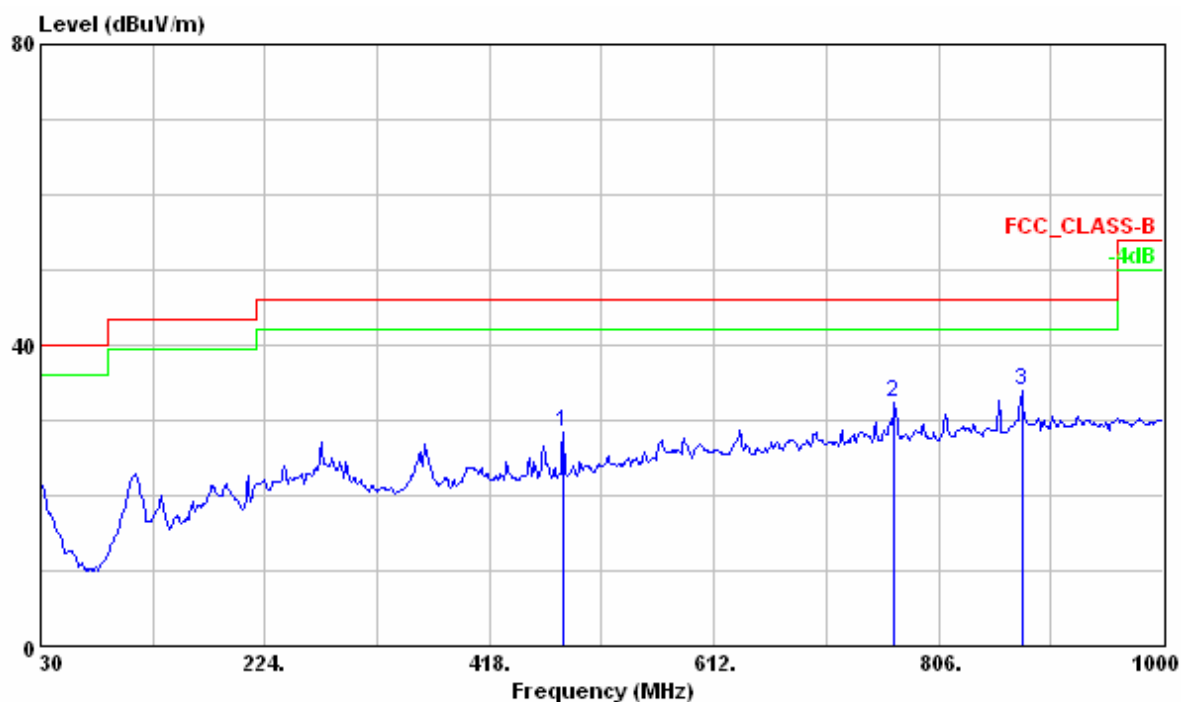

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	481.050	28.43	36.07	-7.64	46.00	-17.57	---	---	HORIZONTAL	Peak
2	768.170	32.47	35.22	-2.75	46.00	-13.53	---	---	HORIZONTAL	Peak
3	877.780	33.82	34.89	-1.07	46.00	-12.18	---	---	HORIZONTAL	Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Mode : Channel 39(2441MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Polarization : Vertical

Frequency Range : 30MHz~1000MHz

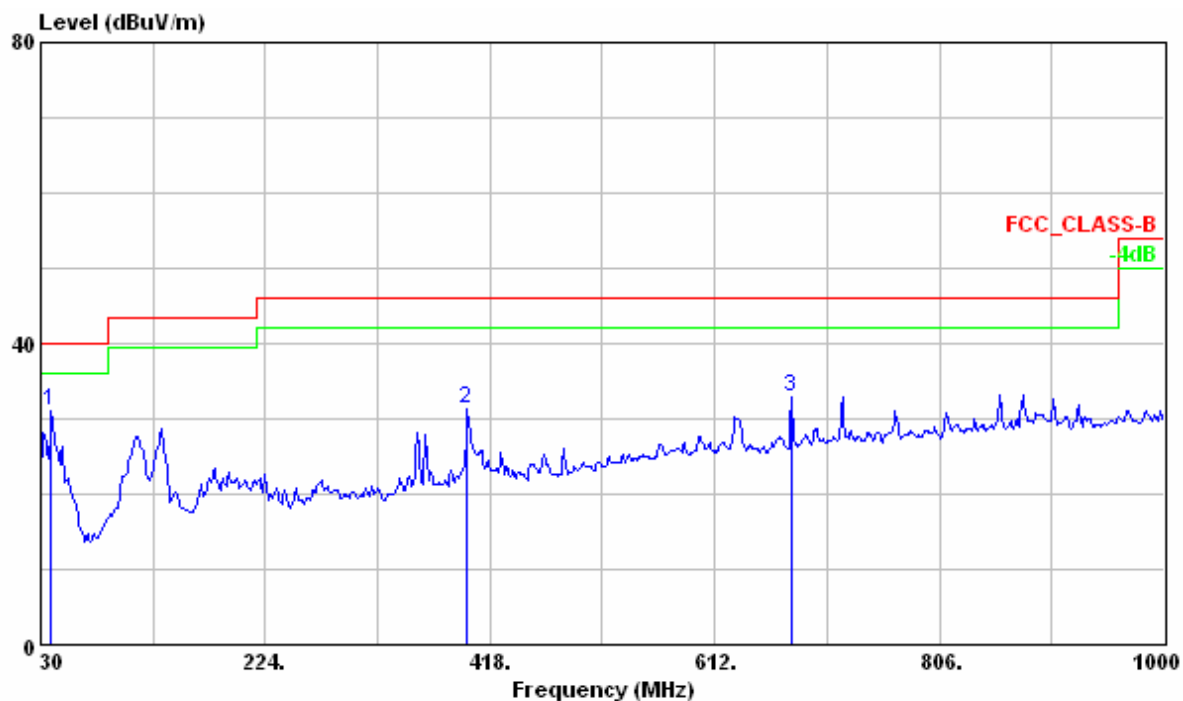

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Factor	Line	Limit	Pos	Pos	Pol/Phase
			dBuV	dB/m	dBuV/m	dB	cm	deg	Remark
1	38.730	31.00	44.73	-13.73	40.00	-9.00	---	---	VERTICAL
2	398.600	31.24	40.36	-9.12	46.00	-14.76	---	---	VERTICAL
3	677.960	32.77	36.59	-3.82	46.00	-13.23	---	---	VERTICAL

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Mode : Channel 39(2441MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Polarization : Horizontal

Frequency Range : 30MHz~1000MHz

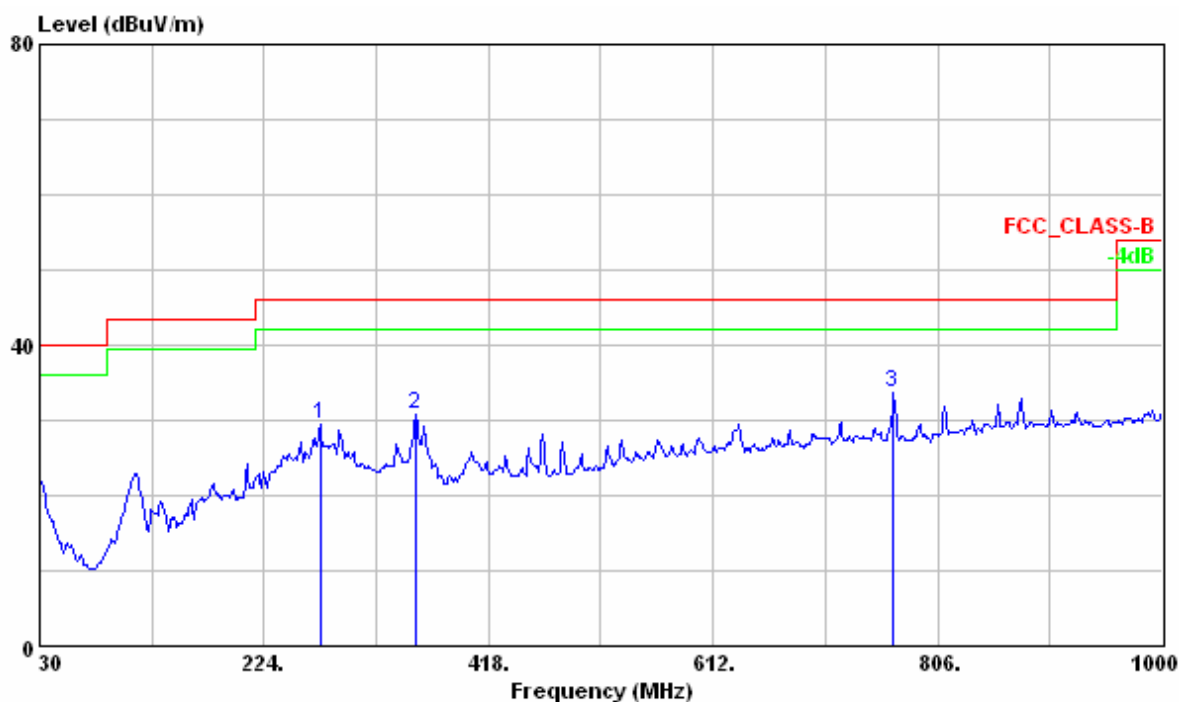

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Factor	Line	Limit	Pos	Pos	Pol/Phase
			dBuV	dB/m	dBuV/m	dB	cm	deg	Remark
1	272.500	29.47	42.75	-13.28	46.00	-16.53	---	---	HORIZONTAL Peak
2	354.950	30.73	41.13	-10.40	46.00	-15.27	---	---	HORIZONTAL Peak
3	768.170	33.70	36.45	-2.75	46.00	-12.30	---	---	HORIZONTAL Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Model : Channel 78(2480MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Polarization : Vertical

Frequency Range : 30MHz~1000MHz

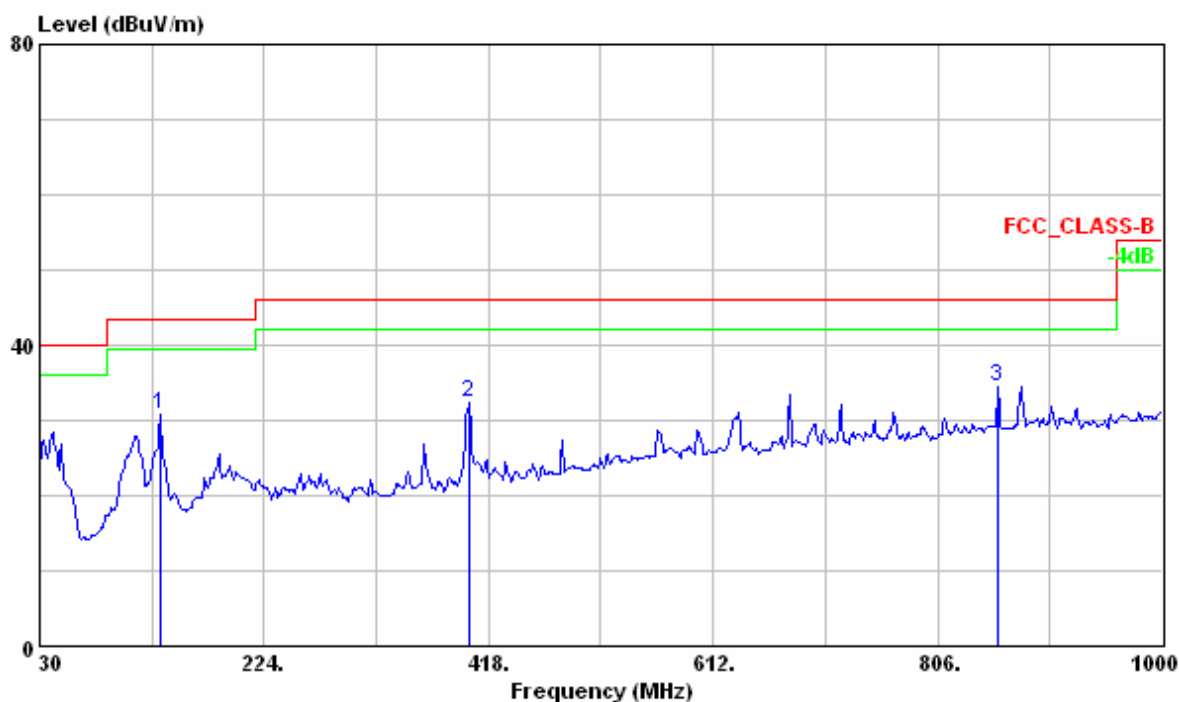

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Factor	Line	Limit	Pos	Pos	Pol/Phase
			dBuV	dB/m	dBuV/m	dB	cm	deg	Remark
1	133.790	30.66	50.09	-19.43	43.50	-12.84	---	---	VERTICAL
2	401.510	32.44	41.50	-9.06	46.00	-13.56	---	---	VERTICAL
3	858.380	34.46	35.92	-1.46	46.00	-11.54	---	---	VERTICAL

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Model : Channel 78(2480MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Polarization : Horizontal

Frequency Range : 30MHz~1000MHz

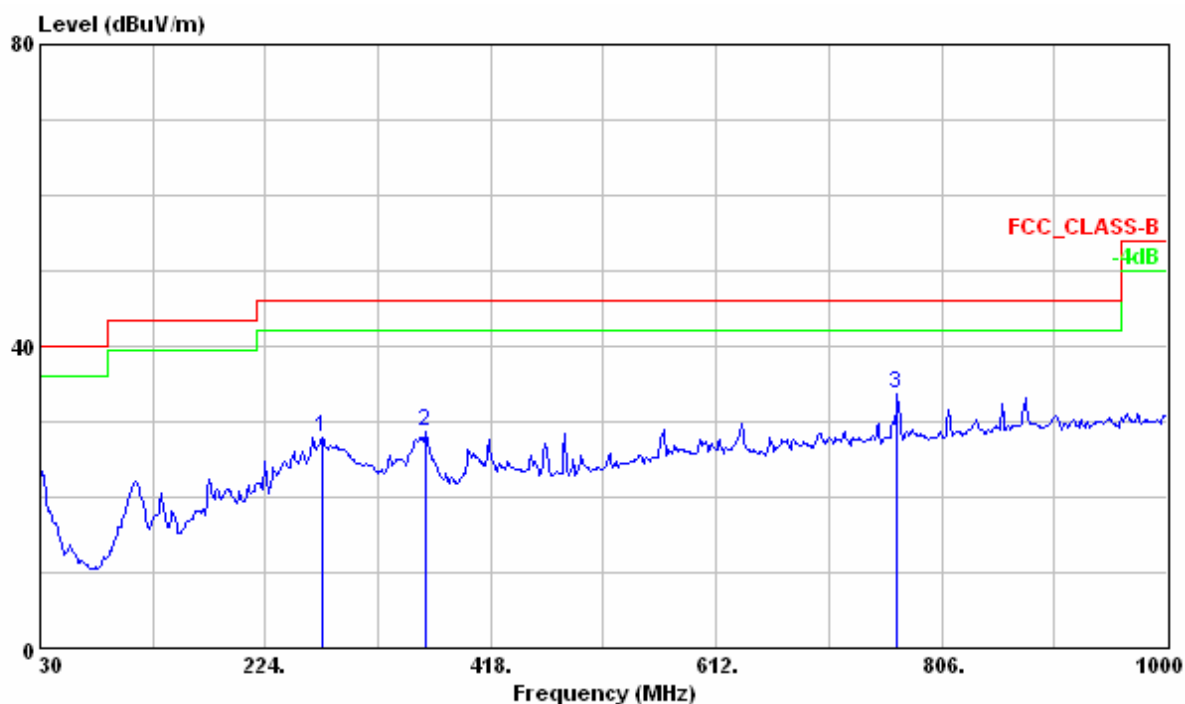

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Factor	Line	Limit	Pos	Pos	Pol/Phase
			dBuV	dB/m	dBuV/m	dB	cm	deg	Remark
1	272.500	28.02	41.30	-13.28	46.00	-17.98	---	---	HORIZONTAL Peak
2	362.710	28.64	38.81	-10.17	46.00	-17.36	---	---	HORIZONTAL Peak
3	768.170	33.78	36.53	-2.75	46.00	-12.22	---	---	HORIZONTAL Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Model : Channel 0(2402MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization: Vertical

Frequency Range : 30MHz~1000MHz

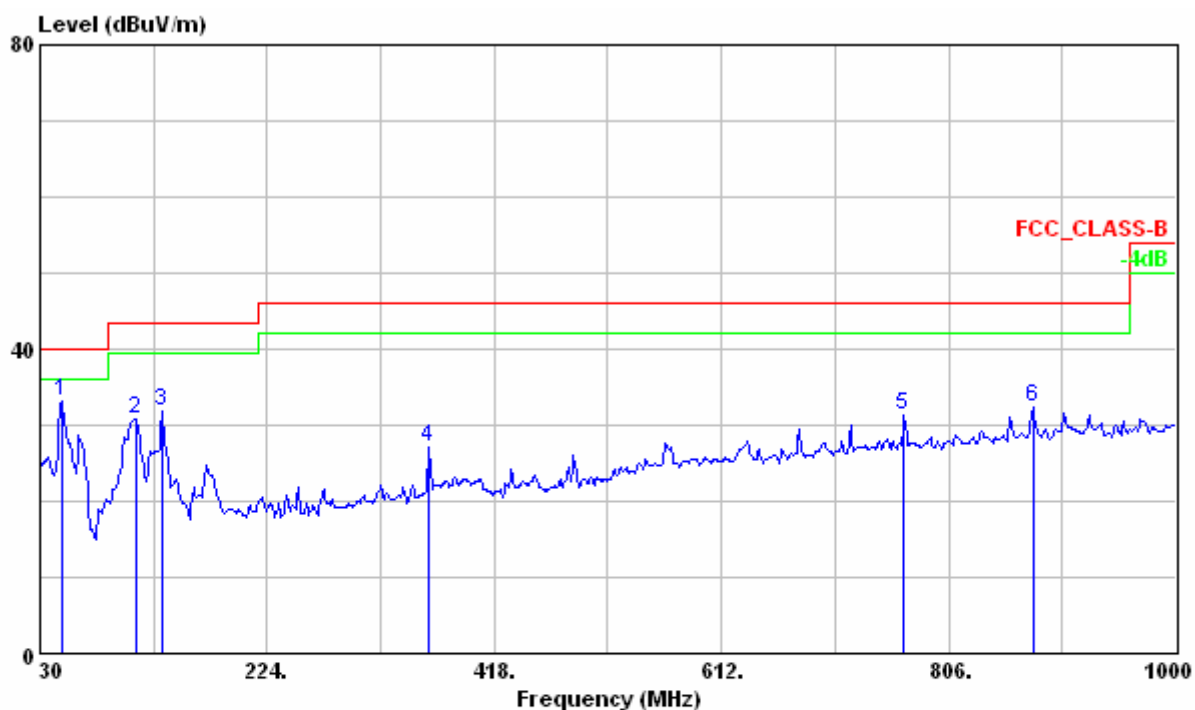

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Line	Limit	Pos	Pos	Pol/Phase	Remark
			dBuV	dB/m	dBuV/m	dB	cm	deg	
1	48.430	33.07	50.49	-17.42	40.00	-6.93	---	---	VERTICAL Peak
2	111.480	30.70	49.93	-19.23	43.50	-12.80	---	---	VERTICAL Peak
3	133.790	31.97	51.40	-19.43	43.50	-11.53	---	---	VERTICAL Peak
4	362.710	27.10	37.27	-10.17	46.00	-18.90	---	---	VERTICAL Peak
5	768.170	31.44	34.19	-2.75	46.00	-14.56	---	---	VERTICAL Peak
6	877.780	32.35	33.42	-1.07	46.00	-13.65	---	---	VERTICAL Peak

Note :

- Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
- Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Mode : Channel 0(2402MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Polarization : Horizontal

Frequency Range : 30MHz~1000MHz

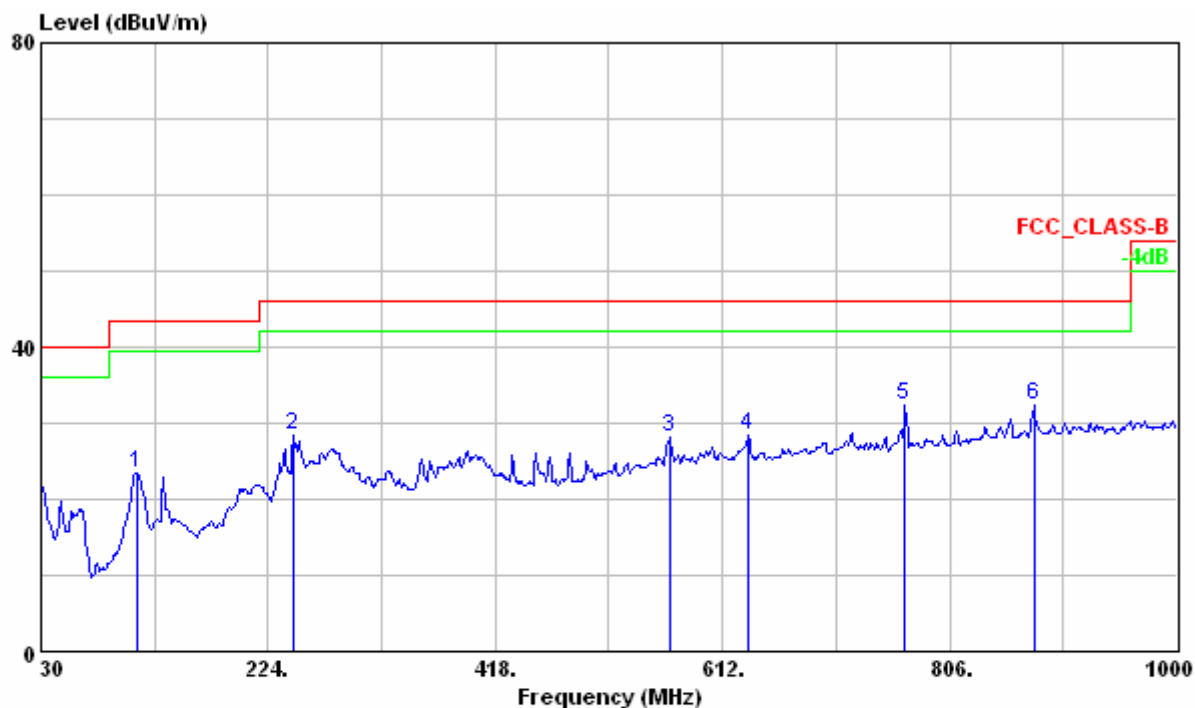

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	111.480	23.48	42.71	-19.23	43.50	-20.02	---	---	HORIZONTAL	Peak
2	245.340	28.49	42.77	-14.28	46.00	-17.51	---	---	HORIZONTAL	Peak
3	566.410	28.03	33.38	-5.35	46.00	-17.97	---	---	HORIZONTAL	Peak
4	634.310	28.48	33.18	-4.70	46.00	-17.52	---	---	HORIZONTAL	Peak
5	768.170	32.42	35.17	-2.75	46.00	-13.58	---	---	HORIZONTAL	Peak
6	877.780	32.26	33.33	-1.07	46.00	-13.74	---	---	HORIZONTAL	Peak

Note :

- Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
- Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Model : Channel 39(2441MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization: Vertical

Frequency Range : 30MHz~1000MHz

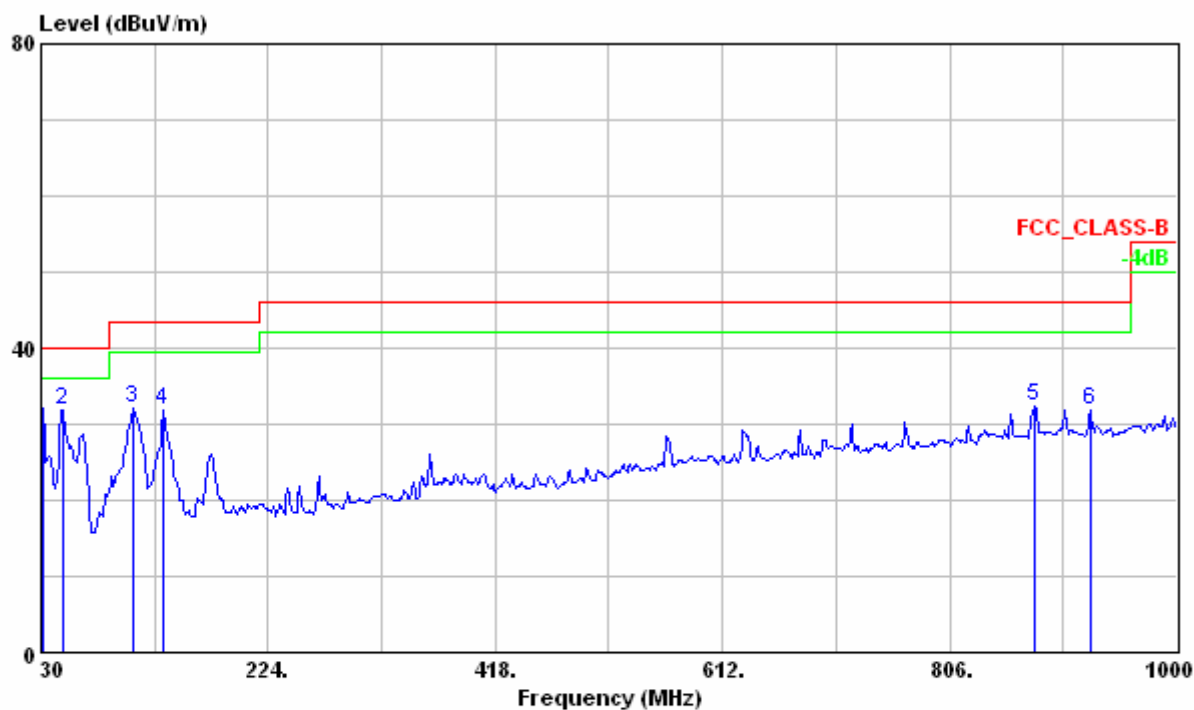

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Factor	Line	Limit	Pos	Pos	Pol/Phase
			dBuV	dB/m	dBuV/m	dB	cm	deg	Remark
1	31.940	32.15	41.90	-9.75	40.00	-7.85	---	---	VERTICAL
2	48.430	31.77	49.19	-17.42	40.00	-8.23	---	---	VERTICAL
3	109.540	32.15	51.29	-19.14	43.50	-11.35	---	---	VERTICAL
4	133.790	31.92	51.35	-19.43	43.50	-11.58	---	---	VERTICAL
5	877.780	32.42	33.49	-1.07	46.00	-13.58	---	---	VERTICAL
6	926.280	31.95	32.57	-0.62	46.00	-14.05	---	---	VERTICAL

Note :

- Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
- Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Model : Channel 39(2441MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization: Horizontal

Frequency Range : 30MHz~1000MHz

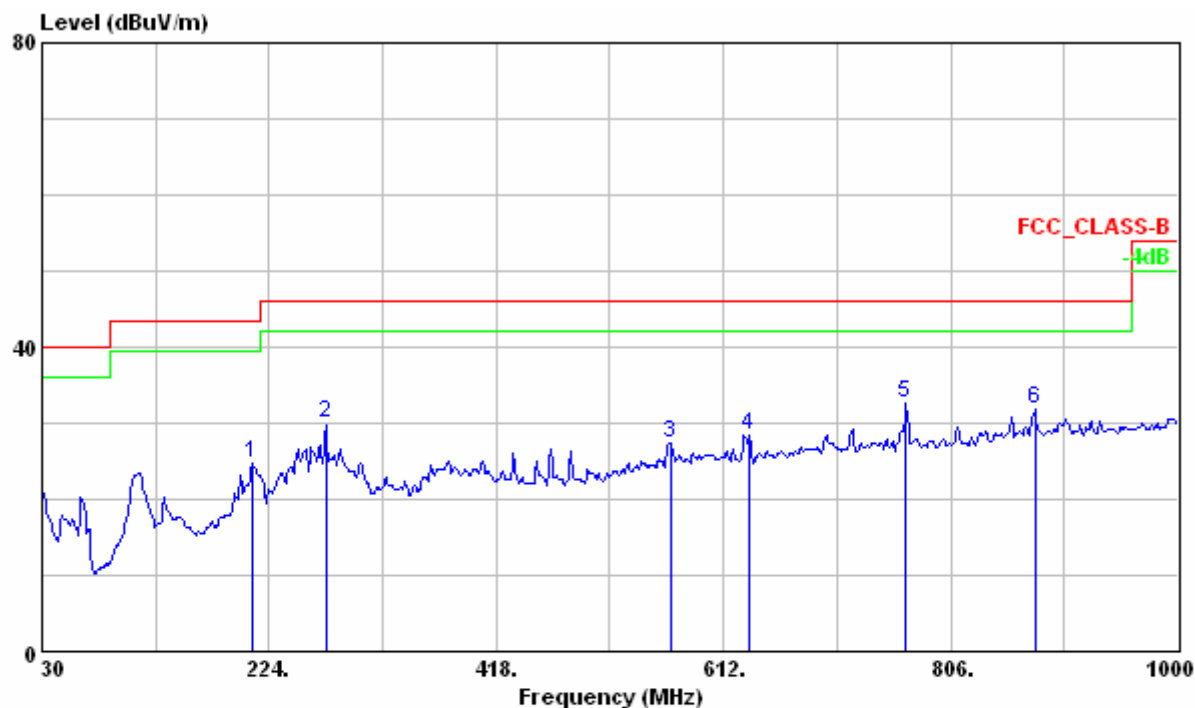

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Factor	Line	Limit	Pos	Pos	Pol/Phase
			dBuV	dB/m	dBuV/m	dB	cm	deg	Remark
1	209.450	24.64	40.28	-15.64	43.50	-18.86	---	---	HORIZONTAL Peak
2	272.500	29.87	43.15	-13.28	46.00	-16.13	---	---	HORIZONTAL Peak
3	566.410	27.42	32.77	-5.35	46.00	-18.58	---	---	HORIZONTAL Peak
4	634.310	28.43	33.13	-4.70	46.00	-17.57	---	---	HORIZONTAL Peak
5	768.170	32.72	35.47	-2.75	46.00	-13.28	---	---	HORIZONTAL Peak
6	877.780	31.76	32.83	-1.07	46.00	-14.24	---	---	HORIZONTAL Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Model : Channel 78(2480MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization: Vertical

Frequency Range : 30MHz~1000MHz

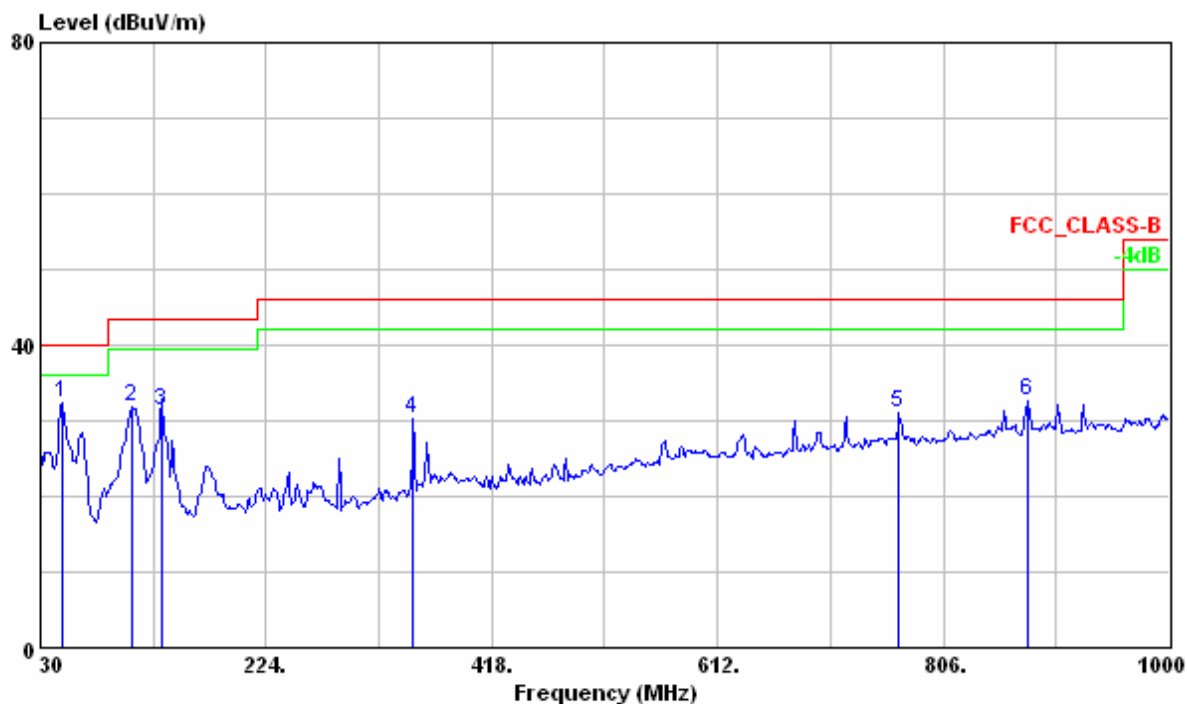

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	48.430	32.36	49.78	-17.42	40.00	-7.64	---	---	VERTICAL	Peak
2	109.540	31.90	51.04	-19.14	43.50	-11.60	---	---	VERTICAL	Peak
3	134.760	31.41	50.77	-19.36	43.50	-12.09	---	---	VERTICAL	Peak
4	350.100	30.38	40.93	-10.55	46.00	-15.62	---	---	VERTICAL	Peak
5	768.170	31.00	33.75	-2.75	46.00	-15.00	---	---	VERTICAL	Peak
6	877.780	32.70	33.77	-1.07	46.00	-13.30	---	---	VERTICAL	Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor


Test Model : Channel 78(2480MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization: Horizontal

Frequency Range : 30MHz~1000MHz

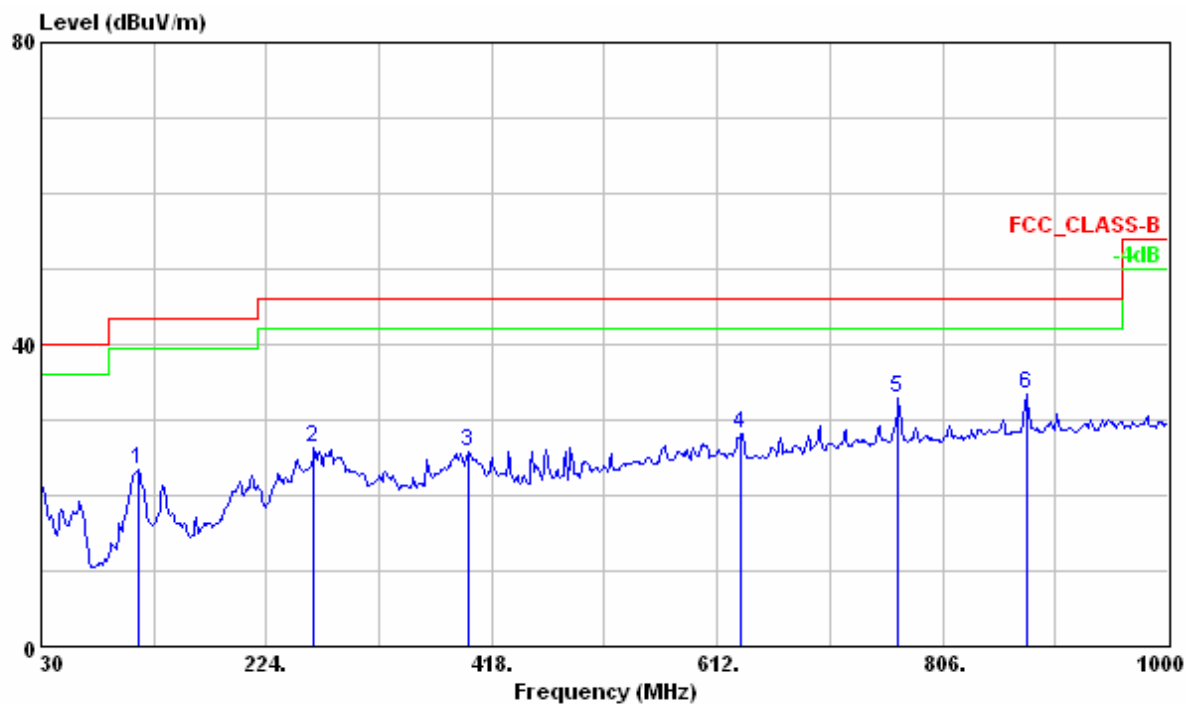

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	114.390	23.54	42.92	-19.38	43.50	-19.96	---	---	HORIZONTAL	Peak
2	264.740	26.39	39.92	-13.53	46.00	-19.61	---	---	HORIZONTAL	Peak
3	398.600	25.90	35.02	-9.12	46.00	-20.10	---	---	HORIZONTAL	Peak
4	632.370	28.18	32.88	-4.70	46.00	-17.82	---	---	HORIZONTAL	Peak
5	768.170	32.83	35.58	-2.75	46.00	-13.17	---	---	HORIZONTAL	Peak
6	877.780	33.39	34.46	-1.07	46.00	-12.61	---	---	HORIZONTAL	Peak

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor

Radiated Emission Measurement above 1000MHz


Test Model : Channel 0(2402MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Antenna Polarization : Vertical

Frequency Range :1GHz~25GHz

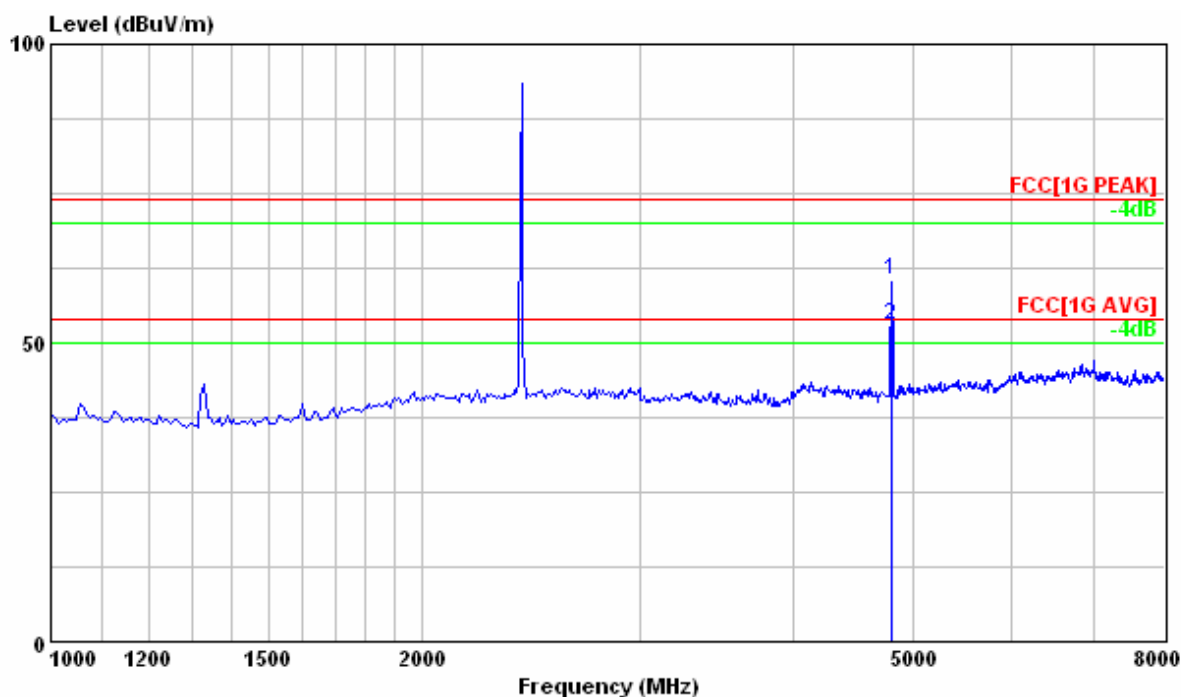

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.087	60.68	84.99	-24.31	74.00	-13.32	100	202	VERTICAL	Peak
2	4804.087	52.89	77.20	-24.31	54.00	-1.11	100	202	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 0(2402MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Antenna Polarization : Horizontal

Frequency Range :1GHz~25GHz

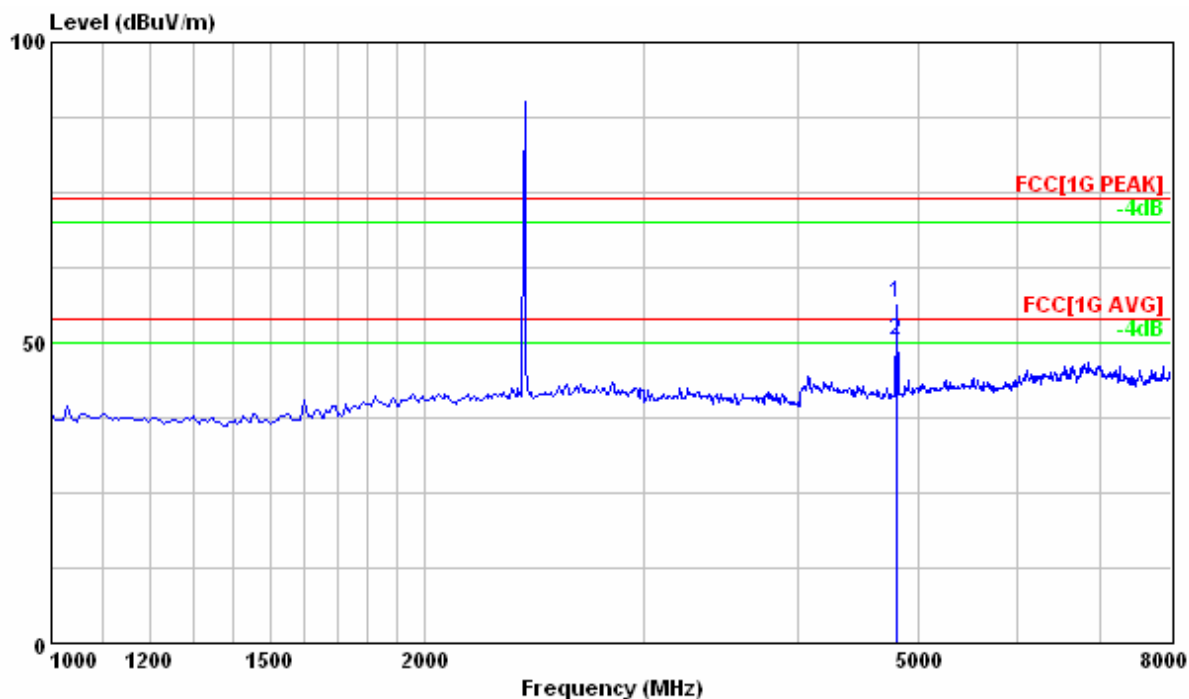

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.010	56.65	80.96	-24.31	74.00	-17.35	164	175	HORIZONTAL	Peak
2 !	4804.010	50.36	74.67	-24.31	54.00	-3.64	164	175	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 39(2441MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Antenna Polarization : Vertical

Frequency Range :1GHz~25GHz

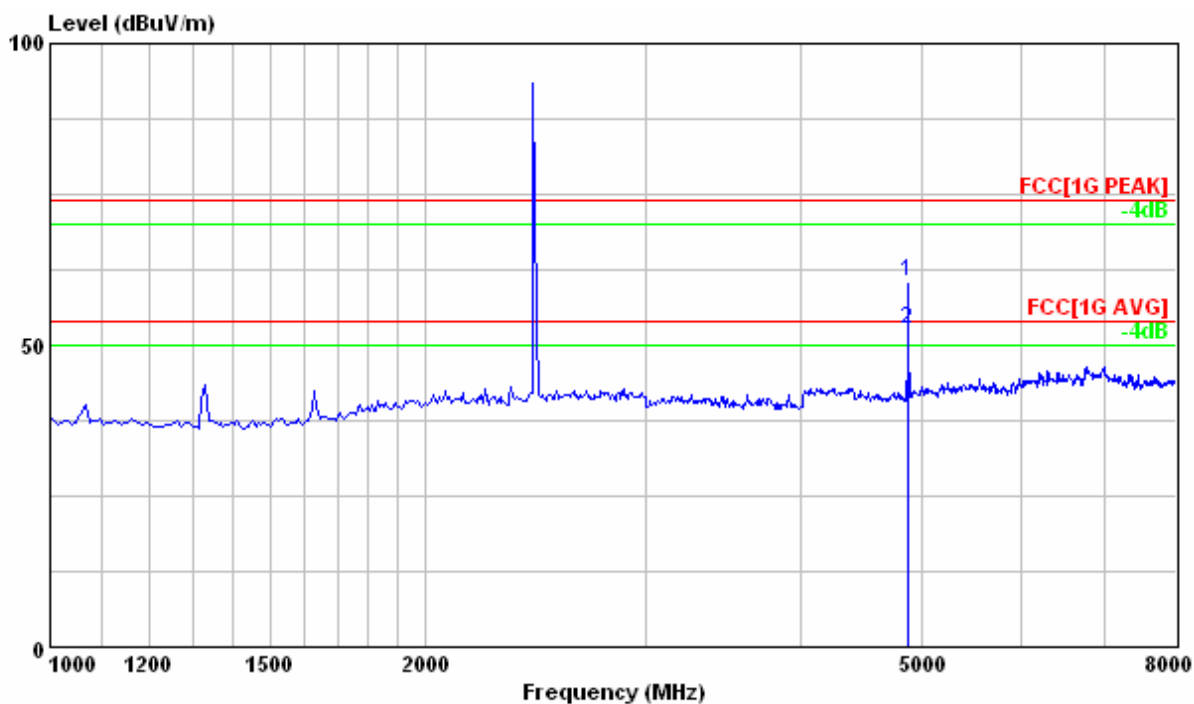

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4882.025	60.61	84.94	-24.33	74.00	-13.39	100	205	VERTICAL	Peak
2 !	4882.025	52.78	77.11	-24.33	54.00	-1.22	100	205	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 39(2441MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Antenna Polarization : Horizontal

Frequency Range :1GHz~25GHz

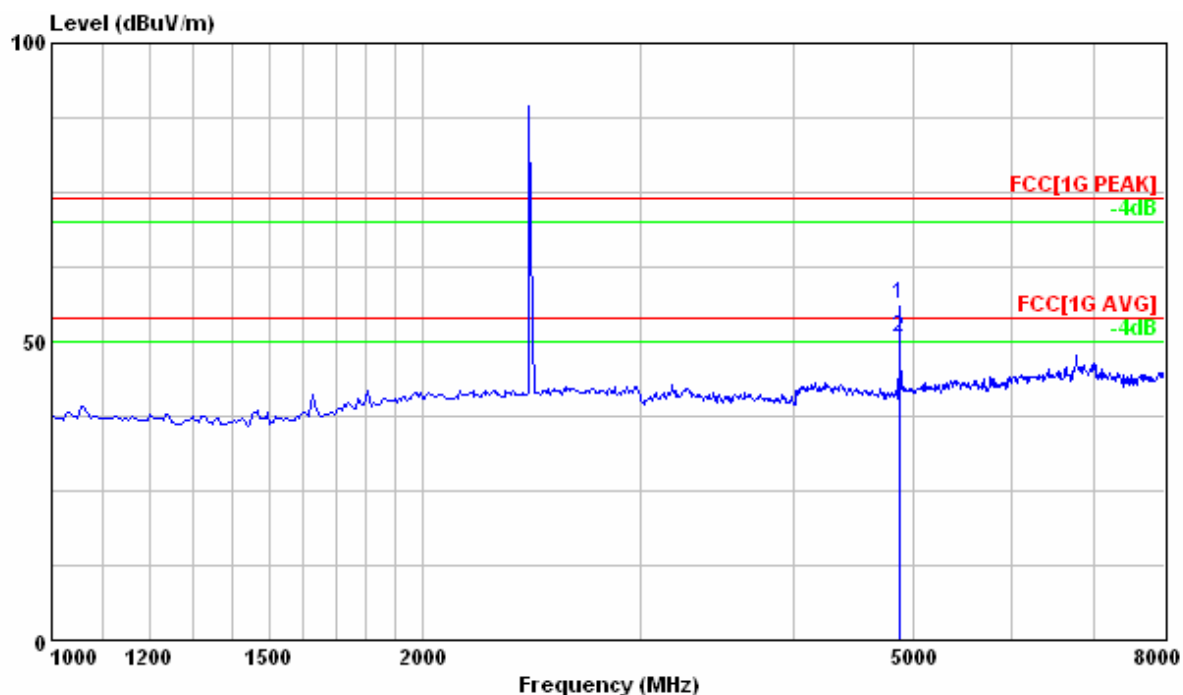

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4881.825	56.33	80.66	-24.33	74.00	-17.67	221	148	HORIZONTAL	Peak
2 !	4881.825	50.74	75.07	-24.33	54.00	-3.26	221	148	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 78(2480MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Antenna Polarization : Vertical

Frequency Range :1GHz~25GHz

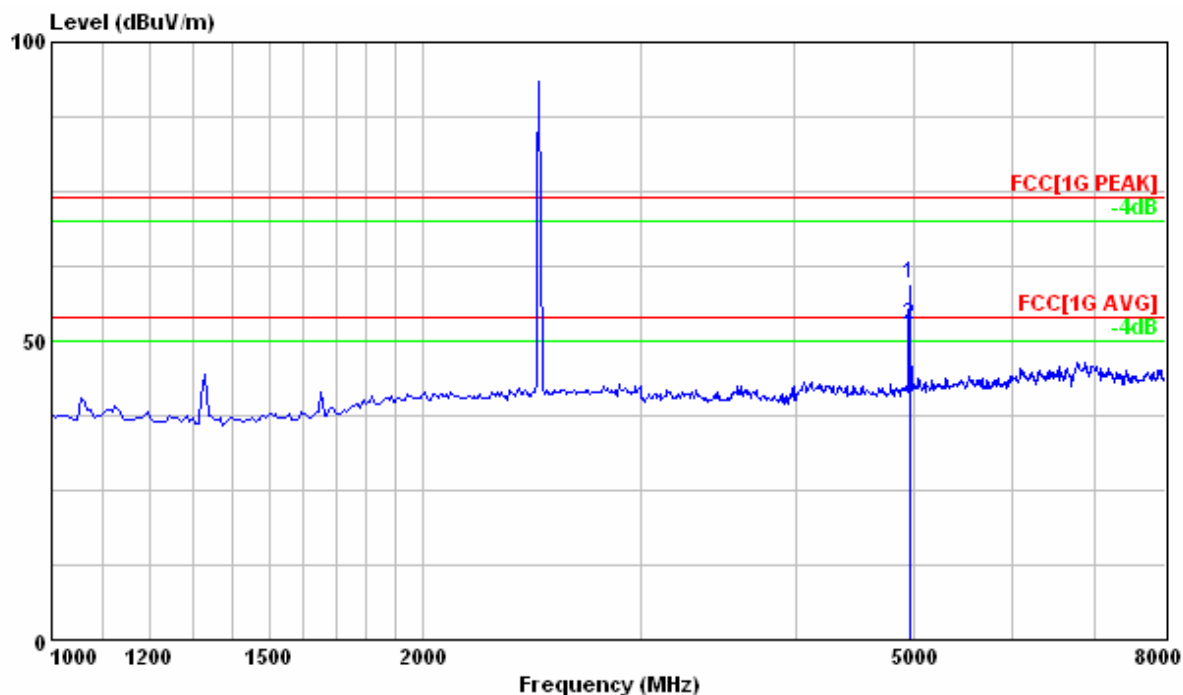

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.237	59.42	83.72	-24.30	74.00	-14.58	100	214	VERTICAL	Peak
2	4960.237	52.77	77.07	-24.30	54.00	-1.23	100	214	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 78(2480MHz), Continuous Transmitting

Test Distance : 3m

Tester : Bill

Antenna Polarization : Horizontal

Frequency Range :1GHz~25GHz

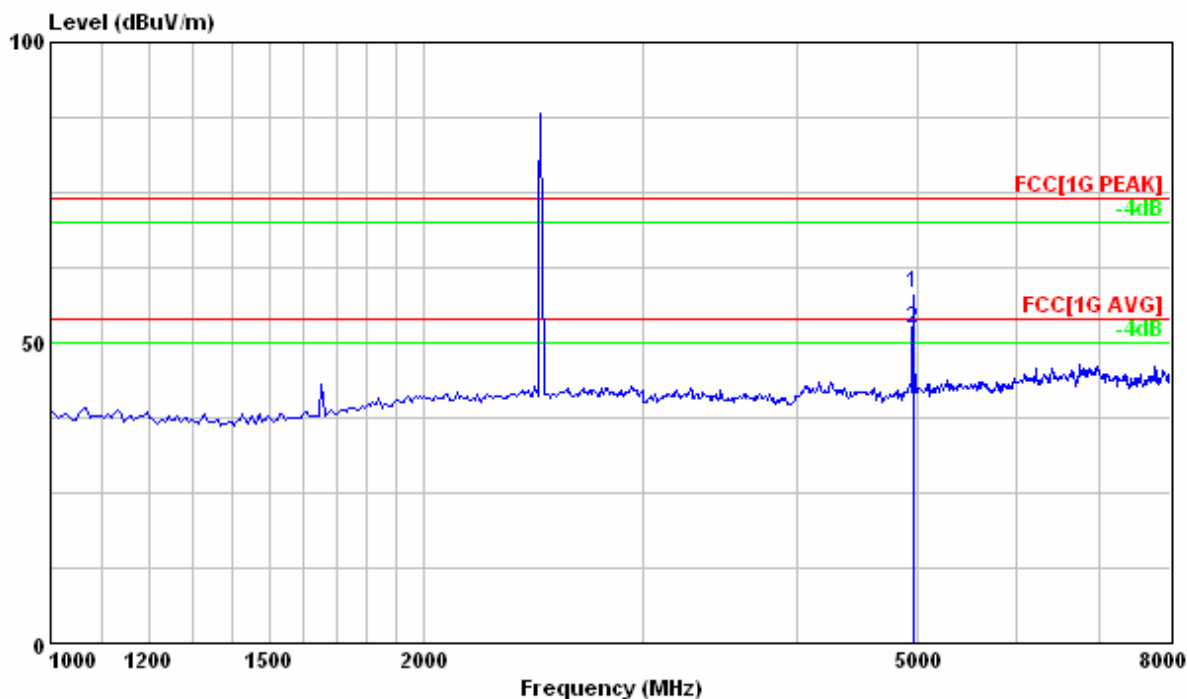

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4959.837	58.24	82.54	-24.30	74.00	-15.76	100	147	HORIZONTAL	Peak
2 !	4959.837	52.38	76.68	-24.30	54.00	-1.62	100	147	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 0(2402MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization : Vertical

Frequency Range :1GHz~25GHz

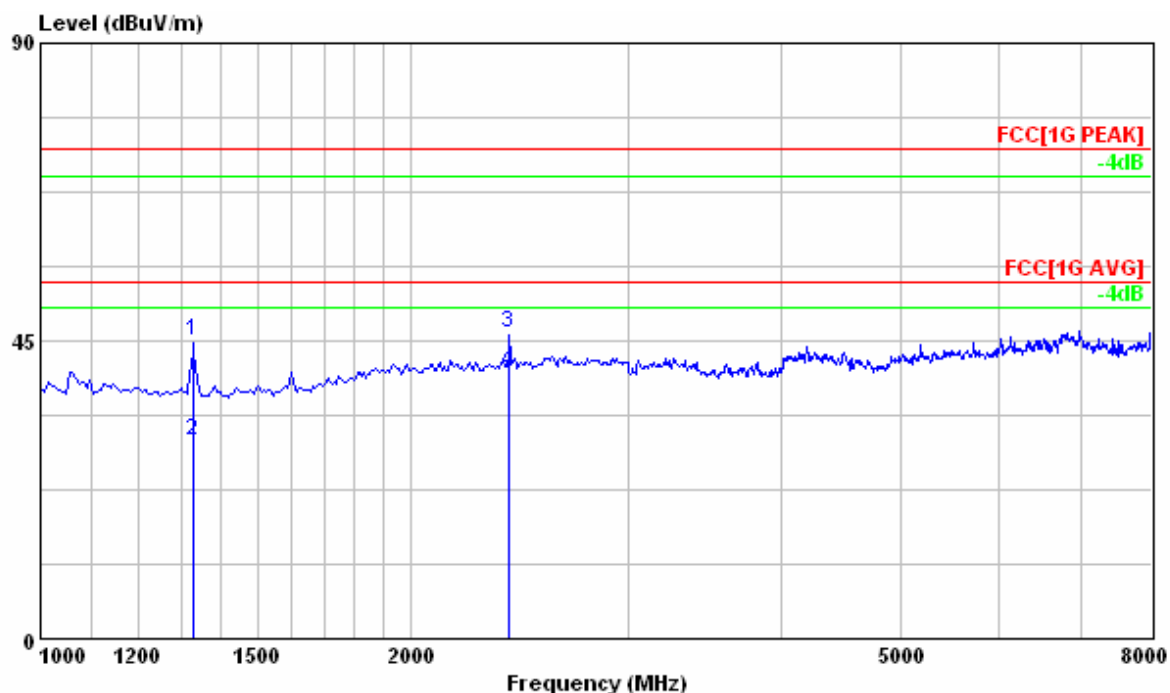

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	1329.350	45.02	78.14	-33.12	74.00	-28.98	101	360	VERTICAL	Peak
2	1329.350	29.80	62.92	-33.12	54.00	-24.20	101	360	VERTICAL	Average
3	2400.300	46.31	73.91	-27.60	74.00	-27.69	139	134	VERTICAL	Peak
4	2400.300	40.21	67.81	-27.60	54.00	-13.79	139	134	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 0(2402MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization : Horizontal

Frequency Range :1GHz~25GHz

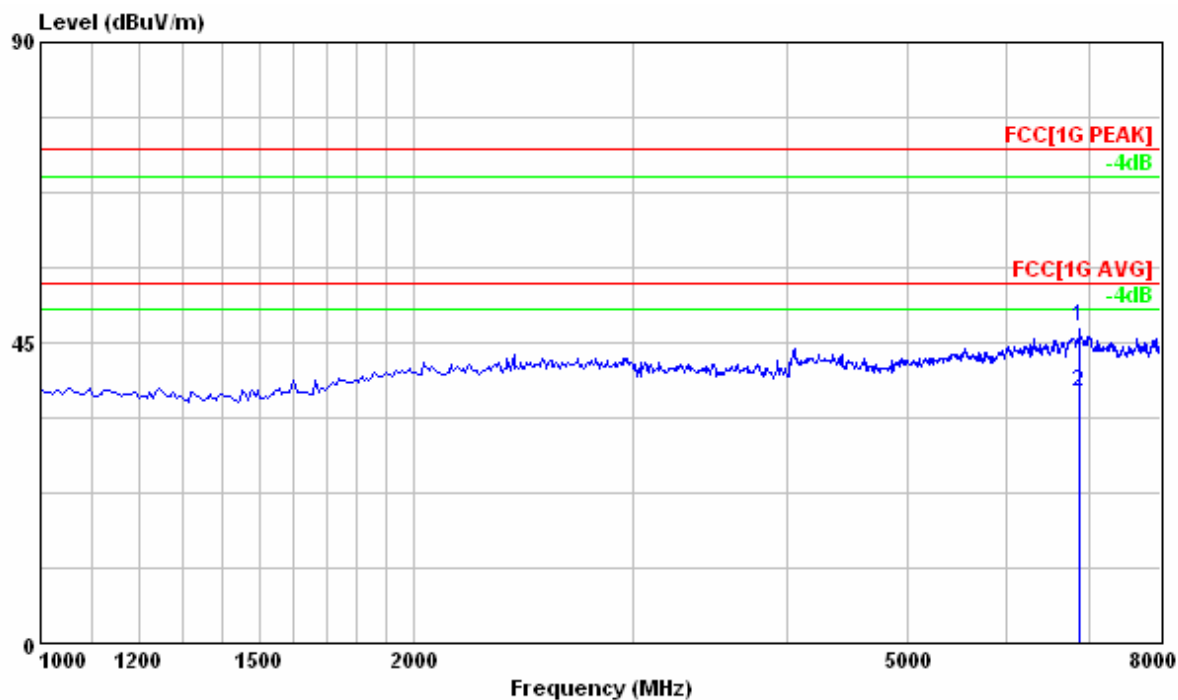

	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Line	Limit	Pos	Pos	Pol/Phase	Remark
			Factor						
			dB/m	dBuV/m	dB	cm	deg		
1	6876.000	47.49	68.43	-20.94	74.00	-26.51	100	0 HORIZONTAL	Peak
2	6876.000	37.69	58.63	-20.94	54.00	-16.31	100	0 HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 39(2441MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization : Vertical

Frequency Range :1GHz~25GHz

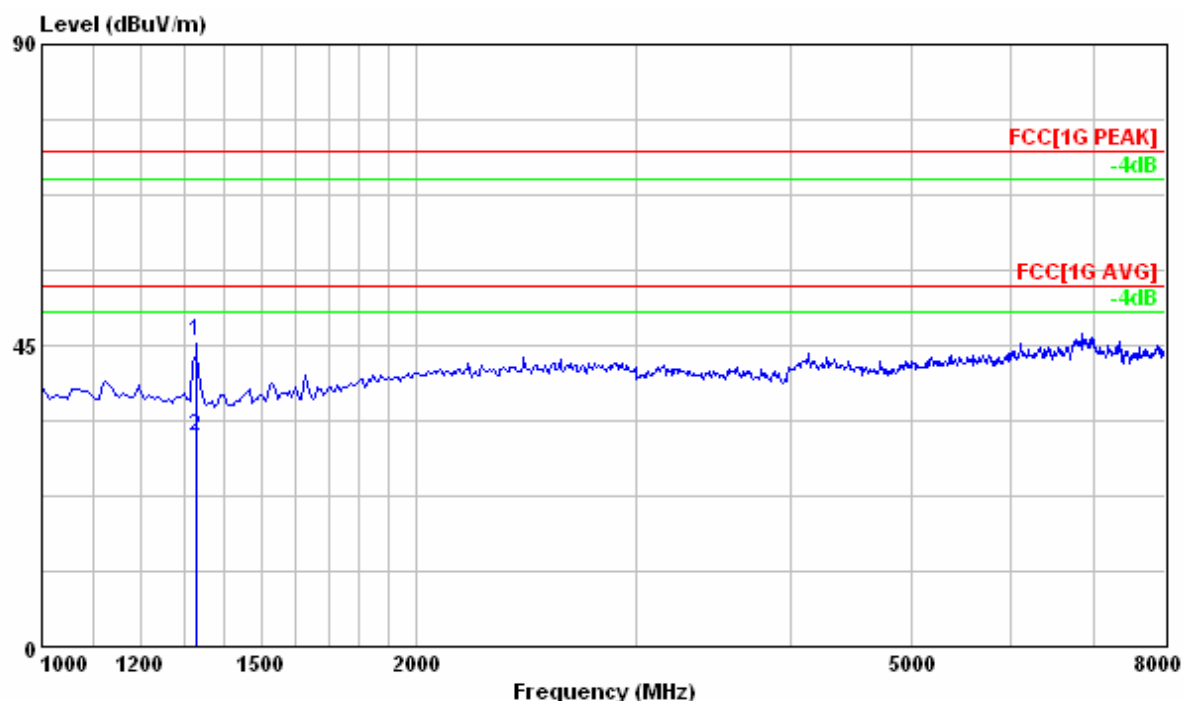

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	1330.400	45.72	78.84	-33.12	74.00	-28.28	101	360	VERTICAL	Peak
2	1330.400	31.43	64.55	-33.12	54.00	-22.57	101	360	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 39(2441MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization : Horizontal

Frequency Range :1GHz~25GHz

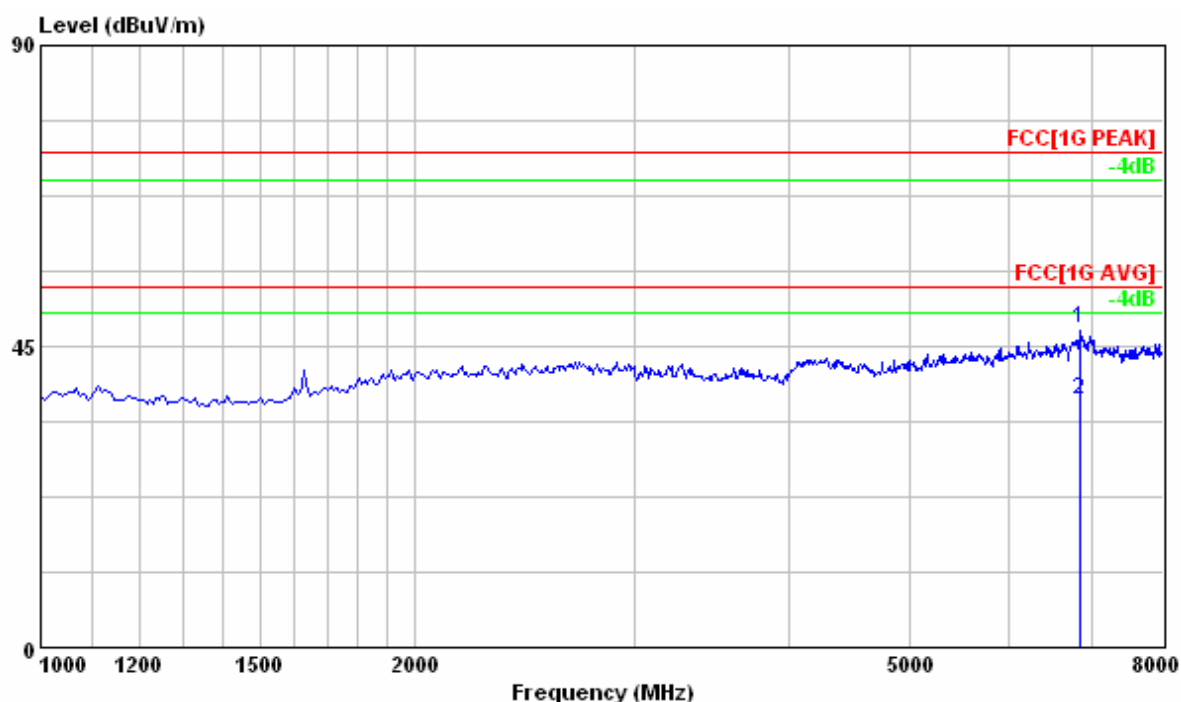

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	6864.000	47.53	68.51	-20.98	74.00	-26.47	120	85	HORIZONTAL	Peak
2	6864.000	36.90	57.88	-20.98	54.00	-17.10	120	85	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 78(2480MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization : Vertical

Frequency Range :1GHz~25GHz

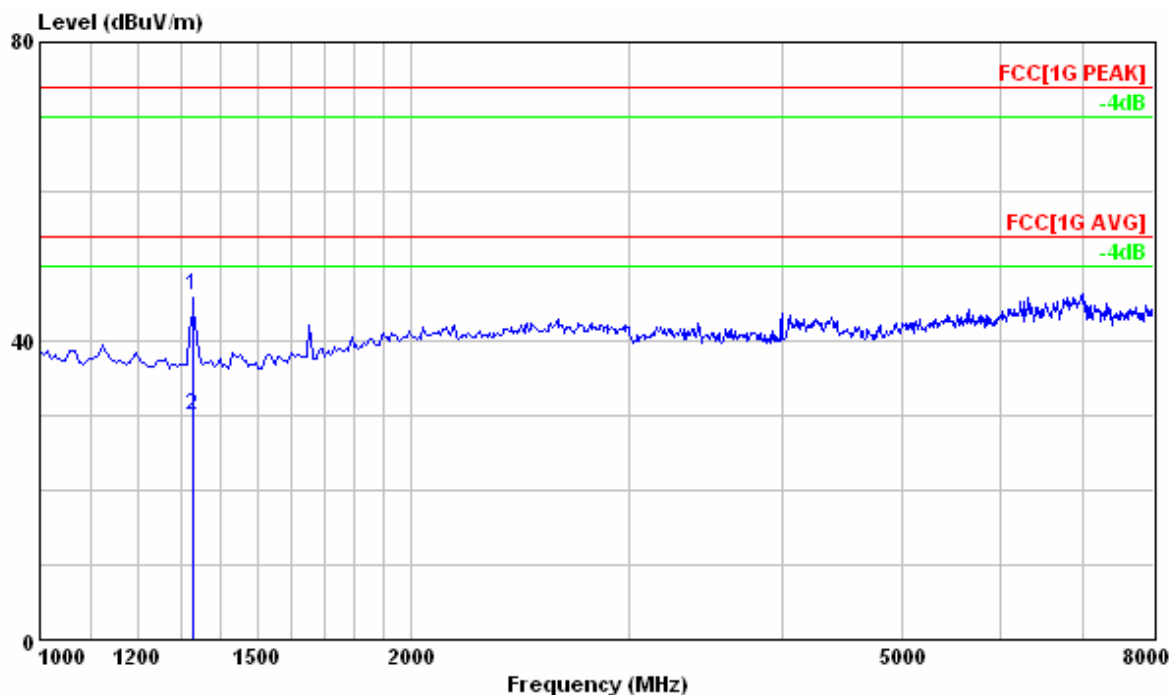

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	1330.000	46.08	79.20	-33.12	74.00	-27.92	100	0	VERTICAL	Peak
2	1330.000	30.08	63.20	-33.12	54.00	-23.92	100	0	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.


Test Model : Channel 78(2480MHz), Continuous Receiving

Test Distance : 3m

Tester : Bill

Antenna Polarization : Horizontal

Frequency Range :1GHz~25GHz

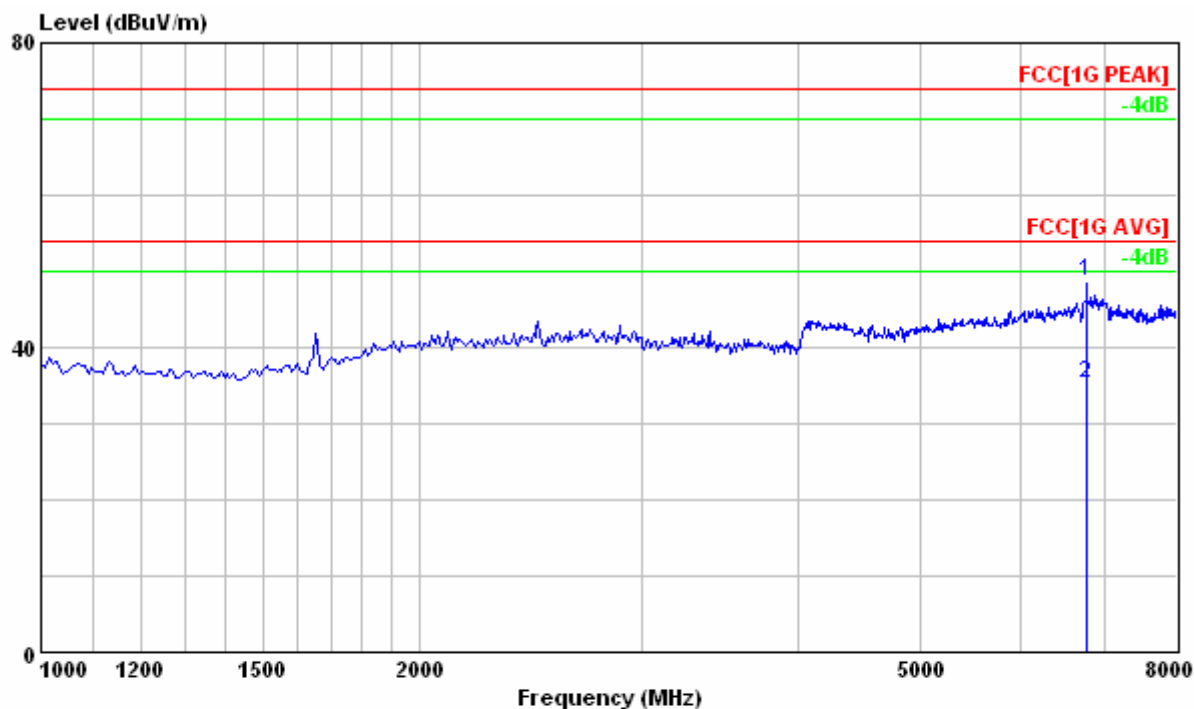

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	6784.000	48.56	69.85	-21.29	74.00	-25.44	100	210	HORIZONTAL	Peak
2	6784.000	35.16	56.45	-21.29	54.00	-18.84	100	210	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier.
3. PK. and AV. are abbreviation of peak and average respectively.

No signal can be detected from 8GHz to 25GHz, so the graphs are omitted above 8GHz.

7 Dwell Time

Result: Pass

7.1 Applied standard

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Shielded Room	ETS.LINDGREN	TR4/ 15353-E	NCR	NCR
Spectrum Analyzer	Agilent	E4405B/ MY45106706	2008/3/25	2009/3/24

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR: No Calibration Required.

Instrument Setting

RBW	VBW	Span	Detector	Comment
100kHz	100kHz	0Hz	Peak	


Climatic Condition

Ambient Temperature : 28°C ; Relative Humidity : 64%

7.3 Measurement Procedure

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit data with the same packet type.
- c. According to FCC Public Notice DA00-705, Span = zero span, RBW = 1 MHz, VBW \geq RBW to measure the single packet duration time
- d. Change the transmitting packet type and repeat the step b.
- e. Calculate the dwell time and compare with the required limit.

7.4 Test configuration

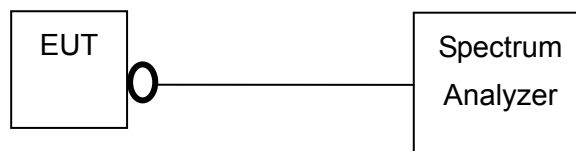

7.5 Test Data

Test Mode : Continuous Transmitting


Tester : Bill

Operating Frequency (MHz)	Data Type	Single Packet Duration Time (ms)	Hopping Repetition Rate (1/s)	Dwell Time (ms)	Limit (ms)	Margin (ms)
2412	DH1	0.46	10.13	147.25	400	252.75
2412	DH3	1.78	5.06	284.61	400	115.39
2412	DH5	3.04	3.38	324.70	400	75.30


Note:

1. Hopping Cycle(second) = $79 \times 0.4 = 31.6$
2. Hopping Repetition Rate(1/s) :DH1= $1600/79/2=10.13$; DH1600/79/4=5.06
DH5=1600/79/6=3.38
3. Dwell Time (ms) = Single Packet Duration Time X Hopping repetition Rate X Hopping Cycle
4. Margin (ms) = Limit – Dwell Time


DH1

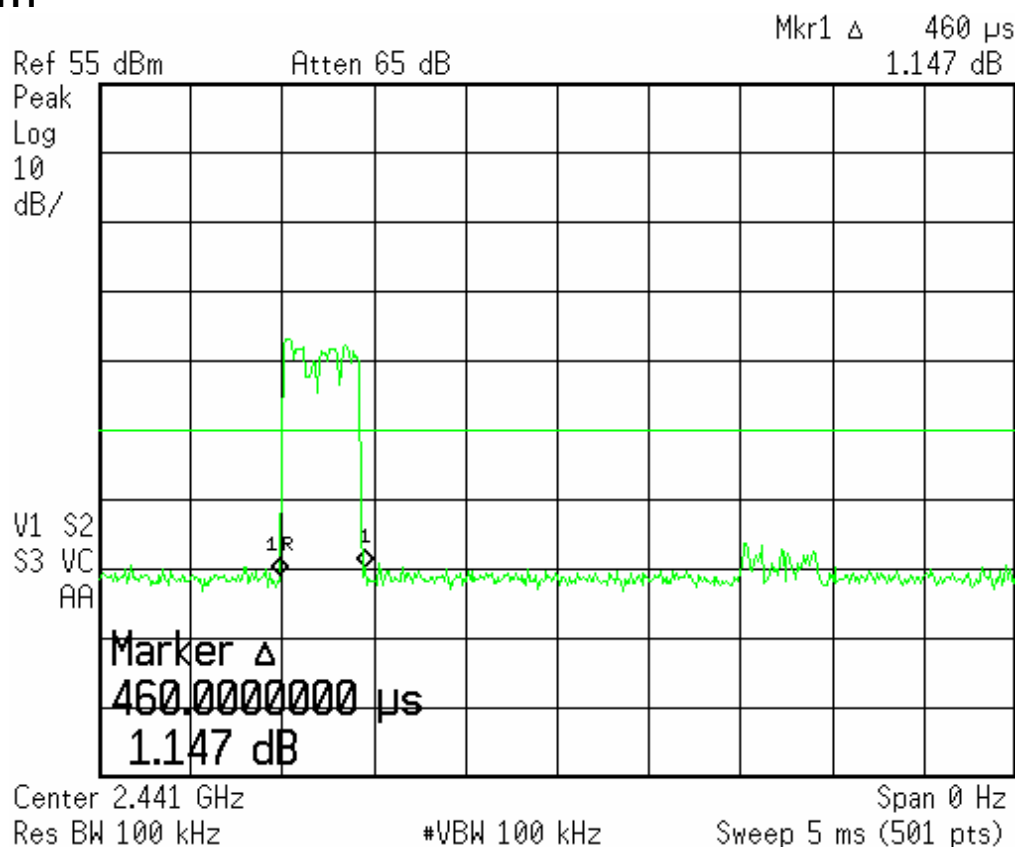

DH3

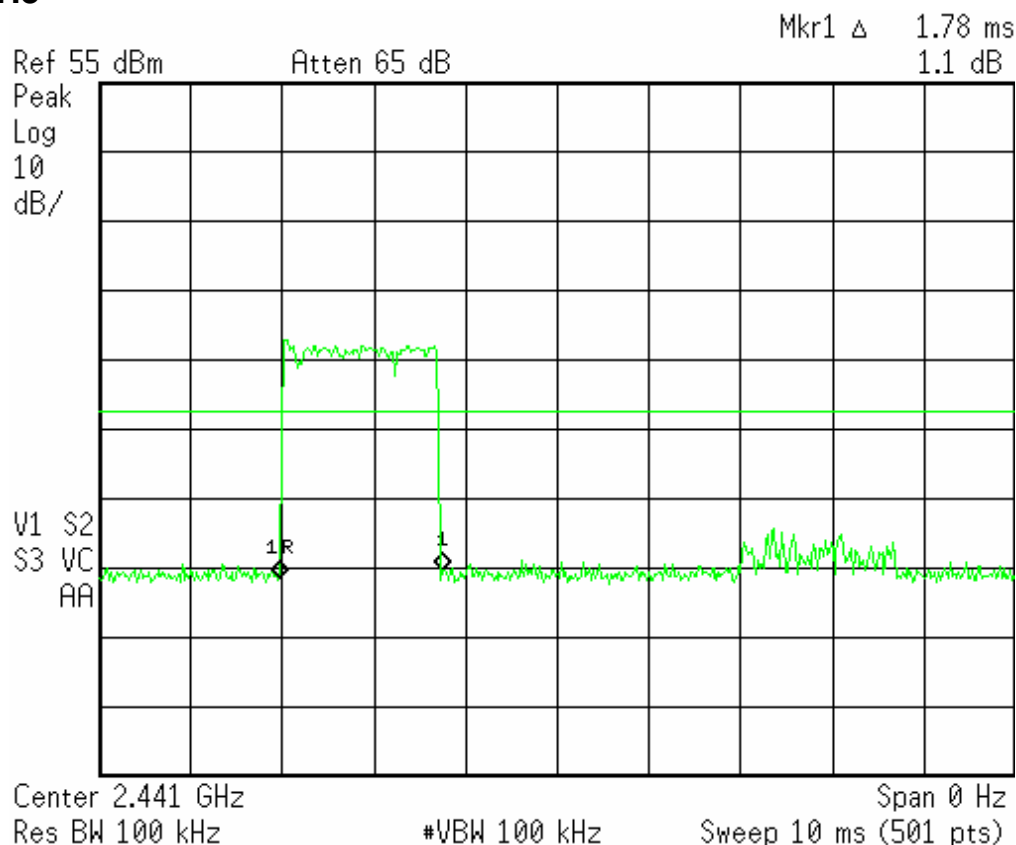

DH5

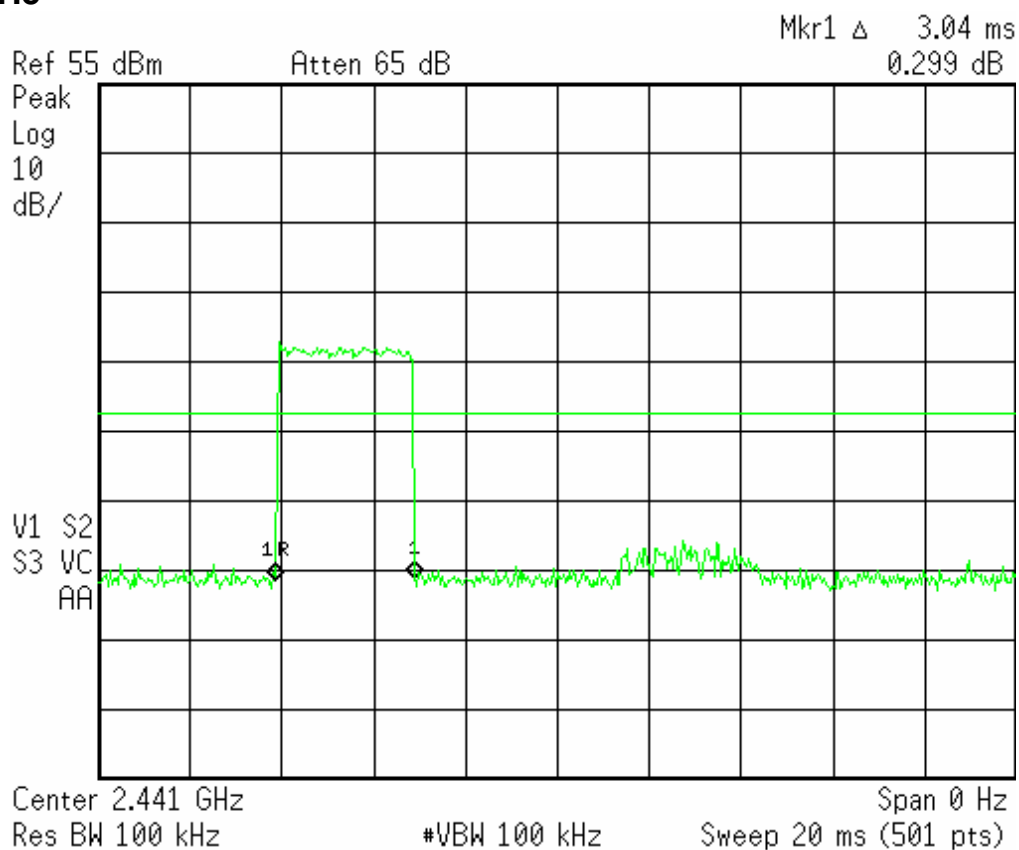

8 Conducted Emission Measurement

Result: Pass

8.1 Applied standard

For intentional device, according to §15.207(a) line conduction emission limit is as below table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Shielded room	ETS.LINDGREN	TR5/15353-F	NCR	NCR
Test Receiver	R&S	ESCS30/ 836858/021	2008/1/11	2009/1/10
LISN	R&S	ESH2-Z5/ 836613/001	2008/1/7	2009/1/6
2nd LISN	R&S	ENV4200/ 833209/010	2008/1/14	2009/1/13
50Ω terminator	JYEBAO	BNC3900-0002/001	2007/8/27	2008/8/26

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR : No Calibration Required.

Instrument Setting

IF BW	Measurement Time	Detector	Trace	Comment
9kHz	1 second	Quasi-Peak / Average	Maxhold	


Climatic Condition

Ambient Temperature : 28°C ; Relative Humidity : 64%

8.3 Measurement Procedure


- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. If the EUT is tabletop equipment, it was placed on a non-conducted table with a height of 0.8 meters above the reference ground plane and 0.4 meters from the conducting wall of the shielded room. Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height of 12 millimeters above the reference ground plane.
- c. Connect the EUT's power source to the appropriate power mains through the LISN.
- d. All the other peripherals are connected to the 2nd LISN, if any.
- e. The LISN was placed 0.8 meters from the EUT and at least 0.8 meters from other units and other metal planes.
- f. Measure the conducted emissions on each power line (Neutral Line and Line 1 – Hot side) of the EUT's power source by using the test receiver connected to the coupling RF output port of LISN.
- g. Rapidly scan the signal from 150kHz to 30MHz by using the receiver through the Maximum-Peak detector to determine those frequencies associated with higher emission levels for each measured line.
- h. Then measure the maximum level of conducted disturbance for each frequency found from step g. by using the receiver through the Quasi-Peak and Average detectors per CISPR 16-1.
- i. Record the level for each frequency and compare with the required limit.

8.4 Test configuration

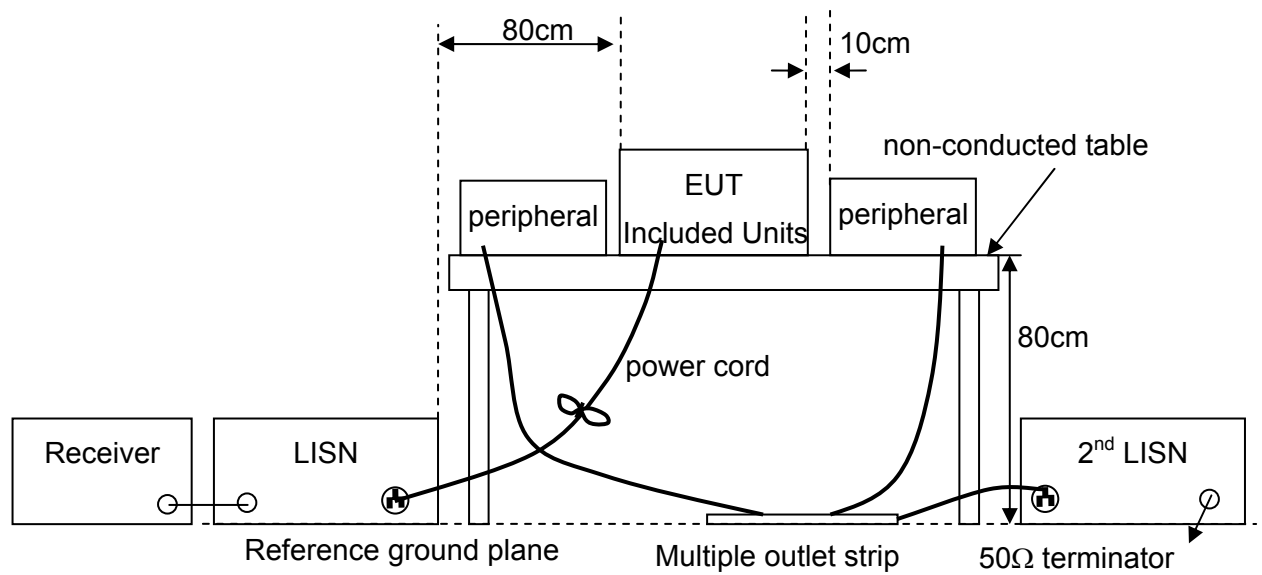

8.5 Test Data

Test Mode : Continuous Transmitting, 2402MHz
 Frequency Range : 150kHz~30MHz Phase : Line
 Tester : CDC

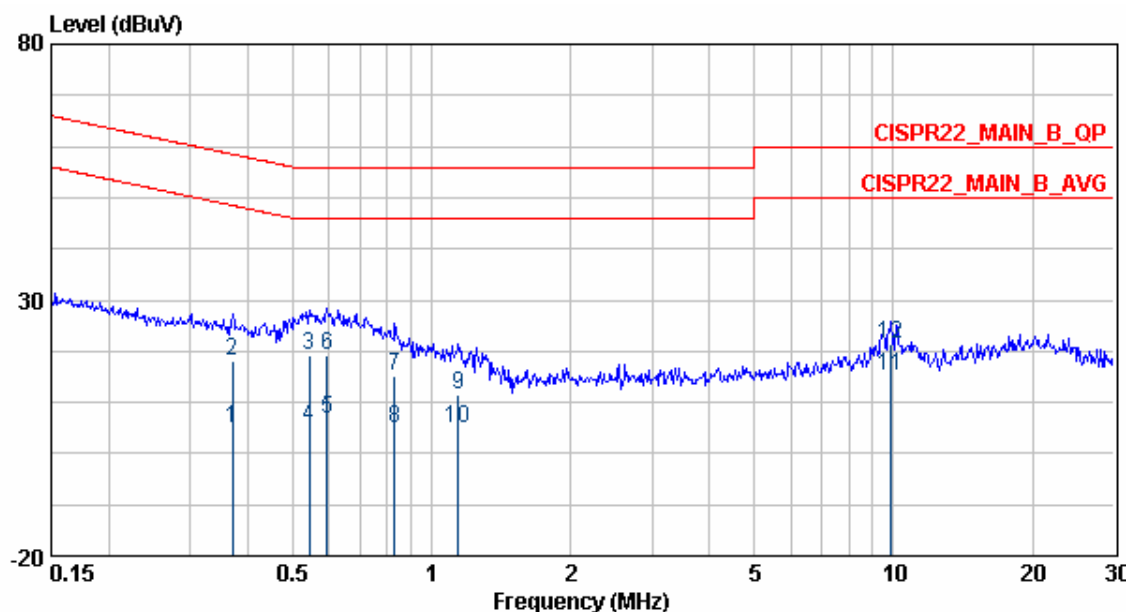

	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	cm		
1	0.37	5.06	0.16	4.90	48.47	-43.41	---	LINE	AVERAGE
2	0.37	17.95	0.16	17.79	58.47	-40.52	---	LINE	QP
3	0.54	19.26	0.17	19.09	56.00	-36.74	---	LINE	QP
4	0.54	5.42	0.17	5.25	46.00	-40.58	---	LINE	AVERAGE
5	0.59	6.67	0.17	6.50	46.00	-39.33	---	LINE	AVERAGE
6	0.59	19.16	0.17	18.99	56.00	-36.84	---	LINE	QP
7	0.83	15.01	0.19	14.82	56.00	-40.99	---	LINE	QP
8	0.83	5.01	0.19	4.82	46.00	-40.99	---	LINE	AVERAGE
9	1.14	11.34	0.21	11.13	56.00	-44.66	---	LINE	QP
10	1.14	4.77	0.21	4.56	46.00	-41.23	---	LINE	AVERAGE
11 B	9.91	15.27	0.73	14.54	50.00	-34.73	---	LINE	AVERAGE
12	9.91	21.57	0.73	20.84	60.00	-38.43	---	LINE	QP

Note:


1. Emission Level = Reading Data + correction factor.
2. Correction factor = cable loss + insertion loss of LISN.
3. P.K., Q.P. and AV. are abbreviation of peak, quasi-peak and average respectively.

Test Mode : Continuous Transmitting, 2402MHz

Frequency Range : 150kHz~30MHz

Phase : Neutral

Tester : CDC

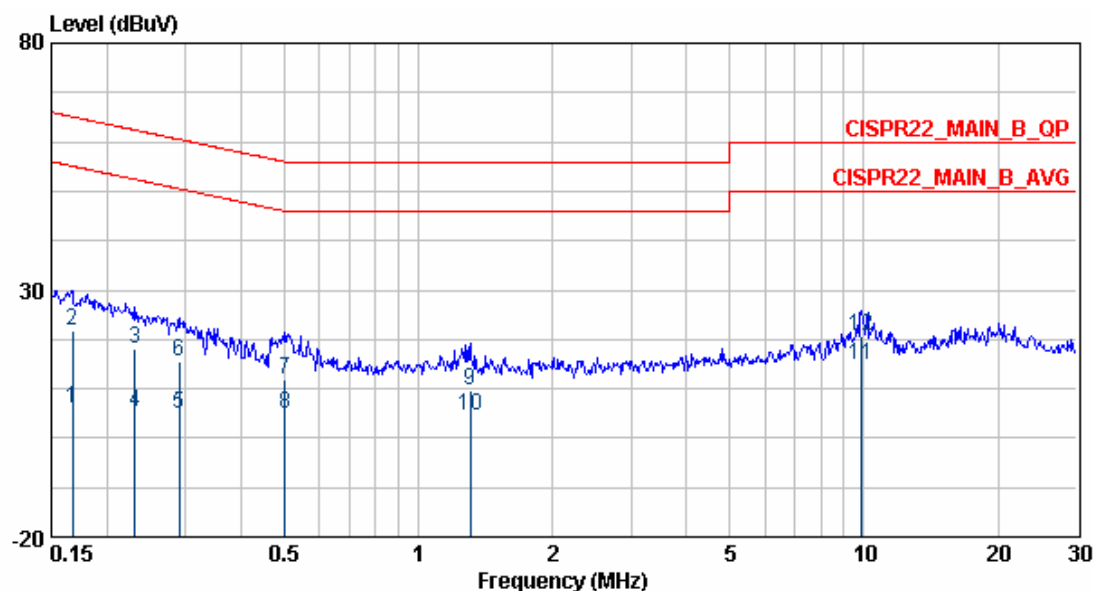

	Freq	Level	Factor	Read	Limit	Over	Ant		
	MHz	dBuV	dB	Level	Line	Limit	Pos	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	cm		
1	0.17	5.91	0.15	5.76	55.08	-49.16	---	NEUTRAL	AVERAGE
2	0.17	21.85	0.15	21.70	65.08	-43.22	---	NEUTRAL	QP
3	0.23	17.99	0.16	17.83	62.39	-44.40	---	NEUTRAL	QP
4	0.23	5.28	0.16	5.12	52.39	-47.11	---	NEUTRAL	AVERAGE
5	0.29	5.08	0.17	4.91	50.50	-45.42	---	NEUTRAL	AVERAGE
6	0.29	15.42	0.17	15.25	60.50	-45.08	---	NEUTRAL	QP
7	0.50	12.03	0.18	11.85	56.00	-43.97	---	NEUTRAL	QP
8	0.50	4.90	0.18	4.72	46.00	-41.10	---	NEUTRAL	AVERAGE
9	1.31	9.57	0.23	9.34	56.00	-46.43	---	NEUTRAL	QP
10	1.31	4.60	0.23	4.37	46.00	-41.40	---	NEUTRAL	AVERAGE
11	9.91	14.90	0.78	14.12	50.00	-35.10	---	NEUTRAL	AVERAGE
12	9.91	20.58	0.78	19.80	60.00	-39.42	---	NEUTRAL	QP

Note:

1. Emission Level = Reading Data + correction factor.
2. Correction factor = cable loss + insertion loss of LISN.
3. P.K., Q.P. and AV. are abbreviation of peak, quasi-peak and average respectively.

9 Antenna Requirement

9.1 Applied standard

According to 15.247(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

9.2 Antenna Information

This antenna's relative information as follow:

Brand	Model	Frequency Range (MHz)	Gain (dBi)	Comment
ARISTOTLE	RFA-02-5-F7M3	2400 ~ 2483.5	5	

Antenna Position:



9.3 Result

Gain of the antenn is less than 6dBi.