

File name: J207736C.RES  
Date: 19. Nov 08 11:48




CMA Testing  
and Certification  
Laboratories  
廠商會檢定中心

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	5k	9k	QP+AV	20ms	AUTO LN	OFF	
1M	30M	10k	9k	QP+AV	20ms	AUTO LN	OFF	

Transducer No.	Start	Stop	Name
12	150k	30M	EL228

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 30dB

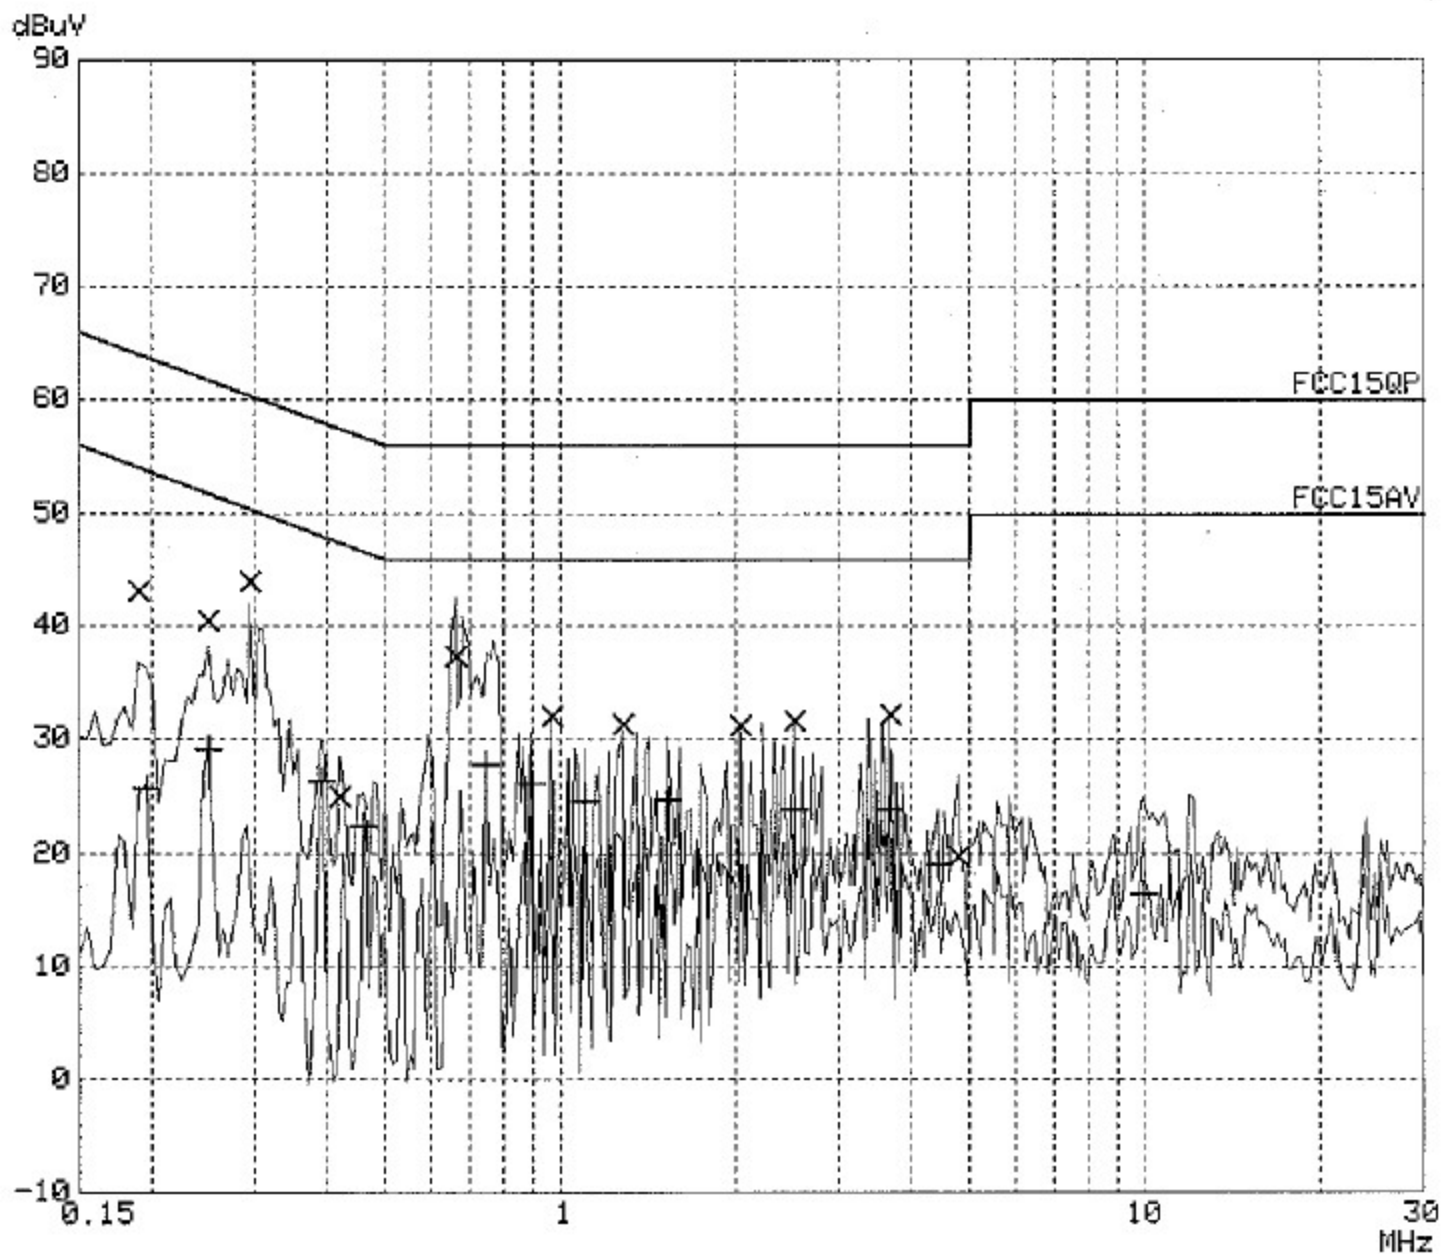

File name: J207736C.RES  
Date: 19. Nov 08 11:48



CMA Testing  
and Certification  
Laboratories  
廠商查檢中心

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.19000	43.2	-20.9	L1	gnd
0.25000	40.5	-21.3	L1	gnd
0.29500	44.0	-16.3	L1	gnd
0.42000	25.0	-32.5	N	gnd
0.66000	37.3	-18.6	N	gnd
0.96500	32.0	-23.9	N	gnd
1.28000	31.4	-24.5	N	gnd
2.03000	31.3	-24.6	L1	gnd
2.51000	31.6	-24.3	N	gnd
3.67000	32.2	-23.8	L1	gnd
4.80000	19.7	-36.2	N	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.19500	25.7	-28.1	L1	gnd
0.25000	29.2	-22.5	L1	gnd
0.39000	26.3	-21.6	L1	gnd
0.46000	22.4	-24.2	L1	gnd
0.74500	27.8	-18.1	L1	gnd
0.89000	26.1	-19.8	L1	gnd
1.10000	24.6	-21.3	L1	gnd
1.53000	24.8	-21.1	L1	gnd
2.51000	23.9	-22.0	N	gnd
3.67000	24.0	-21.9	L1	gnd
4.44000	19.1	-26.9	N	gnd
9.94000	16.5	-33.4	N	gnd

\* limit exceeded