



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #2033

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2014/11/16

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: WiFi Advisor

Engineer Signature: PEI


Mode: TX 5190MHz

Distance: 3m

Model: WFED-300AC

Manufacturer: JDSU

Note: 802.11an HT40---2TX (Beamforming)

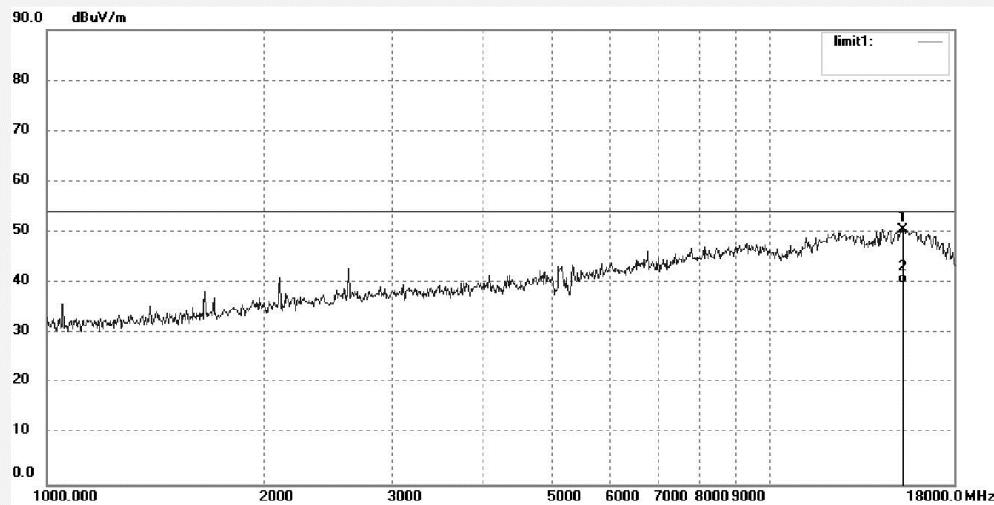

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	15292.613	9.96	40.51	50.47	74.00	-23.53	peak			
2	15292.613	-0.48	40.51	40.03	54.00	-13.97	AVG			

Appendix B



Produkte

Products

17042741 003

Page 481 of 730

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #2034

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2014/11/16

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: WiFi Advisor

Engineer Signature: PEI


Mode: TX 5230MHz

Distance: 3m

Model: WFED-300AC

Manufacturer: JDSU

Note: 802.11an HT40---2TX (Beamforming)

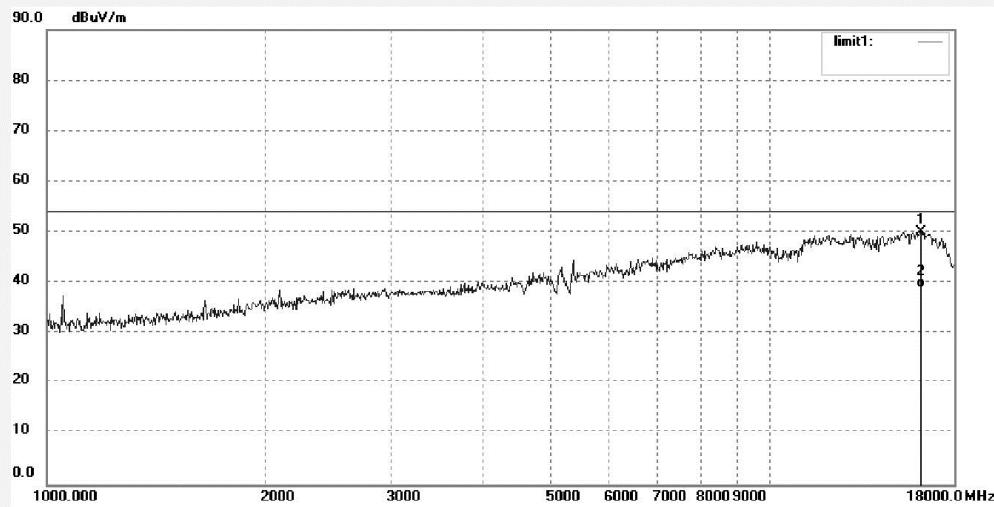

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	16209.295	10.02	40.13	50.15	74.00	-23.85	peak			
2	16209.295	-0.98	40.13	39.15	54.00	-14.85	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #2035	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2014/11/16
Temp. (C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5230MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11an HT40---2TX (Beamforming)		

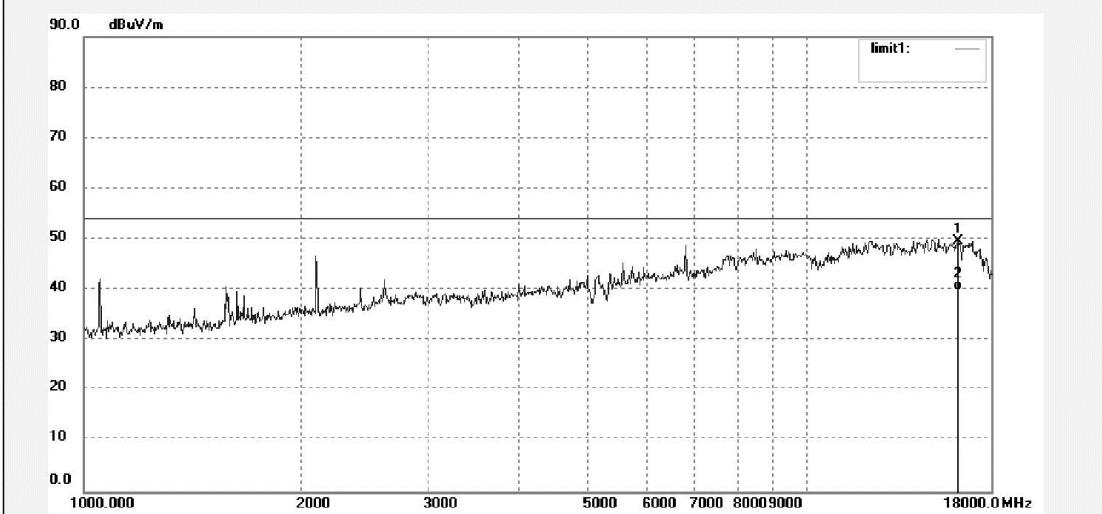

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	16209.295	9.59	40.13	49.72	74.00	-24.28	peak			
2	16209.295	-0.18	40.13	39.95	54.00	-14.05	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1618	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5190MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40---2TX (Beamforming)	

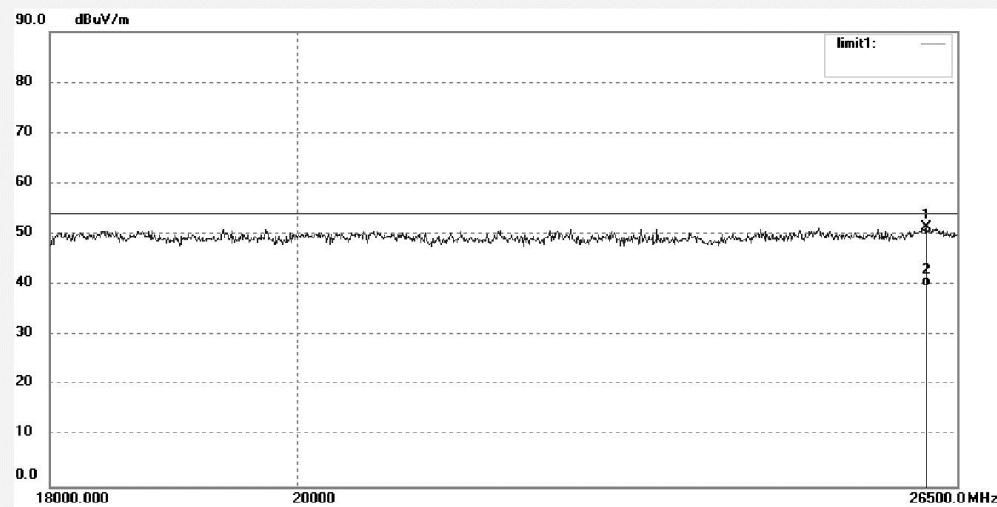

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26153.799	34.21	17.13	51.34	74.00	-22.66	peak			
2	26153.799	22.52	17.13	39.65	54.00	-14.35	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1619	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5190MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40---2TX (Beamforming)	

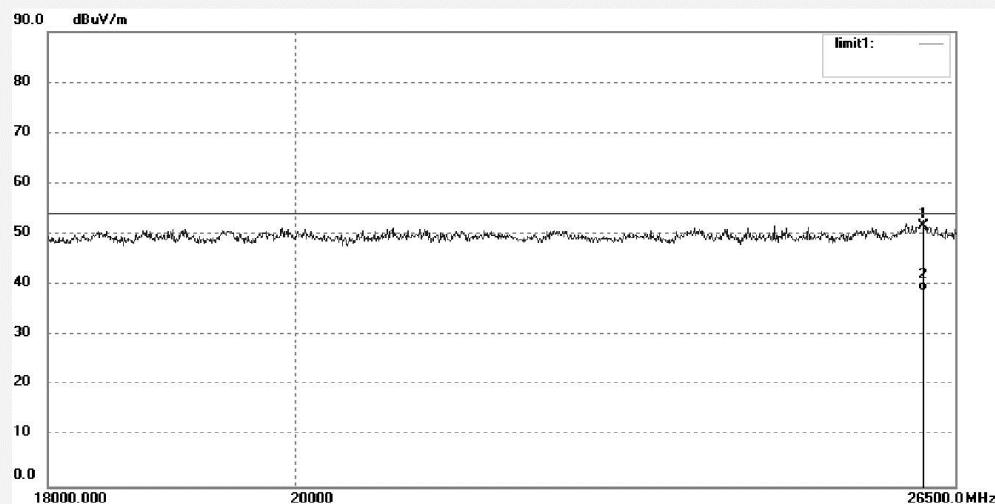

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26133.575	35.21	16.50	51.71	74.00	-22.29	peak			
2	26133.575	22.40	16.50	38.90	54.00	-15.10	AVG			

Appendix B



Produkte

Products

17042741 003

Page 485 of 730


**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1620	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40---2TX (Beamforming)	

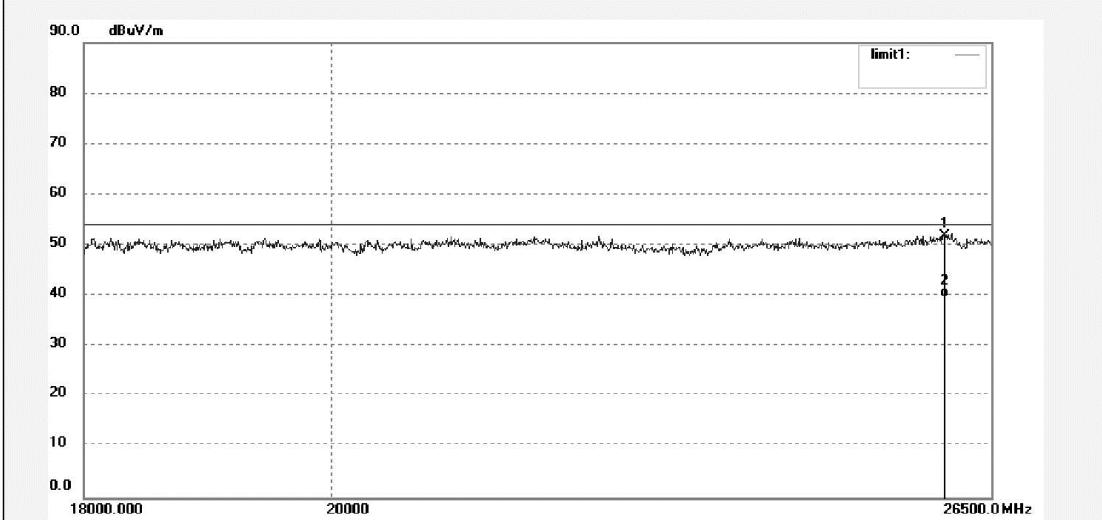

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25972.351	34.71	17.25	51.96	74.00	-22.04	peak			
2	25972.351	22.49	17.25	39.74	54.00	-14.26	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1621

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2014/11/09

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: WiFi Advisor

Engineer Signature: PEI


Mode: TX 5230MHz

Distance: 3m

Model: WFED-300AC

Manufacturer: JDSU

Note: 802.11an HT40---2TX (Beamforming)

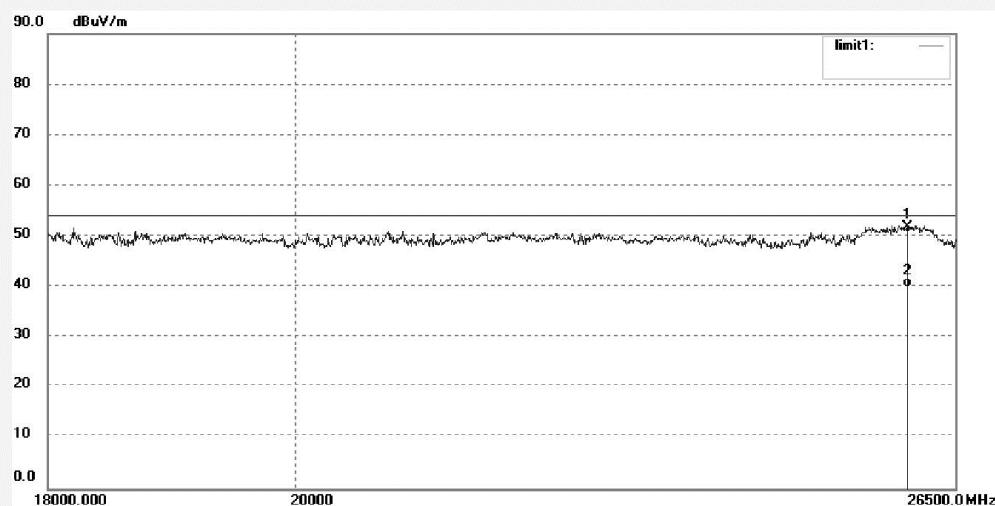

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25962.307	34.52	17.26	51.78	74.00	-22.22	peak			
2	25962.307	22.64	17.26	39.90	54.00	-14.10	AVG			

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5190MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11an HT40--2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

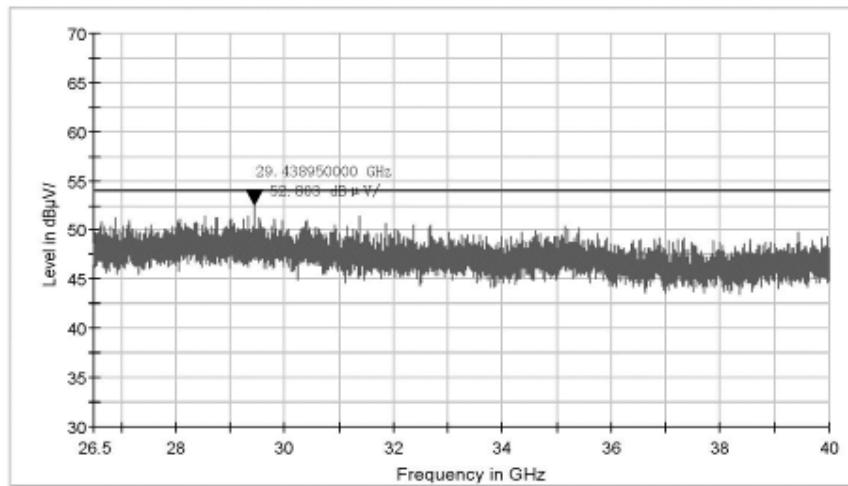

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5190MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Vertical
Operator Name:
Comment: 802.11an HT40--2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

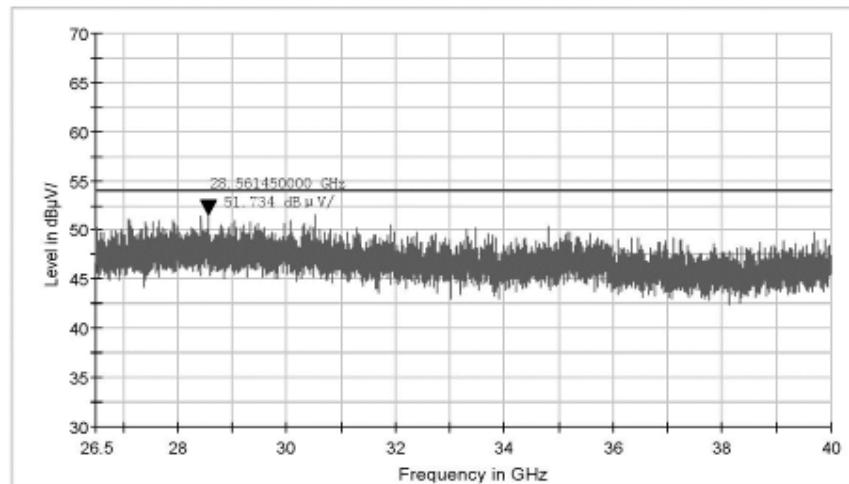

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5240MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11an HT40--2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

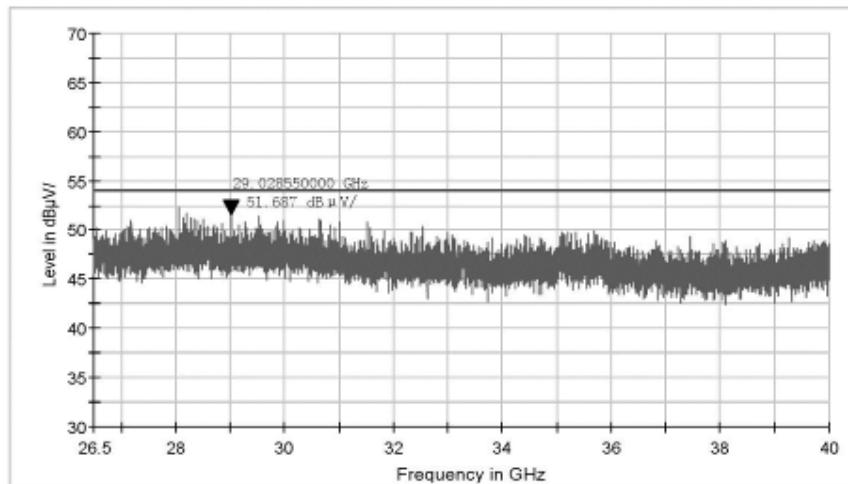

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5240MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Vertical
Operator Name:
Comment: 802.11an HT40--2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

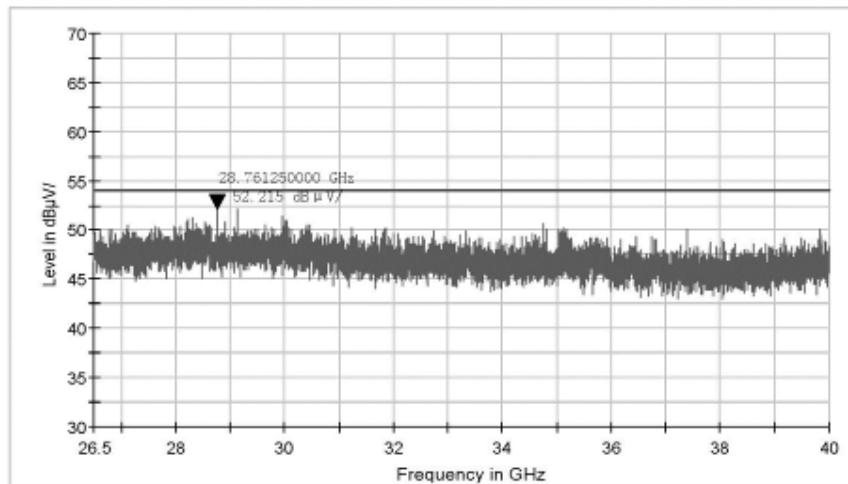

802.11n HT40_3TX - Beamforming



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1876	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/15/
Temp. (C)/Hum. (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5190MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40--3TX (Beamforming)	

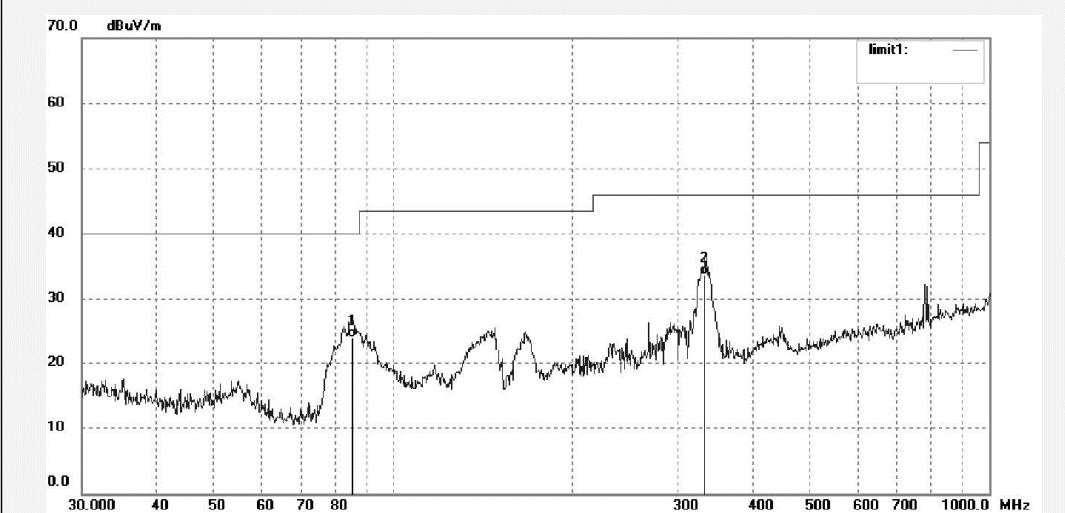

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	85.1770	39.46	-15.38	24.08	40.00	-15.92	QP			
2	332.9534	41.95	-8.29	33.66	46.00	-12.34	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #1877	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	14/11/15/
Temp. (C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5190MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11an HT40---3TX (Beamforming)		

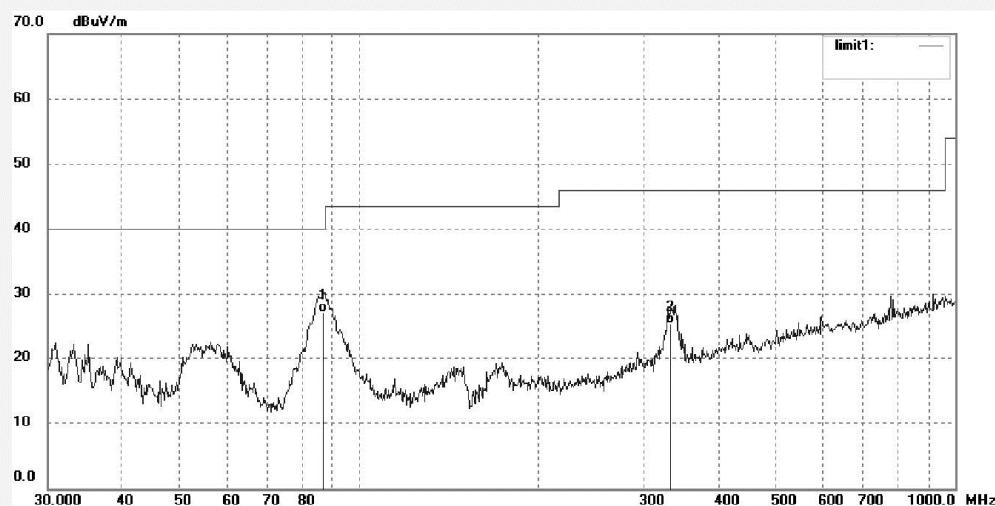

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	86.9916	42.49	-15.26	27.23	40.00	-12.77	QP			
2	332.9534	33.76	-8.29	25.47	46.00	-20.53	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #1878	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	14/11/15/
Temp.(C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5230MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11an HT40---3TX (Beamforming)		

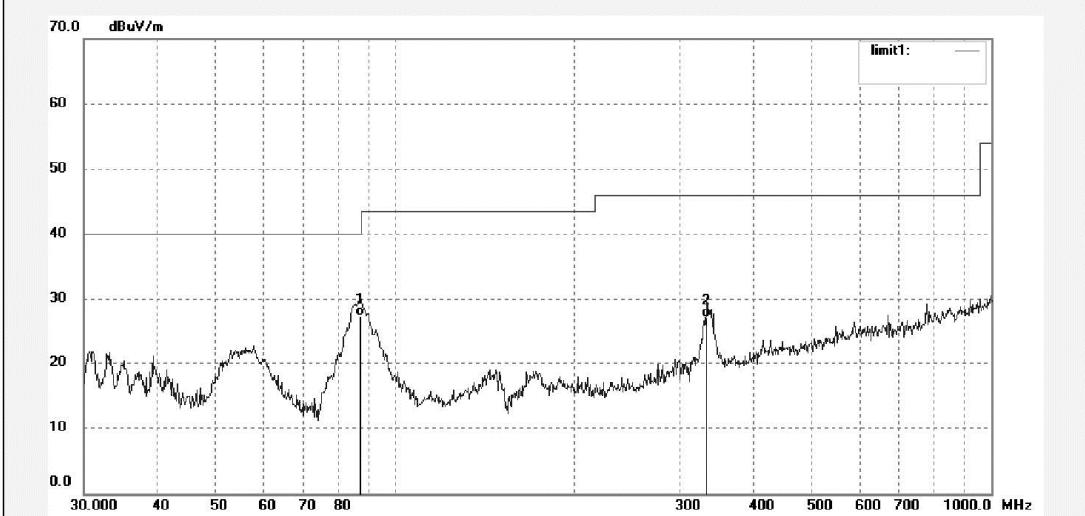

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	87.2980	42.59	-15.24	27.35	40.00	-12.65	QP			
2	332.9534	35.53	-8.29	27.24	46.00	-18.76	QP			

Appendix B



Produkte

Products

17042741 003

Page 494 of 730


**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1879	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/15/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40---3TX (Beamforming)	

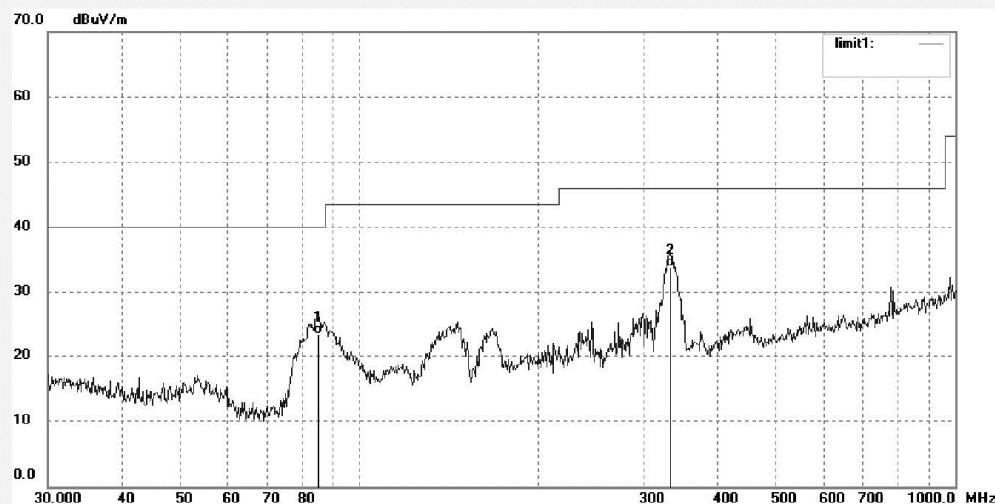

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	85.4769	38.96	-15.36	23.60	40.00	-16.40	QP			
2	332.9534	42.07	-8.29	33.78	46.00	-12.22	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #2036	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2014/11/16
Temp. (C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5190MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11an HT40---3TX (Beamforming)		

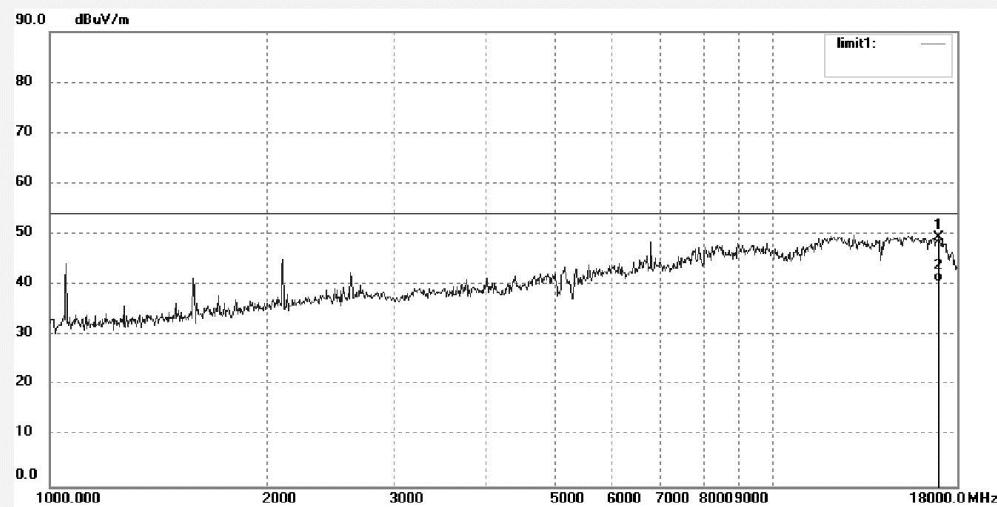

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	16932.690	7.78	41.51	49.29	74.00	-24.71	peak			
2	16932.690	-0.84	41.51	40.67	54.00	-13.33	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #2037	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2014/11/16
Temp. (C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5190MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11an HT40---3TX (Beamforming)		

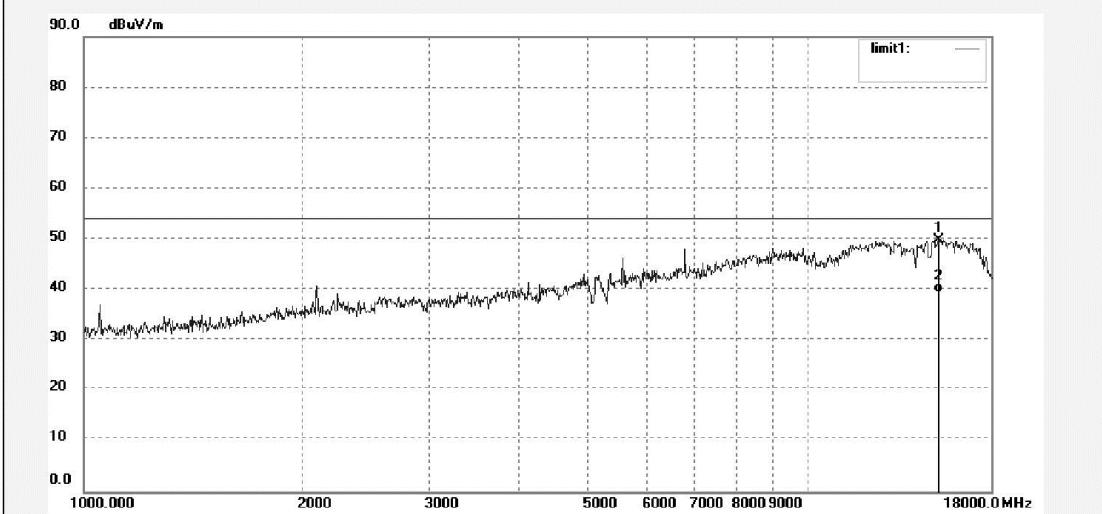

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	15203.846	9.21	40.69	49.90	74.00	-24.10	peak			
2	15203.846	-1.20	40.69	39.49	54.00	-14.51	AVG			

Appendix B



Produkte

Products

17042741 003

Page 497 of 730

**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #2038

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 2014/11/16

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: WiFi Advisor

Engineer Signature: PEI


Mode: TX 5230MHz

Distance: 3m

Model: WFED-300AC

Manufacturer: JDSU

Note: 802.11an HT40---3TX (Beamforming)

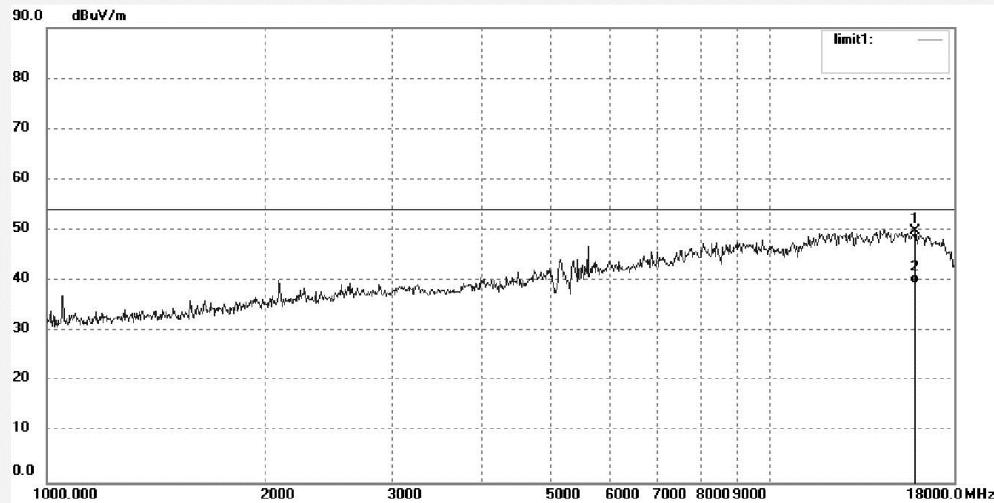

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	15882.369	9.75	40.02	49.77	74.00	-24.23	peak			
2	15882.369	-0.63	40.02	39.39	54.00	-14.61	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #2039	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2014/11/16
Temp. (C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5230MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11an HT40---3TX (Beamforming)		

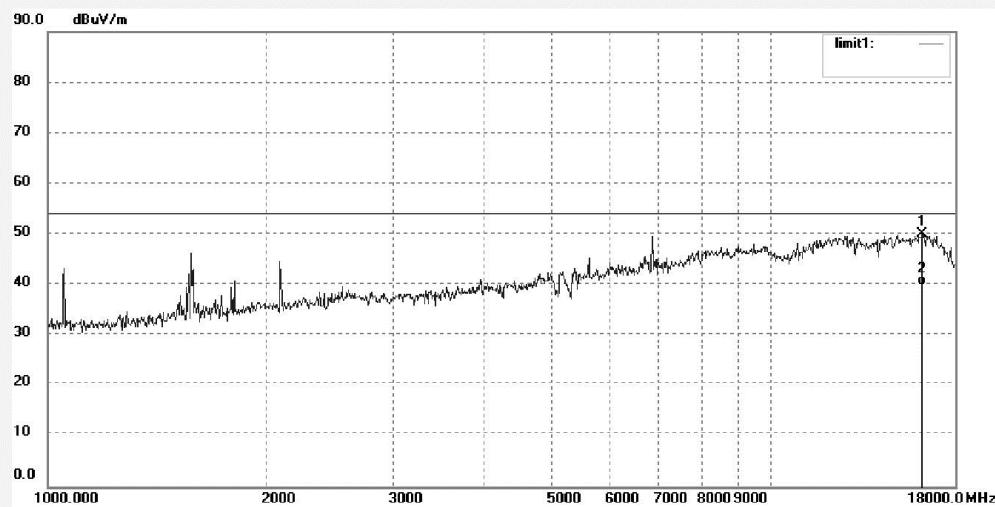

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	16209.295	9.98	40.13	50.11	74.00	-23.89	peak			
2	16209.295	-0.25	40.13	39.88	54.00	-14.12	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #1622	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2014/11/09
Temp.(C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5190MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11an HT40---3TX (Beamforming)		

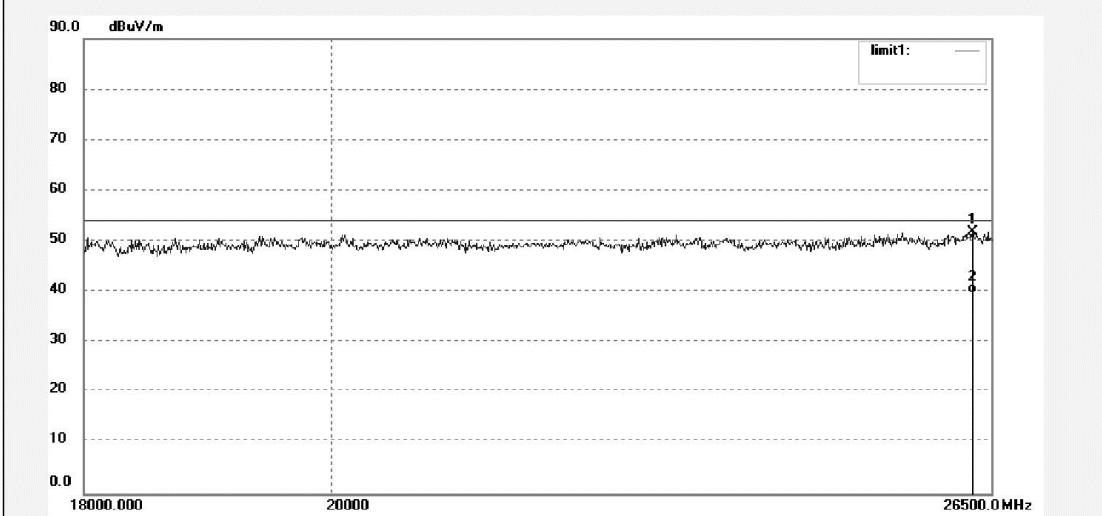

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26285.633	34.78	17.04	51.82	74.00	-22.18	peak			
2	26285.633	22.58	17.04	39.62	54.00	-14.38	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1623	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5190MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40---3TX (Beamforming)	

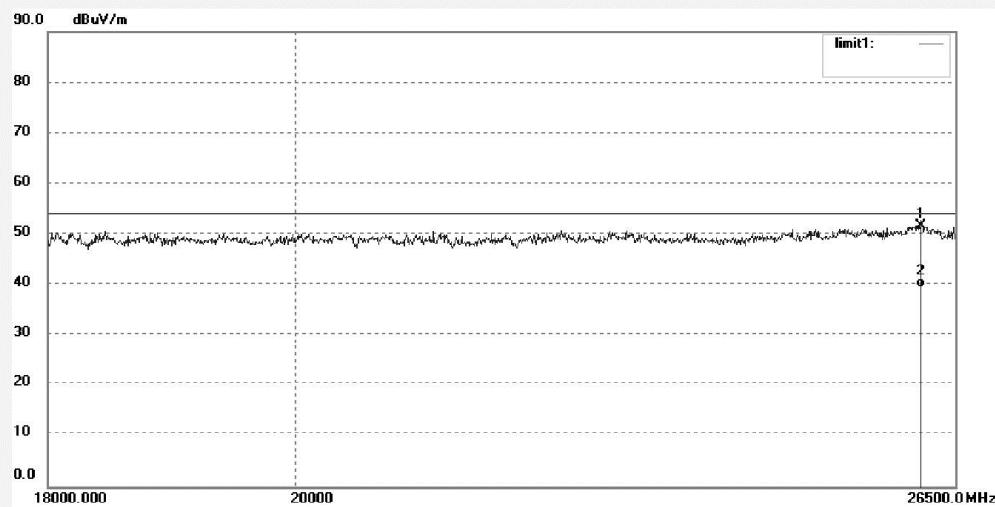

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26113.368	35.24	16.50	51.74	74.00	-22.26	peak			
2	26113.368	22.91	16.50	39.41	54.00	-14.59	AVG			

Appendix B



Produkte

Products

17042741 003

Page 501 of 730


**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1624	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40---3TX (Beamforming)	

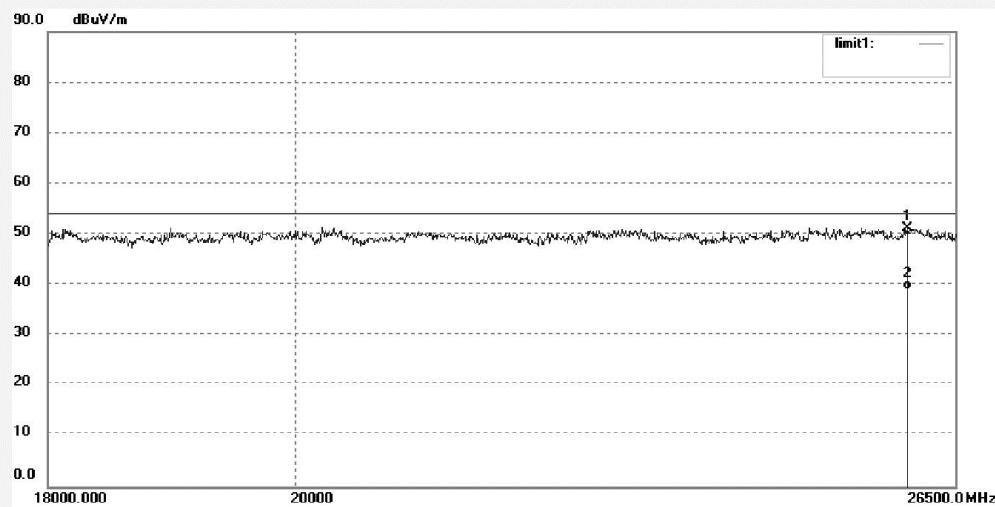

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25962.307	34.76	16.50	51.26	74.00	-22.74	peak			
2	25962.307	22.59	16.50	39.09	54.00	-14.91	AVG			

Appendix B



Produkte

Products

17042741 003

Page 502 of 730


**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1625	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11an HT40---3TX (Beamforming)	

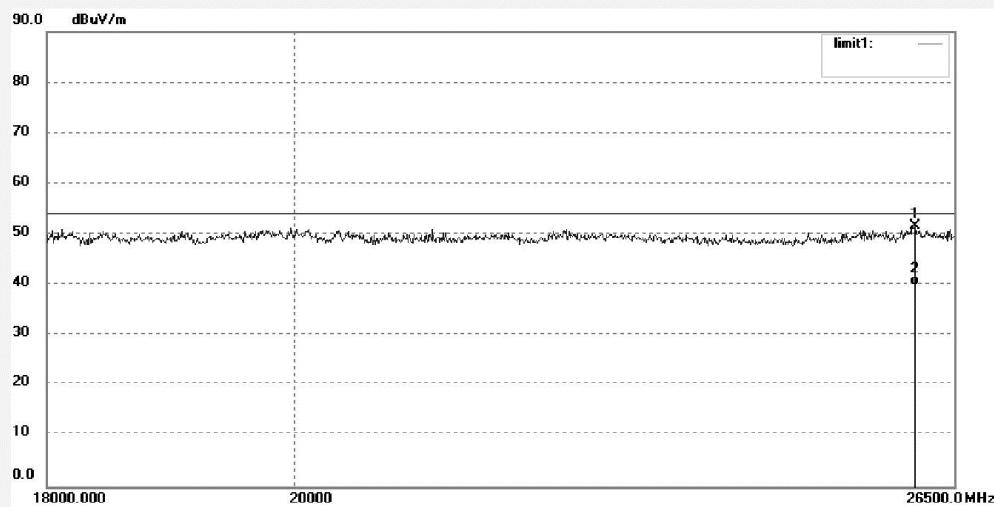

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26062.917	34.45	17.19	51.64	74.00	-22.36	peak			
2	26062.917	22.86	17.19	40.05	54.00	-13.95	AVG			

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5190MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11an HT40--3TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

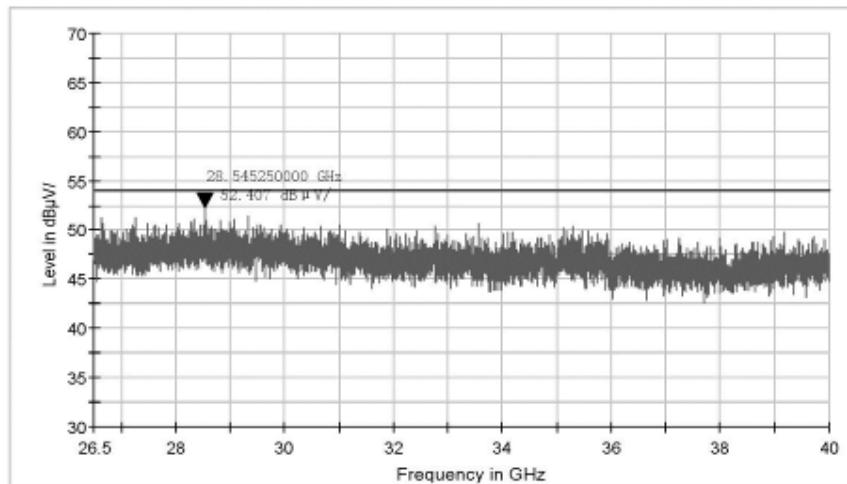

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5190MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Vertical
Operator Name:
Comment: 802.11an HT40--3TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

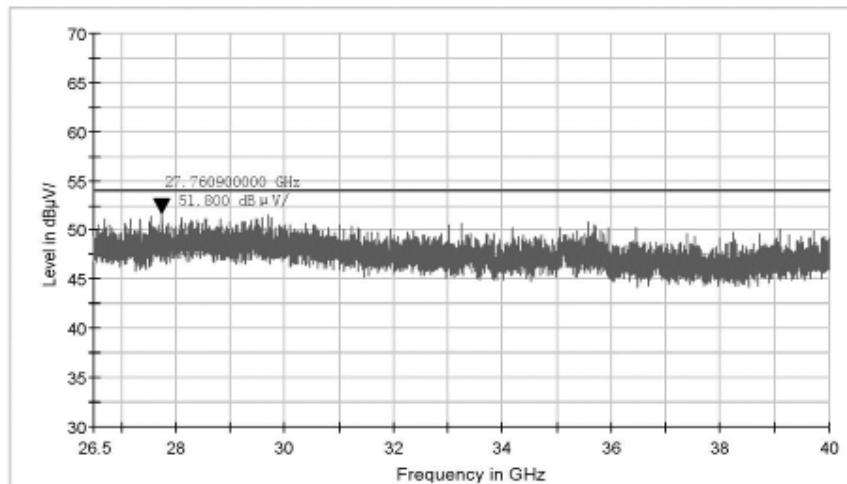

Test

1 / 1

Radiated Emission


Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11an HT40---3TX (Beamforming)

EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5240MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Copy of FCC Electric Field Strength 26.5-40GHz

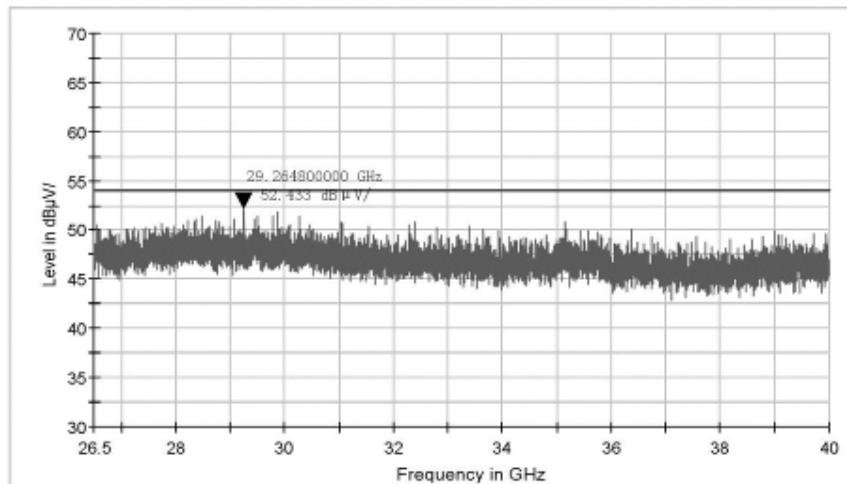

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5240MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Vertical
Operator Name:
Comment: 802.11an HT40--3TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

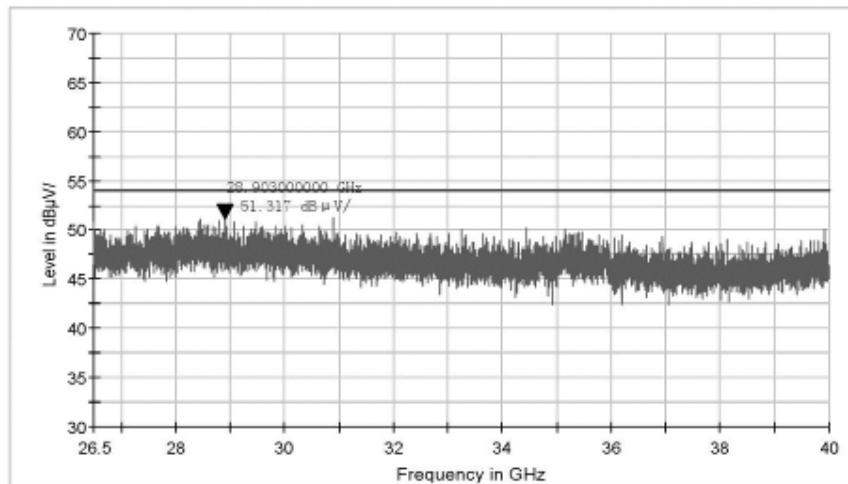

802.11ac VHT20_2TX - Beamforming



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1880

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/11/15/

Temp. (C)/Hum. (%) 23 C / 48 %

Time:

EUT: WiFi Advisor

Engineer Signature: PEI


Mode: TX 5180MHz

Distance: 3m

Model: WFED-300AC

Manufacturer: JDSU

Note: 802.11ac VHT20--2TX (Beamforming)

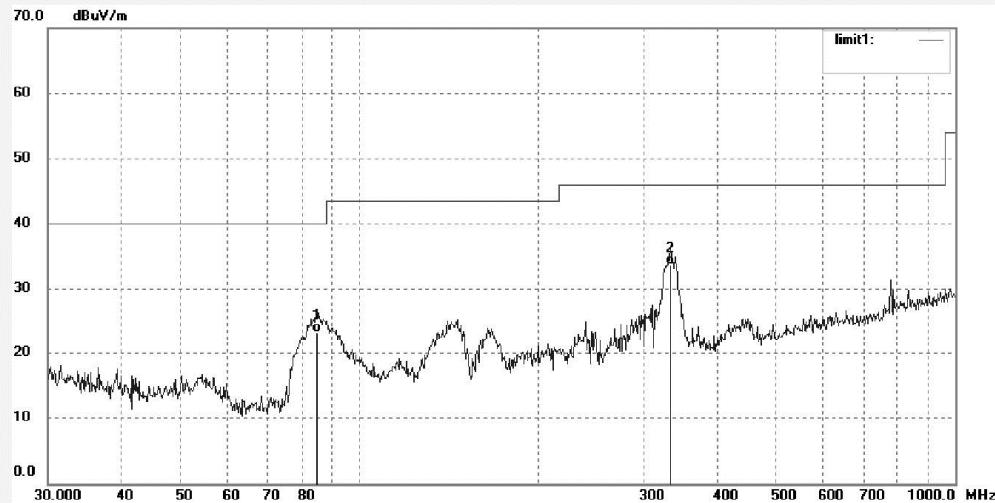

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.8782	38.85	-15.42	23.43	40.00	-16.57	QP			
2	332.9534	41.98	-8.29	33.69	46.00	-12.31	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1881

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/11/15

Temp. (C)/Hum.(%) 23 C / 48 %

Time:

EUT: WiFi Advisor

Engineer Signature: PEI


Mode: TX 5180MHz

Distance: 3m

Model: WFED-300AC

Manufacturer: JDSU

Note: 802.11ac VHT20---2TX (Beamforming)

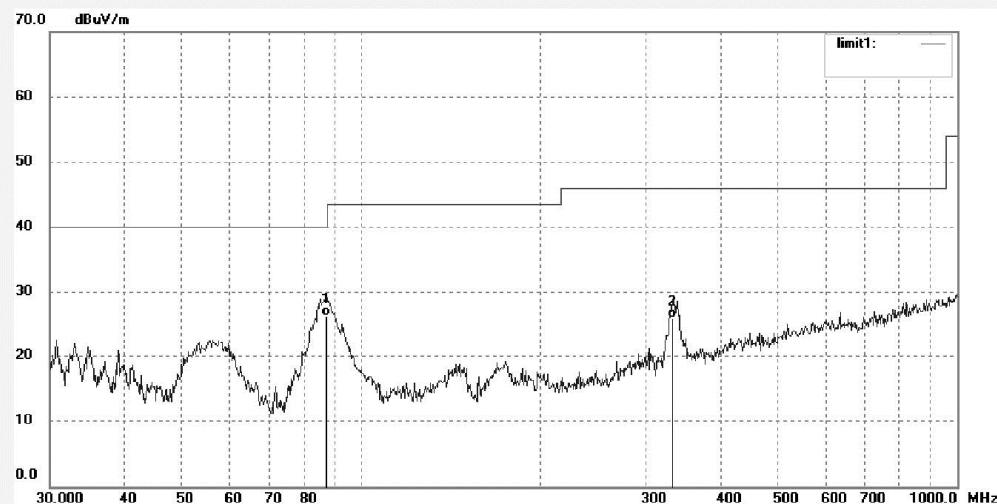

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	87.2980	41.60	-15.24	26.36	40.00	-13.64	QP			
2	331.7857	34.29	-8.31	25.98	46.00	-20.02	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #1882	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	14/11/15/
Temp. (C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5200MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.11ac VHT20---2TX (Beamforming)		

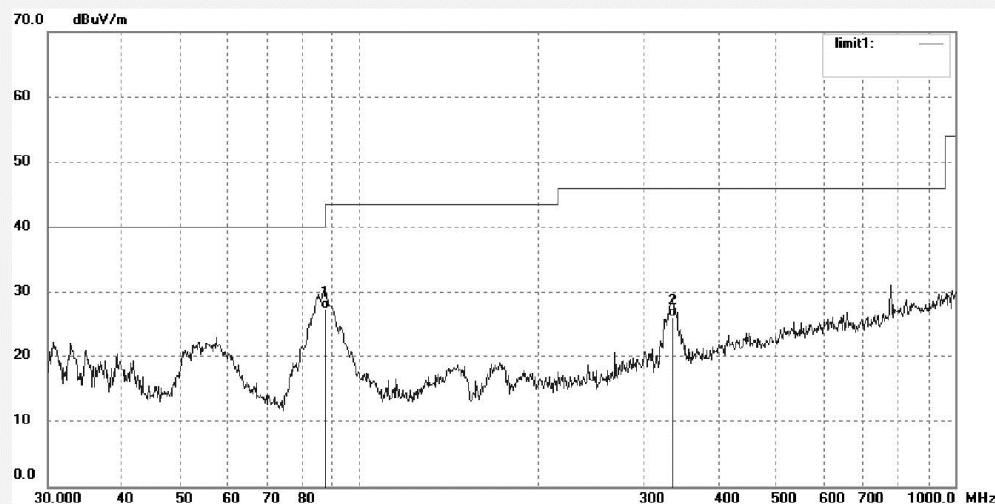

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	87.9136	42.57	-15.21	27.36	40.00	-12.64	QP			
2	335.3016	34.46	-8.25	26.21	46.00	-19.79	QP			

Appendix B



Produkte

Products

17042741 003

Page 510 of 730


**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pz #1883	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/15/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 5200MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11ac VHT20---2TX (Beamforming)	

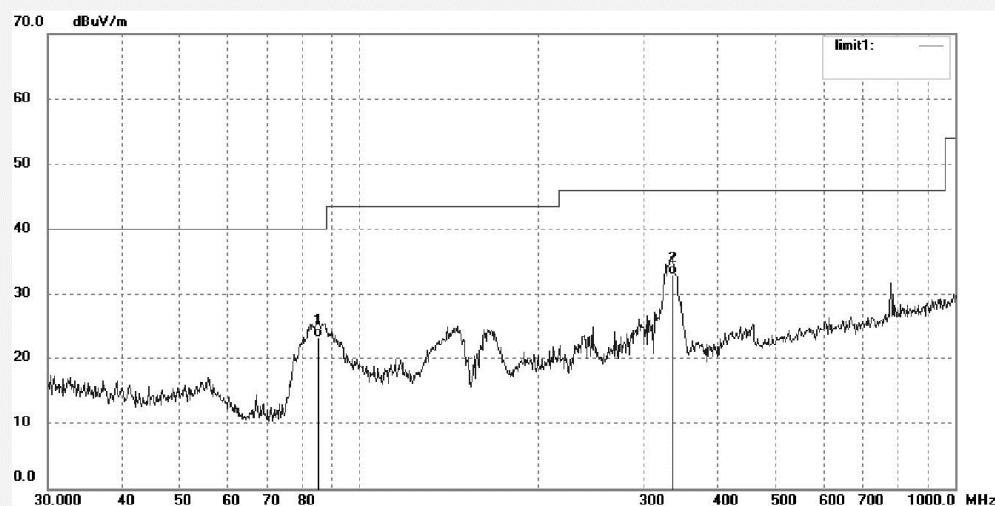

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	85.1770	38.69	-15.38	23.31	40.00	-16.69	QP			
2	335.3016	41.16	-8.25	32.91	46.00	-13.09	QP			

Appendix B



Produkte

Products

17042741 003

Page 511 of 730


**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #1884	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	14/11/15/
Temp.(C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5220MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note: 802.11ac VHT20---2TX (Beamforming)			

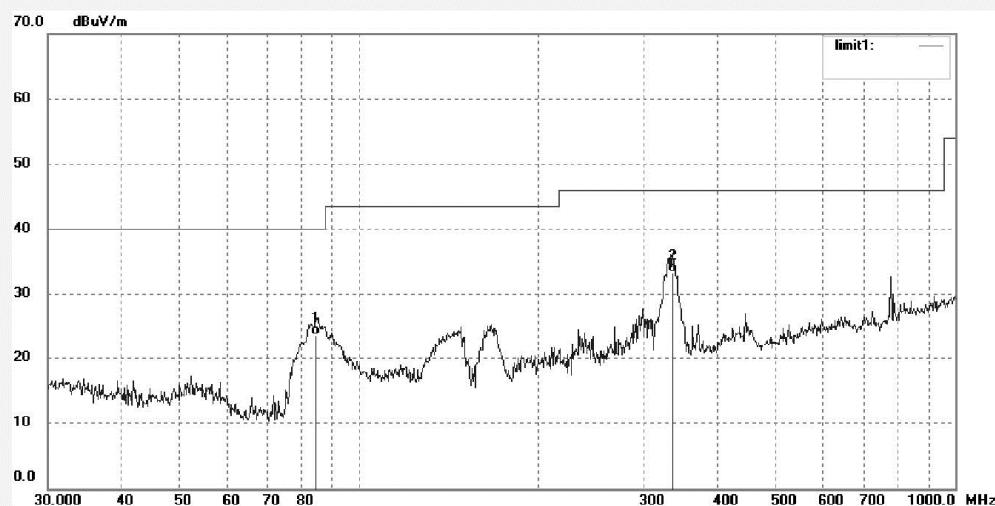

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.5806	39.26	-15.49	23.77	40.00	-16.23	QP			
2	335.3016	41.52	-8.25	33.27	46.00	-12.73	QP			

Appendix B



Produkte

Products

17042741 003

Page 512 of 730


**ACCURATE TECHNOLOGY CO., LTD.**F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	pz #1885	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	14/11/15/
Temp. (C)/Hum.(%)	23 C / 48 %	Time:	
EUT:	WiFi Advisor	Engineer Signature:	PEI
Mode:	TX 5220MHz	Distance:	3m
Model:	WFED-300AC		
Manufacturer:	JDSU		
Note:	802.1ac VHT20---2TX (Beamforming)		

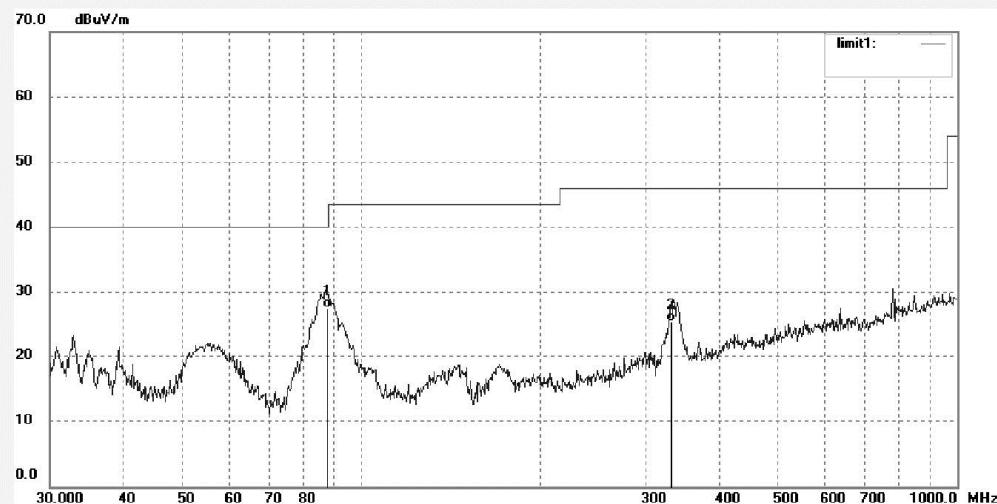

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	87.6050	42.75	-15.23	27.52	40.00	-12.48	QP			
2	330.6220	33.87	-8.33	25.54	46.00	-20.46	QP			