FCC RF Test Report

APPLICANT : Brightstar Corporation

EQUIPMENT: Mobile phone

BRAND NAME : mint
MODEL NAME : Mint 150
MARKETING NAME : Mint 150
FCC ID : WVB150M

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)

CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Sep. 28, 2015 and testing was completed on Oct. 27, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

James Huang

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 1 of 24
Report Issued Date : Oct. 28, 2015

Testing Laboratory

Report No.: FG592802

Report Version : Rev. 01

TABLE OF CONTENTS

1	GEN	ERAL DESCRIPTION	5
	1.1 1.2 1.3 1.4 1.5 1.6 1.7	Applicant	5 6 6
2	TES	CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1 2.2 2.3 2.4	Test Mode Connection Diagram of Test System Support Unit used in test configuration Measurement Results Explanation Example	10 11
3	CON	DUCTED TEST RESULT	12
4	4.1	Measuring Instruments Test Setup Test Result of Conducted Test Conducted Output Power Peak-to-Average Ratio 99% Occupied Bandwidth and 26dB Bandwidth Measurement Conducted Band Edge Conducted Spurious Emission Frequency Stability IATED TEST ITEMS Measuring Instruments	12131415161718
	4.2 4.3 4.4 4.5	Test Setup Test Result of Radiated Test Effective Radiated Power and Effective Isotropic Radiated Power Measurement Field Strength of Spurious Radiation Measurement	19 20
5	LIST	OF MEASURING EQUIPMENT	23
6	UNC	ERTAINTY OF EVALUATION	24
ΑP	PEND	DIX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	DIX B. TEST RESULTS OF RADIATED TEST	
ΑP	PEND	DIX C. TEST SETUP PHOTOGRAPHS	

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 2 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG592802	Rev. 01	Initial issue of report	Oct. 28, 2015

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 3 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark	
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-	
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-	
3.6	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	Reporting Only	PASS	-	
3.7	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-	
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-	
3.9	§2.1055 §22.355	Frequency Stability for	< 2.5 ppm for Part 22H	PASS	-	
	§2.1055 §24.235	Temperature & Voltage	Within Authorized Band			
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-	
4.4	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-	
4.5	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 13.30 dB at 3346.000 MHz	

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 4 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

General Description

1.1 Applicant

Brightstar Corporation

9725 NW 117th Ave., Miami, Florida, FL 33178, United States

1.2 Manufacturer

SpeedMobile Technology Co., Ltd.

Room701-703, East Block, Skyworth Semiconductor Building Nanshan District, Shenzhen, China

1.3 Product Feature of Equipment Under Test

Product Feature					
Equipment	Mobile phone				
Brand Name	mint				
Model Name	Mint 150				
Marketing Name	Mint 150				
FCC ID	WVB150M				
Marketing Name	Mint 150				
EUT supports Radios application	GSM/GPRS/EGPRS/ WCDMA/HSPA/HSPA+(16QAM uplink is not supported) WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE				
IMEI Code	Conducted: 358518020001441/358518020001458 Radiation: 358518020001425/358518020001433 ERP&EIRP:358518020001755/358518020001748				
HW Version	MOLY.WR8.W1315.MD.WG.MP.V47				
SW Version	Mint_150_OM.CO.W25.V01.05				
EUT Stage	Production Unit				

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M

Page Number : 5 of 24 Report Issued Date: Oct. 28, 2015 Report Version

: Rev. 01

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard				
	GSM/GPRS/EDGE:			
	850:	824.2 MHz ~ 848.8 MHz		
Ty Francisco	1900:	1850.2 MHz ~ 1909.8MHz		
Tx Frequency	WCDMA:			
	Band V:	826.4 MHz ~ 846.6 MHz		
	Band II:	1852.4 MHz ~ 1907.6 MHz		
	GSM/GPF	RS/EDGE:		
	850:	869.2 MHz ~ 893.8 MHz		
By Fraguency	1900:	1930.2 MHz ~ 1989.8 MHz		
Rx Frequency	WCDMA:			
	Band V:	871.4 MHz ~ 891.6 MHz		
	Band II:	1932.4 MHz ~ 1987.6 MHz		
	GSM/EDGE:			
	850:	32.84 dBm		
Maximum Outnut Bower to Antonno	1900:	29.96 dBm		
Maximum Output Power to Antenna	WCDMA:			
	Band V:	22.16 dBm		
	Band II:	22.40 dBm		
Antenna Type	FPC Antenna			
	GSM: GMSK			
	GPRS: GM			
	EDGE: GMSK / 8PSK			
Type of Modulation	WCDMA: QPSK (Uplink)			
	HSDPA: QPSK (Uplink)			
	HSUPA: QPSK (Uplink)			
	HSPA+: 16QAM uplink is not supported			

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 6 of 24
Report Issued Date : Oct. 28, 2015

Report No.: FG592802

Report Version : Rev. 01

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	0.5518	0.0287	250KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2280	0.0311	246KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0534	0.0213	4M16F9W
Part 24	GSM1900 GSM	GMSK	0.6830	0.0133	247KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.2254	0.0176	245KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.1338	0.0347	4M18F9W

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 7 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili
Test Site Location	Town, Nanshan District, Shenzhen, Guangdong, P. R. China
Test Site Location	TEL: +86-755-8637-9589
	FAX: +86-755-8637-9595
Took Cita No	Sporton Site No.
Test Site No.	TH01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.				
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China				
	TEL: +86-755- 3320-2398				
Toot Site No	Sporton Site No. FCC Registration N				
Test Site No.	03CH01-SZ 831040				

Note: The test site complies with ANSI C63.4 2009 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 8 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
- 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II. 2.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes							
Band	Radiated TCs	Conducted TCs					
GSM 850	■ GSM Link	■ GSM Link					
GSIVI 650	■ EDGE class 8 Link	■ EDGE class 8 Link					
CCM 4000	■ GSM Link	■ GSM Link					
GSM 1900	■ EDGE class 8 Link	■ EDGE class 8 Link					
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: WVB150M


TEL: 86-755-8637-9589

: 9 of 24 Page Number Report Issued Date: Oct. 28, 2015 Report Version


: Rev. 01

2.2 Connection Diagram of Test System

For 22H

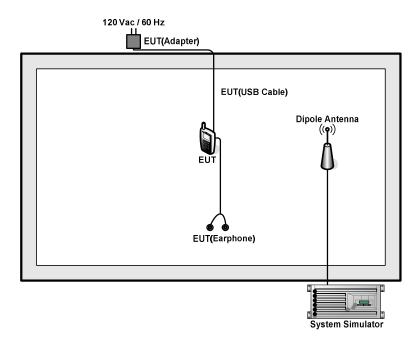

For 24E

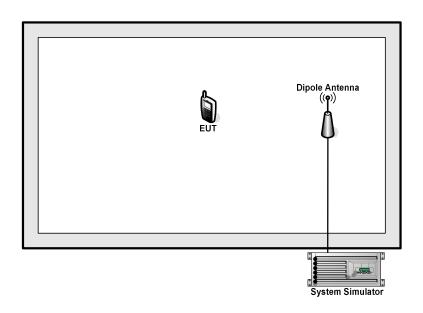

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 10 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

2.3 Support Unit used in test configuration

Item Equipment		Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.5 + 10 = 14.5 (dB)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M

Page Number : 11 of 24 Report Issued Date: Oct. 28, 2015 Report Version

: Rev. 01


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

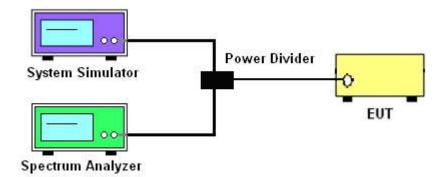

3.2.3 Frequency Stability

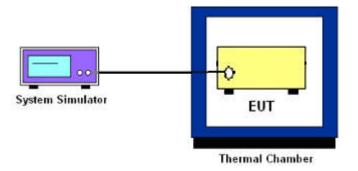

3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 12 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 13 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
- 6. Record the maximum PAPR level associated with a probability of 0.1%.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: WVB150M

TEL: 86-755-8637-9589

Page Number : 14 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG592802

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- 6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

Page Number

Report Version

: 15 of 24

: Rev. 01

Report Issued Date: Oct. 28, 2015

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: WVB150M

TEL: 86-755-8637-9589

Page Number : 16 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 17 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: WVB150M

TEL: 86-755-8637-9589

Page Number : 18 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

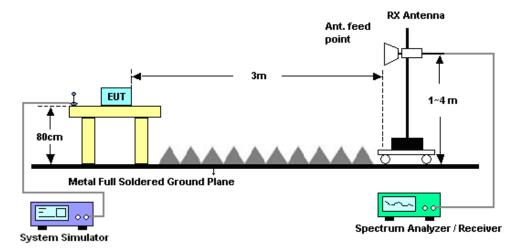

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 19 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

4.4.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
- The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
- 3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- 4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. Tx Cable loss + Substitution antenna gain Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, EIRP = LVL + Correction factor and ERP = EIRP 2.15. Take the record of the output power at substitution antenna.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 20 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

Page Number : 21 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
- The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12.ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 22 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Oct. 17, 2015~ Oct. 27, 2015	May 04, 2016	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Aug. 07, 2015	Oct. 17, 2015~ Oct. 27, 2015	Aug. 06, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2015	Oct. 08, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz;Max 30dBm	Jun. 07, 2015	Oct. 08, 2015	Jun. 06, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz-2GHz	Nov. 07, 2014	Oct. 08, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 18, 2014	Oct. 08, 2015	Oct. 17, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Aug. 19, 2015	Oct. 08, 2015	Aug. 18, 2016	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz ~3000MHz / 30 dB	Jan. 28, 2015	Oct. 08, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Oct. 08, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Oct. 08, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 08, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 08, 2015	NCR	Radiation (03CH01-SZ)

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : 23 of 24
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Uncertainty of Evaluation 6

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	4.5dB
Confidence of 95% (U = 2Uc(y))	4.5ub

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M

: 24 of 24 Page Number Report Issued Date: Oct. 28, 2015

Report No.: FG592802

Report Version : Rev. 01

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

SIM1 Card

	Conducted Power (*Unit: dBm)					
Band		GSM850		GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	<mark>32.84</mark>	32.78	32.79	<mark>29.96</mark>	29.67	29.20
GPRS class 8	32.83	32.74	32.75	29.95	29.58	29.17
GPRS class 10	31.79	31.67	31.74	28.92	28.50	28.09
GPRS class 11	29.51	29.39	29.45	26.73	26.28	25.78
GPRS class 12	28.18	28.15	28.17	25.52	25.11	24.53
EGPRS class 8	28.72	28.15	28.12	25.30	24.47	24.01
EGPRS class 10	27.63	27.10	27.18	24.15	23.06	22.75
EGPRS class 11	25.59	25.01	25.15	21.88	20.79	20.38
EGPRS class 12	24.35	24.01	23.74	20.41	19.68	19.06

	Conducted Power (*Unit: dBm)					
Band	V	CDMA Band	V	WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
AMR 12.2K	22.14	21.88	22.15	22.38	22.13	21.50
RMC 12.2K	22.15	21.89	<mark>22.16</mark>	<mark>22.40</mark>	22.15	21.52
HSDPA Subtest-1	21.61	21.72	21.90	22.38	22.16	22.18
HSDPA Subtest-2	21.67	21.75	21.95	22.28	22.19	22.21
HSDPA Subtest-3	21.20	21.29	21.47	21.92	21.76	21.75
HSDPA Subtest-4	21.19	21.25	21.43	21.88	21.72	21.71
HSUPA Subtest-1	19.55	19.76	19.92	20.50	20.27	20.17
HSUPA Subtest-2	19.67	19.65	19.93	20.43	20.17	20.23
HSUPA Subtest-3	20.69	20.75	20.93	21.39	21.19	21.18
HSUPA Subtest-4	19.13	19.18	19.35	19.89	19.66	19.71
HSUPA Subtest-5	21.70	21.70	21.90	22.30	22.10	22.00

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A1 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

SIM2 Card

	Conducted Power (*Unit: dBm)					
Band		GSM850		GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.75	<mark>32.78</mark>	32.76	<mark>29.90</mark>	29.65	29.19
GPRS class 8	32.69	32.69	32.74	29.78	29.55	29.15
GPRS class 10	31.68	31.63	31.73	28.86	28.48	28.06
GPRS class 11	29.41	29.35	29.44	26.71	26.24	25.77
GPRS class 12	28.11	28.10	28.17	25.48	25.06	24.46
EGPRS class 8	28.27	28.04	28.02	25.09	24.46	23.79
EGPRS class 10	27.36	26.94	27.12	24.14	23.02	22.73
EGPRS class 11	25.25	24.81	24.97	21.80	20.77	20.34
EGPRS class 12	23.96	23.66	23.72	20.40	19.54	18.96

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A2 of A 25 Report Issued Date : Oct. 28, 2015 Report Version : Rev. 01

Peak-to-Average Ratio


Mode	GSM850		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.20	2.68	
Middle CH	0.20	2.80	PASS
Highest CH	0.20	2.64	

Mode	GSM1900		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.20	3.16	
Middle CH	0.24	3.24	PASS
Highest CH	0.24	3.40]


Mode	WCDMA Band V	WCDMA Band II	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.20	2.72	
Middle CH	3.16	2.88	PASS
Highest CH	3.24	2.72	

SPORTON INTERNATIONAL (SHENZHEN) INC.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A3 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

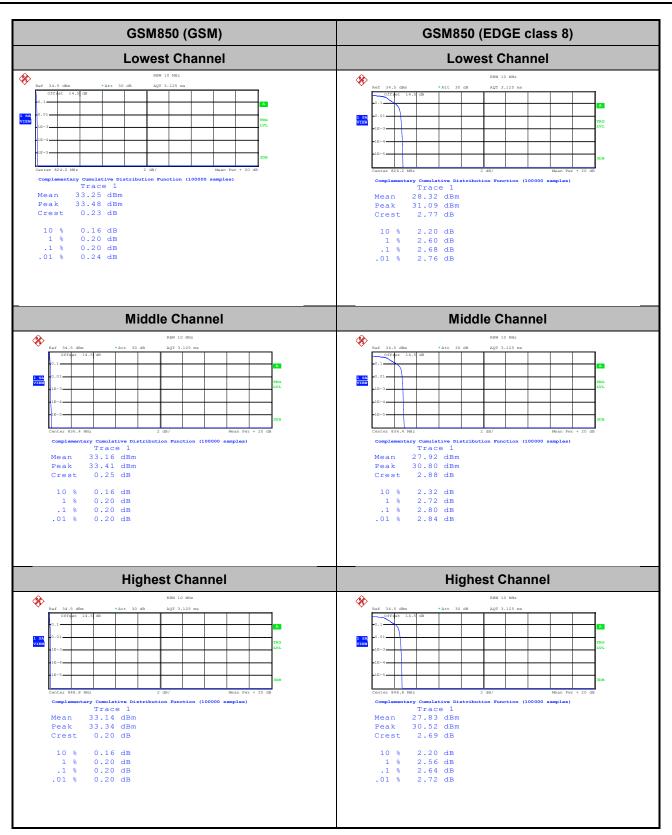

Page Number : A4 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

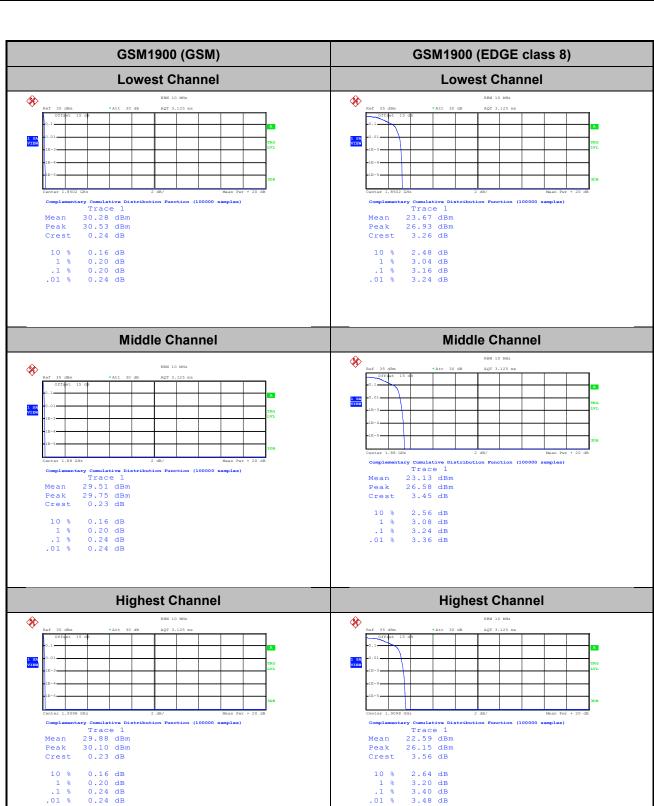

Page Number : A5 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

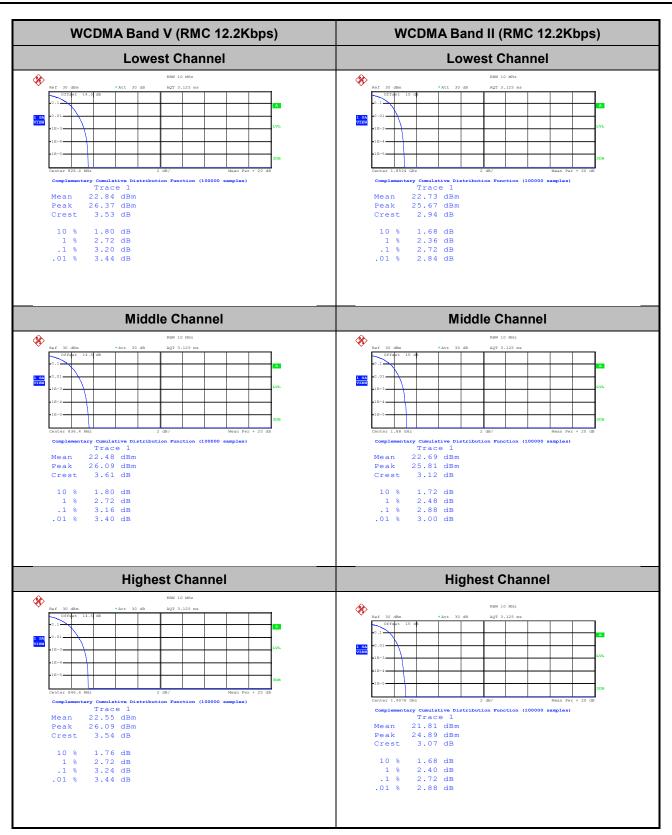

Page Number : A6 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

26dB Bandwidth


Mode	GSM850			
Mod.	GSM EDGE class 8			
Lowest CH	0.315	0.305		
Middle CH	0.316	0.316		
Highest CH	0.310	0.314		

Mode	GSM1900		
Mod.	GSM	EDGE class 8	
Lowest CH	0.310	0.299	
Middle CH	0.290	0.280	
Highest CH	0.310	0.285	


Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.67	4.70
Middle CH	4.68	4.68
Highest CH	4.66	4.70

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A7 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

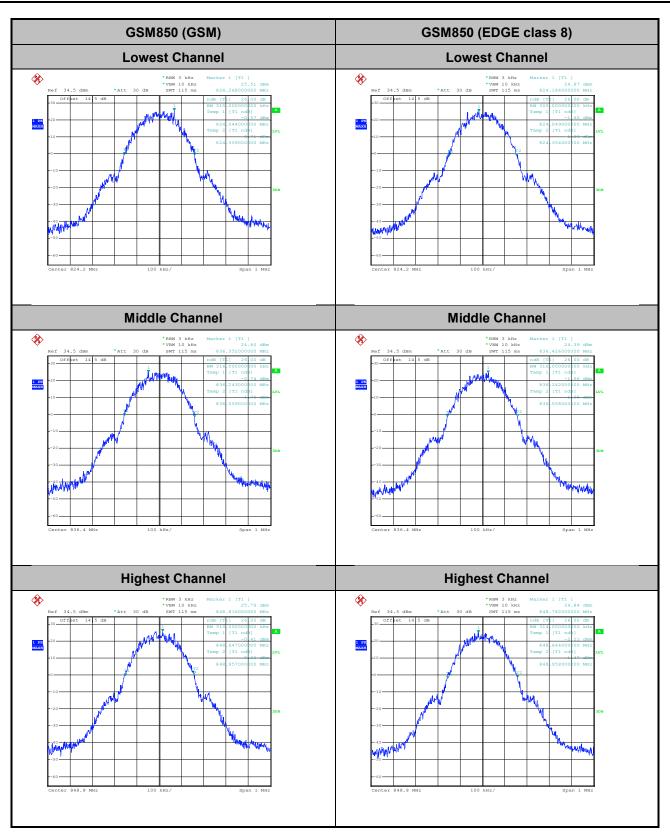


Page Number : A8 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

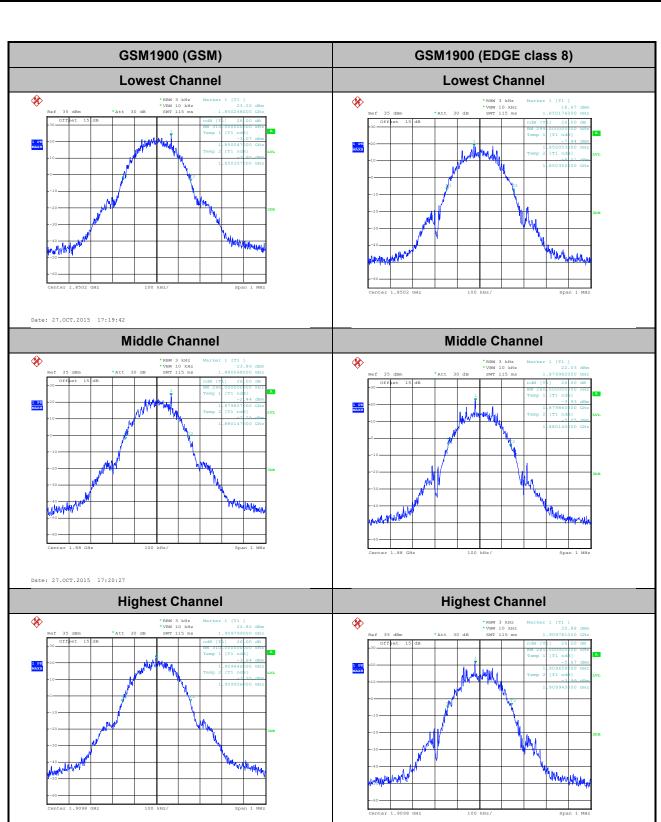

Date: 27.0CT.2015 17:21:25

Page Number : A9 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

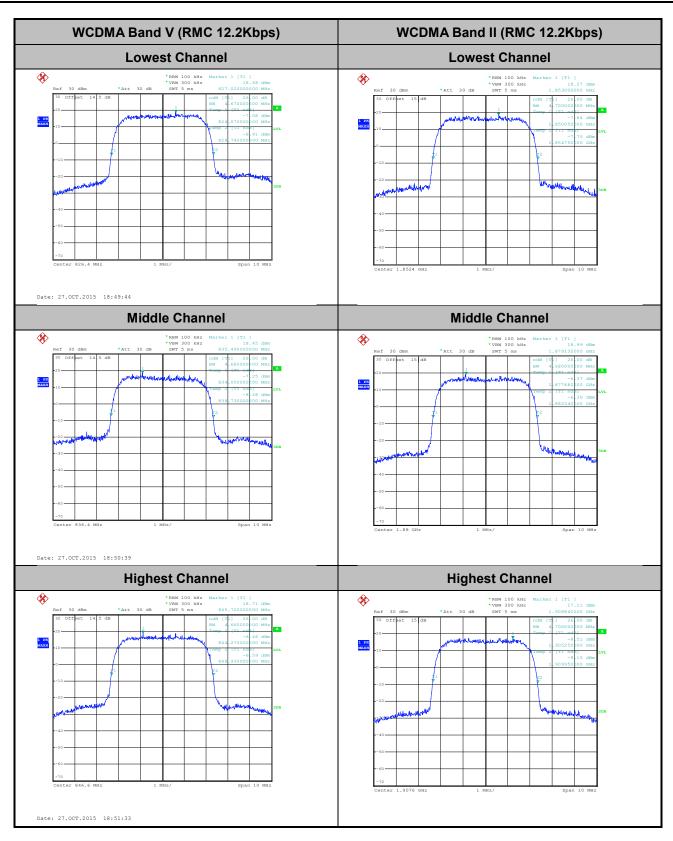

Page Number : A10 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Occupied Bandwidth


Mode	GSM850		
Mod.	GSM EDGE class 8		
Lowest CH	0.250	0.245	
Middle CH	0.249	0.244	
Highest CH	0.247	0.246	

Mode	GSM1900			
Mod.	GSM EDGE class 8			
Lowest CH	0.245	0.245		
Middle CH	0.244	0.240		
Highest CH	0.247	0.242		

Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.16	4.16
Middle CH	4.16	4.18
Highest CH	4.13	4.16

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A11 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

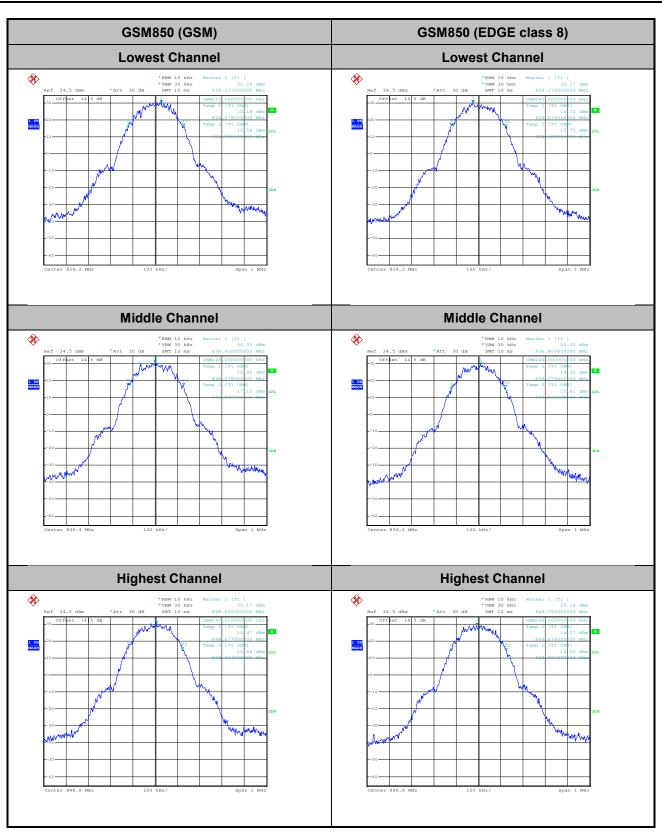


Page Number : A12 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

GSM1900 (GSM) GSM1900 (EDGE class 8) **Lowest Channel Lowest Channel %** Middle Channel **Middle Channel % %** Date: 27.0CT.2015 17:23:08 **Highest Channel Highest Channel % %**

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M


Date: 27.OCT.2015 17:24:02

Page Number : A13 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

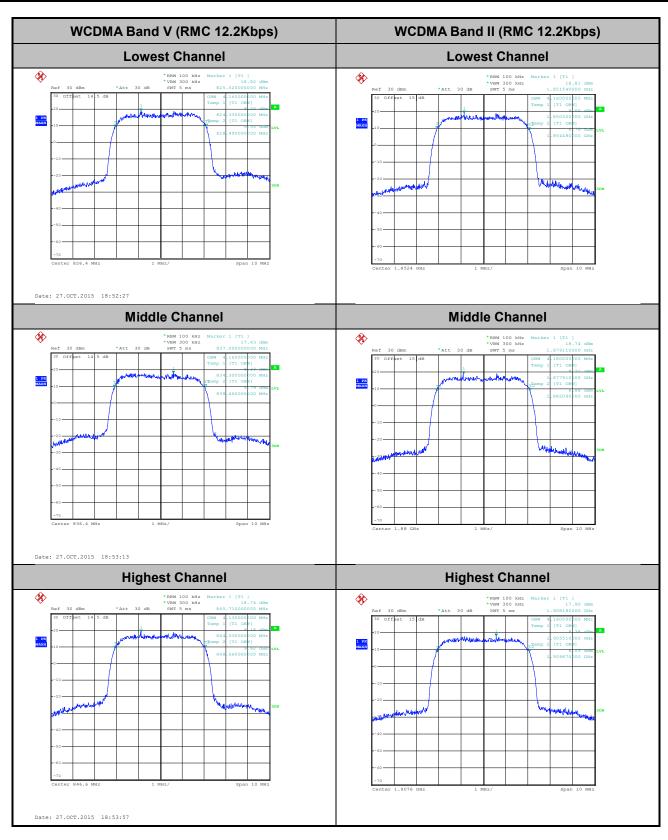

Page Number : A14 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Conducted Band Edge

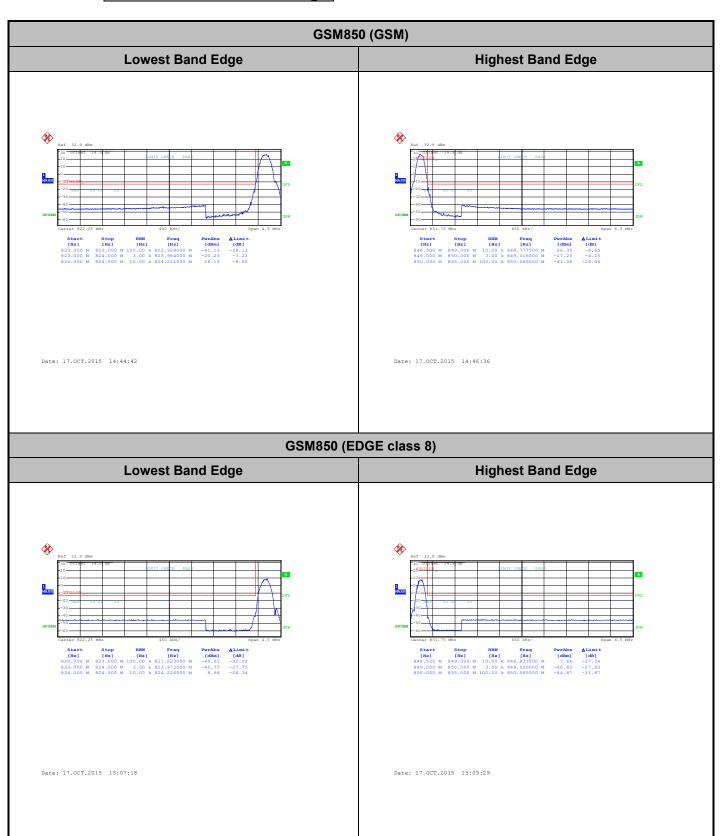


SPORTON INTERNATIONAL (SHENZHEN) INC.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A15 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

GSM1900 (GSM) Lowest Band Edge Highest Band Edge Date: 27.0CT.2015 17:37:05 Date: 27.0CT.2015 17:41:19 GSM1900 (EDGE class 8) **Lowest Band Edge Highest Band Edge** Date: 20.OCT.2015 17:46:44 Date: 17.0CT.2015 16:03:06

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A16 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

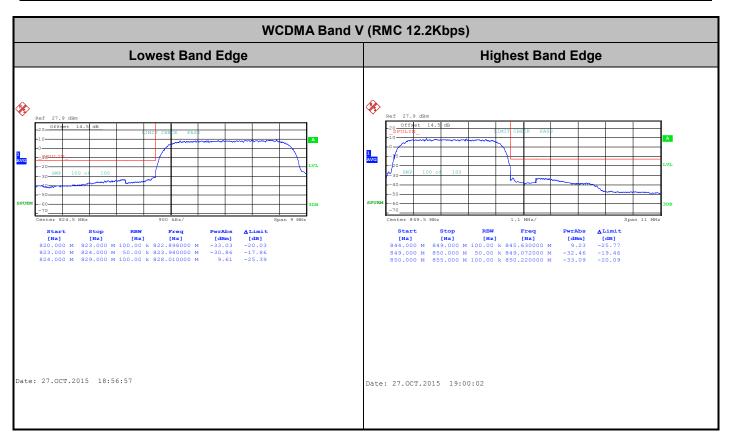


Page Number : A17 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

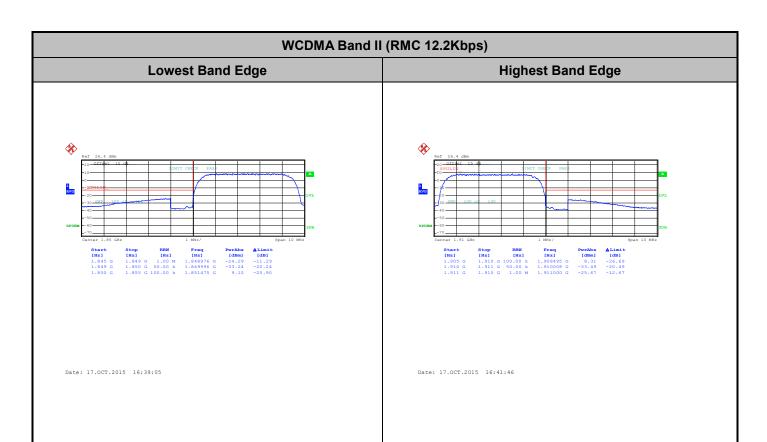


Page Number : A18 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Conducted Spurious Emission

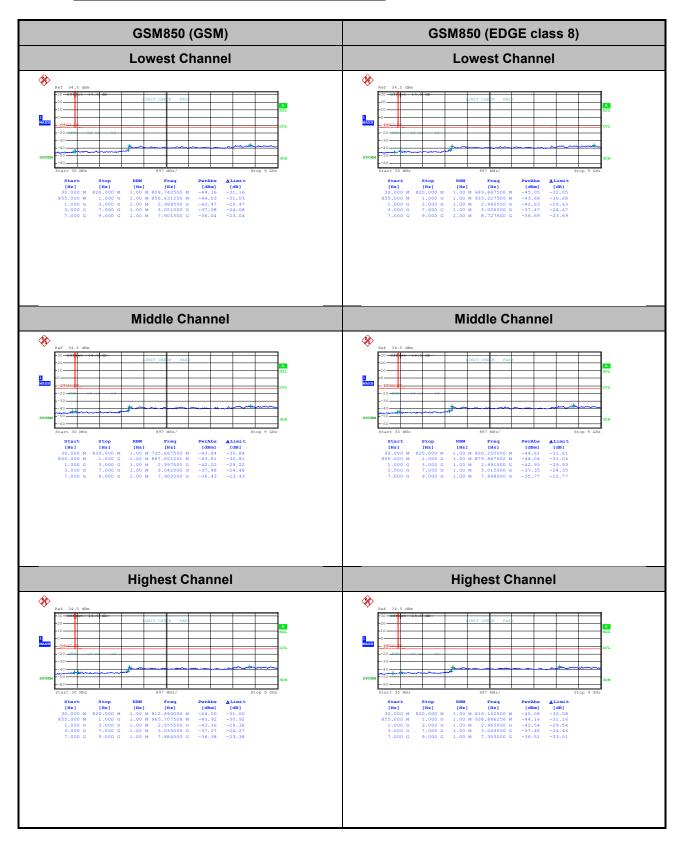

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A19 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01



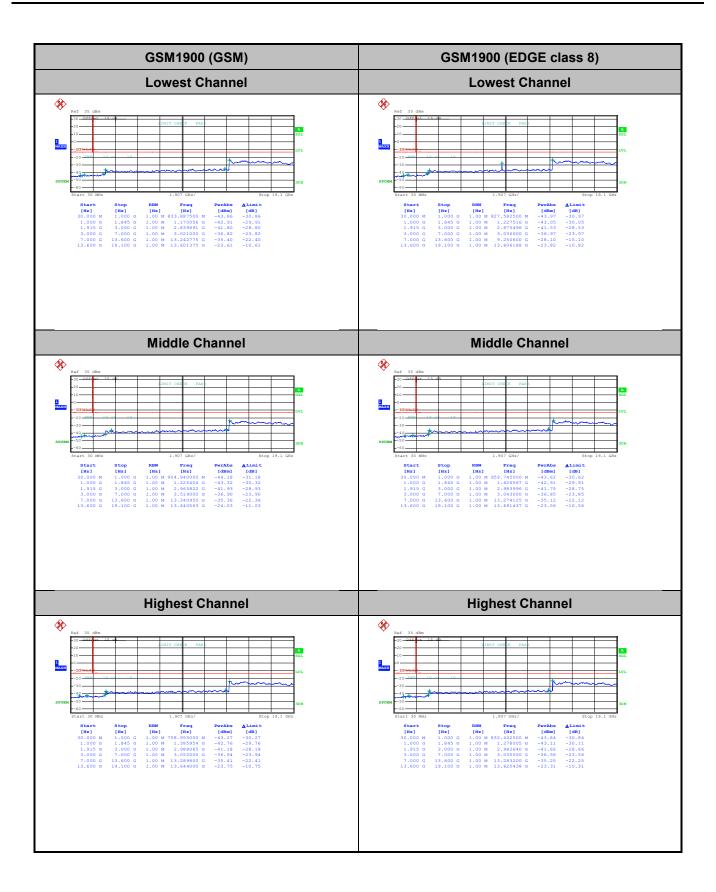

Page Number : A20 of A 25 Report Issued Date: Oct. 28, 2015 : Rev. 01 Report Version

Report No.: FG592802 WCDMA Band V (RMC 12.2Kbps) WCDMA Band II (RMC 12.2Kbps) **Lowest Channel Lowest Channel % % Middle Channel Middle Channel % % Highest Channel Highest Channel %**

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A21 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm			
Temperature (°C)	Voltage (Volt)	Deviatio	Deviation (ppm)				
50	Normal Voltage	0.0287	0.0311				
40	Normal Voltage	0.0215	0.0263				
30	Normal Voltage	0.0072	0.0108				
20(Ref.)	Normal Voltage	0.0000	0.0000				
10	Normal Voltage	0.0167	0.0048				
0	Normal Voltage	0.0215	0.0072				
-10	Normal Voltage	0.0072	0.0120	PASS			
-20	Normal Voltage	0.0012	0.0263				
-30	Normal Voltage	0.0024	0.0287				
20	Maximum Voltage	0.0143	0.0096				
20	Normal Voltage	0.0000	0.0000				
20	Battery End Point	0.0024	0.0132				

Note: Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.2 V

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A22 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.		
Temperature (°C)	Voltage (Volt)	Deviation (ppm)				
50	Normal Voltage	0.0122	0.0149			
40	Normal Voltage	0.0064	0.0069			
30	Normal Voltage	0.0027	0.0032			
20(Ref.)	Normal Voltage	0.0000	0.0000			
10	Normal Voltage	0.0027	0.0021			
0	Normal Voltage	0.0032	0.0059			
-10	Normal Voltage	0.0059	0.0064	PASS		
-20	Normal Voltage	0.0090	0.0149			
-30	Normal Voltage	0.0133	0.0176			
20	Maximum Voltage	0.0037	0.0064			
20	Normal Voltage	0.0000	0.0000			
20	Battery End Point	0.0069	0.0106			

Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A23 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01



Limit **WCDMA Band V Test Conditions Middle Channel** (RMC 12.2Kbps) 2.5ppm **Deviation (ppm)** Result Temperature (°C) Voltage (Volt) 0.0176 50 Normal Voltage 0.0090 40 Normal Voltage 30 Normal Voltage 0.0059 0.0000 20(Ref.) Normal Voltage 0.0032 10 Normal Voltage 0.0112 0 Normal Voltage **PASS** -10 Normal Voltage 0.0133 0.0181 -20 Normal Voltage 0.0213 -30 Normal Voltage 0.0059 20 Maximum Voltage 20 Normal Voltage 0.0000 0.0027 20 **Battery End Point**

Note: Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.2 V

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A24 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0311	
40	Normal Voltage	0.0155	
30	Normal Voltage	0.0060	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0060	
0	Normal Voltage	0.0012]
-10	Normal Voltage	0.0096	PASS
-20	Normal Voltage	0.0179	
-30	Normal Voltage	0.0347	
20	Maximum Voltage	0.0060	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0132	

Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.2 V
- 2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : A25 of A 25
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Appendix B. Test Results of Radiated Test

ERP/EIRP

Channel	Mode	Horiz	ontal	Vert	ical	
Channel	Wode	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)	
Lowest	GSM850	27.39	0.5478	18.59	0.0722	
Middle	GSM	27.35	0.5432	18.33	0.0680	
Highest	GSIVI	27.42	0.5518	18.27	0.0671	
Lowest	0011050	23.36	0.2167	14.58	0.0287	
Middle	GSM850 EDGE class 8	23.58	0.2280	14.48	0.0280	
Highest	EDGE Class o	23.34	0.2155	14.11	0.0258	
Lowest	MCDMA Bond V	16.94	0.0495	8.05	0.0064	
Middle	WCDMA Band V	17.07	0.0509	7.98	0.0063	
Highest	RMC 12.2Kbps	17.27	0.0534	8.03	0.0064	
Limit	ERP < 7W	Re	sult	PASS		

Channal	Mada	Horiz	ontal	Vert	ical	
Channel	Mode	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)	
Lowest	GSM1900	28.06	0.6399	28.26	0.6704	
Middle	GSM	28.21	0.6626	28.34	0.6830	
Highest	GSW	27.98	0.6276	28.13	0.6507	
Lowest	GSM1900	23.53	0.2254	23.53	0.2254	
Middle	EDGE class 8	23.26	0.2119	23.39	0.2183	
Highest	EDGE Class 6	22.92	0.1957	23.03	0.2008	
Lowest	WCDMA Band II	20.92	0.1237	20.93	0.1240	
Middle	WCDMA Band II RMC 12.2Kbps	21.27	0.1338	21.24	0.1332	
Highest		20.52	0.1127	20.72	0.1181	
Limit	EIRP < 2W	Re	sult	PASS		

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : B1 of B4
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

Radiated Spurious Emission

	GSM850 (GSM)												
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)				
	1672	-40.89	-13	-27.89	-57.27	-47.57	0.57	9.40	Н				
	2510	-44.60	-13	-31.60	-66.79	-52.30	0.75	10.60	Н				
Middle	3346	-34.17	-13	-21.17	-62.93	-43.75	0.87	12.60	Н				
Middle	1672	-32.47	-13	-19.47	-49.90	-39.15	0.57	9.40	V				
	2510	-34.23	-13	-21.23	-61.20	-41.93	0.75	10.60	V				
	3346	-26.30	-13	-13.30	-59.09	-35.88	0.87	12.60	V				

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

	GSM850 (EDGE class 8)												
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)				
	1672	-44.03	-13	-31.03	-60.29	-50.71	0.57	9.40	Н				
	2510	-47.59	-13	-34.59	-69.05	-55.29	0.75	10.60	Н				
Middle	3346	-44.55	-13	-31.55	-70.48	-54.13	0.87	12.60	Н				
Middle	1672	-48.47	-13	-35.47	-64.67	-55.15	0.57	9.40	V				
	2510	-41.57	-13	-28.57	-66.95	-49.27	0.75	10.60	V				
	3346	-37.84	-13	-24.84	-68.27	-47.42	0.87	12.60	V				

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: WVB150M

TEL: 86-755-8637-9589

Page Number : B2 of B4
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

	GSM1900 (GSM)												
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)				
	3760	-44.38	-13	-31.38	-73.02	-56.11	0.87	12.60	Н				
	5640	-40.82	-13	-27.82	-71.14	-52.85	1.07	13.10	Н				
Middle	7520	-38.83	-13	-25.83	-70.49	-48.26	1.87	11.30	Н				
Middle	3760	-44.99	-13	-31.99	-73.44	-56.72	0.87	12.6	V				
	5640	-41.70	-13	-28.70	-72.83	-53.73	1.07	13.1	V				
	7520	-36.35	-13	-23.35	-70.45	-45.78	1.87	11.3	V				

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

	GSM1900 (EDGE class 8)											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	3760	-44.44	-13	-31.44	-73.08	-56.17	0.87	12.60	Н			
	5640	-43.29	-13	-30.29	-73.61	-55.32	1.07	13.10	Н			
Middle	7520	-42.89	-13	-29.89	-74.55	-52.32	1.87	11.30	Н			
Middle	3760	-44.84	-13	-31.84	-73.29	-56.57	0.87	12.6	V			
	5640	-42.30	-13	-29.30	-73.43	-54.33	1.07	13.1	V			
	7520	-43.34	-13	-30.34	-75.23	-52.77	1.87	11.3	V			

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : B3 of B4
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01

	WCDMA Band V(RMC 12.2Kbps)											
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	1672	-49.63	-13	-36.63	-64.61	-56.31	0.57	9.40	Н			
	2510	-48.88	-13	-35.88	-69.86	-56.58	0.75	10.60	Н			
Middle	3346	-44.95	-13	-31.95	-70.88	-54.53	0.87	12.60	Н			
Middle	1672	-48.45	-13	-35.45	-64.65	-55.13	0.57	9.40	V			
	2510	-40.79	-13	-27.79	-66.46	-48.49	0.75	10.60	V			
	3346	-41.71	-13	-28.71	-71.08	-51.29	0.87	12.60	V			

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

	WCDMA Band II(RMC 12.2Kbps)												
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)				
	3760	-36.86	-13	-23.86	-68.46	-48.59	0.87	12.60	Н				
	5640	-42.64	-13	-29.64	-72.96	-54.67	1.07	13.10	Н				
Middle	7520	-44.16	-13	-31.16	-75.82	-53.59	1.87	11.30	Н				
Middle	3760	-38.23	-13	-25.23	-68.79	-49.96	0.87	12.6	V				
	5640	-42.14	-13	-29.14	-73.27	-54.17	1.07	13.1	V				
	7520	-43.32	-13	-30.32	-75.21	-52.75	1.87	11.3	V				

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: WVB150M Page Number : B4 of B4
Report Issued Date : Oct. 28, 2015
Report Version : Rev. 01