



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

588 West Jindu Road, Songjiang District, Shanghai, China
Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM150500127003
Page: 1 of 7

1 Cover Page

FCC RF Exposure REPORT

Application No.:	SHEM1505001270CR
Applicant:	Beijing Choice Electronic Technology Co., Ltd.
FCC ID:	WWIPR1
Equipment Under Test (EUT): NOTE: The following sample(s) was/were submitted and identified by the client as	
Product Name:	MyMed Reminder
Model No.(EUT):	PR1
Standards:	FCC Rules 47 CFR §2.1093 KDB447498 D01 General RF Exposure Guidance
Date of Receipt:	May 08, 2015
Date of Test:	June 25, 2015 to July 02, 2015
Date of Issue:	July 23, 2015
Test Result:	Pass*

* In the configuration tested, the EUT complied with the standards specified above.






The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	July 23, 2015	/	Original

Authorized for issue by:				
Engineer		Eddy Zong		
		Print Name		
Clerk		Susie Liu		
		Print Name		
Reviewer		Keny Xu		
		Print Name		

3 Contents

	Page
1 COVER PAGE	1
2 VERSION.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.	4
4.3 DETAILS OF E.U.T.	4
4.4 TEST LOCATION.....	5
4.5 TEST FACILITY	5
5 TEST STANDARDS AND LIMITS	6
6 MEASUREMENT AND CALCULATION	7
6.1 MAXIMUM TRANSMIT POWER	7
6.2 RF EXPOSURE CALCULATION.....	7
7 EUT CONSTRUCTIONAL DETAILS.....	7

4 General Information

4.1 Client Information

Applicant:	Beijing Choice Electronic Technology Co., Ltd.
Address of Applicant:	Room 4104, No. A12 Yuquan Road, Haidian District, 100143 Beijing, PEOPLE'S REPUBLIC OF CHINA
Manufacturer:	Beijing Choice Electronic Technology Co., Ltd.
Address of Manufacturer:	Room 4104, No. A12 Yuquan Road, Haidian District, 100143 Beijing, PEOPLE'S REPUBLIC OF CHINA
Factory:	Beijing Choice Electronic Technology Co., Ltd.
Address of Factory:	No.9 Shuangyuan Rd., Badachu Hi-tech Zone, Shijiangshan District, 100041 Beijing, P.R. China.

4.2 General Description of E.U.T.

Brand Name:	iChoice
Product Description:	Portable Product
Adapter:	Manufacturer: Apple
	Model No.: A1402
	Rated Input: AC 100~240V 50~60Hz 0.15A
	Rated Output: DC 5.0V 1A
	Cable length: DC port: 20 cm
Rechargeable Batteries:	DC 3.7V Li-on Rechargeable Battery
	Supply the EUT with fully charged battery during the testing.

4.3 Details of E.U.T.

Operation Frequency:	2402MHz-2480MHz
Bluetooth Version:	BT 4.0
Modulation Type:	GFSK
Number of Channel:	40
Antenna Type	Integral
Antenna Gain	0dBi

4.4 Test Location

All tests were performed at SGS E&E EMC lab

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2017-09-16.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868, C-4336, T-2221, G-830 respectively. Date of Expiry: 2017-11-16.

5 Test Standards and Limits

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table. The equation and threshold in KDB447498 D01 section 4.3.1 must be applied to determine SAR test exclusion.


MHz	5	10	15	20	25	30	35	40	45	50	mm
150	39	77	116	155	194	232	271	310	349	387	(mW)
300	27	55	82	110	137	164	192	219	246	274	
450	22	45	67	89	112	134	157	179	201	224	
835	16	33	49	66	82	98	115	131	148	164	
900	16	32	47	63	79	95	111	126	142	158	
1500	12	24	37	49	61	73	86	98	110	122	
1900	11	22	33	44	54	65	76	87	98	109	
2450	10	19	29	38	48	57	67	77	86	96	
3600	8	16	24	32	40	47	55	63	71	79	
5200	7	13	20	26	33	39	46	53	59	66	
5400	6	13	19	26	32	39	45	52	58	65	
5800	6	12	19	25	31	37	44	50	56	62	

6 Measurement and Calculation

6.1 Maximum transmit power

EUT Operation: Test in fixing frequency operating mode at lowest, middle and highest frequency.

Test Configuration:

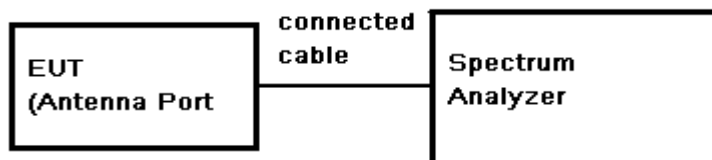

Test Data:

Test mode	Channel	Reading Peak Power (dBm)	Cable Loss (dB)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (dBm)	Result
GFSK	Low	-7.38	0.5	-6.88	0.205	30	PASS
	Mid	-7.35	0.5	-6.85	0.207	30	PASS
	High	-7.44	0.5	-6.94	0.202	30	PASS

6.2 RF Exposure Calculation

The Max Conducted Peak Output Power is 0.207mW in middle channel, The best case gain of the antenna is 0dBi. 0dBi logarithmic terms convert to numeric result is nearly 1.00

According to the formula. calculate the EIRP test result:

$$\text{EIRP} = P \times G = 0.207 \text{ mW} \times 1.0 = 0.207 \text{ mW} < 10 \text{ mW}$$

So the SAR report is not required.

7 EUT Constructional Details

Refer to the < PR1_External Photos -FCC> & < PR1_Internal Photos-FCC>.

--End of the Report--