

TEST REPORT

1. Applicant

Name : Cuu:B Co., Ltd.
Address : #801, Campunian-Apartel, 93-3, Hwayang-dong,
Gwangjin-gu, Seoul City, South Korea

2. Products

Name : Portable GPS Receiver with Bluetooth
Model/Type : Pocket GPS S1 (PG-S1)
Manufacturer : Cuu:B Co., Ltd.

3. Test Standard : FCC CFR 47 Part 15.247 Subpart C

4. Test Method : ANSI C63.4-2009

5. Test Result : Positive

6. Date of receipt : December 29, 2009

7. Date of Issue : February 11, 2010

Tested by



YoungRyul, Jo

Test Engineer:

Approved by



SungBum, Hong

Compliance Engineer:

This report may not be reproduced without the full written consent of Korea Standard Quality Laboratories.

TABLE OF CONTENTS

1. GENERAL	4
2. TEST SITE	4
2.1 Location	4
2.2 Test Date	4
2.3 Test Environment	4
3. DESCRIPTION OF THE EQUIPMENT UNDER TEST	5
3.1 Rating and Physical Characteristics	5
3.2 Equipment Modifications	5
3.3 Submitted Documents	5
4. MEASUREMENT CONDITIONS	6
4.1 Description of test configuration	6
4.2 List of Peripherals	6
4.3 Type of Used Cables	6
5. TEST AND MEASUREMENT	7
5.1 ANTENNA REQUIREMENT	7
5.1.1 Regulation	7
5.1.2 Result	7
5.2. 20dB BANDWIDTH	8
5.2.1 Regulation	8
5.2.2 Test Condition	8
5.2.3 Test result	8
Table 1 : Measured values of the 20dB Bandwidth	8
Figure 1 Plot of the 20dB Channel Bandwidth	9
5.3. MAXIMUM PEAK POWER	11
5.3.1 Regulation	11
5.3.2 Test Condition	11
5.3.3 Test result	11
Table 2 : Measured values of the Maximum Peak Output Power(Conducted)	11
Figure 2 : Plot of the Maximum Peak Output Power(Conducted)	12
5.4. CARRIER FREQUENCY SEPARATION	14
5.4.1 Regulation	14
5.4.2 Test Condition	14

5.4.3. Test result.....	14
Table 3 : Measured values of the Carrier Frequency Separation.....	14
Figure 3 : Plot of the Carrier Frequency Separation.....	15
5.5. NUMBER OF HOPPING CHANNELS.....	17
5.5.1 Regulation.....	17
5.5.2 Test Condition.....	17
5.5.3 Test result.....	17
Table 4 : Measured values of the Number of Hopping Channels.....	17
Figure 4 : Plot of the Number of Hopping Channels.....	18
5.6. DWELL TIME.....	19
5.6.1 Regulation.....	19
5.6.2 Test Condition.....	19
5.6.3 Test result.....	19
Table 5 : Measured values of the Dwell Time.....	19
Figure 5 : Plot of the Carrier Dwell Time.....	20
5.7. SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS.....	22
5.7.1 Regulation.....	22
5.7.2 Test Setup Layout.....	23
5.7.2.1 Radiated Emission Test Set-Up, Frequency Below 1000MHz.....	23
5.7.2.2 Radiated Emission Test Set-UP Frequency Over 1000MHz	23
5.7.3 Test Procedure.....	24
5.7.4 Test Results.....	26
Table 6 : Measured values of the Field strength of spurious emission (Transmit mode).....	26
Figure 6 : Plot of the Band Edge (Conducted).....	27
Figure 7 : Plot of the Band Edge (Radiated).....	28
Figure 8 : Plot of the Spurious RF conducted emissions.....	29
5.8 RECEIVER SPURIOUS EMISSIONS.....	33
5.8.1 Regulation.....	33
5.8.2 Test Results.....	34
5.9 RF EXPOSURE.....	35
5.9.1 Regulation.....	35
5.9.2 RF Exposure Compliance Issue.....	35
6. TEST EQUIPMENTS.....	36
** APPENDIXS	
1. EUT photo	

1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4, 2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247

The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by Korea Standard Quality Laboratories and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. TEST SITE

Korea Standard Quality Laboratories

2.1 Location

#102, Jangduk-Dong, Hwasung-City, Kyunggi-Do, South Korea
(FCC Registered Test Site Number: 100384)

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

2.2 Test Date

Date of Test: February 01, 2010 ~ February 03, 2010

2.3 Test Environment

See each test item's description.

3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

3.1 Rating and Physical Characteristics

Power source	DC 3.7 V Li-ion battery
Transmit Frequency	2402 ~ 2480 MHz (1 MHz step, 79 channels)
X-tal or Oscillator	X-tal: 12 MHz
Antenna Type	Integral (Chip antenna, Gain: 0.3 dBi)
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)
External Ports	Mini-USB (DC Input for battery charging)
	Earjack (3.5mm)

3.2 Equipment Modifications

None.


3.3 Submitted Documents

Block diagram
Schematic diagram
Antenna Specification
External photos
Internal photos
Test setup photos
Part List
Tune up Procedure
Label Location
User manual

4. MEASUREMENT CONDITIONS

4.1 Description of test configuration

The measurements were taken in continuous transmitting mode using the TEST MODE. For controlling the EUT as TEST MODE, the test program and the cable assembly were provided by the applicant.

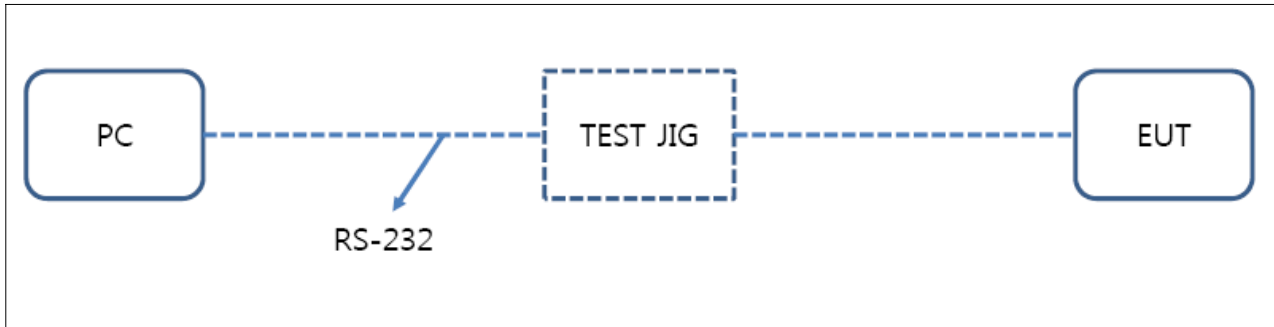

[System Block Diagram of Test Configuration]

4.2 List of Peripherals

Equipment Type	Manufacturer	Model	S/N
Personal Computer**	FineMV	Br3658	-
TEST JIG**	Cuu:B Co., Ltd.	-	-

** For control of the RF module via SPI interface in the EUT. For radiated spurious emission measurements, the EUT was tested as stand-alone equipment without TEST JIG, setting the EUT to TEST MODE.

The AC power line conducted emission measurement was performed while charging the battery and simultaneously transmitting the RF signal. If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a pattern type DH5 for GFSK, 2-DH5 for $\pi/4$ DQPSK, and 3-DH5 for 8DPSK was used.

4.3 Type of Used Cables

#	START		END		CABLE	
	NAME	I/O PORT	NAME	I/O PORT	LENGTH(m)	SHIELDED
1	PC	RS-232	TEST JIG	RS-232	1.5	YES
2						

5. TEST AND MEASUREMENT

Summary of Test Results

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	3.1	PASS
20dB Bandwidth	15.247(a)(1)	3.2	PASS
Maximum Peak Output Power	15.247(b)(1), (4)	3.3	PASS
Carrier Frequency Separation	15.247(a)(1)	3.4	PASS
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	3.5	PASS
Dwell Time	15.247(a)(iii)	3.6	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	3.7	PASS
Receiver Spurious Emissions	-	3.8	PASS
RF Exposure	15.247(i), 1.1307(b)(1)	3.9	PASS

5.1 ANTENNA REQUIREMENT

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result : **PASS**

The transmitter has an integral Chip antenna. The directional gain of the antenna is 0.3 dBi.

5.2. 20dB BANDWIDTH

5.2.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2.2. Test Condition

- Set RBW of Spectrum analyzer to 10 kHz, Span=3MHz, Sweep=auto
- The 20dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 20dB . Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater

5.2.3. Test result :


PASS

Table 1 : Measured values of the 20dB Bandwidth			
Modulation	Frequency (MHz)	Result (kHz)	Verdict
Basic (GFSK)	2402	933	Pass
	2441	933	Pass
	2480	933	Pass
EDR ($\pi/4$ DQPSK)	2402	1318	Pass
	2441	1318	Pass
	2480	1318	Pass
EDR (8DPSK)	2402	1282	Pass
	2441	1282	Pass
	2480	1282	Pass


Figure 1. Plot of the 20dB Channel Bandwidth

Basic (GFSK)



Lowest Channel (2402 MHz)

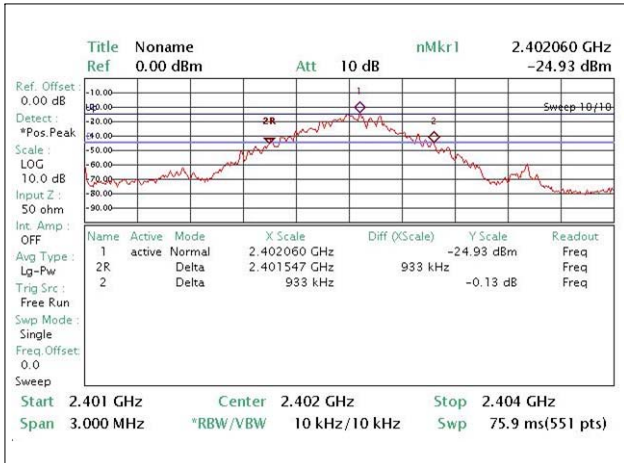



EDR($\pi/4$ DQPSK)

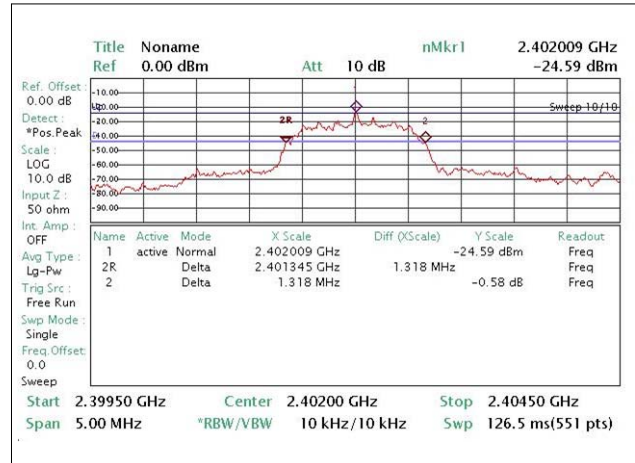

Middle Channel (2441 MHz)

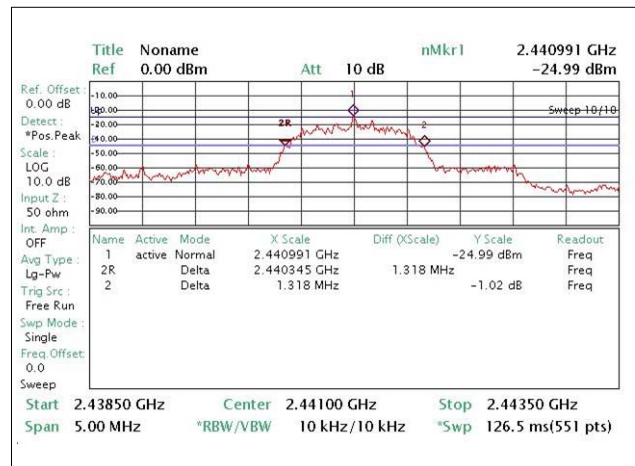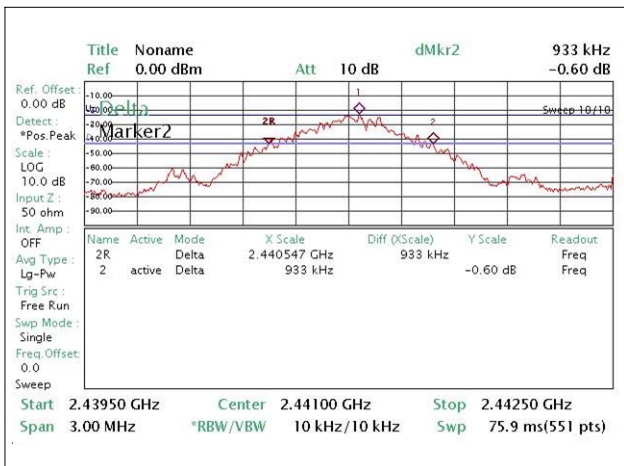


Highest Channel (2480 MHz)

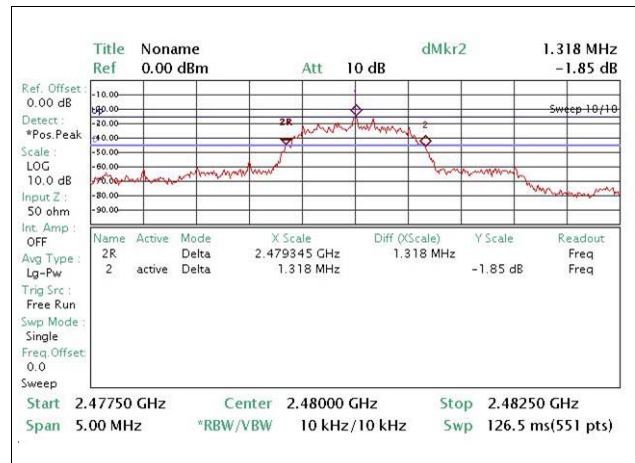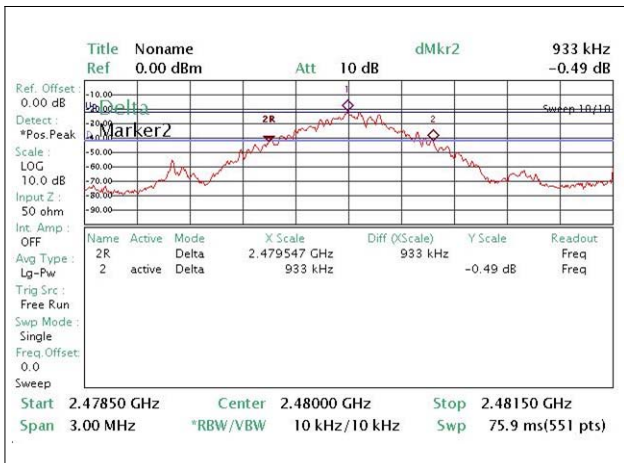


EDR (8DPSK)


Lowest Channel (2402 MHz)

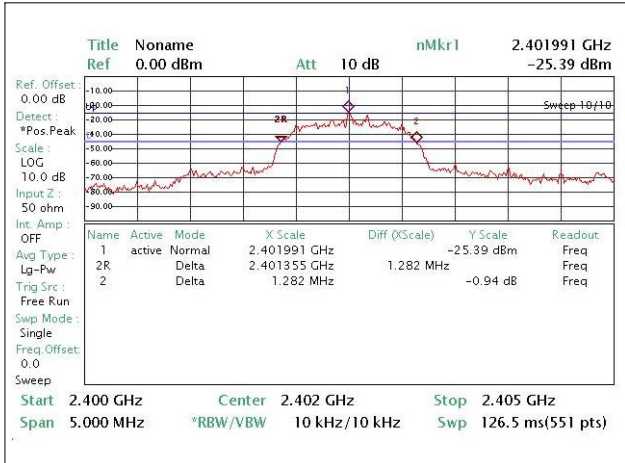

Middle Channel (2441 MHz)

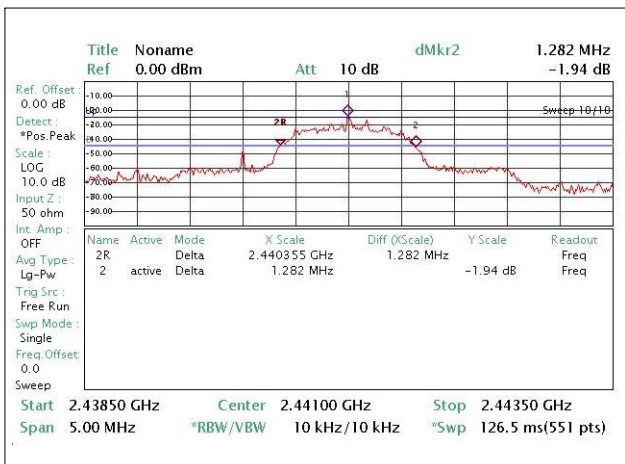

Highest Channel (2480 MHz)

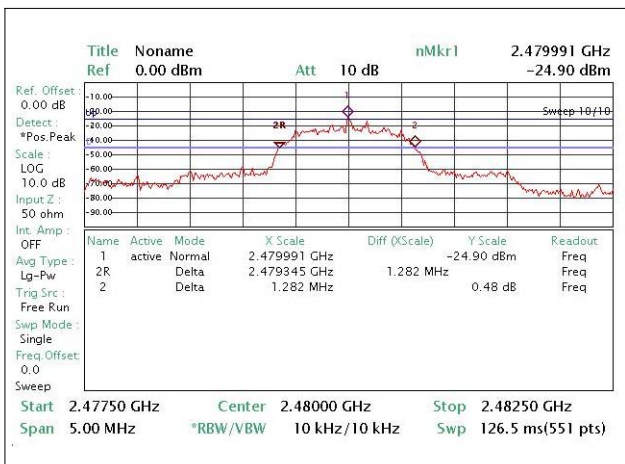

5.3. MAXIMUM PEAK POWER

5.3.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2 Test Condition

- Set RBW of Spectrum analyzer to 1 MHz
- The Maximum Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

5.3.3 Test result :

PASS



Table 2 : Measured values of the Maximum Peak Output Power(Conducted)					
Modulation	Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)	Verdict
Basic (GFSK)	2402	-19.43	0.00001	1	Pass
	2441	-18.26	0.00002	1	Pass
	2480	-17.22	0.00002	1	Pass
EDR ($\pi/4$ DQPSK)	2402	-17.84	0.00002	0.125	Pass
	2441	-18.00	0.00002	0.125	Pass
	2480	-17.86	0.00002	0.125	Pass
EDR (8DPSK)	2402	-17.73	0.00002	0.125	Pass
	2441	-17.96	0.00002	0.125	Pass
	2480	-17.77	0.00002	0.125	Pass

Figure 2. Plot of the Maximum Peak Output Power(Conducted)



Basic (GFSK)

EDR($\pi/4$ DQPSK)



Lowest Channel (2402 MHz)

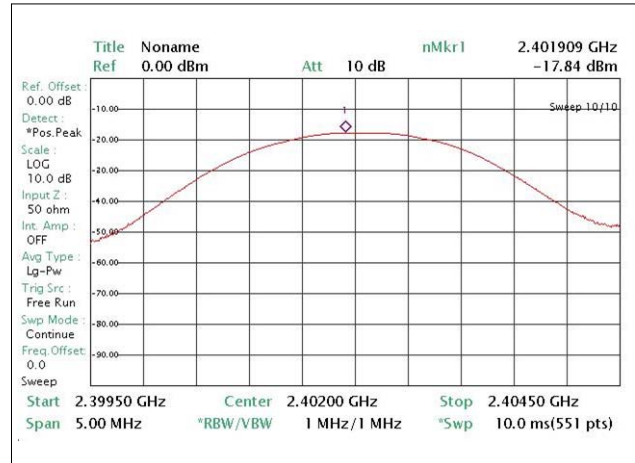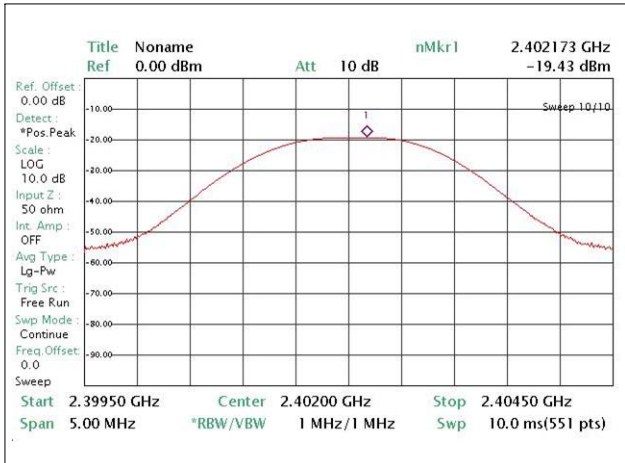

Middle Channel (2441 MHz)

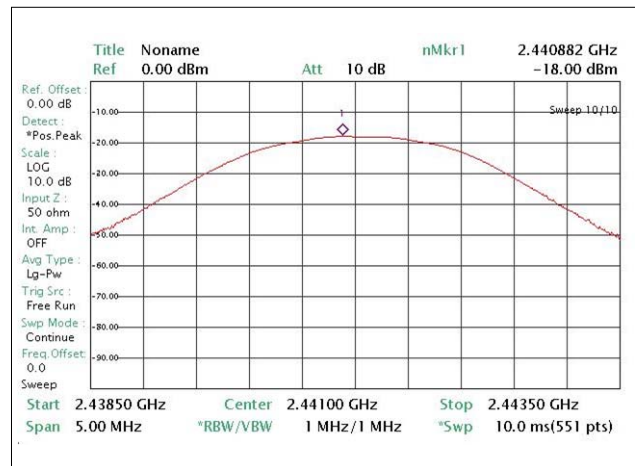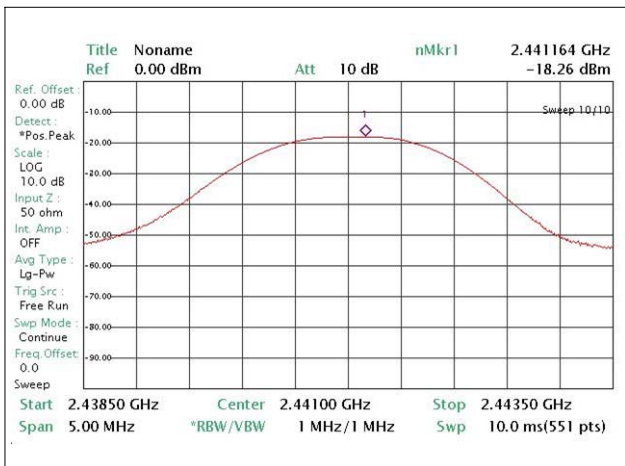


Highest Channel (2480 MHz)

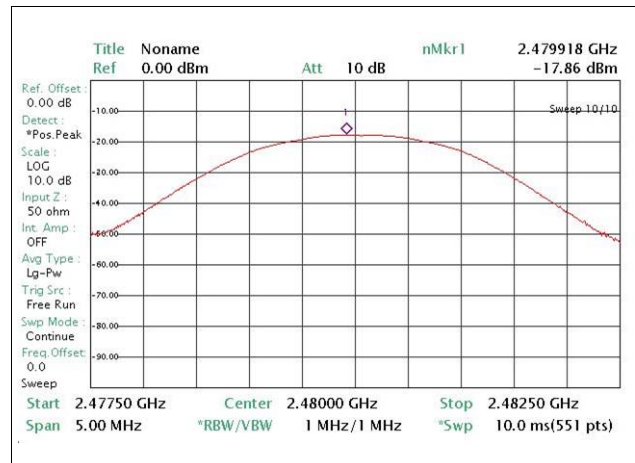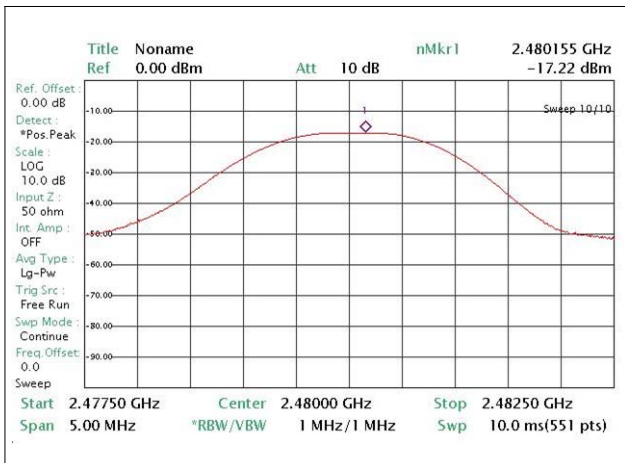


EDR (8DPSK)


Lowest Channel (2402 MHz)

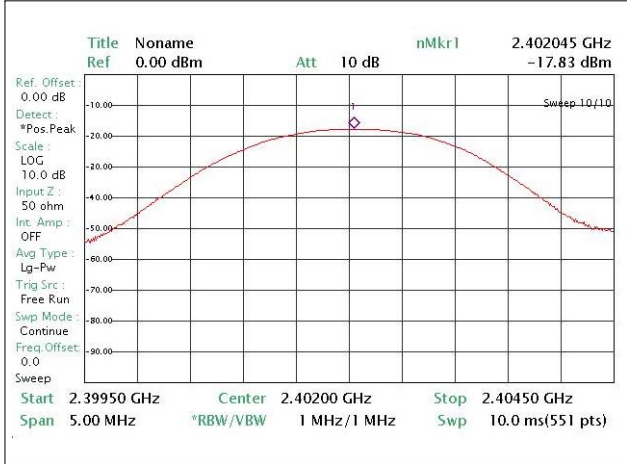

Middle Channel (2441 MHz)

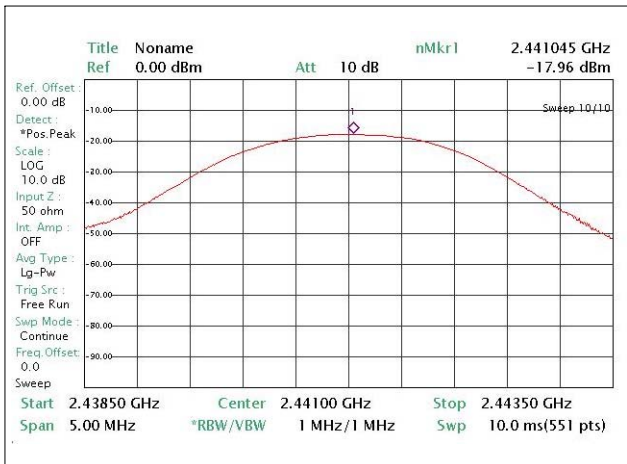

Highest Channel (2480 MHz)

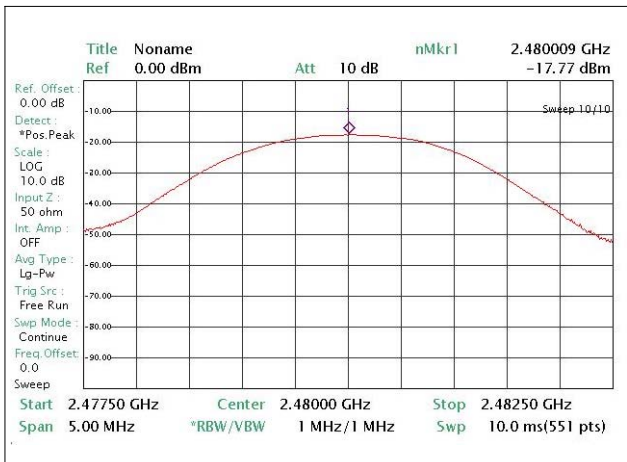

5.4 CARRIER FREQUENCY SEPARATION

5.4.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.4.2 Test Condition

- Set RBW of Spectrum analyzer to 30 kHz, Span=3MHz, Sweep=auto
- Frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

5.4.3 Test result :


PASS

Table 3 : Measured values of the Carrier Frequency Separation				
Modulation	Operating frequency (MHz)	frequency separation (kHz)	Limit (frequency separation)	Verdict
Basic (GFSK)	2402	993	≥ 25 kHz or 20 dB bandwidth, whichever is greater	Pass
	2441	998		Pass
	2480	998		Pass
EDR ($\pi/4$ DQPSK)	2402	1004	Alternatively ≥ 25 kHz or two-thirds of the 20 dB bandwidth, whichever is greater (output power ≤ 125 mW)	Pass
	2441	1004		Pass
	2480	1009		Pass
EDR (8DPSK)	2402	1004		Pass
	2441	1004		Pass
	2480	1004		Pass


Figure 3. Plot of the Carrier Frequency Separation

Basic (GFSK)



Lowest Channel (2402 MHz)

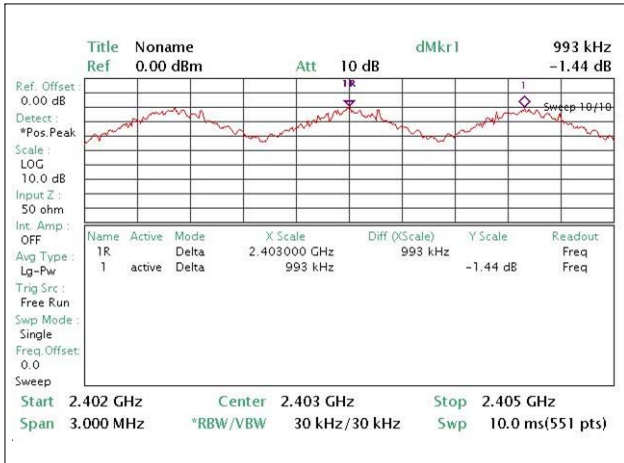



EDR(π /4DQPSK)

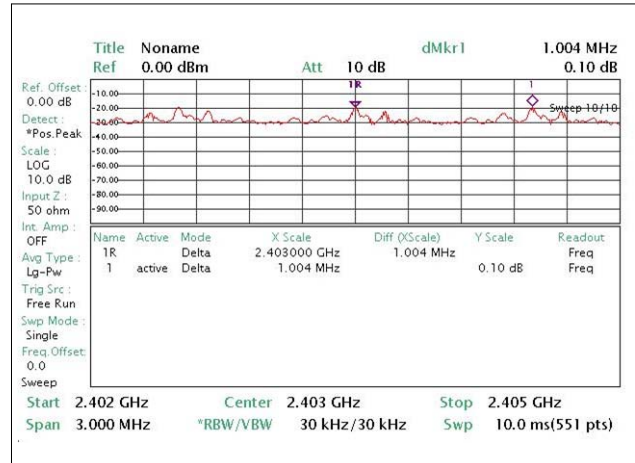

Middle Channel (2441 MHz)

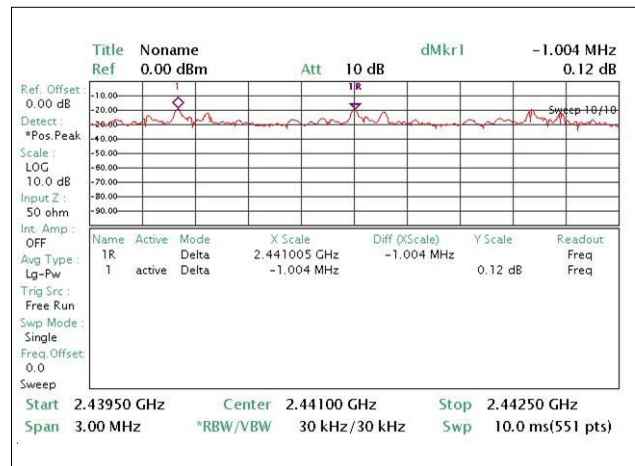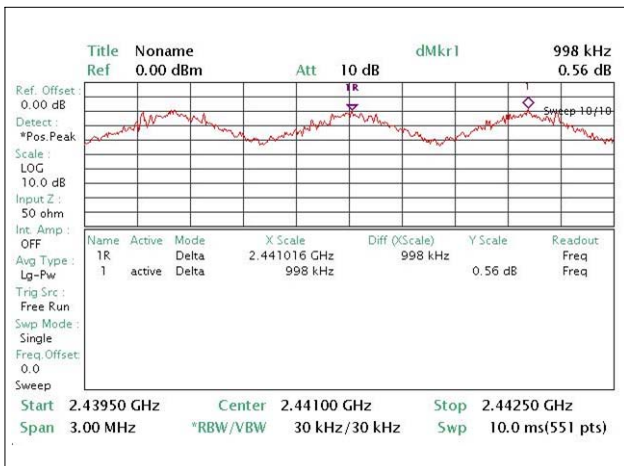


Highest Channel (2480 MHz)

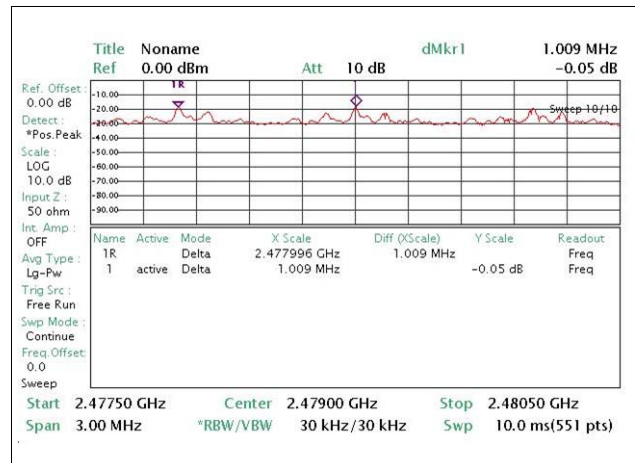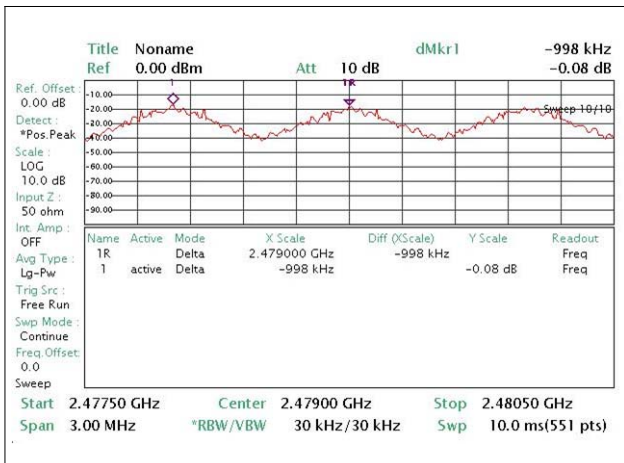


EDR (8DPSK)


Lowest Channel (2402 MHz)

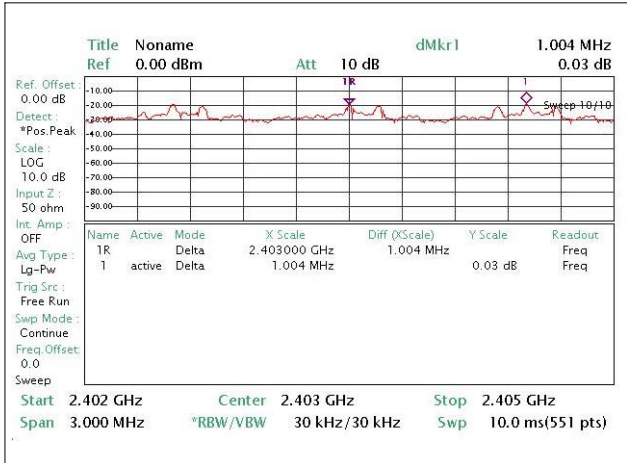

Middle Channel (2441 MHz)

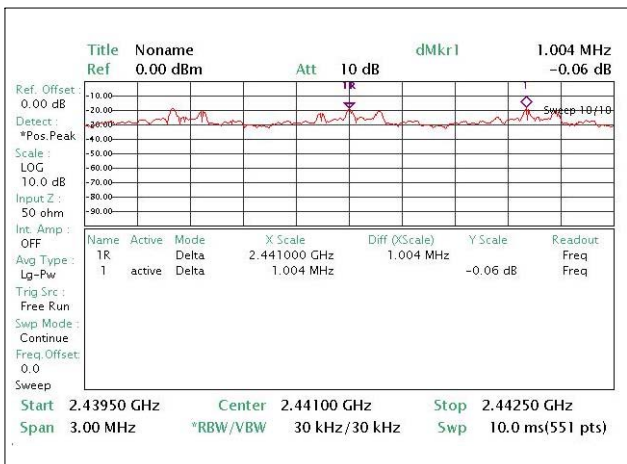

Highest Channel (2480 MHz)

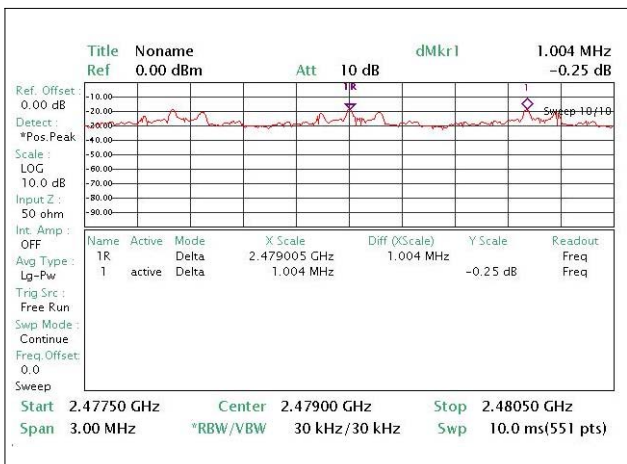

5.5. NUMBER OF HOPPING CHANNELS

5.5.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.5.2 Test Condition



- Set RBW of Spectrum analyzer to 100 kHz
- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.5.3 Test result :



PASS

Table 4 : Measured values of the Number of Hopping Channels				
Modulation	Operating frequency (MHz)	Result (channel)	Limit (channel)	Verdict
Basic (GFSK)	2402 ~ 2480MHz	79	15	Pass
EDR ($\pi/4$ DQPSK)	2402 ~ 2480MHz	79	15	Pass
EDR (8DPSK)	2402 ~ 2480MHz	79	15	Pass



Figure 4. Plot of the Number of Hopping Channels
Basic (GFSK)

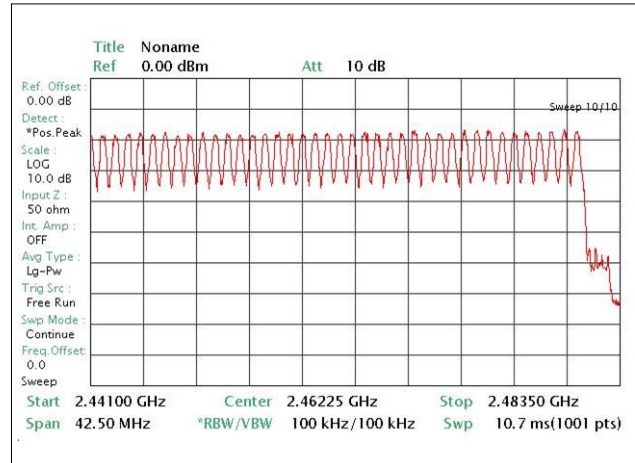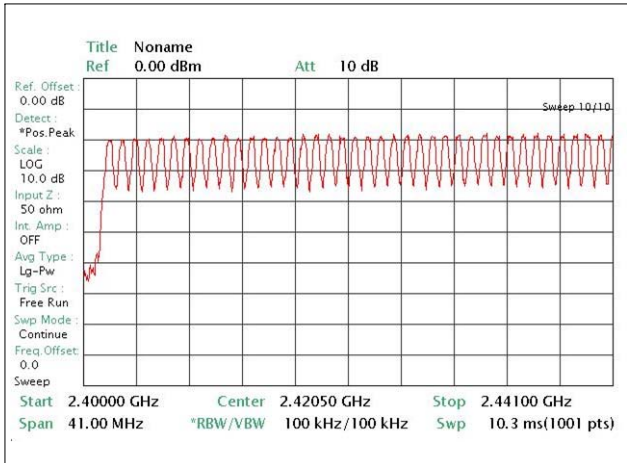

EDR($\pi/4$ DQPSK)

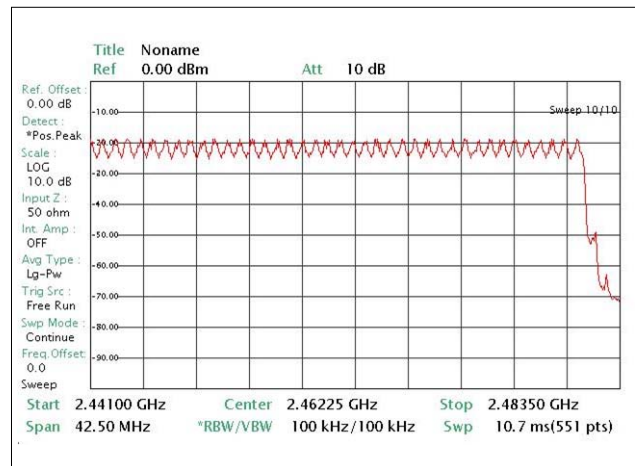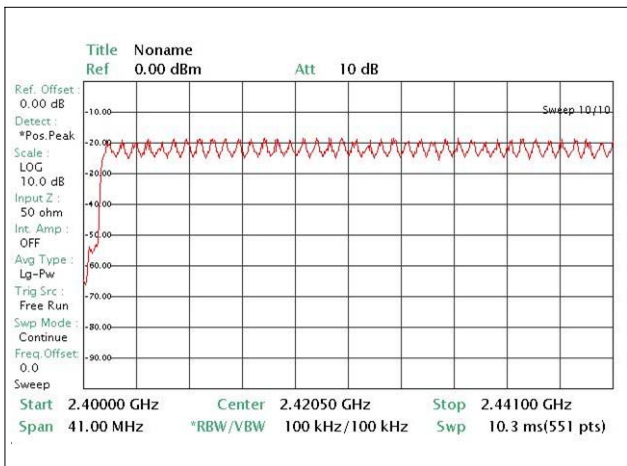

EDR (8DPSK)

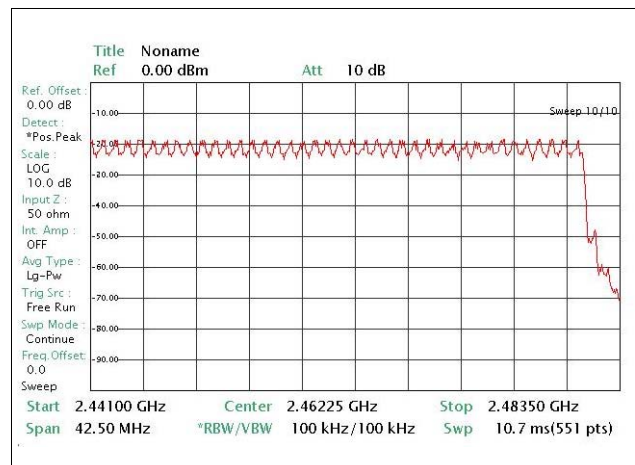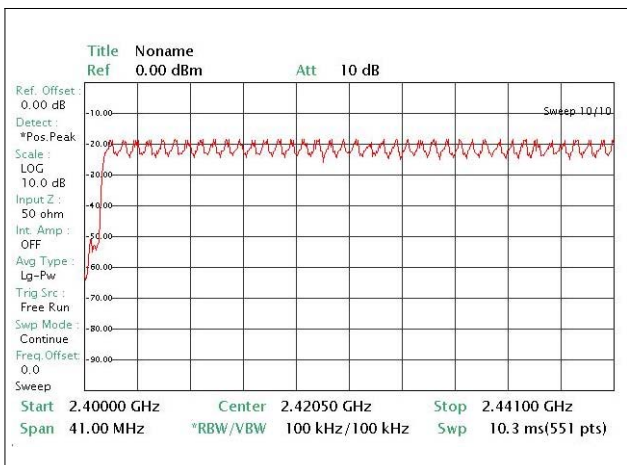

5.6 DWELL TIME

5.6.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Condition

- Set RBW of Spectrum analyzer to 3 MHz, sweep time is 4.0 ms
- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

The dwell time is calculated by:

Dwell time = Reading * hop rate * 31.6/ Number of hopping channels with:

- hop rate=1600 * 1/s for DH1 packets =1600
- hop rate=1600/3 * 1/s for DH3 packets =533.33
- hop rate=1600/5 * 1/s for DH5 packets =320
- number of hopping channels=79
- 31.6 s=0.4 seconds multiplied by the number of hopping channels=0.4s * 79

5.6.3 Test result :

PASS


Table 5 : Measured values of the Dwell Time

Modulation	Operating frequency (MHz)	Reading (ms)	hop rate	Number of hopping Channels	Dwell time (seconds)	Limits (seconds)	Verdict
Basic (GFSK)	2402 MHz	2.909	1600	79	1.862	≤ 400	Pass
	2402 MHz	2.909	1600	79	1.862	≤ 400	Pass
	2402 MHz	2.909	1600	79	1.862	≤ 400	Pass
EDR (π/4DQPSK)	2402 MHz	2.902	533.33	79	0.62	≤ 400	Pass
	2402 MHz	2.909	533.33	79	0.62	≤ 400	Pass
	2402 MHz	2.909	533.33	79	0.62	≤ 400	Pass
EDR (8DPSK)	2402 MHz	2.909	320	79	0.37	≤ 400	Pass
	2402 MHz	2.909	320	79	0.37	≤ 400	Pass
	2402 MHz	2.909	320	79	0.37	≤ 400	Pass


Figure 5. Plot of the Carrier Dwell Time

Basic (GFSK)



Lowest Channel (2402 MHz)

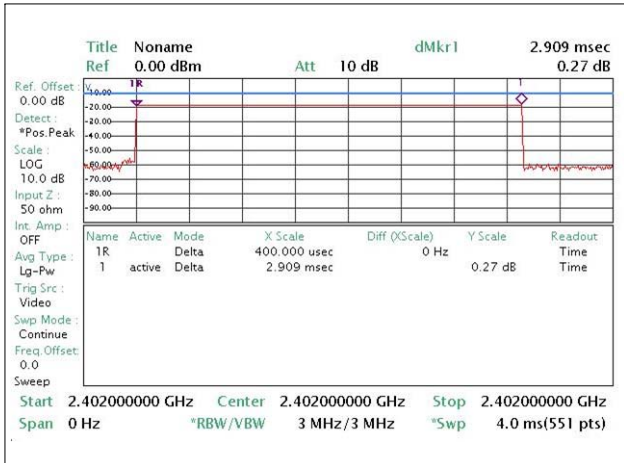



EDR(π /4DQPSK)

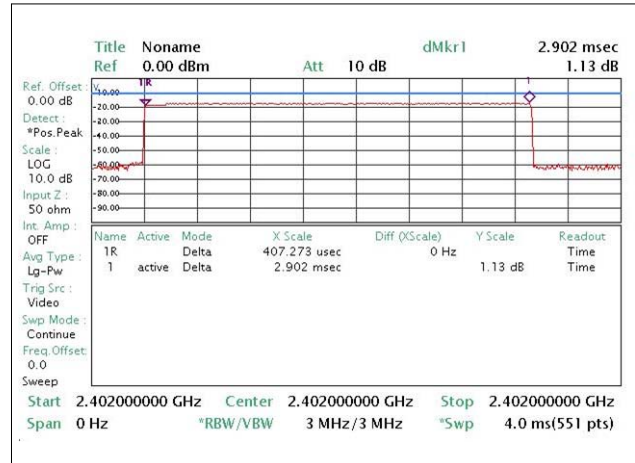

Middle Channel (2441 MHz)

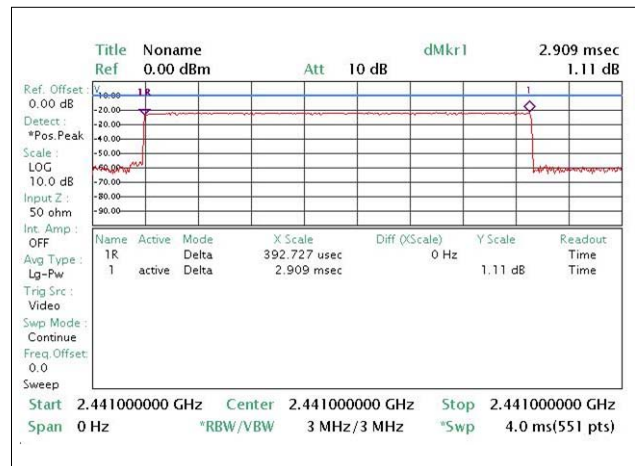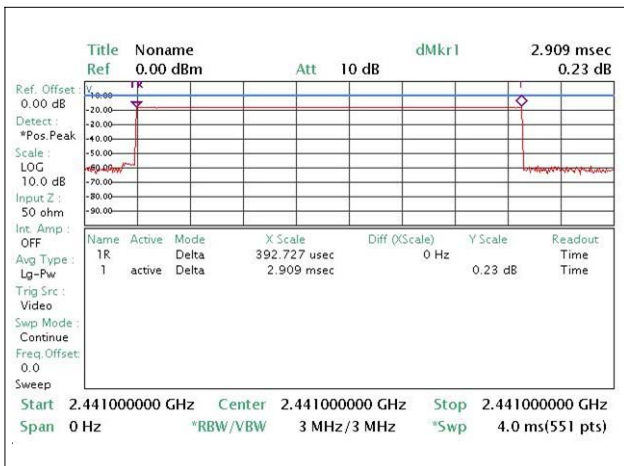


Highest Channel (2480 MHz)

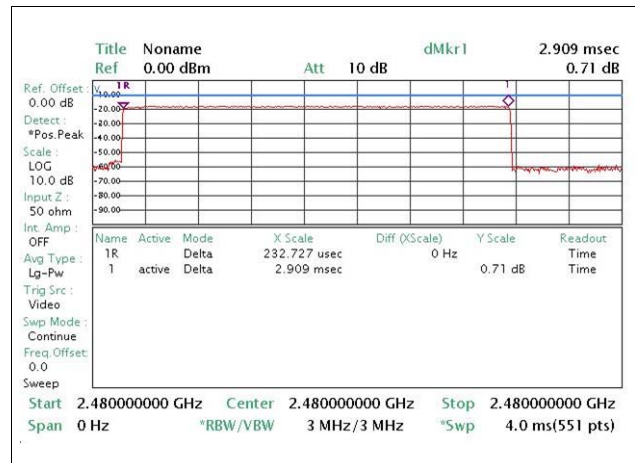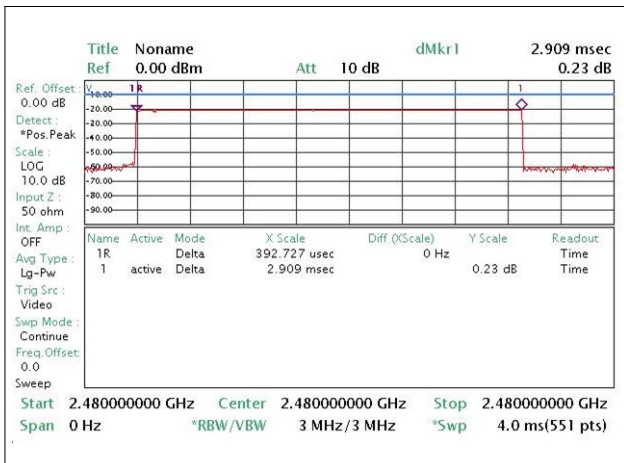


EDR (8DPSK)


Lowest Channel (2402 MHz)

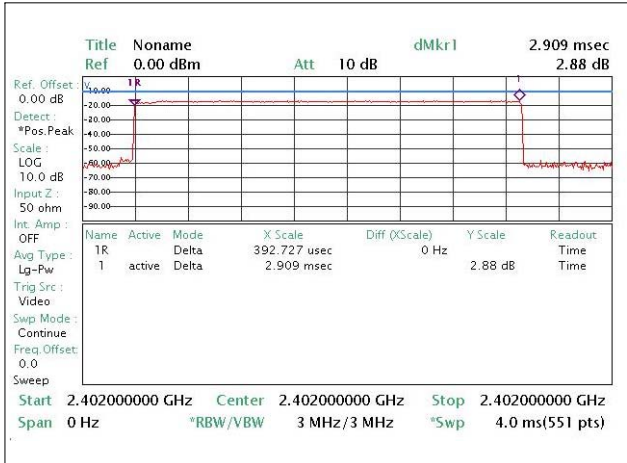

Middle Channel (2441 MHz)

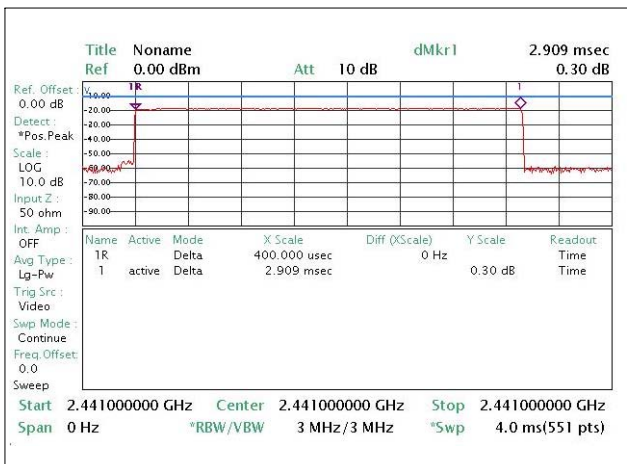

Highest Channel (2480 MHz)

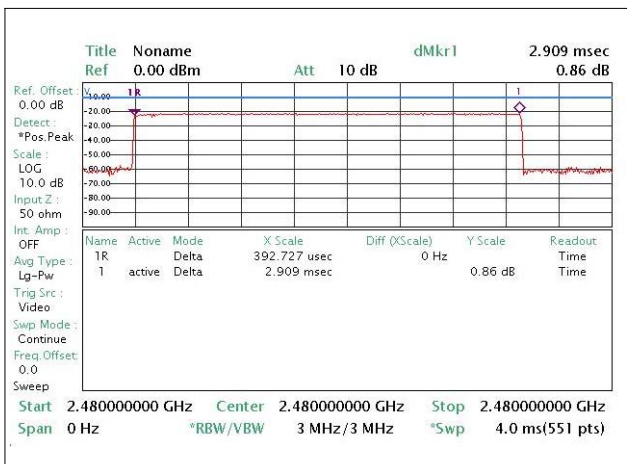

5.7 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

5.7.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency (MHz)	Field strength ($\mu\text{V/m}$ @ 3m)	Field strength ($\text{dB}\mu\text{V/m}$ @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.


** The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

5.7.2 Test Setup Layout

5.7.2.1 Radiated Emission Test Set-Up, Frequency Below 1000MHz

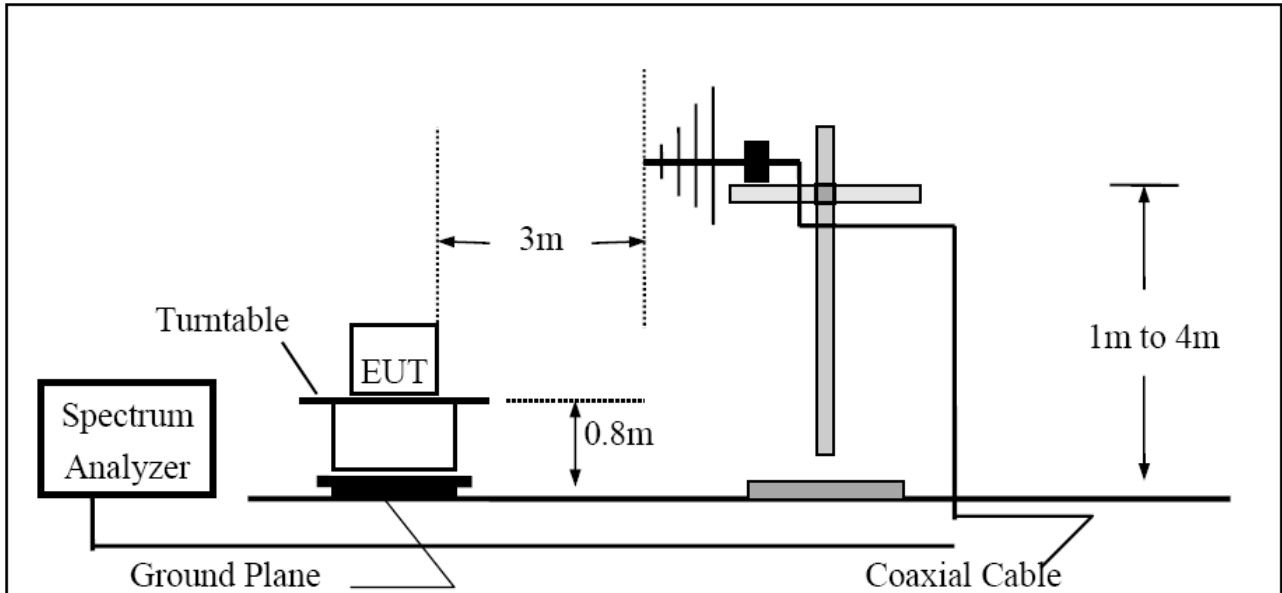

5.7.2.2 Radiated Emission Test Set-UP Frequency Over 1000MHz

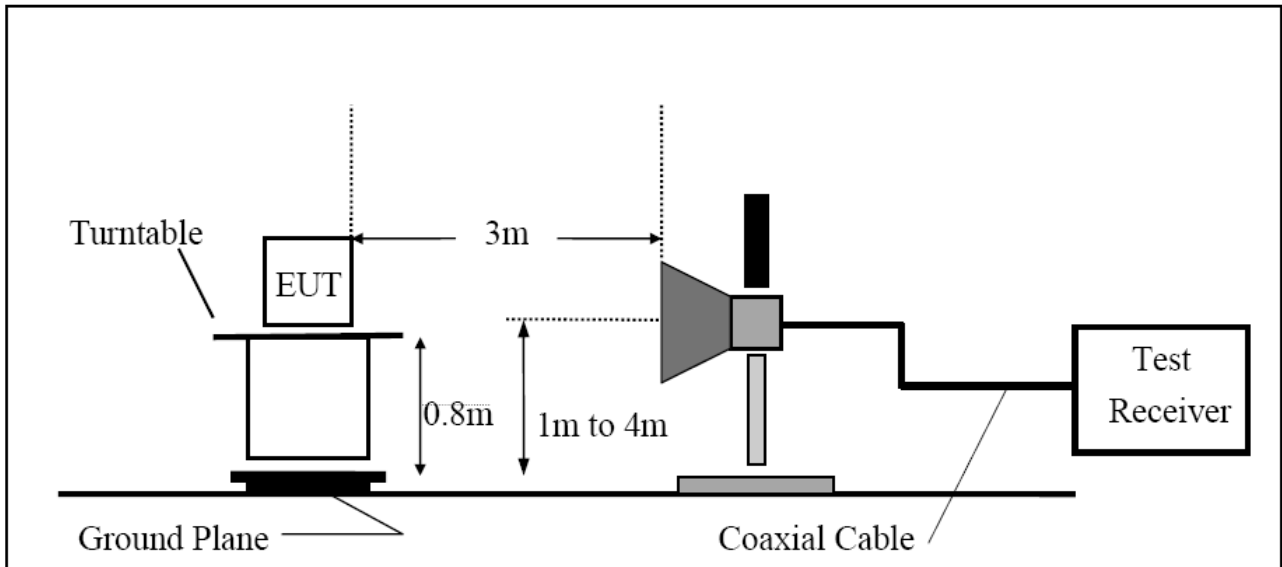

5.7.3 Test Procedure

1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

$RBW \geq 1\%$ of the span

$VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

$RBW = 100\text{ kHz}$

$VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters for above 30 MHz, and at 1 meter distance for below 30 MHz.
2. The EUT was placed on the top of the 0.8-meter height, 1×1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360° .

3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, from 30 to 1000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 × 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative “marker-delta” method may be employed.

4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two “standard” bandwidths must be measured as the above Spurious Radiated Emissions test procedure.

5.7.4 Test Results:

PASS

Band-edge compliance of RF conducted/radiated emissions was shown in the Figure 6 and Figure 7

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

Spurious RF conducted emissions were shown in the Figure 8

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

Table 6 : Measured values of the Field strength of spurious emission (Transmit mode)

Frequency (MHz)	Detect Mode	Polarization (V/H)	Turn Table (degree)	Measured Value (dB μ V)	Antenna Factor + Cable Loss (dB/m)	Amplifier Gain (dB)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	
Average/Peak/Quasi-peak data, emissions below 30 MHz										
			No Spurious Radiated Emissions Found							
Quasi-peak data, emissions below 1000 MHz										
			No Spurious Radiated Emissions Found							
Peak/Average data, emissions above 1000 MHz										
CH 0 (2402MHz)	4804	Peak	V	209	25.23	40.3	-23.2	42.33	74	31.67
	4804	Average	V	209	18.96	40.3	-23.2	36.06	54	17.94
	4804	Peak	H	48	26.24	40.3	-23.2	43.34	74	30.66
	4804	Average	H	48	17.47	40.3	-23.2	34.57	54	19.43
CH 39 (2441MHz)	4882	Peak	V	350	24.63	40.7	-23.2	42.13	74	31.87
	4882	Average	V	350	18.46	40.7	-23.2	35.96	54	18.04
	4882	Peak	H	37	23.81	40.7	-23.2	41.31	74	32.69
	4882	Average	H	37	17.68	40.7	-23.2	35.18	54	18.82
CH 78 (2480MHz)	4960	Peak	V	286	25.53	41.2	-23.2	43.53	74	30.47
	4960	Average	V	286	19.43	41.2	-23.2	37.43	54	16.57
	4960	Peak	H	93	24.96	41.2	-23.2	42.96	74	31.04
	4960	Average	H	93	18.45	41.2	-23.2	36.45	54	17.55


1. Margin (dB) = Limit – Emission Level

2. H = Horizontal, V = Vertical Polarization


Figure 6. Plot of the Band Edge (Conducted)

Basic (GFSK)



Lowest Channel (2402 MHz)

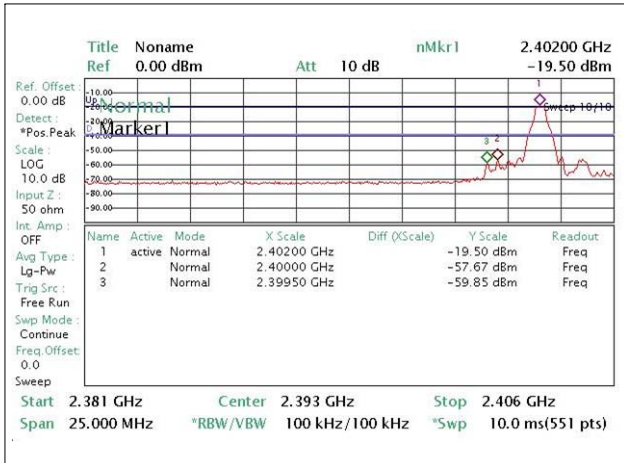

Highest Channel (2480 MHz)

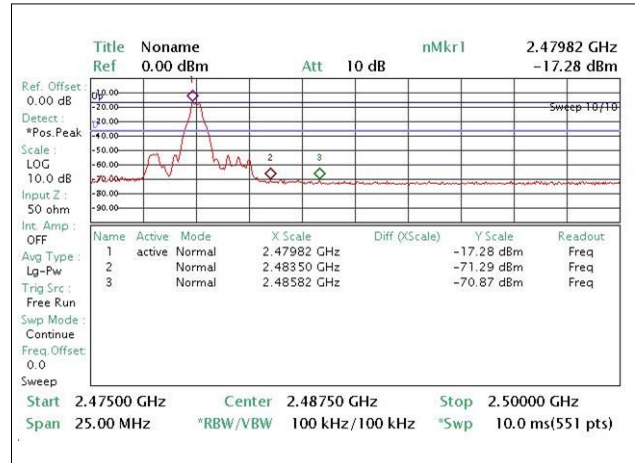

EDR($\pi/4$ DQPSK)

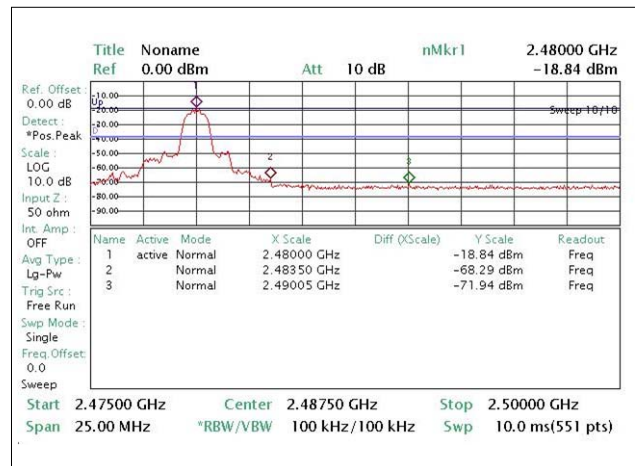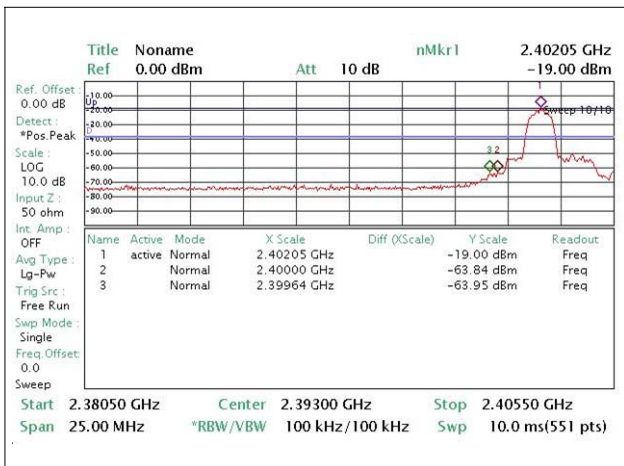

EDR (8DPSK)



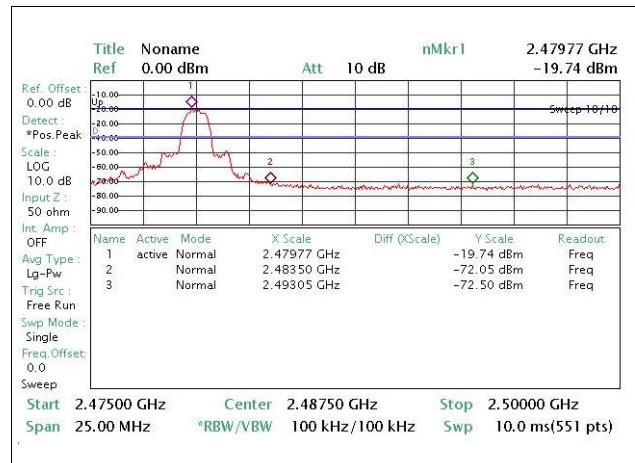



Figure 7. Plot of the Band Edge (Radiated)

Basic (GFSK)



Lowest Channel (2402 MHz) : PEAK

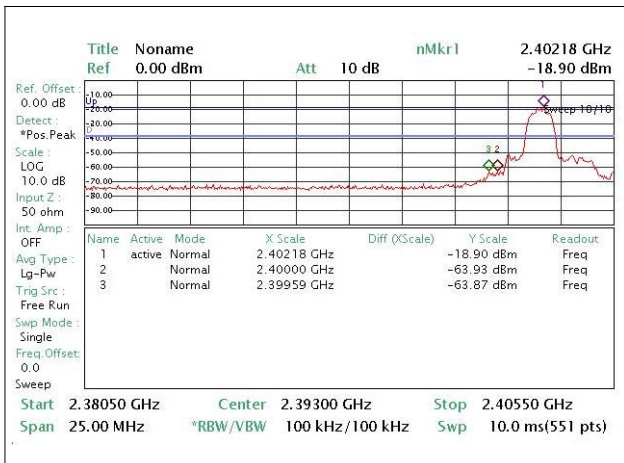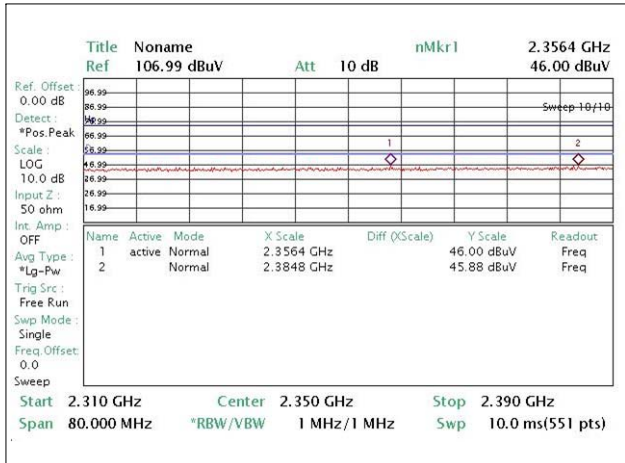



Highest Channel (2402 MHz) : AVERAGE

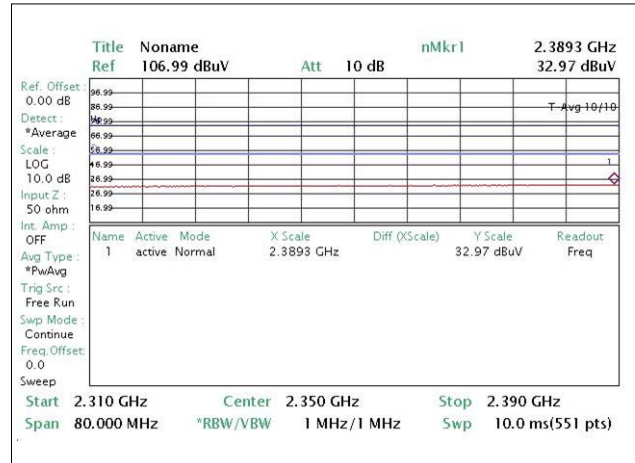

EDR(π /4DQPSK)

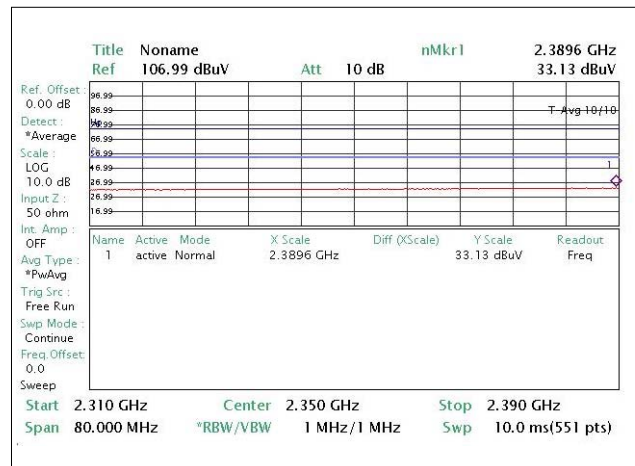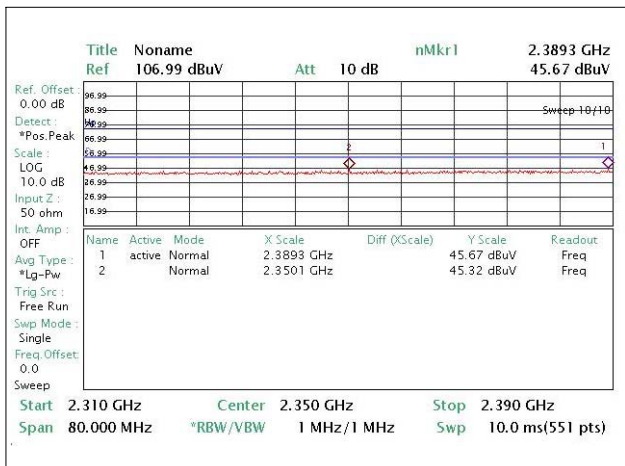


EDR (8DPSK)

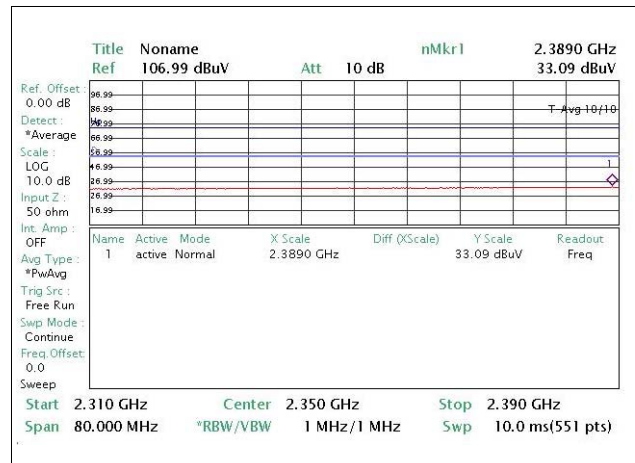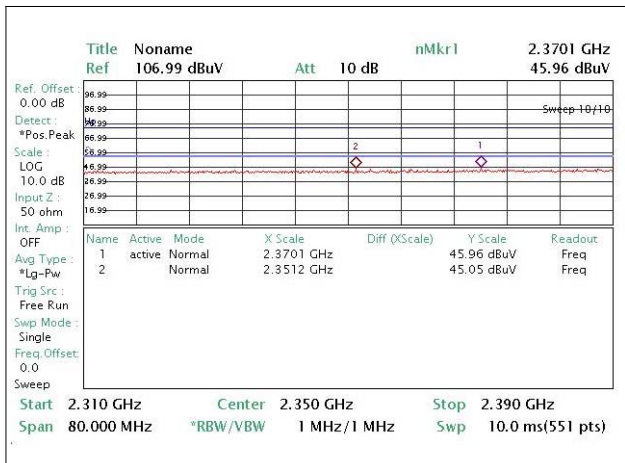


Plot of the Band Edge (Radiated)

Basic (GFSK)



Lowest Channel (2402 MHz) : PEAK

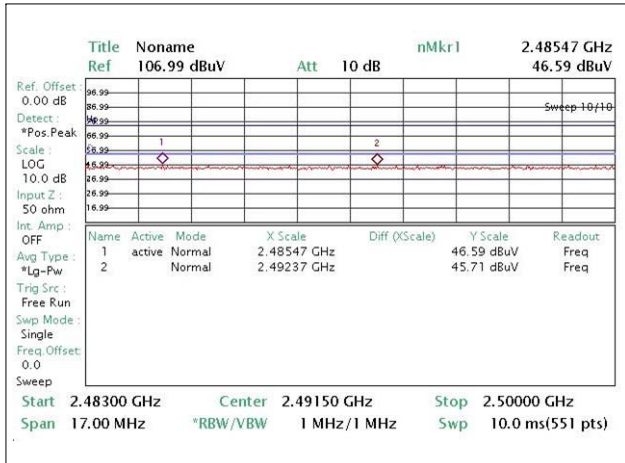

Highest Channel (2402 MHz) : AVERAGE

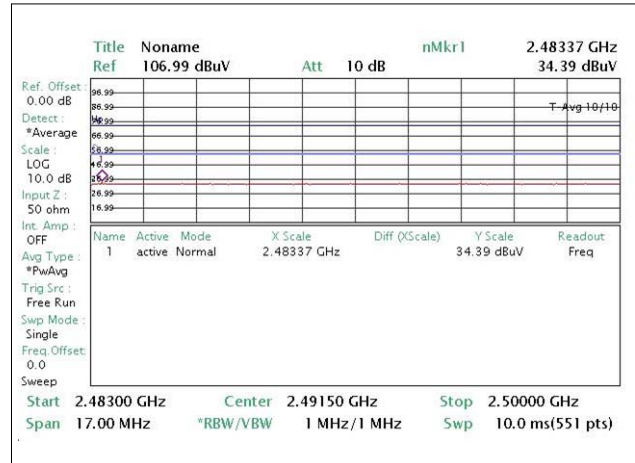

EDR(π /4DQPSK)

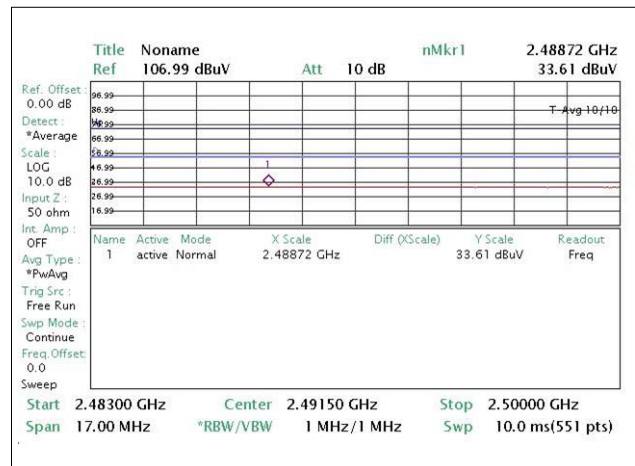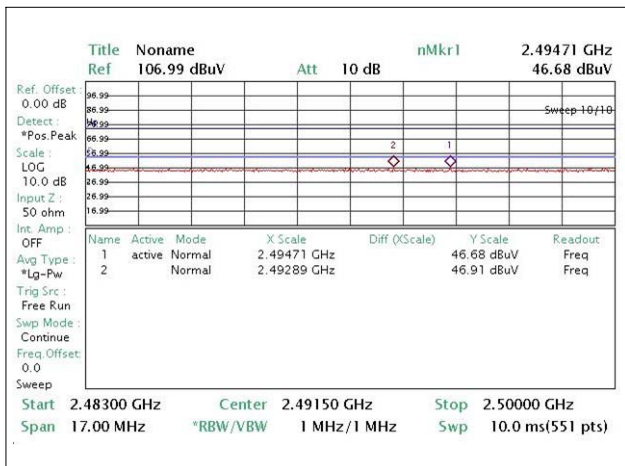

EDR (8DPSK)



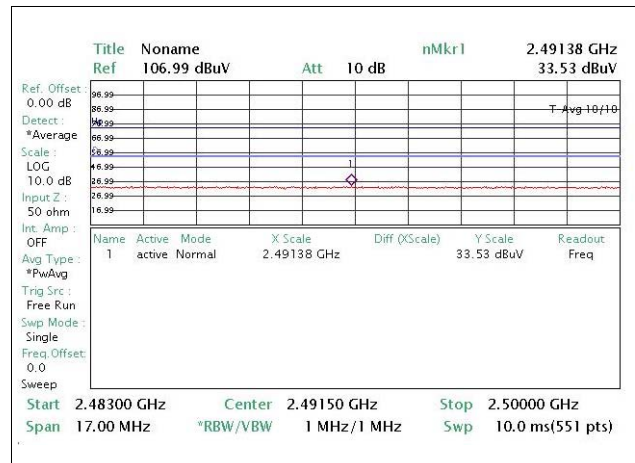



Figure 8. Plot of the Spurious RF conducted emissions

Basic (GFSK)


Lowest Channel (2402 MHz) : 30MHz ~ 3GHz

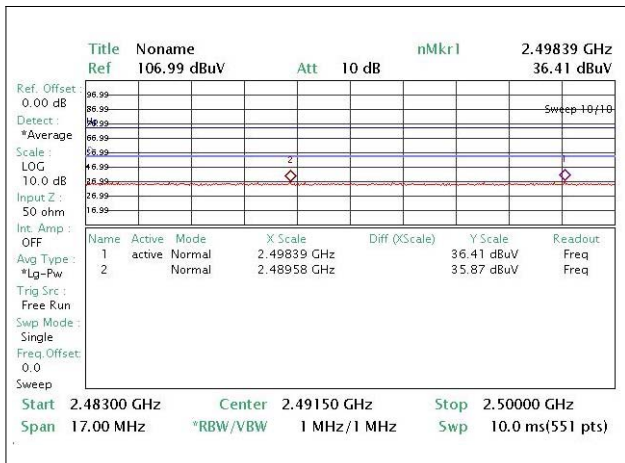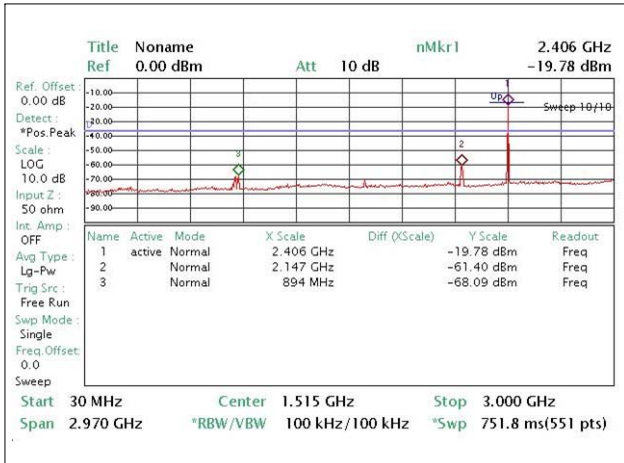


Lowest Channel (2402 MHz) : 3GHz ~ 26.5GHz

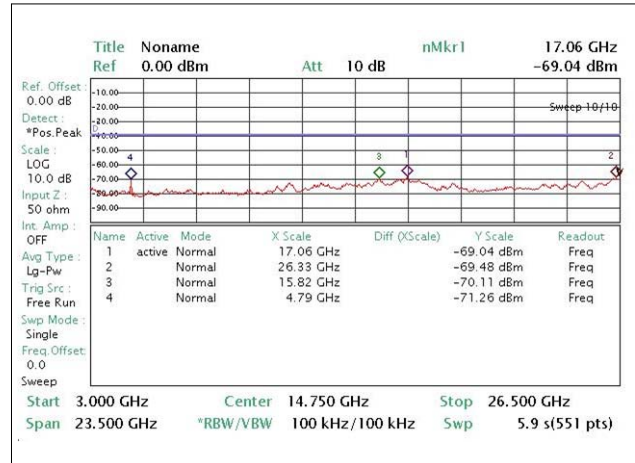


Middle Channel (2441 MHz) : 30MHz ~ 3GHz

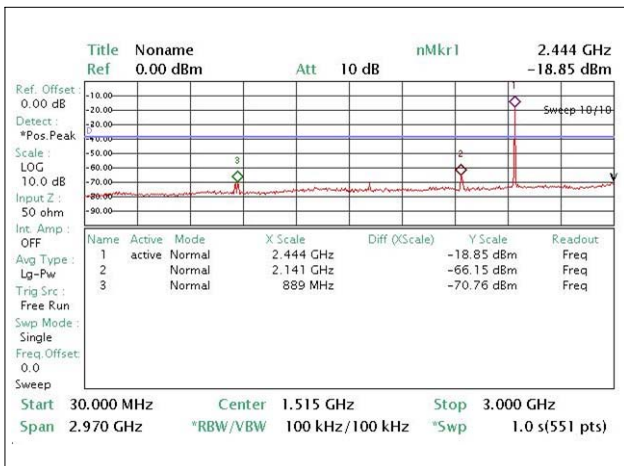


Middle Channel (2441 MHz) : 3GHz ~ 26.5GHz

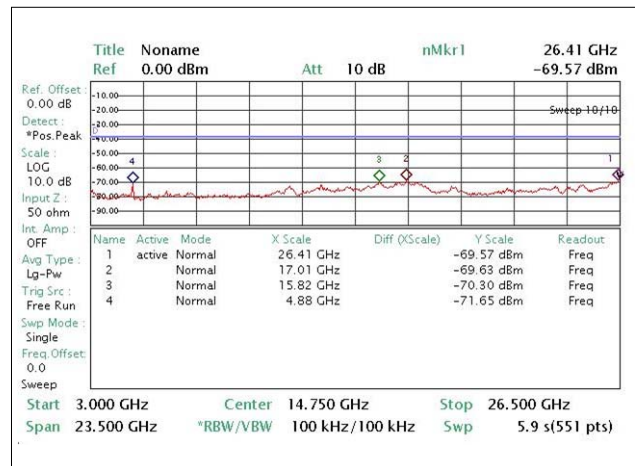

Highest Channel (2480 MHz) : 30MHz ~ 3GHz

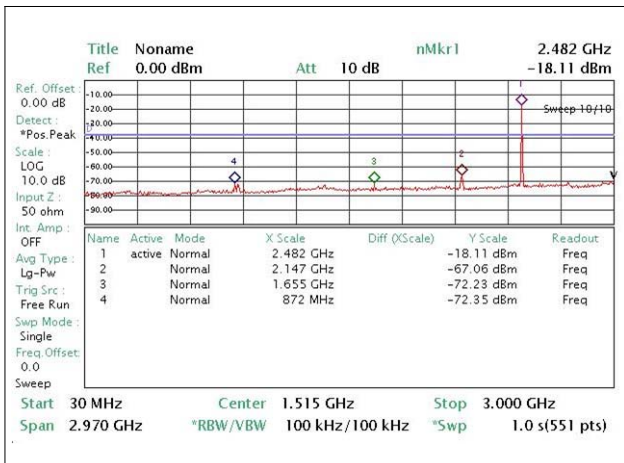


Highest Channel (2480 MHz) : 3GHz ~ 26.5GHz

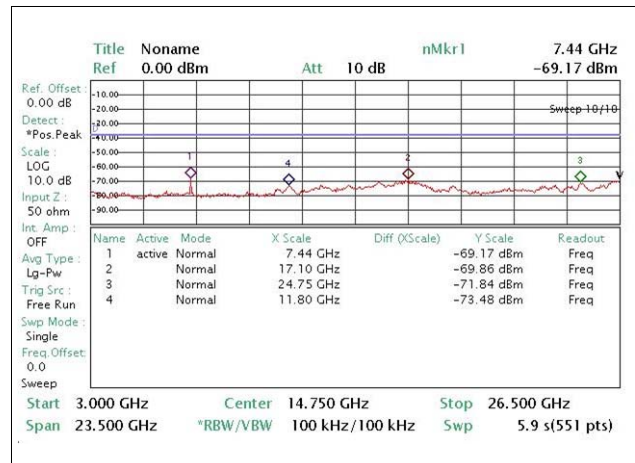


Plot of the Spurious RF conducted emissions

EDR($\pi/4$ DQPSK)


Lowest Channel (2402 MHz) : 30MHz ~ 3GHz

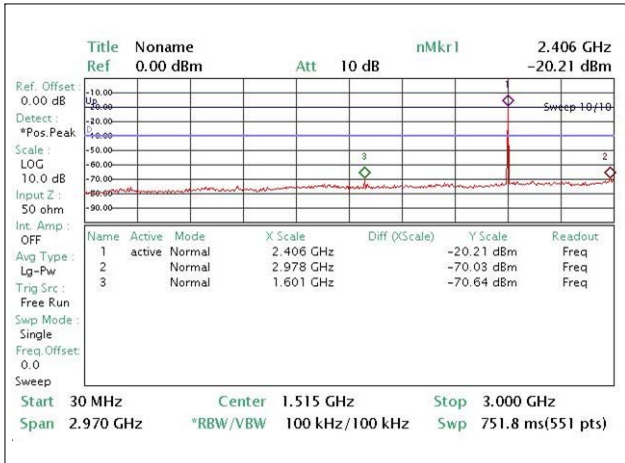


Lowest Channel (2402 MHz) : 3GHz ~ 26.5GHz

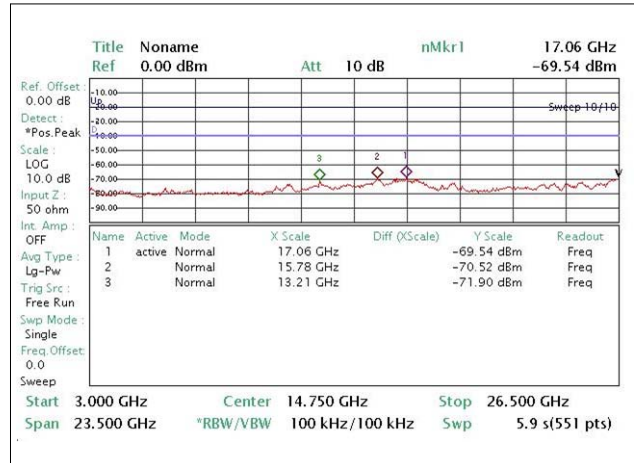


Middle Channel (2441 MHz) : 30MHz ~ 3GHz

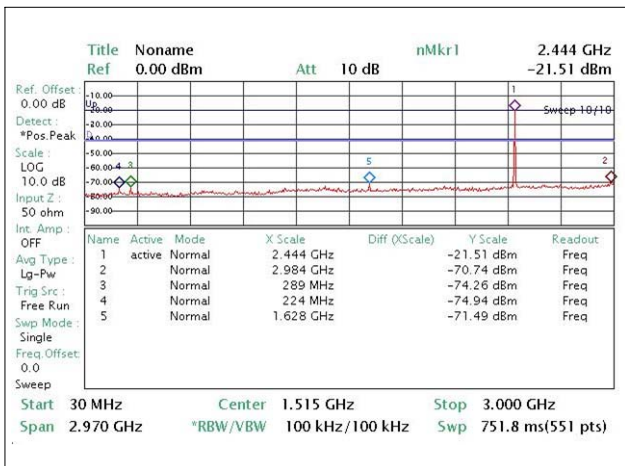


Middle Channel (2441 MHz) : 3GHz ~ 26.5GHz

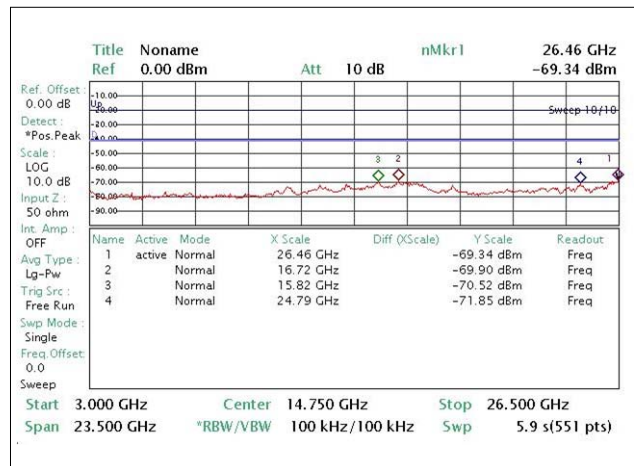

Highest Channel (2480 MHz) : 30MHz ~ 3GHz

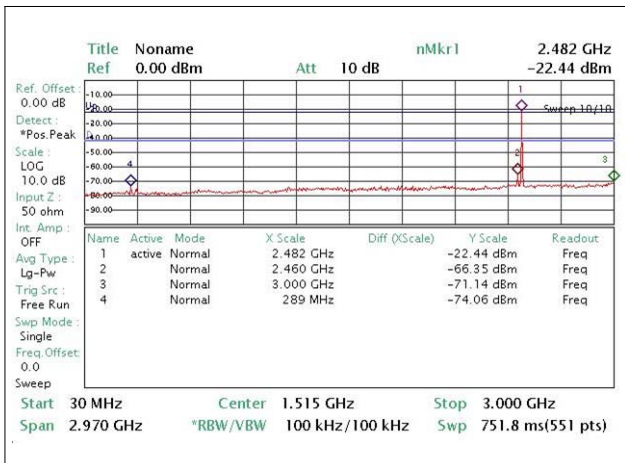


Highest Channel (2480 MHz) : 3GHz ~ 26.5GHz

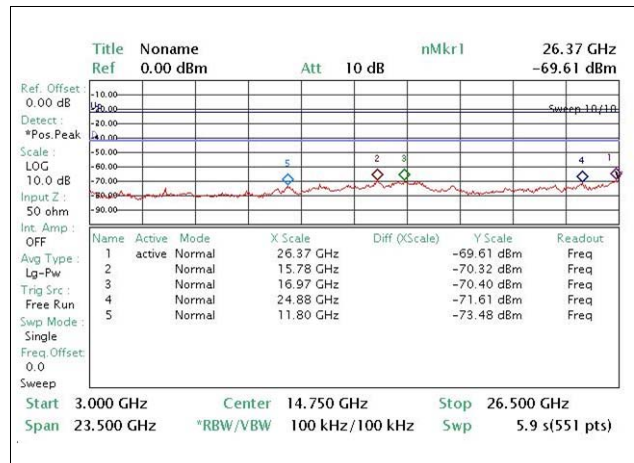


Plot of the Spurious RF conducted emissions

EDR (8DPSK)


Lowest Channel (2402 MHz) : 30MHz ~ 3GHz

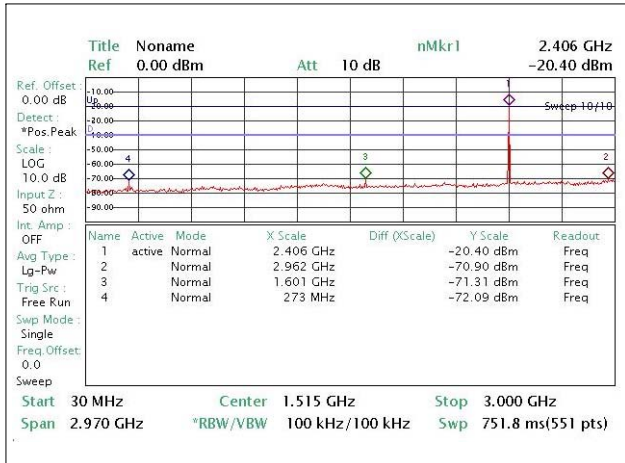


Lowest Channel (2402 MHz) : 3GHz ~ 26.5GHz

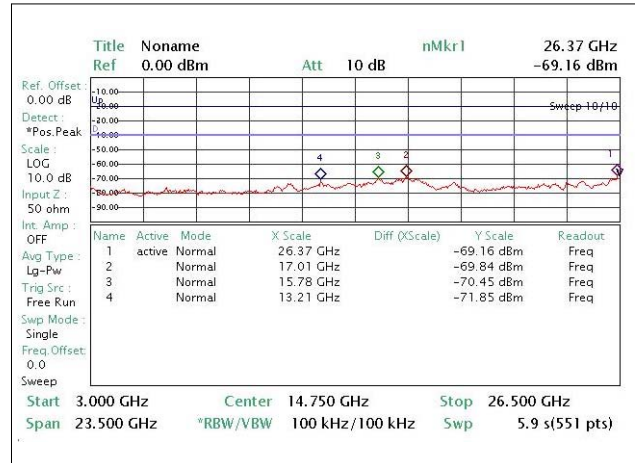


Middle Channel (2441 MHz) : 30MHz ~ 3GHz

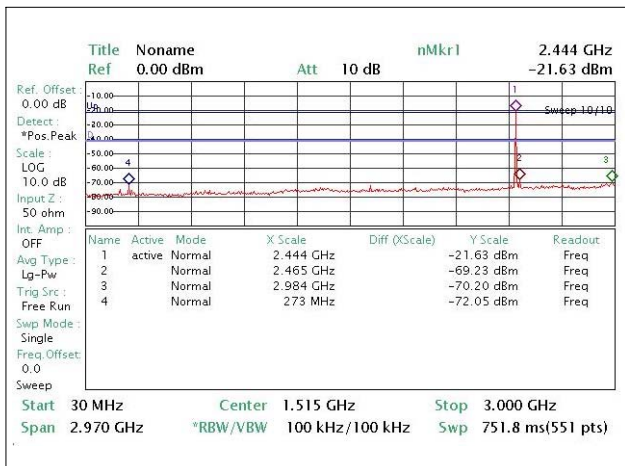


Middle Channel (2441 MHz) : 3GHz ~ 26.5GHz

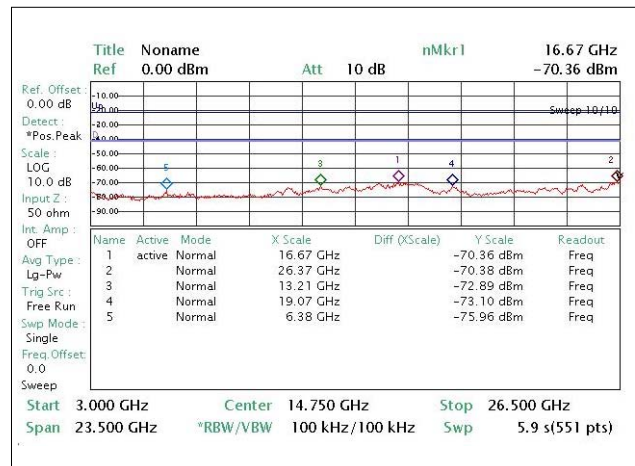

Highest Channel (2480 MHz) : 30MHz ~ 3GHz

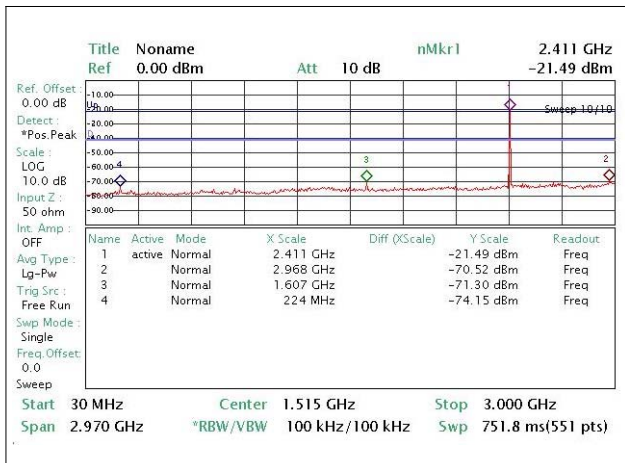

Highest Channel (2480 MHz) : 3GHz ~ 26.5GHz

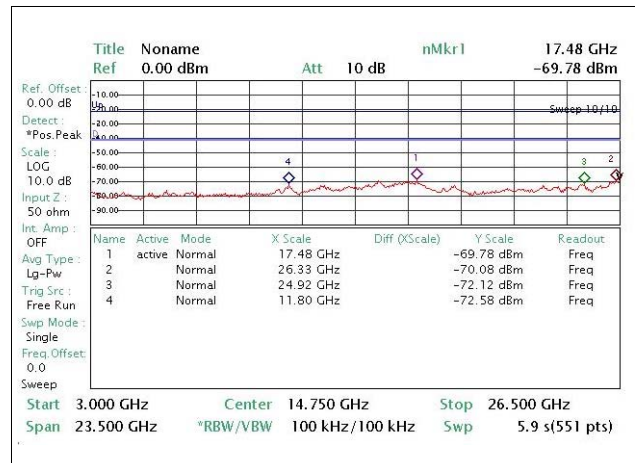

5.8 RECEIVER SPURIOUS EMISSIONS

5.8.1 Regulation

The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz, and 1.0 MHz for measurements above 1.0 GHz.

Spurious Emission Limit for Receivers

Frequency (MHz)	Field strength ($\mu\text{V/m}$ @ 3m)	Field strength ($\text{dB}\mu\text{V/m}$ @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

* Use quasi-peak below 1000 MHz and averaging meter above 1000 MHz.

5.8.2 Test Results:

PASS

Table 6 : Measured values of the Receiver Spurious Emissions

Frequency (MHz)	Detect Mode	Polarization (V/H)	Turn Table (degree)	Measured Value (dB μ V)	Antenna Factor + Cable Loss (dB/m)	Amplifier Gain (dB)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	
Quasi-peak data, emissions below 1000 MHz										
			No Spurious Radiated Emissions Found							
Peak/Average data, emissions above 1000 MHz										
CH 0 (2402MHz)	2403.5	Peak	V	342	35.45	40.3	-23.2	52.55	74	21.45
	2403.5	Average	V	342	22.91	40.3	-23.2	40.01	54	13.99
	2403.5	Peak	H	56	34.23	40.3	-23.2	51.33	74	22.67
	2403.5	Average	H	56	24.70	40.3	-23.2	41.80	54	12.20
CH 39 (2441MHz)	2442.5	Peak	V	114	34.78	40.7	-23.2	52.28	74	21.72
	2442.5	Average	V	114	23.69	40.7	-23.2	41.19	54	12.81
	2442.5	Peak	H	35	34.34	40.7	-23.2	51.84	74	22.16
	2442.5	Average	H	35	23.88	40.7	-23.2	41.38	54	12.62
CH 78 (2480MHz)	2481.5	Peak	V	83	35.16	41.2	-23.2	53.16	74	20.84
	2481.5	Average	V	83	24.13	41.2	-23.2	42.13	54	11.87
	2481.5	Peak	H	267	34.48	41.2	-23.2	52.48	74	21.52
	2481.5	Average	H	267	24.40	41.2	-23.2	42.40	54	11.60

1. Margin (dB) = Limit – Emission Level

2. H = Horizontal, V = Vertical Polarization

5.9 RF EXPOSURE

5.9.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissible Exposure: RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm ²]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	*(100)	30
1.34 ~ 30	824/f	2.19/f	*(180/f ²)	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	1.0	30

f = frequency in MHz, * = Plane-wave equivalent power density

MPE (Maximum Permissible Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = power density [mW/cm²]
 P = power input to antenna [mW]
 G = power gain of the antenna in the direction of interest relative to an isotropic radiator
 R = distance to the center of radiation of the antenna [cm]

EUT: Maximum peak output power=0.02 [mW](=-17.22 dBm)& Antenna gain=1.072 [mW](= 0.3 [dBi])

100 mW, at 20 cm from an antenna 6 [dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400) = 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
0.02 mW, at 20 cm from the antenna 0.3 [dBi]	$S = PG/4\pi R^2 = 0.00004 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
0.02 mW, at 2.5 cm from the antenna 0.3 [dBi]	$S = PG/4\pi R^2 = 0.00031 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$

5.9.2 RF Exposure Compliance Issue

The EUT is categorically excluded from routine environmental because it operates at very low power level. The equipment is deemed to comply with the SAR or MPE limits without testing due to this very low power level. SAR data was not submitted because the output power of the EUT was below the low thresholds in the July 02 TCB Exclusion List: for portable transmitters,

Low threshold [(60/f_{GHz} ≈ 25) mW, d < 2.5 cm, (120/f_{GHz} ≈ 50) mW, d ≥ 2.5 cm], and

High threshold [(900/f_{GHz} ≈ 370) mW, d < 20 cm], where f_{GHz}: 2.44, d: distance to a person's body

APPENDIX

TEST EQUIPMENT USED FOR TESTS

No.	Description	Manufacturer	Model No.	Specifications	Nent Cal. Data	Used equipment
1	Spectrum Analyzer	LIG Nex1	LSA-265	3Hz~26.5GHz	10.12.18	■
2	Dipole ANT	ElectroMetrics	TDA-30/1-4	30~1GHz	10.02.18	□
3	Biconical ANT	ElectroMetrics	BIA-30S	30~300MHz	10.04.03	■
4	Log periodic ANT	ElectroMetrics	LPA-30	0.2~1GHz	10.01.18	■
5	Bilog Antenna	Schaffner-Chase EMC Ltd.	CBL6140A	50V, 5A	10.05.02	□
6	Turn Table	KEI	KEI-TURN	1500×1000×800	N/A	□
7	Turn Table	KEI	KEI-TURN	1500×1000×800	N/A	■
8	Loop ANT.	Com-Power	AL-130	9kHz~30MHz	10.03.24	■
9	Spectrum Analyzer	LIG Nex1	ISA-265	1kHz~26.5GHz	10.05.18	■
10	Function Generator	Agilent	33120A	15MHz sine&square	10.06.16	□
11	Frequency Counter	HP	5350B	10Hz~20GHz	10.06.18	□
12	Modulation Analyzer	Agilent	8901B	10MHz~1.3GHz	10.06.16	□
13	Audio Analyser	Agilent	8903B	20Hz~100kHz	10.06.15	□
14	Attenuator	Agilent	8494B	0~11dB, 18GHz	10.06.17	□
15	Attenuator	Agilent	8496B	0~110dB, 18GHz	10.06.17	□
16	Attenuator	Agilent	8495B	0~70dB, 18GHz	10.06.17	□
17	Attenuator	-	SMA-1	TAE SUNG	10.09.03	□
18	Attenuator	-	SMA-2	TAE SUNG	10.09.03	□
19	Power Meter	Agilent	E4418B	100kHz~110GHz, 0.0001uW~25100mW	10.06.30	□
20	Power Sensor	HP	8485A	50MHz~26.5GHz	10.06.30	□
21	Vibration Tester	Gana	GNV-400	10~60Hz, 0~4mm	10.09.11	□
22	RF Cable	Gigalane	SMS-LL280-S MS-1.5M	1.5m	N/A	■
23	Temp & Humidity Chamber	Seoksan Tech	SE-CT-02	-40~150℃, 30~98%	10.07.07	□
24	Signal Generator	Leader Electronics	3220	100kHz~1.3GHz	10.07.17	□
25	Oscilloscope	Tektronix	TDS-350	200MHz	10.10.09	□
26	Drop Tester	Self-made	KSQ-01	150cm	N/A	□
27	Pre Amplifier	GTC	GA-1825A	0.1~18GHz	10.08.27	■
28	Continuous operation tester	GTC	CT-100	Local Control	N/A	□
29	CW Generator	HP	83711B	1~20GHz	10.07.27	■
30	POWER DIVIDER	Agilent	11636B	26.5GHz	10.07.30	□
31	Power Sensor	Agilent	8482B	100kHz ~ 4.2GHz	10.08.14	□
32	Attenuator	Winswell	53-30-33	dc-2.5GHz, 500W	10.08.13	□
33	DC Power Supply	Hanil	HPS-505A	50V, 5A	10.10.09	■
34	Slidacs	Hanchang	5KV	5kW, 300V	10.10.09	□
35	TERMINATION	KWANG YEOK	KYTE-NJ-150W	150W	10.09.11	□
36	Band-limited filter	MITECH	KSQ-02	600Ω	10.09.14	□
37	Signal Generator	WILTRON	6759B	10MHz ~ 26.5GHz	10.09.10	□
38	Digital Multimeter	DONG HWA	DM-300A	AC/DC 500V Max, 320mA Max	10.09.10	■
39	Horn ANT.	A.H. Systems, inc.	SAS-571	700MHz ~ 18GHz	10.03.17	■

APPENDIX

1. EUT photo

