

TEST REPORT

REGULATION : FCC Part15 Subpart C Section 15.249

Applicant	Testing Laboratory
Fuji Electric Systems Co., Ltd. 1, Fuji-machi, Hino-city, Tokyo 191-8502, Japan Tel. +81 42 585 6171	Intertek Japan K.K. Kashima Site URL: http://www.japan.intertek-etlsemko.com 3-2 Sunayama, Kamisu, Ibaraki 314-0255 Japan Tel. +81 479 40 1097

Equipment Type	Wireless Remote Unit
Trademark	Fe
Model(s)	NRA30201-YYYYY-S
Serial No.	0800001
FCC ID	WY5NRA30201
Test Result	Complied
Report Number	JK09010002
Report Issue Date	March 9, 2009

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Junichi Okada
[Site Manager]



Tested by

Kazuo Masuda



TABLE OF CONTENTS

	Page
SECTION 1. GENERAL INFORMATION	3
SECTION 2. SUMMARY OF TEST RESULTS	4
SECTION 3. EQUIPMENT UNDER TEST	5
SECTION 4. SUPPORT EQUIPMENT.....	7
SECTION 5. USED CABLE(S).....	8
SECTION 6. TEST CONFIGURATION	9
SECTION 7. OPERATING CONDITION	10
SECTION 8. TEST PROCEDURE(S)	11
SECTION 9. MEASUREMENT UNCERTAINTY	14
SECTION 10. EVALUATION OF TEST RESULTS	15
SECTION 11. LIST OF MEASURING INSTRUMENTS.....	26

SECTION 1. GENERAL INFORMATION

TEST PERFORMED

Location	Kashima No.1 Test Site (FCC Reg.: JP0008)
EUT Received	January 8, 2009
Date of Test	From January 8, 2009 to January 16, 2009
Standard Applied	FCC Part15C – Section 15.249
Measurement methods	ANSI C63.4-2003
Test Procedure	Document number : 03-10-003, 03-10-004
Deviation from Standard(s)	None

QUALIFICATIONS OF TESTING LABORATORY

ACCREDITATION	SCOPE	LAB. CODE	Remarks
NVLAP	EMC Testing	100290-0	USA
VLAC	EMC Testing	VLAC-008-1	JAPAN
BSMI	EMC Testing	SL2-IN-E-6008	TAIWAN
FILING			
VCCI	EMC Testing	R-788, C-278, C-279, T-351, T-352 R-274, C-280, C-281, T-353, T-359 R-272, C-276, C-277, T-360, T-361 R-576, C-590, T-362	JAPAN
FCC	EMC Testing	Designation Number : JP0008	USA
IC	EMC Testing	2065A-1, 2065A-3	CANADA
SAUDI ARABIA	EMC Testing	N/A	

ABBREVIATIONS

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment		

SECTION 2. SUMMARY OF TEST RESULTS

The minimum margins to the limits are as follows:

Test	Reference < FCC >	Result
AC Conducted Emission	15.207	N.A.
Field Strength Emission	15.249 (a)	Complied
Spurious Emissions – Radiated	15.249 (d) 15.209 15.205	Complied
Restricted Bands of Operation	15.205 15.209	Complied
Variation Carrier Output Power	15.31(e)	Complied
Variation Carrier Frequency Stability	15.31(e)	Complied

Note : See Section 10 for details.

< Measurement data correction >

* Conducted disturbance at mains terminals

Emission Level [dBμV] = Meter Reading [dBμV] + Factor [dB]

Margin [dB] = Limit [dBμV] - Emission Level [dBμV]

* Factor = LISN Factor + Cable Loss + ATT

* Radiated disturbance

Emission Level [dBμV/m] = Meter Reading [dBμV] + Factor [dB/m]

Margin [dB] = Limit [dBμV/m] - Emission Level [dBμV/m]

* Factor = Antenna Factor + Cable Loss - Amplifier Gain + ATT

(– Distance Conversion Factor)

SECTION 3. EQUIPMENT UNDER TEST

The equipment under test (EUT) consisted of the following apparatus.

3.1 System Configuration

Symbol	Item	Model No.	Serial No.	Manufacturer	Notes	FCC ID
A1	Wireless Remote Unit	NRA30201-YYYYY-S	0800001	Fuji Electric Systems Co., Ltd.	EUT	WY5NRA30201
A2	Wireless Remote Test Board	NRA30201-YYYYY-S	0800002	Fuji Electric Systems Co., Ltd.	EUT	N.A.
Rated Power : DC3V, 100mW						
Supplied Power : DC3V,						
Condition of Equipment		Prototype				
Type		Handheld				
Suppression Devices		No Modifications by the laboratory were made to the device				

3.2 Overview of EUT

Carrier Frequency Ranges	912.00 – 914.85 MHz
Number of RF Channel	20
Carrier Spacing	150kHz
Modulation Method	Two Level Frequency Shift Keying
RF Output Power	87.5 dBuV/m (at 3.0m : Measurement value)
Antenna Gain	1.6dBd (Maximum: -0.55dBi)

3.3 Port(s)/Connector(s)

Port Name	Connector Type	Connector Pin	Remarks
Standard Interface (with VESA FPD1-1)	Receptacle / Header	21pin	

3.4 Highest Frequency Oscillator(s) / Crystal(s)

Base Clock	Operating Frequency	Board Name	Remarks
1830 MHz	915 MHz	Wireless Remote Unit (IC2)	
20 MHz	40 MHz	Wireless Remote Unit (IC1)	
24.576 MHz	24.576 MHz	Wireless Remote Unit (IC2)	
32.768 kHz	32.768 kHz	Wireless Remote Unit (IC1)	

3.5 Frequency Range of Measurements

Field Strength Emission	912.00 – 914.85 MHz
Spurious Emissions – Radiated	30 – 10000 MHz
Frequency Tolerance	912.00 – 914.85 MHz

3.6 Frequency allocation :

Channel Number	Frequency (MHz)	Notes
1	912.00	Tested Channel (Low)
2	912.15	
3	912.30	
4	912.45	
5	912.60	
6	912.75	
7	912.90	
8	913.05	
9	913.20	
10	913.35	Tested Channel (Mid)
11	913.50	
12	913.65	
13	913.80	
14	913.95	
15	914.10	
16	914.25	
17	914.40	
18	914.55	
19	914.70	
20	914.85	Tested Channel (High)

SECTION 4. SUPPORT EQUIPMENT

The EUT was supported by the following equipment during the test.

Symbol	Item	Model No.	Serial No.	Manufacturer	FCC ID
B	Dosemeter Attachment Unit	NRA40201-YYYY-S	00001	Fuji Electric Systems Co., Ltd.	N.A.
C	Dosemeter	NRF30021-121YY	311001	Fuji Electric Systems Co., Ltd.	N.A.
Supplied Power:					
B	DC1.2V (Battery)				
C	DC3V (Battery)				

SECTION 5. USED CABLE(S)

The following cable(s) was used for the test.


No.	Name	Length (m)	Shield	Metal Connector	Ferrite Core
1	Power cable for EUT (DC) (:JIG cable)	0.60	No	No	

SECTION 6. TEST CONFIGURATION

6.1 TX mode


< Radiated Test >

* : EUT

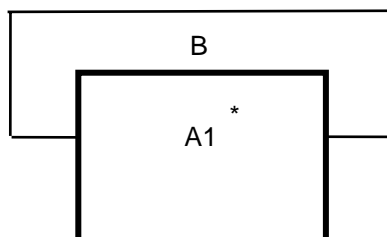

< Conducted Test >


* : EUT

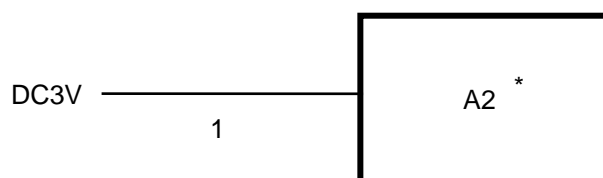

6.2 Communication mode

< Radiated Test >

* : EUT

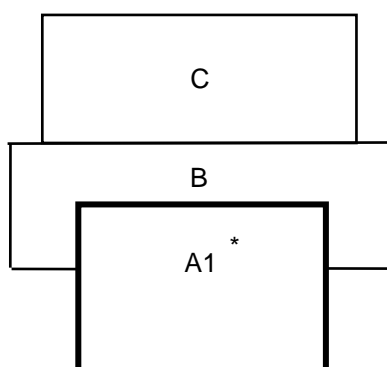

The symbols and numbers assigned to the equipments and cables on this diagram correspond to the ones in Sections 3 to 5.

SECTION 7. OPERATING CONDITION

The EUT was operated under the following conditions during the test.

7.1 Operating Condition


The test was carried out under TX mode and Test mode.

EUT was examined in the operating conditions that had maximum emissions.

7.2 Operating Flow [TX mode and Communication mode]


7.2.1 TX mode

Following operations were performed continuously.

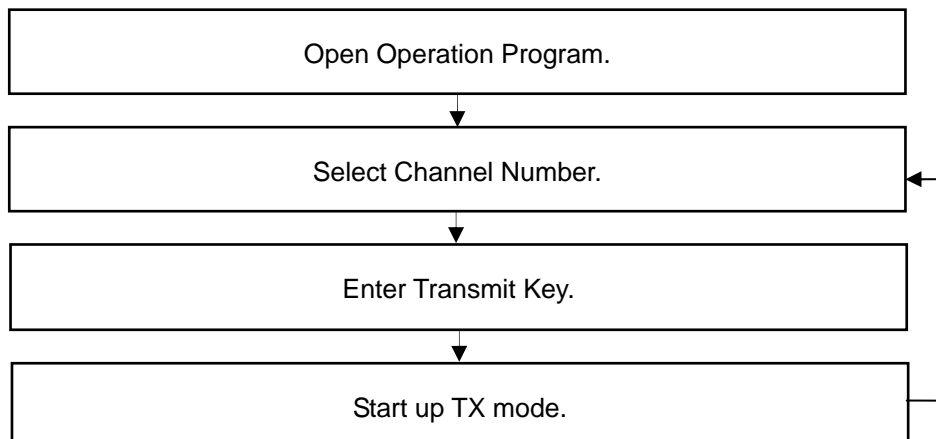

7.2.2 Communication mode


Following operations were performed continuously.

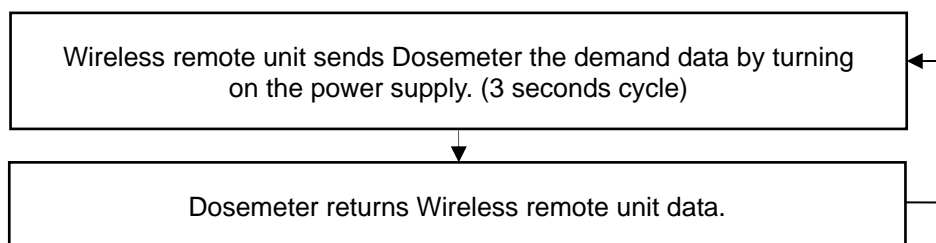


FJP-EM001 Version2.0

Field Strength Emission & Spurious Emissions - Radiated


Test setup

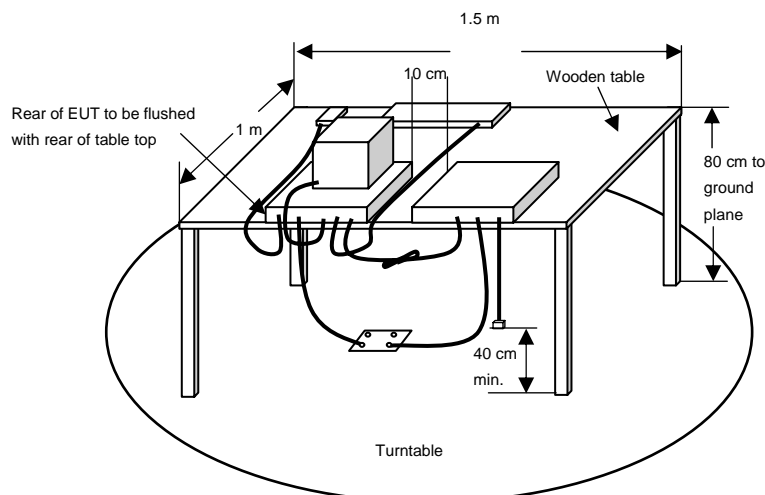

Schema for the spurious emission radiated electric field measurement < 30 - 1000MHz >

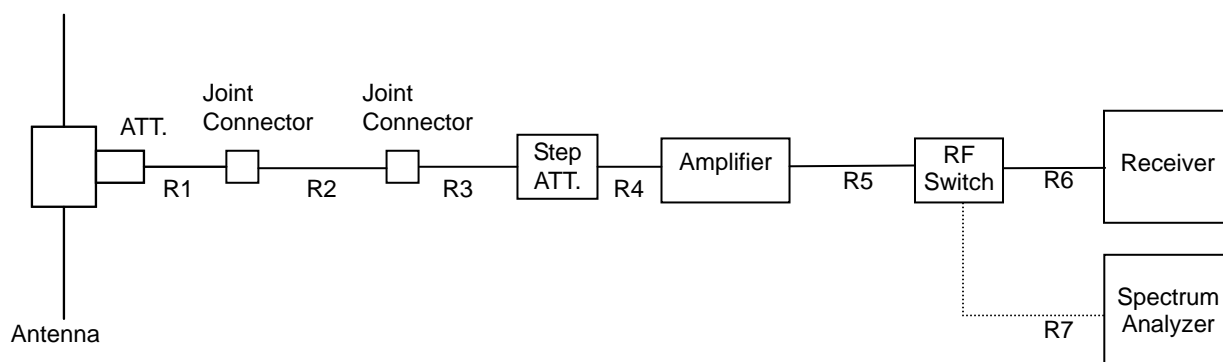

< Above 1GHz >



[Instrument Setup]

Frequency [MHz]	Instrument	Detector Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	Receiver	Quasi Peak	120 kHz	N.A.
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
		Average	1 MHz	10 Hz

[Preliminary Measurement]

EUT is tested on all operating conditions.

The antenna mast is attachable to the broadband Tri-Log and antenna height is adjustable 1 to 4 meters continuously, and antenna polarization is also changed. (vertical and horizontal)

The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree. Then spectrum chart are plotted out to find the worst emission conditions in configuration, operating mode, or ambient noise notation.

[Final Measurement]


The EUT operated in the worst emission condition found by the preliminary test.

The turntable azimuth (EUT direction) and antenna height (1 to 4 meters) are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition. At least six highest spectrum are measured by the test receiver (quasi-peak) and spectrum analyzer (peak and average). When the uncertain result was obtained, the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.

Restricted Bands of Operation

Schema for the spurious emissions conducted measurement

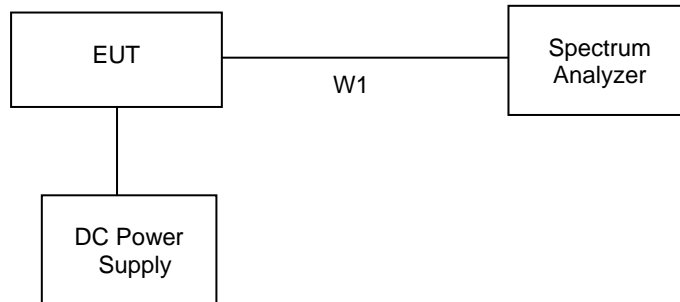

[Measurement]

The Spectrum Analyzer was connected directly to the antenna cable port.

The Spectrum Analyzer was setup using RBW = 100kHz, VBW = 100kHz


and sweep time = Auto.

EUT is tested on all operating conditions.

The spectrum are measured by spectrum analyzer.

Carrier Frequency Stability

Schema for the voltage variation measurement

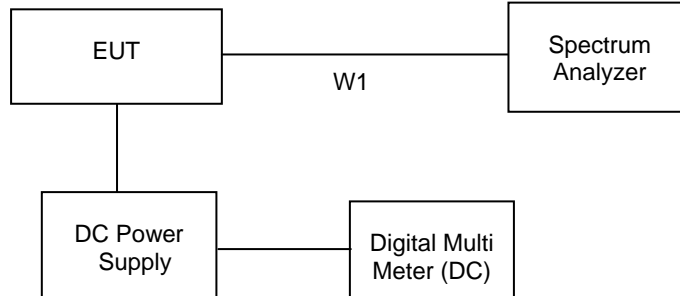

[Preliminary Measurement]

The Spectrum Analyzer was connected directly to the antenna cable port.

The Spectrum Analyzer was setup using RBW = 1MHz, VBW = 3MHz

and sweep time = Auto.

EUT is tested on all operating conditions.

The power supply voltage to the EUT was the normal value measured at the input to the EUT.

[Final Measurement]

The power supply voltage to the EUT was varied from 85% to 115% of the normal value measured at the input to the EUT.

SECTION 9. MEASUREMENT UNCERTAINTY

Radiated disturbance at 3m	
30 MHz – 1000 MHz	+/- 4.1 dB
Above 1 GHz	+/- 4.3 dB
Radiated disturbance at 10m	
30 MHz – 1000 MHz	+/- 5.6 dB
Above 1 GHz	+/- 4.3 dB
Radiated disturbance at 30m	
	N/A
Radiated disturbance (power)	
11.7 GHz – 12.7 GHz	+/- 4.3 dB
Conducted disturbance at mains terminals	
9 kHz – 30 MHz	+/- 3.0 dB
Conducted disturbance at telecommunication ports (voltage)	
9 kHz – 30 MHz	+/- 3.4 dB
Conducted disturbance at telecommunication ports (current)	
9 kHz – 30 MHz	+/- 2.8 dB
Conducted disturbance at terminals	
150 kHz – 30 MHz	+/- 2.8 dB
Disturbance power	
30 MHz – 300 MHz	+/- 4.9 dB
Radiated Magnetic Field	
9 kHz – 30 MHz	+/- 3.16 dB
Frequency Stability	
10 kHz – 1000 MHz	+/- 0.2 %

Note on Radiated Electric Field measurement uncertainty

The following items are not included in the calculations in spite of their own uncertainty components because it is impracticable to find the value.
It is our problem awaiting solution in future.

(1) Repeatability of measurement

It is not possible to calculate repeatability since the measurement was carried out only one time.

(2) Antenna factor variation

The definition of measured (radiated electric field strength) is not completed on the referred standard(s).

(3) Loss of EUT radiation propagation

It is certainly one of the uncertainty components, however is not able to calculate.

Please note that these uncertainties are not reflected to the compliance judgment of the test results in this report.

SECTION 10. EVALUATION OF TEST RESULTS

10.1 Field Strength Emission Test


10.1.1 TX 912.00MHz mode (Ch : Low)

Intertek Japan K.K

Kashima No.1 Test Site

Field Strength of Fundamental

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit
MODEL NO. : NRA30201-YYYYY-S
SERIAL NO. : 0800001
TEST MODE : TX 912.00MHz mode (Ch : Low)
POWER SOURCE : DC3V
DATE TESTED : Jan 13 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (Section 15.249(a))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 20.0 [degC]
HUMIDITY : 30.0 [%]
NOTE :

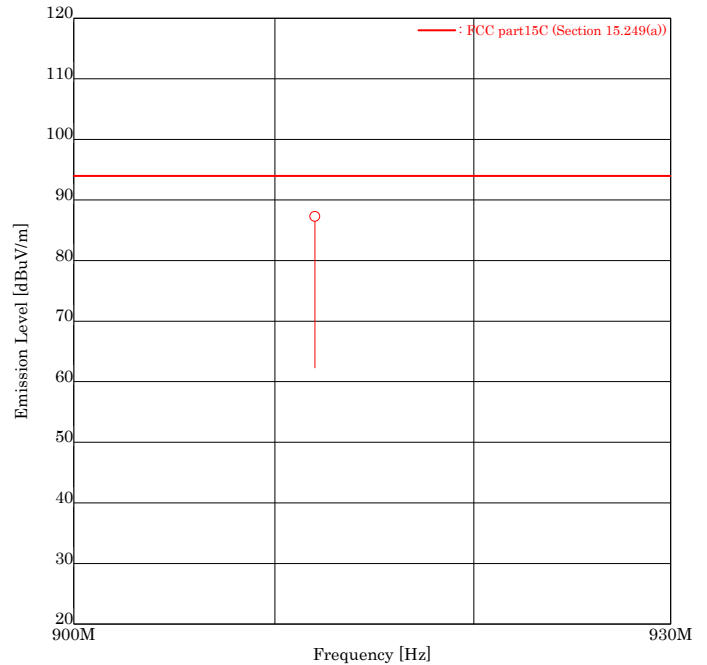

ENGINEER : Kazuo Masuda


FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	912.00	<u>73.8</u>	66.2	13.5	13.5	<u>87.3</u>	79.7	94.0	<u>6.7</u>	14.3

Higher six points are underlined.
Other frequencies : Below the FCC part15C (Section 15.249(a)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamplifier)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

10.1.2 TX 913.50MHz mode (Ch : Mid)

Intertek Japan K.K
Kashima No.1 Test Site
Field Strength of Fundamental

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit
MODEL NO. : NRA30201-YYYYY-S
SERIAL NO. : 0800001
TEST MODE : TX 913.50MHz mode (Ch : Mid)
POWER SOURCE : DC3V
DATE TESTED : Jan 13 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (Section 15.249(a))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 20.0 [degC]
HUMIDITY : 30.0 [%]
NOTE :

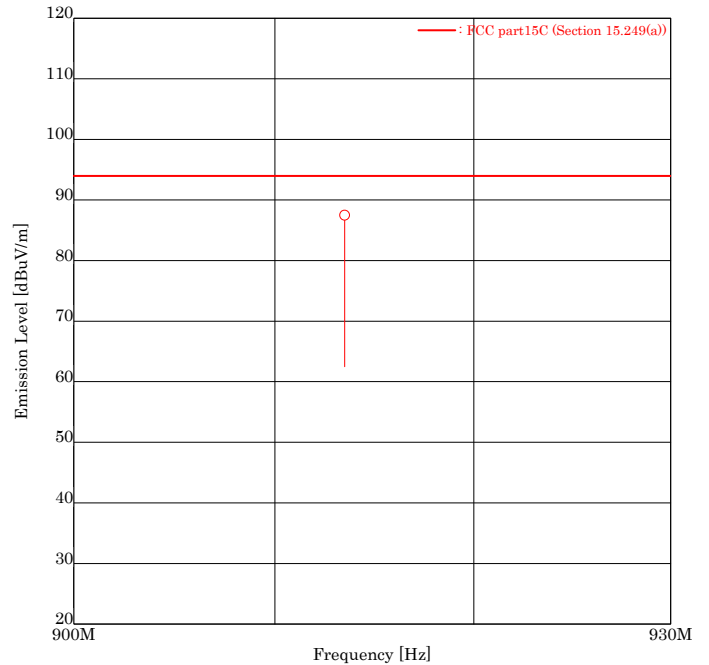

ENGINEER : Kazuo Masuda

FREQUENCY [No]	[MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	913.50	<u>74.0</u>	66.4	13.5	13.5	<u>87.5</u>	79.9	94.0	<u>6.5</u>	14.1

Higher six points are underlined.
Other frequencies : Below the FCC part15C (Section 15.249(a)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


10.1.3 TX 914.85MHz mode (Ch : High)

Intertek Japan K.K

Kashima No.1 Test Site

Field Strength of Fundamental

APPLICANT : Fuji Electric Systems Co., Ltd.
 EUT NAME : Wireless Remote Unit
 MODEL NO. : NRA30201-YYYYY-S
 SERIAL NO. : 0800001
 TEST MODE : TX 914.85MHz mode (Ch : High)
 POWER SOURCE : DC3V
 DATE TESTED : Jan 13 2009
 FILE NO. : JK09010002
 REGULATION : FCC part15C (Section 15.249(a))
 TEST METHOD : ANSI C63.4-2003
 DISTANCE : 3.00 [m]
 TEMPERATURE : 20.0 [degC]
 HUMIDITY : 30.0 [%]
 NOTE :

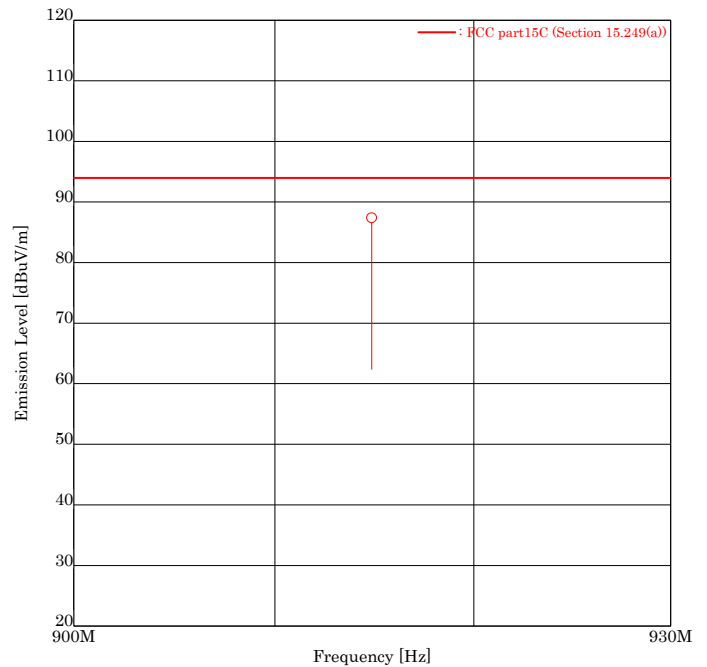

ENGINEER : Kazuo Masuda

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	914.85	<u>73.9</u>	66.5	13.5	13.5	<u>87.4</u>	80.0	94.0	<u>6.6</u>	14.0

Higher six points are underlined.

Other frequencies : Below the FCC part15C (Section 15.249(a)) limit

Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)

ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

10.2 Spurious Emissions – Radiated Test


10.2.1 TX 912.00MHz mode (Ch : Low) < 30MHz – 1000MHz >

Intertek Japan K.K

Kashima No.1 Test Site

Spurious Emissions - Radiated Test

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit (with Dosemeter)
MODEL NO. : NRA30201-YYYYY-S (NRF31)
SERIAL NO. : 0800001 (311001)
TEST MODE : TX 912.00MHz mode (Ch : Low)
POWER SOURCE : DC3V
DATE TESTED : Jan 15 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (15.209, 249(d))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 20.0 [degC]
HUMIDITY : 26.0 [%]
NOTE :

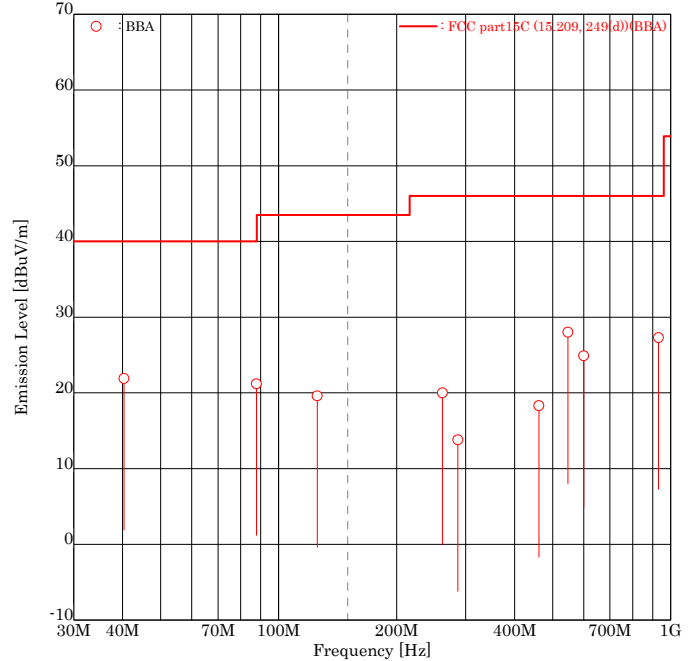

ENGINEER : Kazuo Masuda

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	40.30	-	<u>24.8</u>	-2.9	-2.9	-	<u>21.9</u>	40.0	-	<u>18.1</u>
2	87.75	-	<u>28.9</u>	-7.7	-7.7	-	<u>21.2</u>	40.0	-	<u>18.8</u>
3	125.40	-	<u>23.3</u>	-3.7	-3.7	-	<u>19.6</u>	43.5	-	<u>23.9</u>
4	261.80	-	22.1	-2.1	-2.1	-	20.0	46.0	-	26.0
5	286.60	-	14.6	-0.8	-0.8	-	13.8	46.0	-	32.2
6	461.00	-	13.9	4.4	4.4	-	18.3	46.0	-	27.7
7	547.00	<u>21.2</u>	14.9	6.8	6.8	<u>28.0</u>	21.7	46.0	<u>18.0</u>	24.3
8	599.99	<u>16.7</u>	14.7	8.2	8.2	<u>24.9</u>	22.9	46.0	<u>21.1</u>	23.1
9	931.45	<u>13.5</u>	-	13.8	13.8	<u>27.3</u>	-	46.0	<u>18.7</u>	-

Higher six points are underlined.
Other frequencies : Below the FCC part15C (15.209, 249(d)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preampl)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


10.2.2 TX 912.00MHz mode (Ch : Low) < 1GHz – 10GHz >

Intertek Japan K.K

Kashima No.1 Test Site

Spurious Emissions - Radiated Test

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit (with Dosemeter)
MODEL NO. : NRA30201-YYYYY-S (NRF31)
SERIAL NO. : 0800001 (311001)
TEST MODE : TX 912.00MHz mode (Ch : Low)
POWER SOURCE : DC3V
DATE TESTED : Jan 14 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (15.209, 249(d))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 21.0 [degC]
HUMIDITY : 28.0 [%]
NOTE :

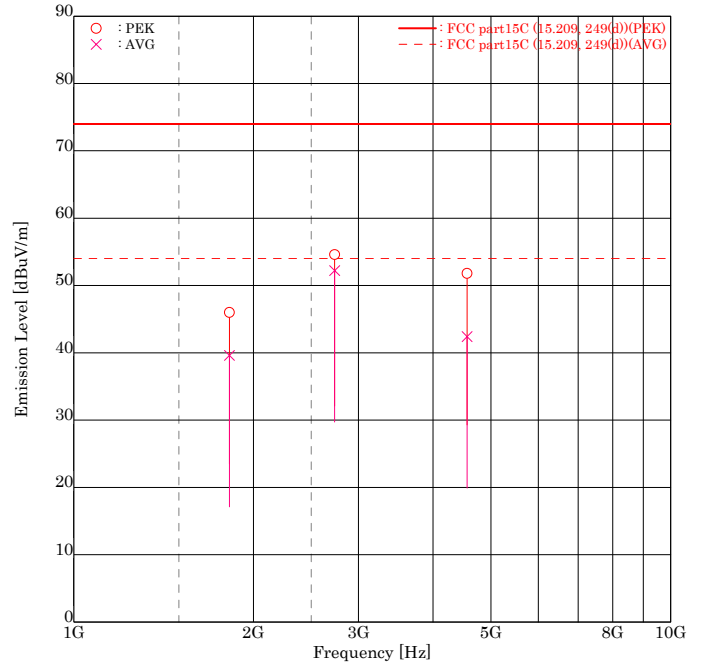

ENGINEER : Kazuo Masuda

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	1824.00	PEK	<u>43.7</u>	41.9	2.3	2.3	<u>46.0</u>	44.2	74.0	<u>28.0</u>	29.8
2	1824.00	AVG	<u>37.3</u>	33.8	2.3	2.3	<u>39.6</u>	36.1	54.0	<u>14.4</u>	17.9
3	2736.00	PEK	<u>48.7</u>	44.0	5.9	5.9	<u>54.6</u>	49.9	74.0	<u>19.4</u>	24.1
4	2736.00	AVG	<u>46.3</u>	37.0	5.9	5.9	<u>52.2</u>	42.9	54.0	<u>1.8</u>	11.1
5	4560.00	PEK	<u>40.2</u>	-	11.6	11.6	<u>51.8</u>	-	74.0	<u>22.2</u>	-
6	4560.00	AVG	<u>30.8</u>	-	11.6	11.6	<u>42.4</u>	-	54.0	<u>11.6</u>	-

Higher six points are underlined.
Other frequencies : Below the FCC part15C (15.209, 249(d)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preampl)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


10.2.3 TX 913.50MHz mode (Ch : Mid) < 30MHz – 1000MHz >

Intertek Japan K.K

Kashima No.1 Test Site

Spurious Emissions - Radiated Test

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit (with Dosemeter)
MODEL NO. : NRA30201-YYYYY-S (NRF31)
SERIAL NO. : 0800001 (311001)
TEST MODE : TX 913.50MHz mode (Ch : Mid)
POWER SOURCE : DC3V
DATE TESTED : Jan 15 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (15.209, 249(d))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 20.0 [degC]
HUMIDITY : 26.0 [%]
NOTE :

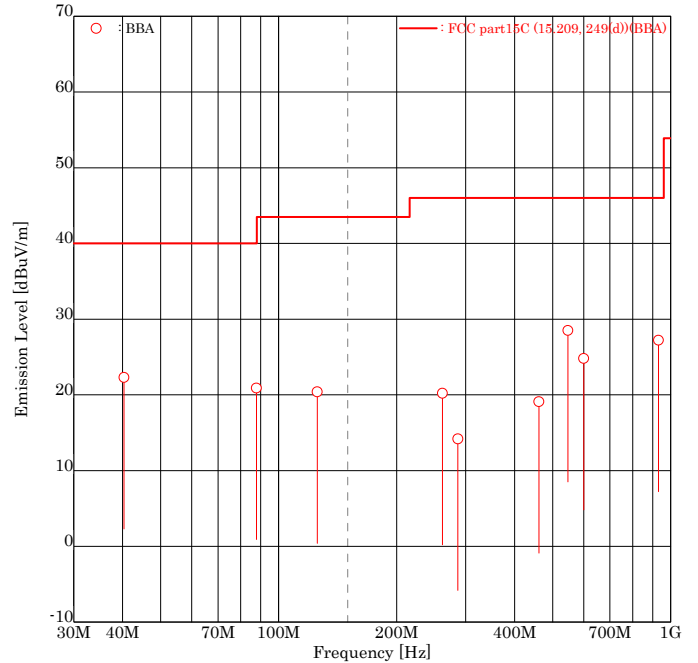

ENGINEER : Kazuo Masuda

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]		MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert
1	40.30	-	<u>25.2</u>	-2.9	-2.9	-	<u>22.3</u>	40.0	-	<u>17.7</u>	-
2	87.75	-	<u>28.6</u>	-7.7	-7.7	-	<u>20.9</u>	40.0	-	<u>19.1</u>	-
3	125.40	-	<u>24.1</u>	-3.7	-3.7	-	<u>20.4</u>	43.5	-	<u>23.1</u>	-
4	261.80	-	22.3	-2.1	-2.1	-	20.2	46.0	-	25.8	-
5	286.60	-	15.0	-0.8	-0.8	-	14.2	46.0	-	31.8	-
6	461.00	-	14.7	4.4	4.4	-	19.1	46.0	-	26.9	-
7	547.00	<u>21.7</u>	15.2	6.8	6.8	<u>28.5</u>	22.0	46.0	<u>17.5</u>	24.0	-
8	599.99	<u>16.6</u>	14.7	8.2	8.2	<u>24.8</u>	22.9	46.0	<u>21.2</u>	23.1	-
9	931.45	<u>13.4</u>	-	13.8	13.8	<u>27.2</u>	-	46.0	<u>18.8</u>	-	-

Higher six points are underlined.
Other frequencies : Below the FCC part15C (15.209, 249(d)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preampl)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


10.2.4 TX 913.50MHz mode (Ch : Mid) < 1GHz – 10GHz >

Intertek Japan K.K

Kashima No.1 Test Site

Spurious Emissions - Radiated Test

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit (with Dosimeter)
MODEL NO. : NRA30201-YYYYY-S (NRF31)
SERIAL NO. : 0800001 (311001)
TEST MODE : TX 913.50MHz mode (Ch : Mid)
POWER SOURCE : DC3V
DATE TESTED : Jan 14 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (15.209, 249(d))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 20.0 [degC]
HUMIDITY : 30.0 [%]
NOTE :

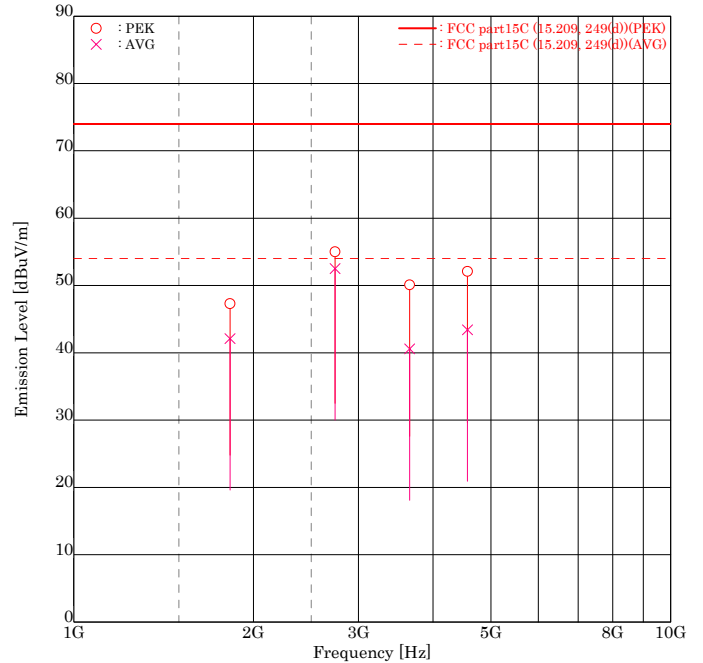

ENGINEER : Kazuo Masuda

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	1827.00	PEK	45.0	43.0	2.3	2.3	47.3	45.3	74.0	26.7	28.7
2	1827.00	AVG	<u>39.8</u>	35.9	2.3	2.3	<u>42.1</u>	38.2	54.0	<u>11.9</u>	15.8
3	2740.50	PEK	<u>49.0</u>	44.9	6.0	6.0	<u>55.0</u>	50.9	74.0	<u>19.0</u>	23.1
4	2740.50	AVG	<u>46.5</u>	39.1	6.0	6.0	<u>52.5</u>	45.1	54.0	<u>1.5</u>	8.9
5	3654.00	PEK	39.6	40.5	9.6	9.6	49.2	50.1	74.0	24.8	23.9
6	3654.00	AVG	30.0	<u>31.0</u>	9.6	9.6	39.6	<u>40.6</u>	54.0	14.4	<u>13.4</u>
7	4567.50	PEK	40.2	<u>40.5</u>	11.6	11.6	51.8	<u>52.1</u>	74.0	22.2	<u>21.9</u>
8	4567.50	AVG	<u>31.8</u>	31.0	11.6	11.6	<u>43.4</u>	42.6	54.0	<u>10.6</u>	11.4

Higher six points are underlined.
Other frequencies : Below the FCC part15C (15.209, 249(d)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preampl)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


10.2.5 TX 914.85MHz mode (Ch : High) < 30MHz – 1000MHz >

Intertek Japan K.K

Kashima No.1 Test Site

Spurious Emissions - Radiated Test

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit (with Dosemeter)
MODEL NO. : NRA30201-YYYYY-S (NRF31)
SERIAL NO. : 0800001 (311001)
TEST MODE : TX 914.85MHz mode (Ch : High)
POWER SOURCE : DC3V
DATE TESTED : Jan 15 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (15.209, 249(d))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 20.0 [degC]
HUMIDITY : 26.0 [%]
NOTE :

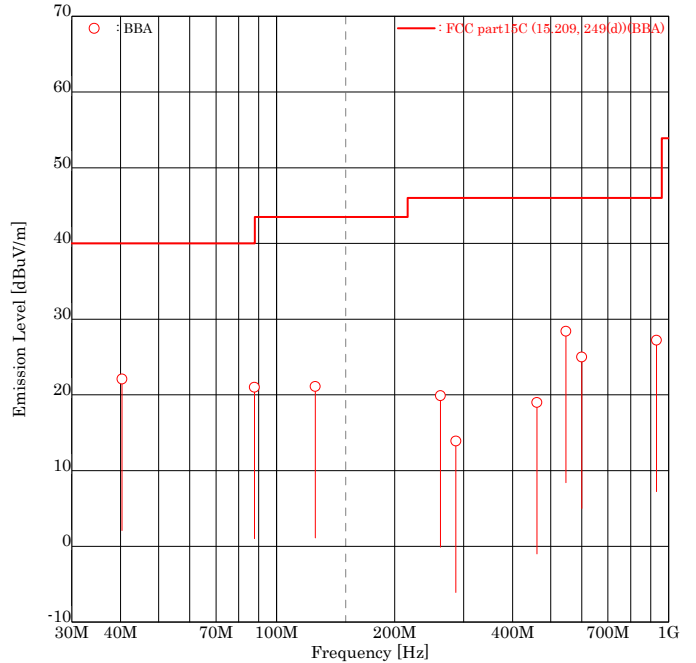

ENGINEER : Kazuo Masuda

FREQUENCY [No]	[MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]		MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert
1	40.30	-	<u>25.0</u>	-2.9	-2.9	-	<u>22.1</u>	40.0	-	-	<u>17.9</u>
2	87.75	-	<u>28.7</u>	-7.7	-7.7	-	<u>21.0</u>	40.0	-	-	<u>19.0</u>
3	125.40	-	<u>24.8</u>	-3.7	-3.7	-	<u>21.1</u>	43.5	-	-	<u>22.4</u>
4	261.80	-	22.0	-2.1	-2.1	-	19.9	46.0	-	-	26.1
5	286.60	-	14.7	-0.8	-0.8	-	13.9	46.0	-	-	32.1
6	461.00	-	14.6	4.4	4.4	-	19.0	46.0	-	-	27.0
7	547.00	<u>21.6</u>	15.1	6.8	6.8	<u>28.4</u>	21.9	46.0	<u>17.6</u>	24.1	
8	599.99	<u>16.8</u>	14.5	8.2	8.2	<u>25.0</u>	22.7	46.0	<u>21.0</u>	23.3	
9	931.45	<u>13.4</u>	-	13.8	13.8	<u>27.2</u>	-	46.0	<u>18.8</u>	-	

Higher six points are underlined.
Other frequencies : Below the FCC part15C (15.209, 249(d)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamplifier)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


10.2.6 TX 914.85MHz mode (Ch : High) < 1GHz – 10GHz >

Intertek Japan K.K

Kashima No.1 Test Site

Spurious Emissions - Radiated Test

APPLICANT : Fuji Electric Systems Co., Ltd.
EUT NAME : Wireless Remote Unit (with Dosemeter)
MODEL NO. : NRA30201-YYYYY-S (NRF31)
SERIAL NO. : 0800001 (311001)
TEST MODE : TX 914.85MHz mode (Ch : High)
POWER SOURCE : DC3V
DATE TESTED : Jan 14 2009
FILE NO. : JK09010002
REGULATION : FCC part15C (15.209, 249(d))
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 21.0 [degC]
HUMIDITY : 28.0 [%]
NOTE :

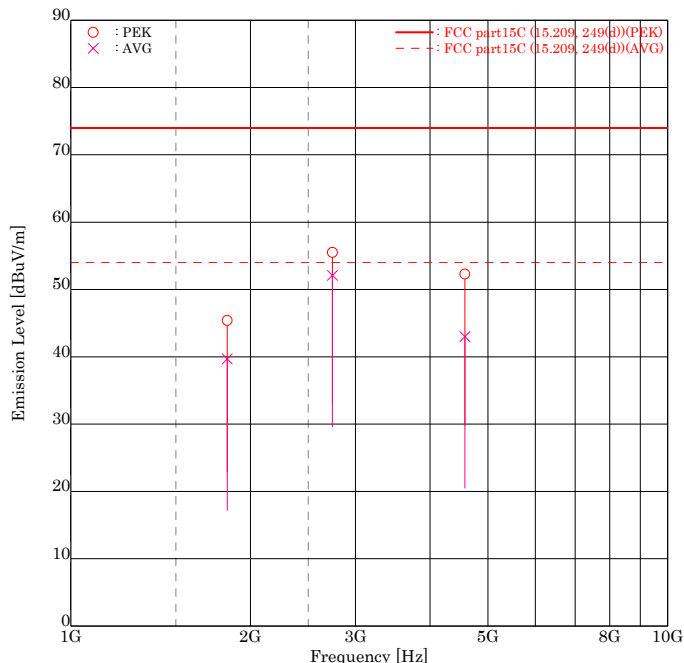


ENGINEER : Kazuo Masuda

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	1829.70	PEK	<u>43.1</u>	41.0	2.3	2.3	<u>45.4</u>	43.3	74.0	<u>28.6</u>	30.7
2	1829.70	AVG	<u>37.4</u>	32.8	2.3	2.3	<u>39.7</u>	35.1	54.0	<u>14.3</u>	18.9
3	2744.55	PEK	<u>49.5</u>	44.0	6.0	6.0	<u>55.5</u>	50.0	74.0	<u>18.5</u>	24.0
4	2744.55	AVG	<u>46.1</u>	38.0	6.0	6.0	<u>52.1</u>	44.0	54.0	<u>1.9</u>	10.0
5	4574.25	PEK	<u>40.6</u>	40.0	11.7	11.7	<u>52.3</u>	51.7	74.0	<u>21.7</u>	22.3
6	4574.25	AVG	<u>31.3</u>	30.8	11.7	11.7	<u>43.0</u>	42.5	54.0	<u>11.0</u>	11.5


Higher six points are underlined.
Other frequencies : Below the FCC part15C (15.209, 249(d)) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preampl)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

10.3 Spurious Emissions – RF Antenna Conducted & Restricted bands of operation

10.3.1 TX 912.00MHz mode (Ch : Low)

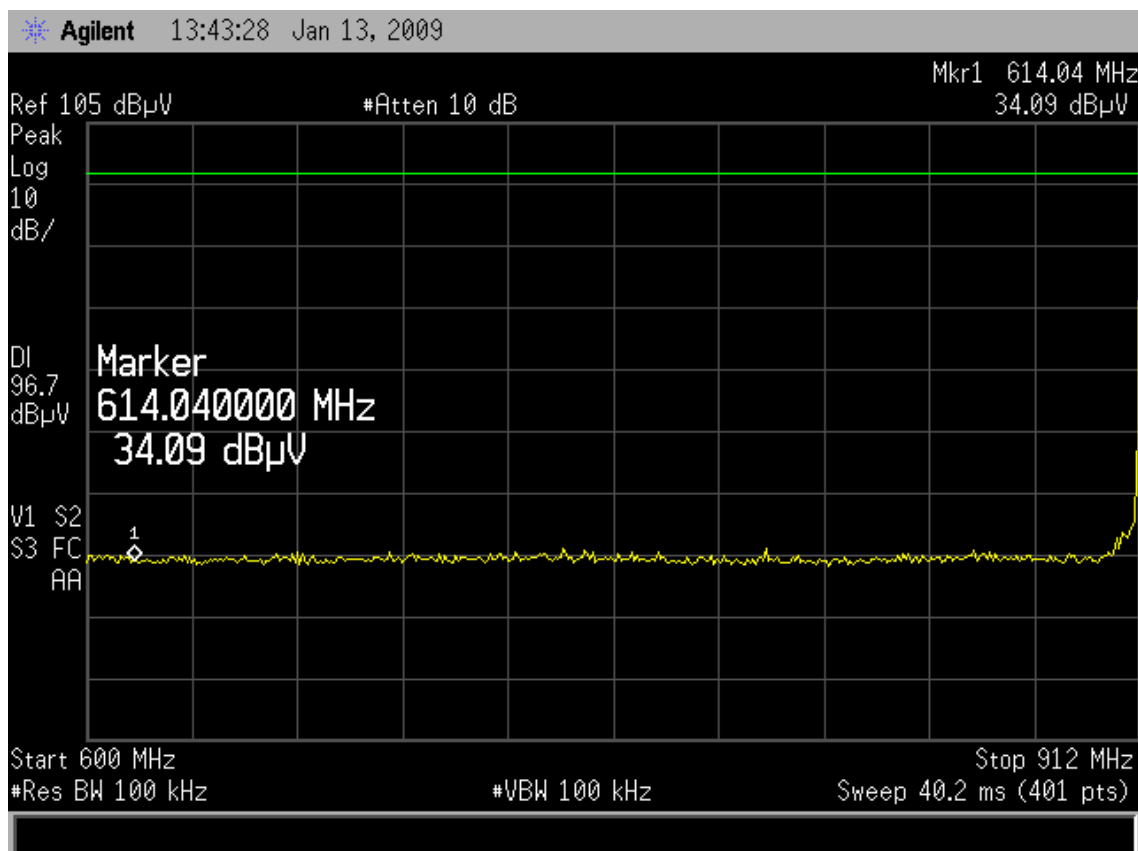

10.3.2 TX 914.85MHz mode (Ch : High)

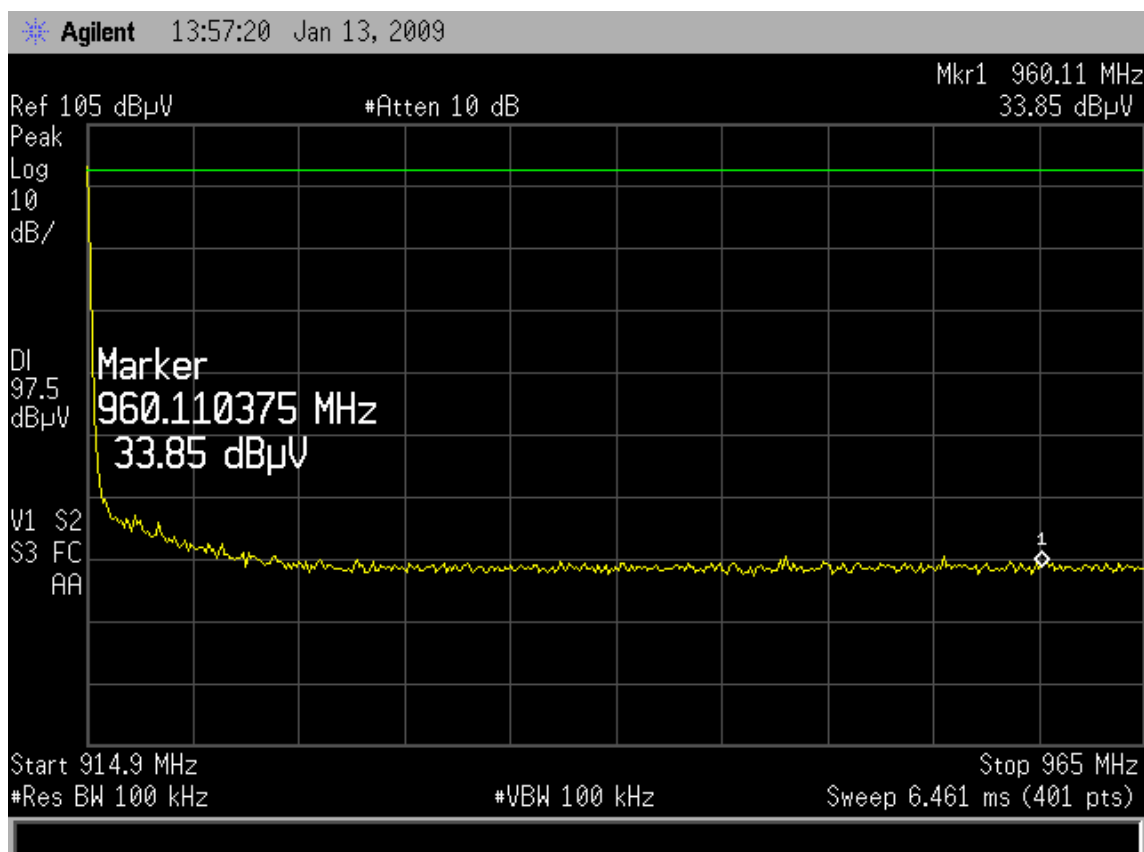

10.4 Frequency Tolerance

Test date : January 16, 2009
Temperature : 22 °C
Humidity : 25 %
Engineer : Kazuo Masuda

10.4.1 Variation Carrier Frequency Stability

Ch	Rate (%)	Voltage (V)	Frequency (MHz)	Deviation (ppm)
1	85	2.55	912.0375	13.71
	100	3.00	912.0250	–
	115	3.45	912.0350	10.96
10	85	2.55	913.5250	8.21
	100	3.00	913.5325	–
	115	3.45	913.5375	5.47
20	85	2.55	914.8850	0.00
	100	3.00	914.8850	–
	115	3.45	914.8875	2.73

10.4.2 Variation Carrier Output Power

Ch	Rate (%)	Voltage (V)	Maximum Output Power (dBm)	Deviation (dBm)
1	85	2.55	-10.68	-0.13
	100	3.00	-10.55	–
	115	3.45	-10.23	0.32
10	85	2.55	-10.21	-0.09
	100	3.00	-10.12	–
	115	3.45	-9.83	0.29
20	85	2.55	-9.10	-0.12
	100	3.00	-8.98	–
	115	3.45	-8.73	0.25

SECTION 11. LIST OF MEASURING INSTRUMENTS

Instrument	Model No.	Serial No.	Manufacturer	Cal. date	Due date
AC Conducted Emission					
LISN (EUT)	ESH2-Z5	882395/022	Rohde & Schwarz	Sep. 04, 08	Sep. 30, 09
6dB Attenuator	CFA-01	None	TME	May 02, 08	May 31, 09
Test Receiver	ESS	844861/004	Rohde & Schwarz	Jun. 05, 08	Jun. 30, 09
RF Switch	ACX-150-1	None	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(7.0m)	C1	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(2.0m)	C2	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(1.0m)	R6	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(1.0m)	R7	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Field Strength Emission & Spurious Emissions - Radiated					
Tri-Log Antenna	VULB9168WP	287	Schwarzbeck	Nov. 18, 08	Nov. 30, 09
6dB Attenuator	MP721B	M57593	Anritsu	Nov. 12, 08	Nov. 30, 09
Step Attenuator	8494B	2726A14513	Hewlett Packard	Nov. 12, 08	Nov. 30, 09
Amplifier	ZX60-3018G	001	Intertek Japan	Nov. 12, 08	Nov. 30, 09
RF Switch	ACX-150-1	None	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(9.0m)	R1	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	10D-2W(5.5m)	R2	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(2.0m)	R3	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(0.2m)	R4	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(1.0m)	R5	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(1.0m)	R6	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Coaxial cable	5D-2W(1.0m)	R7	Intertek Japan	Nov. 12, 08	Nov. 30, 09
Test Receiver	ESS	844861/004	Rohde & Schwarz	Jun. 05, 08	Jun. 30, 09
Double Ridged Antenna	3115	5044	EMCO	Jun. 18, 08	Jun. 30, 09
3dB Attenuator	4768-3	79	narda	Oct. 31, 08	Oct. 31, 09
Amplifier	83051A	3332A00329	Hewlett Packard	Oct. 31, 08	Oct. 31, 09
Coaxial cable	SOCOFLEX102 (1.0m)	R14	SUHNER	Oct. 31, 08	Oct. 31, 09
Coaxial cable	KPS-1501-1969-KPS (5.0m)	R15	Insulated Wire	Oct. 31, 08	Oct. 31, 09
Spectrum Analyzer	8564E	3643A00665	Hewlett Packard	May 08, 08	May 31, 09
Site Attenuation				Dec. 26, 08	Dec. 31, 09
Spurious Emissions – RF Antenna Conducted & Restricted bands of operation					
Spectrum Analyzer	R3182	111100429	ADVANTEST	Jun. 06, 08	Jun. 30, 09
Frequency Tolerance					
Spectrum Analyzer	E7403A	MY42000067	Agilent	Feb. 08, 08	Feb. 28, 09
Digital Multi Meter	CD721	3051002	Sanwa	Jan. 08, 09	Jan. 31, 10
DC Power Supply	PS-3020	None	Daiwa	N.A.	N.A.

Note : Test instruments are calibrated according to Quality Manual and Calibration Rules of Intertek Japan K.K.