




4-DIR & CENTER PUSH BUTTON

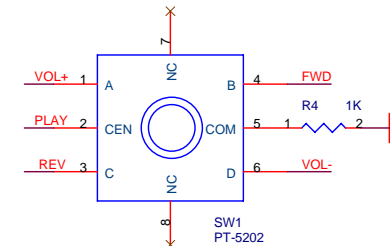

MFB BUTTON



LED



GPIO vs. APP FUNCTION

GPIO	FUNCTION
P1_2	EEPROM SCL
P1_3	EEPROM SDA
P0_1	VOL+
P1_6	VOL-
P2_7	FWD
P0_5	REV
P0_2	PLAY/PAUSE
P3_5	BUZZER DRIVER (*OPTIONAL)

CONFIGURATION TABLE

P2_0	P2_4	MODE
H	H	APPLICATION
L	H	BASEBAND (IBDK MODE)
L	L	BOOT MODE

EAN L: EXT FLASH, H: INT ROM

ISSC ISSC Technologies Corp.
 ADD: 4F, No.8, Dusing Rd., Hsinchu Science Park,
 Hsinchu City 30078, Taiwan
 TEL: 886-3-5778385

Board Name	IS1681N DEFAULT_A		P/N
Size	IS1681N_A		Rev
Date:	Tuesday, January 17, 2012	Sheet	1 of 2