

TEST REPORT

REPORT NUMBER: I09GE4049-FCC-BT

ON

Type of Equipment: Mobile Phone
Type of Designation: Sonim XP3.20-E Quest / Land Rover S1-E by Sonim
Type Number: P22C001AA
Manufacturer: SONIM TECHNOLOGIES INC.

ACCORDING TO


FCC Part 15, FREQUENCY Hopping Spread Spectrum
Transceiver

PART 15 subpart C 15.247

China Telecommunication Technology Labs.

Month date, year
Mar, 20, 2009

Signature



He Guili
Director

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

FCC ID: WYPP22C001AA

Report Date: 2009-3-20

Test Firm Name: China Telecommunication Technology Labs

Registration Number: 840587

Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC Parts 15, subpart C 15.247. The sample tested was found to comply with the requirements defined in the applied rules.

CONTENTS

1 GENERAL INFORMATION	4
1.1 NOTES	4
1.2 TESTERS	5
1.3 TESTING LABORATORY INFORMATION	6
1.4 DETAILS OF APPLICANT OR MANUFACTURER	7
2 TEST ITEM	8
2.1 GENERAL INFORMATION	8
2.2 OUTLINE OF EUT	8
2.3 MODIFICATIONS INCORPORATED IN EUT	8
2.4 EQUIPMENT CONFIGURATION	8
2.5 OTHER INFORMATION	8
3 SUMMARY OF TEST RESULTS	9
4 TEST RESULTS	10
4.1 PEAK POWER	10
4.2 BAND EDGES (CONDUCTED)	13
4.3 BAND EDGES MEASUREMENT (RADIATED)	16
4.4 FREQUENCY SEPARATION	21
4.5 NUMBER OF HOPPING FREQUENCY	24
4.6 TIME OF OCCUPANCY	26
4.7 SPURIOUS MEASUREMENT (CONDUCTED)	29
4.8 RADIATED SPURIOUS MEASUREMENT	32
4.9 POWER LINE CONDUCTED EMISSIONS	34
ANNEX A EUT PHOTOS	36
ANNEX B DEVIATIONS FROM PRESCRIBED TEST METHODS	41

1 General Information

1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC Parts 15, subpart C 15.247.

The test results of this test report relate exclusively to the item(s) tested as specified in section 2.

The following deviation from, additions to, or exclusions from the test specifications have been made. See Annex B.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of director of CTTL Mr. He Guili.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

1.2 Testers

Name: Li Dongjin
Position: Engineer
Department: Department of EMC test
Signature: 

Editor of this test report:

Name: Li Guoqing
Position: Engineer
Department: Department of EMC test
Date: 2009-3-20
Signature: 

Technical responsibility for area of testing:

Name: Zou Dongyi
Position: Manager
Department: Department of EMC test
Date: 2009-3-20
Signature: 

1.3 Testing Laboratory information

1.3.1 Location

Name: China Telecommunication Technology Labs.

Address: No. 11, Yue Tan Nan Jie, Xi Cheng District

BEIJING

P. R. CHINA, 100083

Tel: +86 10 68094053

Fax: +86 10 68011404

Email: emc@chinattl.com

1.3.2 Details of accreditation status

Accredited by: China National Accreditation for Laboratory (CNAL)

Registration number: CNAL Registration No.L0570

Standard: ISO/IEC 17025:2005

1.3.3 Test location, where different from section 1.3.1

Name: -----

Street: -----

City: -----

Country: -----

Telephone: -----

Fax: -----

Postcode: -----

1.4 Details of applicant or manufacturer

1.4.1 Applicant

Name: SONIM TECHNOLOGIES INC.
Address: 1875 S.GRANT STREET
SAN MATEO, CA 94402, USA
Country: USA
Telephone: +1 650 704 4926
Fax: +1 650 378 8109
Contact: JASEN KOLEV
Telephone: +1 650 704 4926
Email: jasen@sonimtech.com

1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: SONIM TECHNOLOGIES INC.
Address: 1875 S.GRANT STREET
SAN MATEO, CA 94402, USA

1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: Flextonics Industrial (Zhuhai)
Address: Xin Qing Science & Technology Industrial Park, Jing An
Town,
DouMen, ZhuHai City, GuangDong, P.R. China,
Zip Code: 519180

2 Test Item

2.1 General Information

Manufacturer: SONIM TECHNOLOGIES INC.
Name: Mobile Phone
Model Number: Sonim XP3.20-E Quest / Land Rover S1-E by Sonim
Type Number: P22C001AA
Serial Number: --
Production Status: Production
Receipt date of test item: 2009-1-8

2.2 Outline of EUT

E.U.T. is a GSM Mobile phone.

2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	SONIM TECHNOLOGIES INC.	Sonim XP3.20-E Quest / Land Rover S1-E by Sonim	--	None
B	adapter	SONIM TECHNOLOGIES INC.	DSA-0051-05C FEU 51055F	--	None
C	battery	SONIM TECHNOLOGIES INC.	XP3.20-0001100	--	None
D	Earphone	SONIM TECHNOLOGIES INC.	ME-848B14	--	None

Cables:

Item	Cable Type	Manufacturer	Length	Shield	Quantity	Remarks
1	DC cable on Adapter	Unknown	1.8m	No	1	None

2.5 Other Information

Hardware version: A

Software version: 05.0.0-18.2-1

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

3 Summary of Test Results

A brief summary of the tests carried out is shown as following.

	Name of Test	Result
1、	Peak power	Pass
2、	Band edge (conducted)	Pass
3、	Band edge (radiated)	Pass
4、	Frequency separation	Pass
5、	Number of hopping frequency	Pass
6、	Time of occupancy	Pass
7、	Spurious emission (conducted)	Pass
8、	Spurious emission (radiated)	Pass
9、	Power line Conducted Emissions	Pass
Note: none		

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

4 Test Results

4.1 Peak power

Specifications:	15.247 (b)(3)(i),(ii)and(iii)					
Date of Tests	2009-3-5					
Test conditions:	Ambient Temperature: 15℃-35℃ Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	Fix channel transmit					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup:

The Universal Radio Communications Tester was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a coupling.

Test Results:

channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
0	2402	1.25	30	Pass
39	2441	0.70	30	Pass
78	2479	-0.18	30	pass

FCC Parts 15 subpart C 15.247


Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

Test Data:

Channel 0:

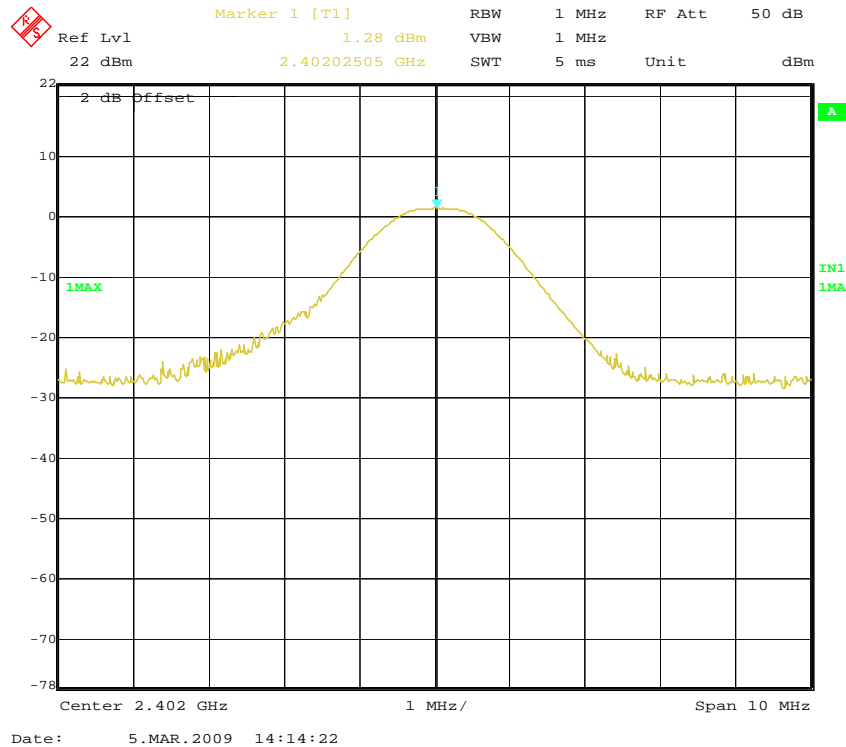


Channel 39

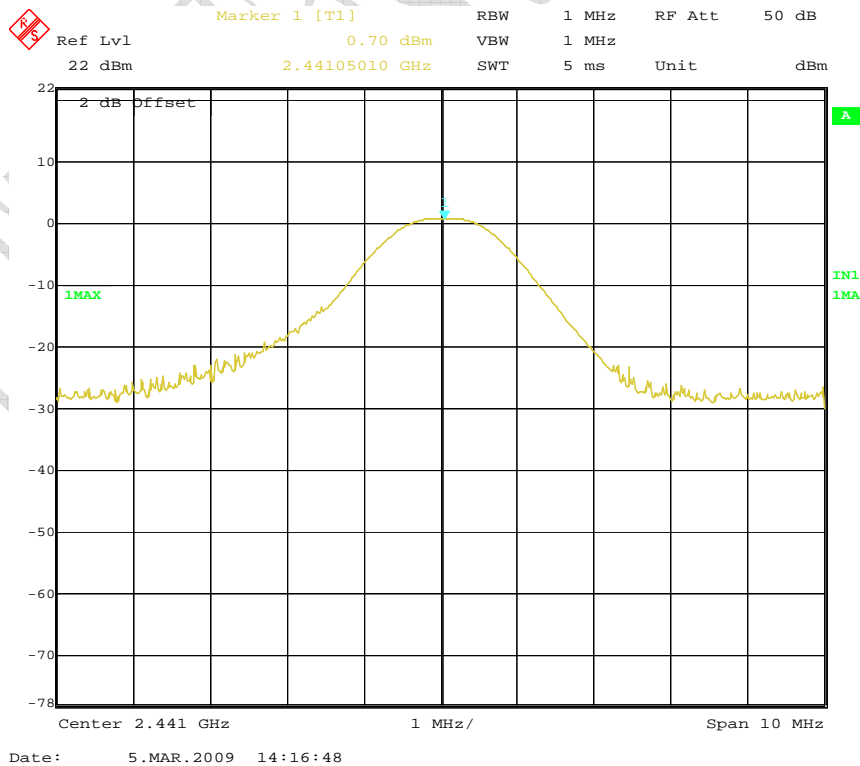

FCC Parts 15 subpart C 15.247
Equipment:
Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

Channel 78

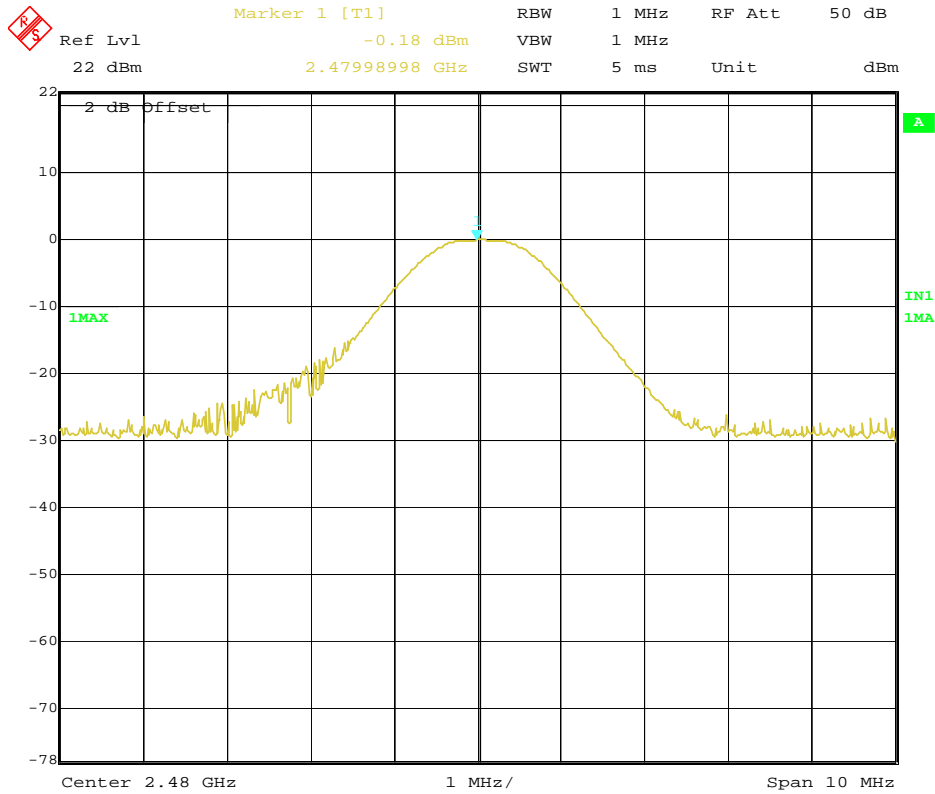

Date: 5.MAR.2009 14:21:36

4.2 Band edges (conducted)

Specifications:	15.247 (d)					
Date of Tests	2009-3-5					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	Fix channel transmit					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup:

The Universal Radio Communications Tester was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a coupling.

FCC Parts 15 subpart C 15.247


Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

Test data:

Channel 0, fixed mode, left band-edge

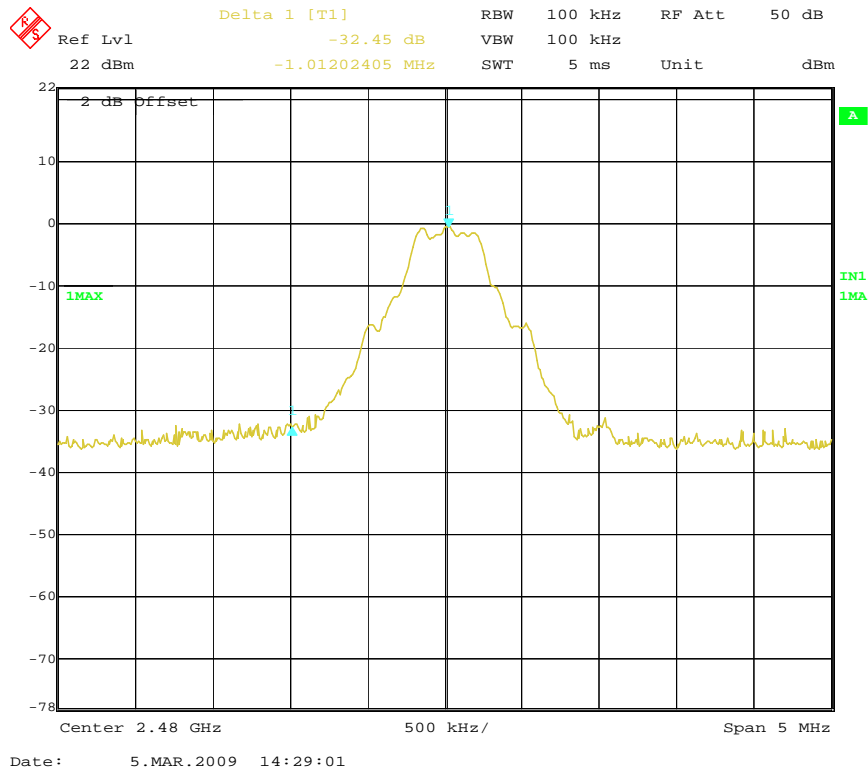

Hopping mode, left band-edge

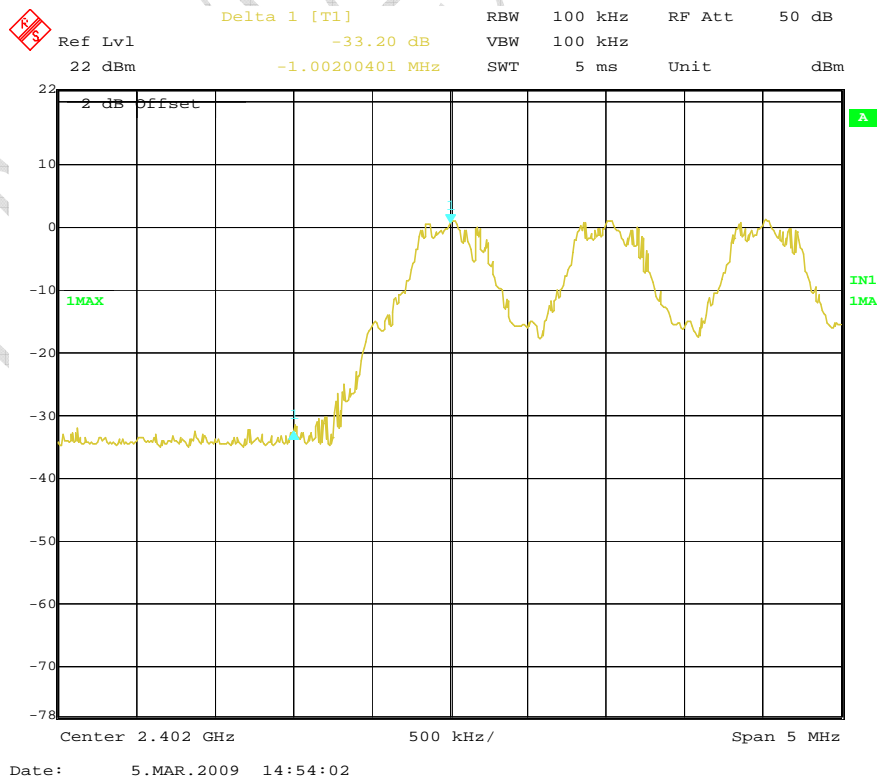


FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

Channel 78, fixed mode, right band-edge

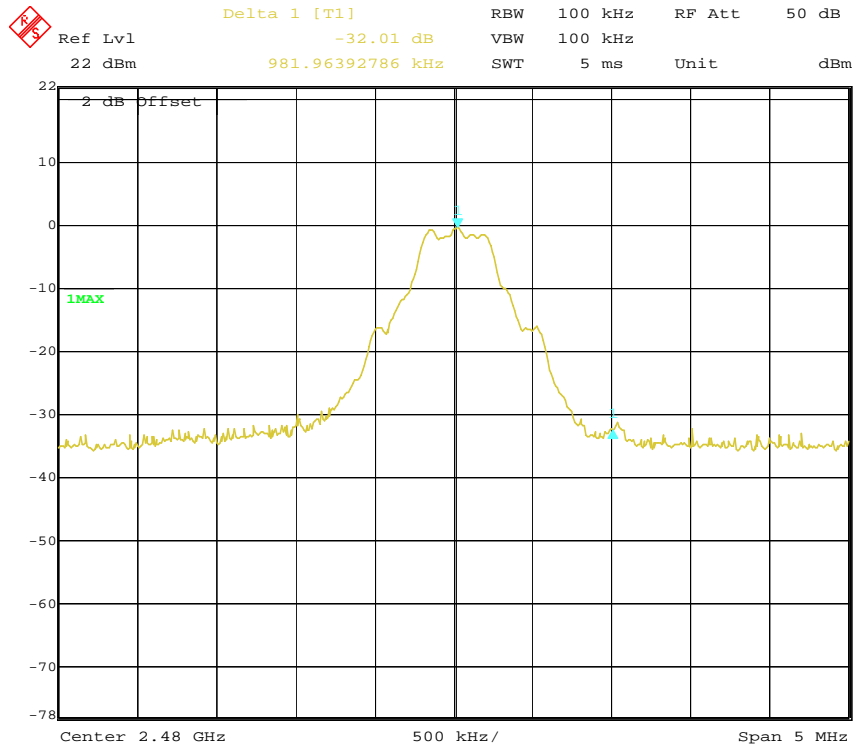

Date: 5.MAR.2009 14:32:54

Hopping mode, right band-edge

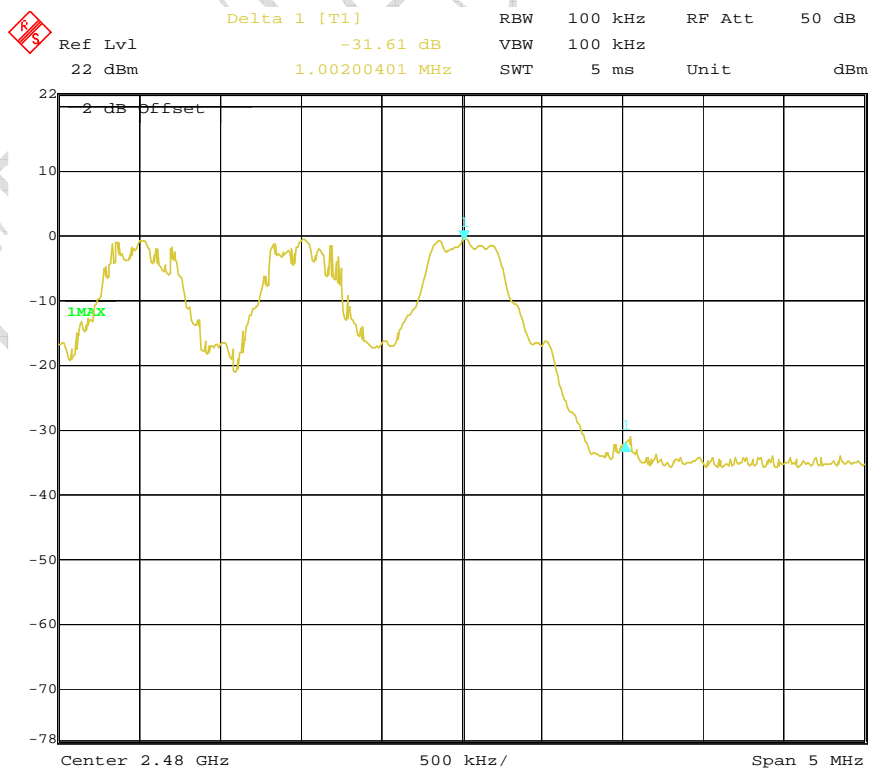

Date: 5.MAR.2009 14:38:37

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

4.3 Band edges measurement (Radiated)

Specifications:	15.247 (c); 15.205(a) and 15.209(a)					
Date of Tests	2009-3-5					
Test conditions:	Ambient Temperature: 15℃-35℃ Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	Fix channel transmit					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Horn Antenna	R/S	HF906	100037	2010-01-09	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-16	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup:

The EUT was placed in an anechoic chamber. The Universal Radio Communications Tester was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a Horn antenna.

Test method:

Use peak and average detector to measure band edges.

Test should be performing under Vertical and Horizontal modes.

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

Test data:


Channel 0

Vertical

Peak mode:

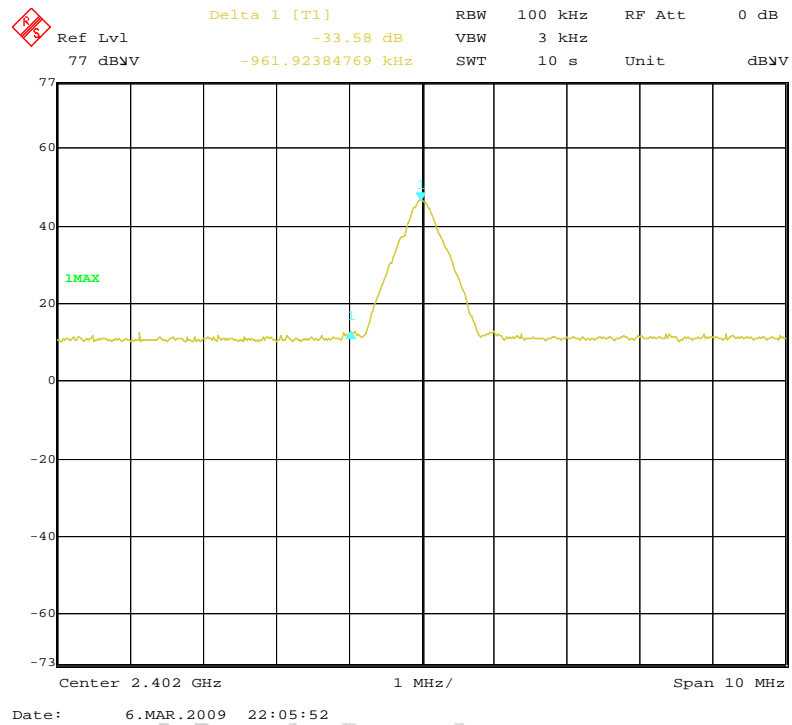

Average mode:

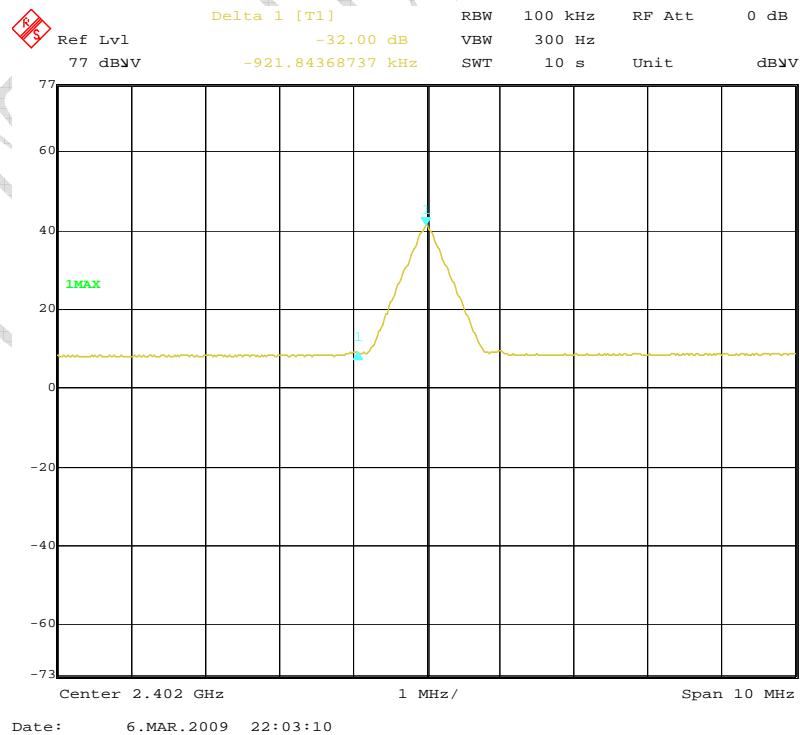

FCC Parts 15 subpart C 15.247

Equipment:


Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT


Channel 0

Horizontal

Peak mode:

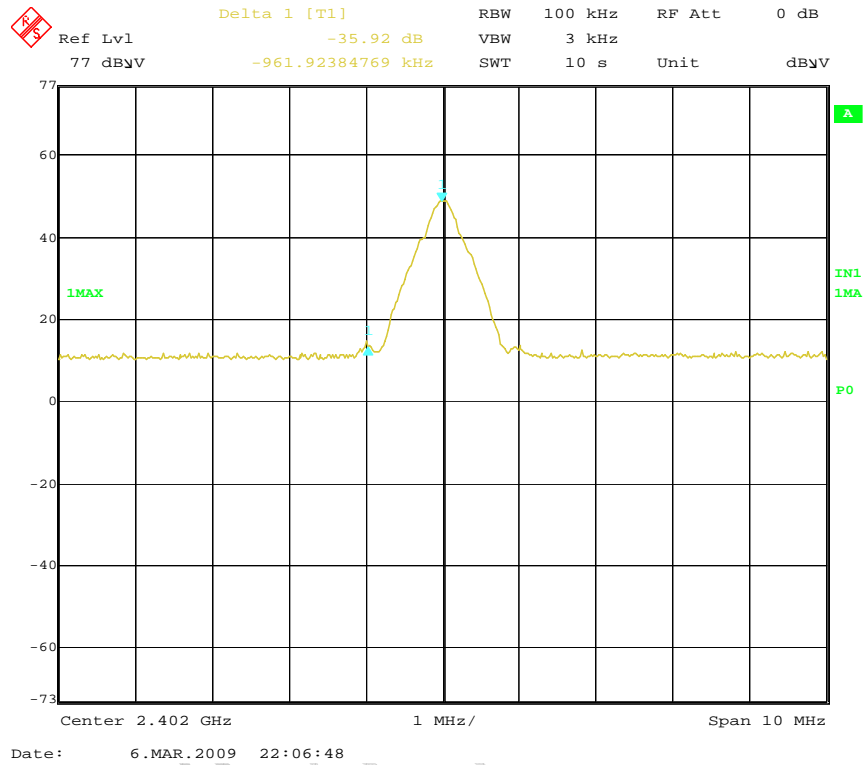

Average mode:

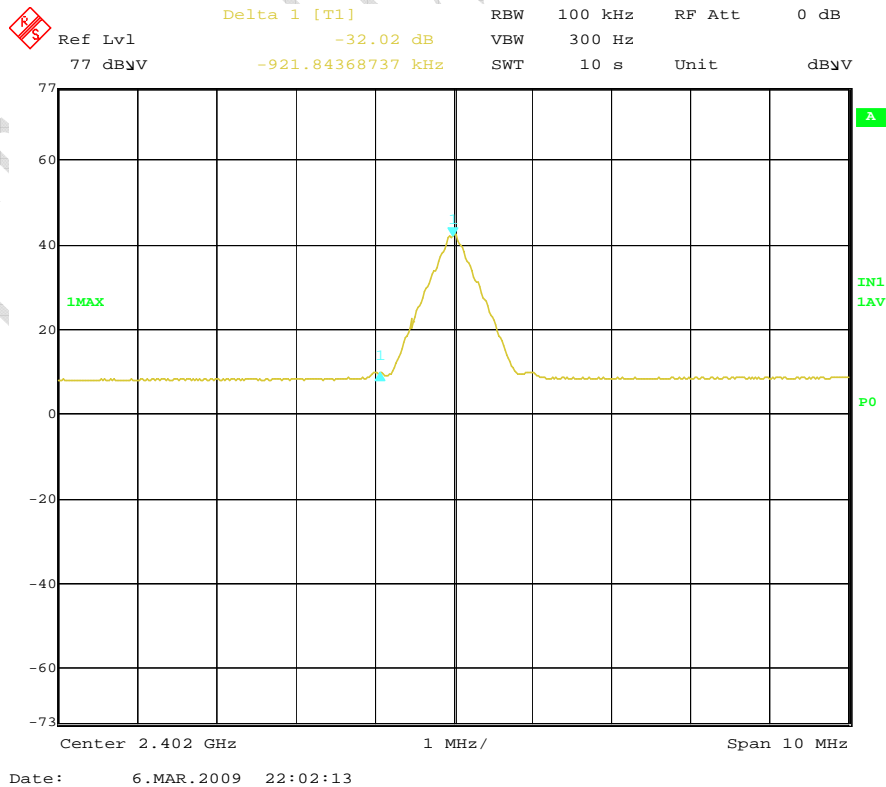

FCC Parts 15 subpart C 15.247

Equipment:


Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

Channel 78


Vertical

Peak mode:

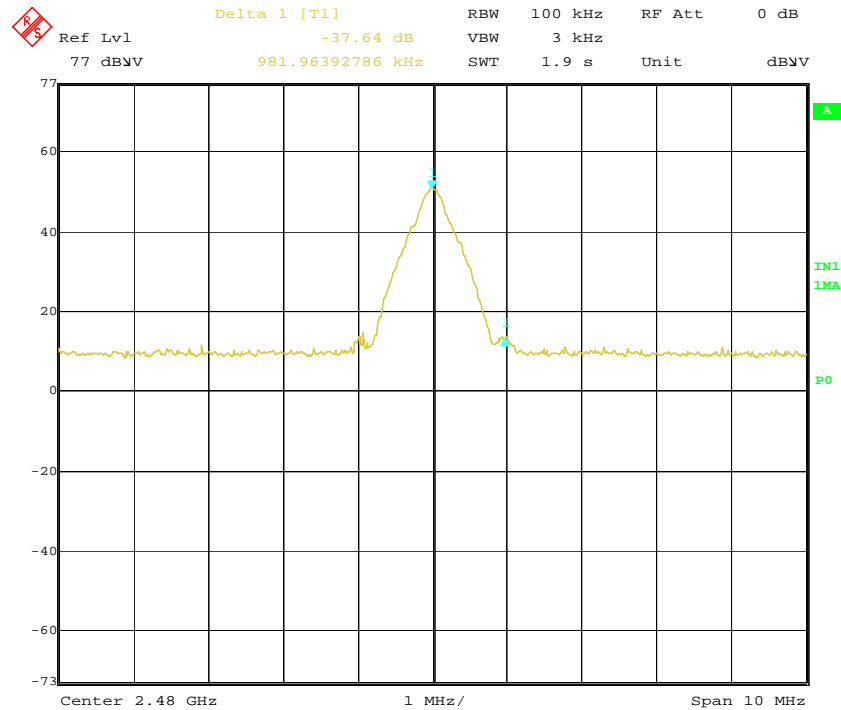

Date: 6.MAR.2009 21:43:01

Average mode:

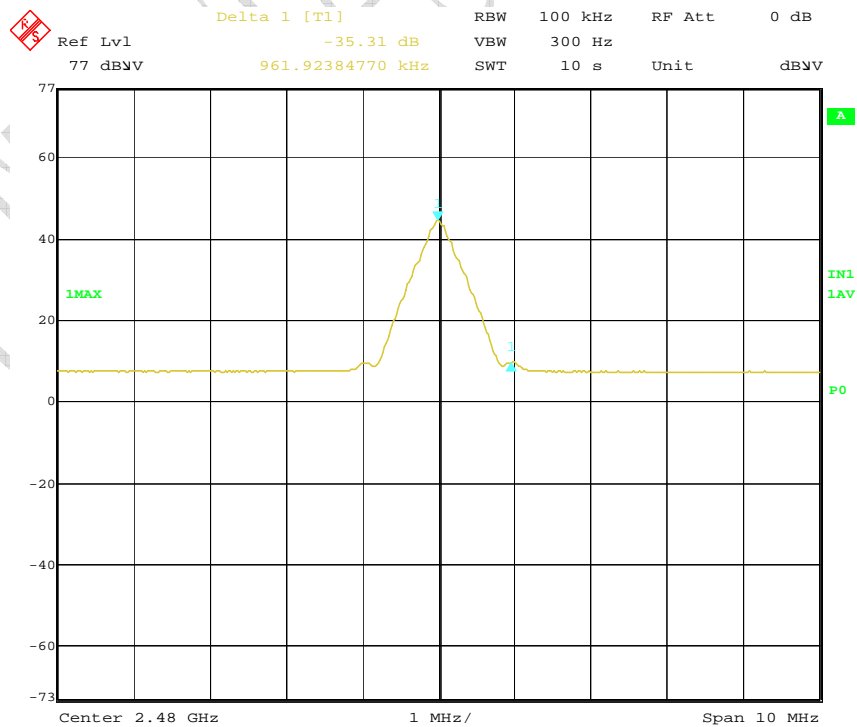

Date: 6.MAR.2009 21:56:18

FCC Parts 15 subpart C 15.247

Equipment:


Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT


Channel 78

Horizontal

Peak mode:

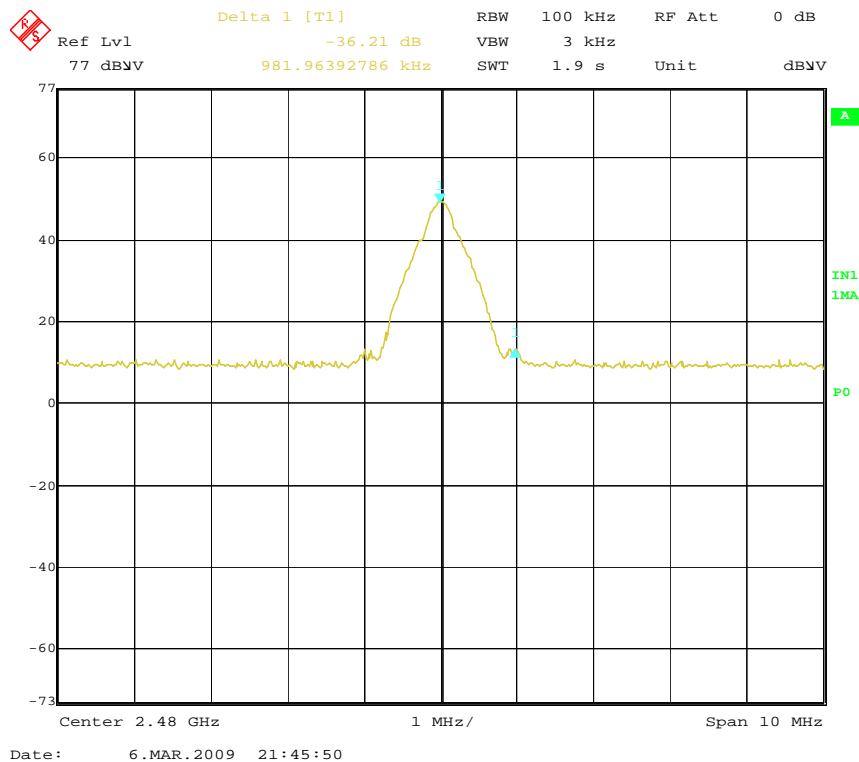

Average mode:

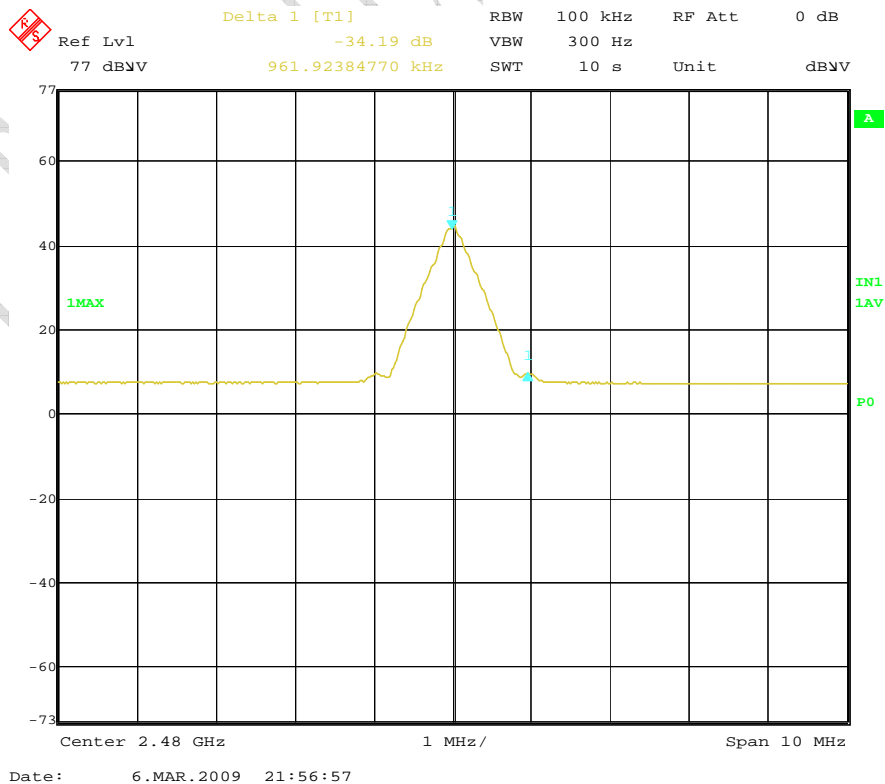

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

4.4 Frequency separation

Specifications:	15.247(a)(1)					
Date of Test	2009-3-5					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	Fix channel transmit					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup

The Universal Radio Communications Tester was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a coupling.

Test Result:

Channel separation (kHz)	20dB Bandwidth (kHz)		Limit (kHz)	Result
997.95	Ch 0	1142	>25	Pass
	Ch 39	1362	>25	Pass
	Ch 78	1142	>25	Pass

FCC Parts 15 subpart C 15.247


Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

Test data:

Channel Separation

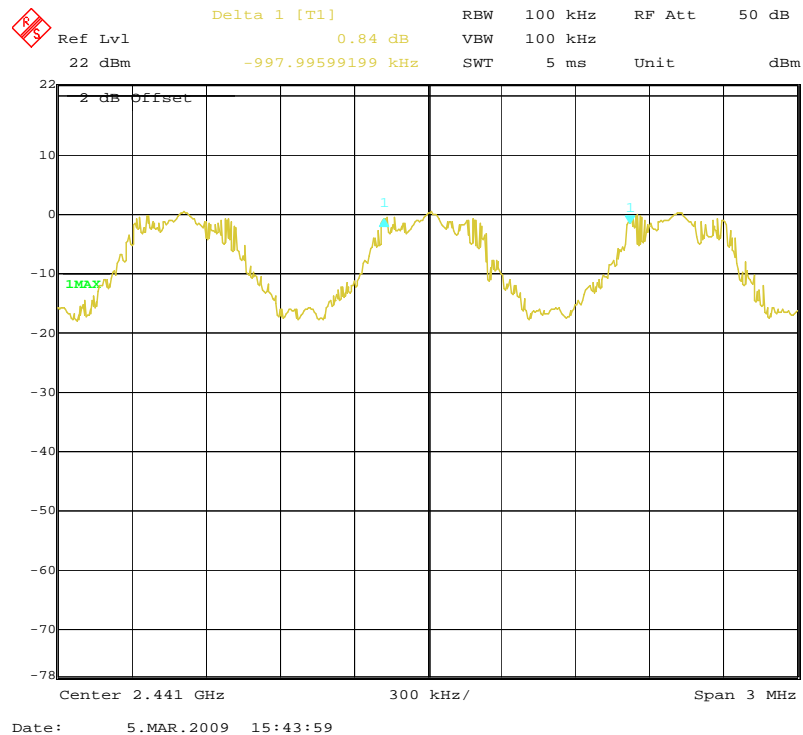

20dB Bandwidth (Ch 0)

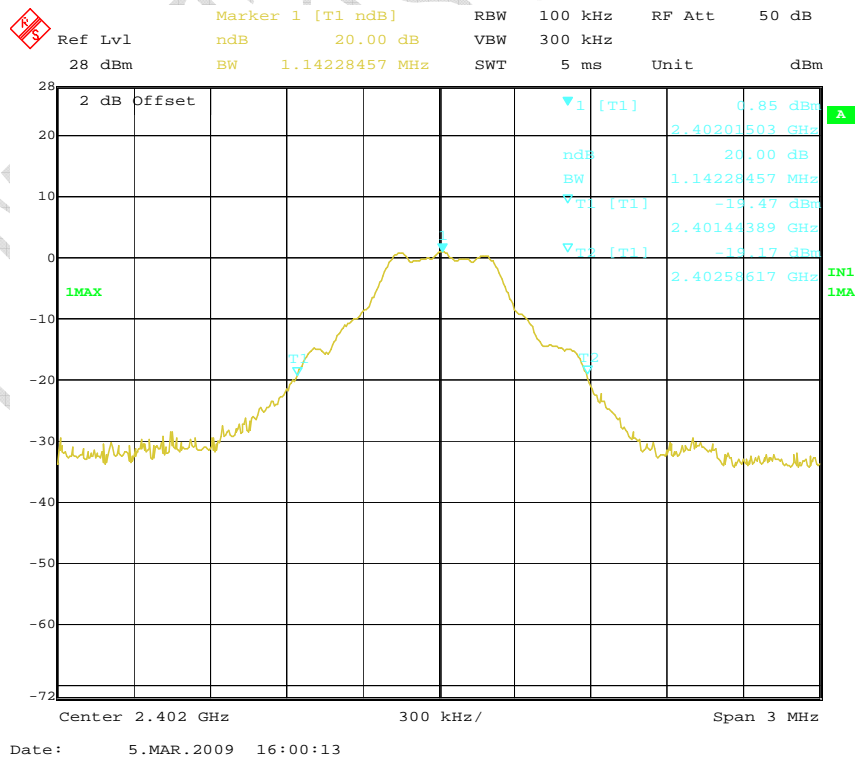


FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

20dB Bandwidth (Ch 39)

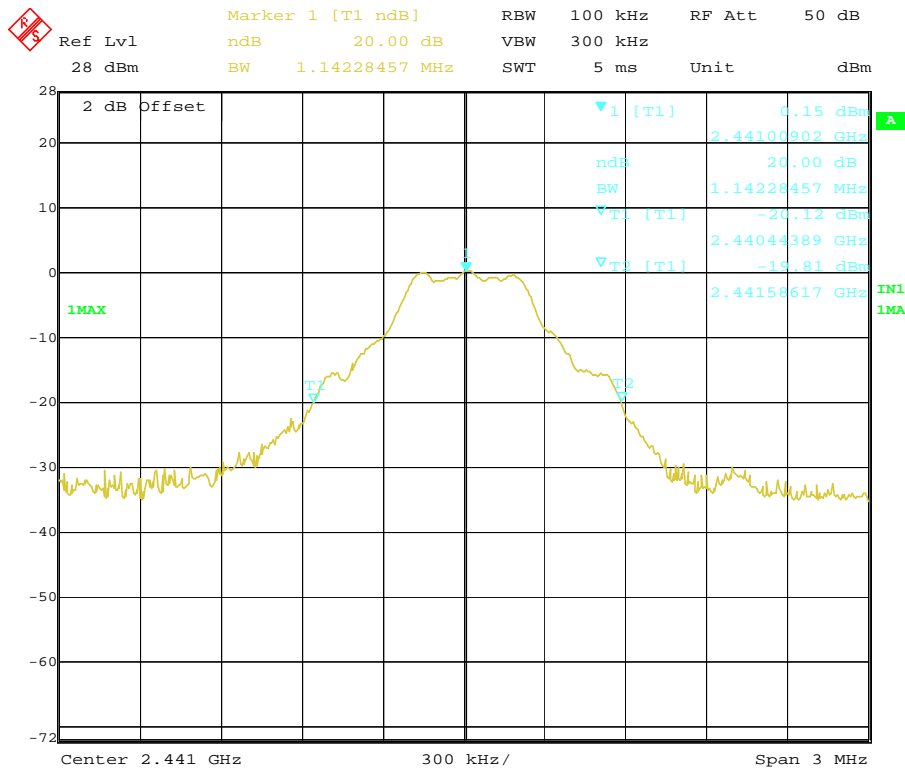

Date: 5.MAR.2009 16:05:12

20dB Bandwidth (Ch 78)

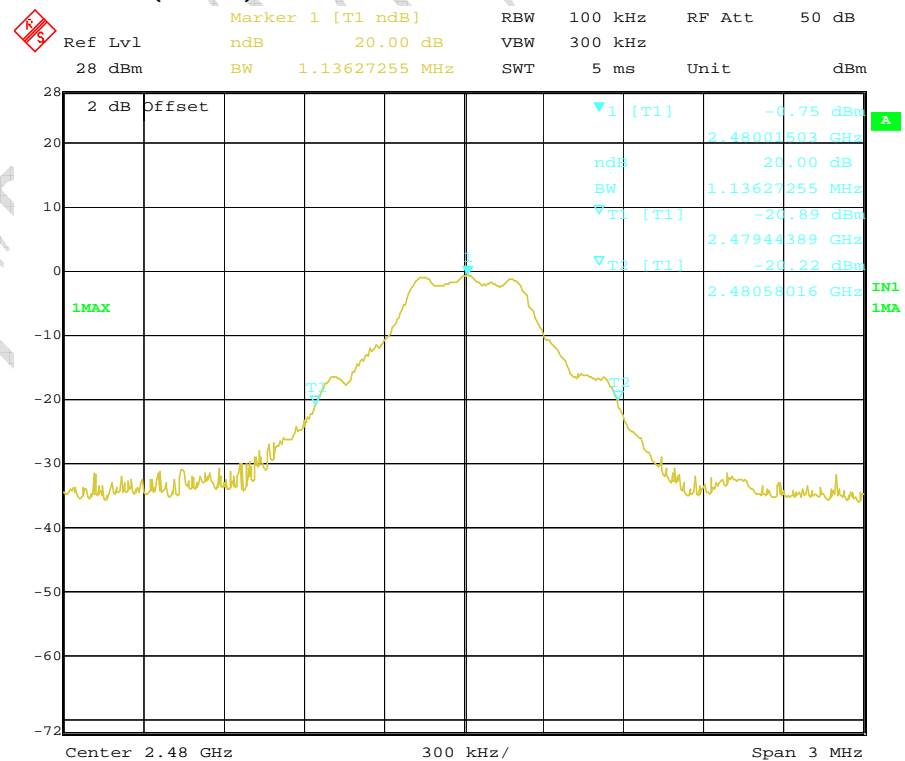

Date: 5.MAR.2009 16:09:50

4.5 Number of hopping frequency

Specifications:	15.247(a)(1)(ii)					
Date of Test	2009-3-5					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	hopping					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup

The Universal Radio Communications Tester was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a coupling.

Test Result:

Result (No. of Ch)	Limit (No. of Ch)	Result
79	>75	Pass

FCC Parts 15 subpart C 15.247


Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

Test data:

Channel Number

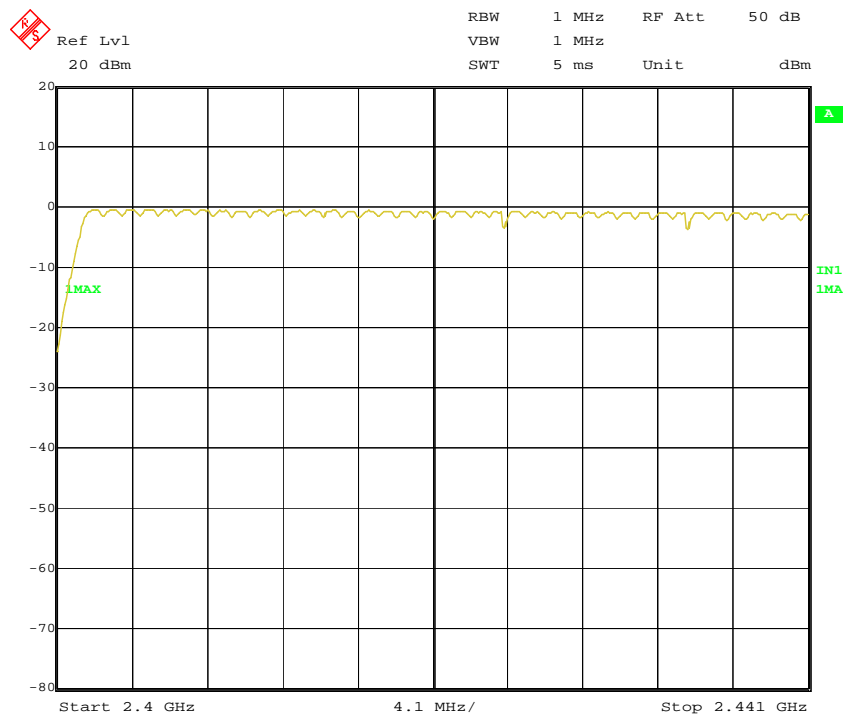

Date: 5.MAR.2009 11:35:00

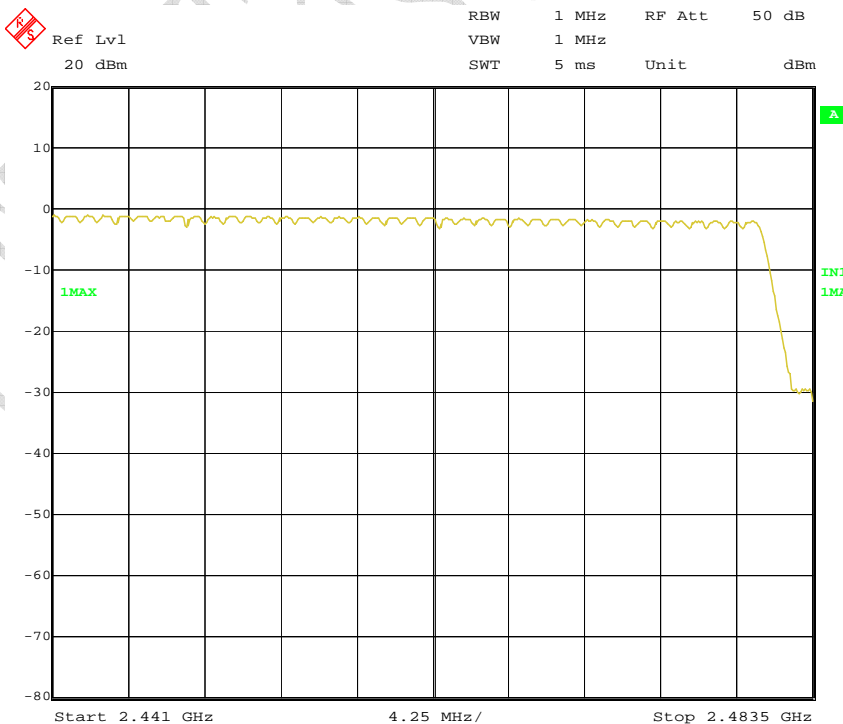

Date: 5.MAR.2009 11:38:00

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

4.6 Time of occupancy

Specifications:	15.247(a)(1)(iii)					
Date of Test	2009-3-5					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	Fix channel					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup

The Universal Radio Communications Tester was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a coupling.

Test Result:


Function for DH5:

$$\text{Total Dwell Time} = \text{pulsetime} \times \left(\frac{1600}{6} \right) / 79 \times 31.6$$


Channel	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0	2.912	310.61	31.6	400	Pass
39	2.895	308.80	31.6		Pass
78	2.895	308.80	31.6		Pass

REPORT NO.: I09GE4049-FCC-BT

Channel 0



Channel 39



REPORT NO.: I09GE4049-FCC-BT

Ref Lvl 28 dBm Delta 1 [T1] -0.20 dB RBW 1 MHz RF Att 50 dB

28 dBm 2.895391 ms SWT 8.4 ms Unit dBm

2 dB Offset

1MAX

1 [T1] -0.61 dBm 4.696593 ms

1 [T1] -0.20 dB 2.895391 ms

Center 2.48 GHz 840 us/

Date: 5.MAR.2009 16:33:07

4.7 Spurious Measurement (Conducted)

Specifications:	15.209(a) and 15.205(a)					
Date of Test	2009-3-5					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	Fix channel transmit					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup

The Universal Radio Communications Tester was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a coupling.

Test Result:

Channel	Result
0	Pass
39	Pass
78	Pass

FCC Parts 15 subpart C 15.247


Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim


REPORT NO.: I09GE4049-FCC-BT

Test data:

Channel 0

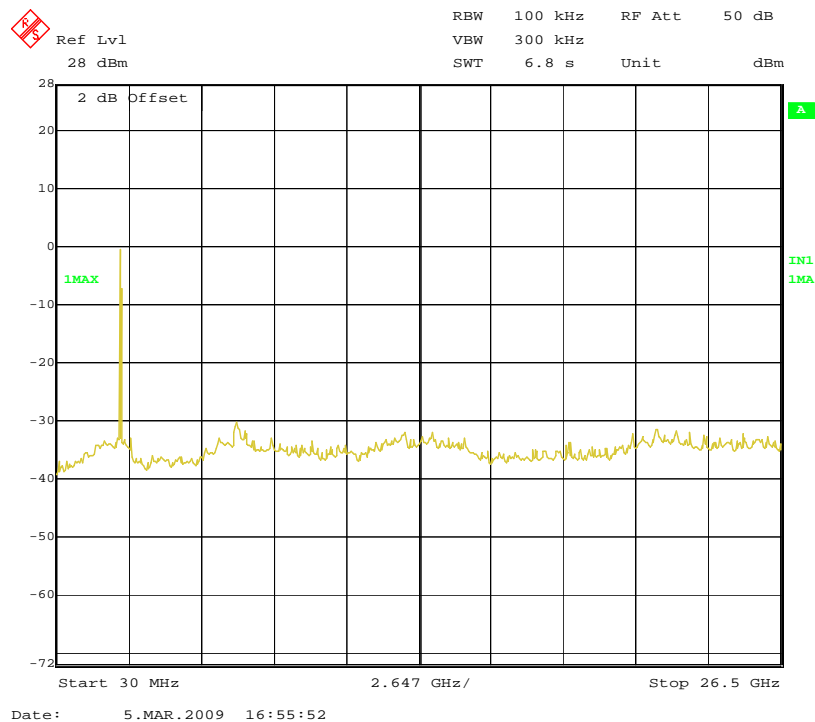


Channel 39

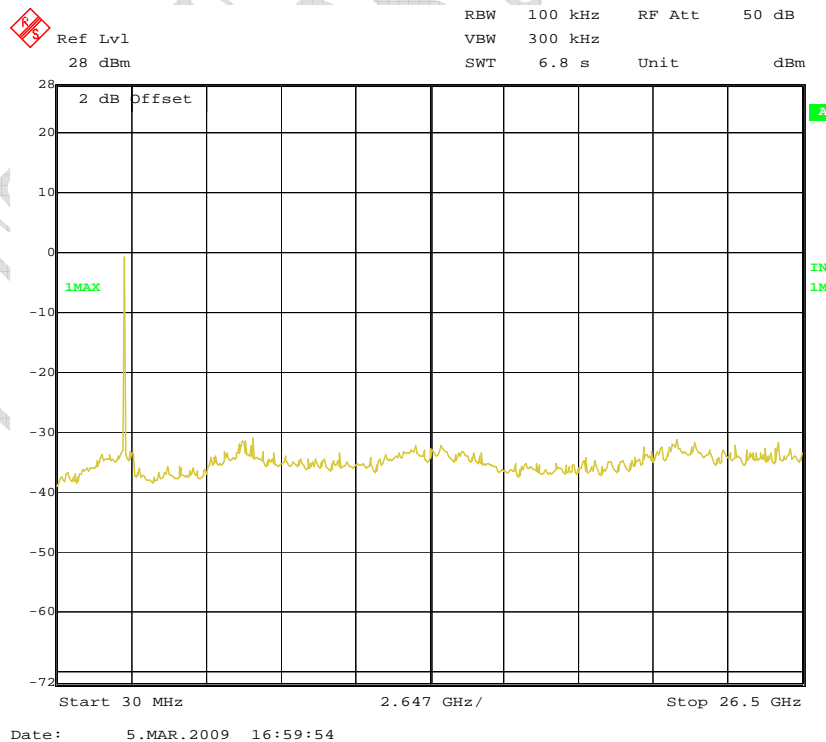

FCC Parts 15 subpart C 15.247
Equipment:
Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

Channel 78

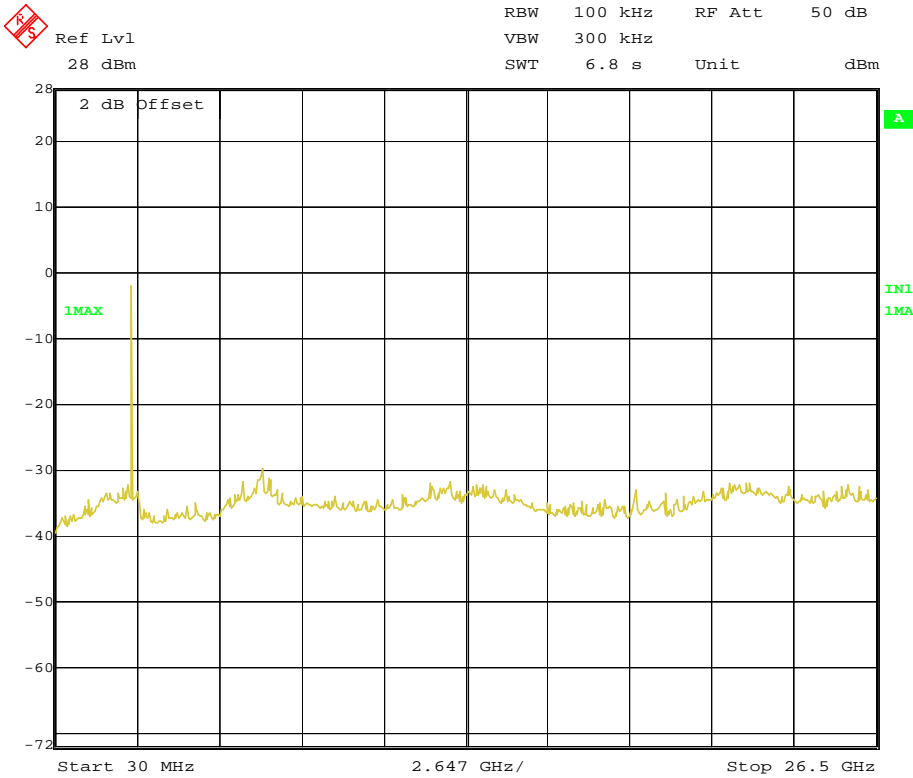

Date: 5.MAR.2009 17:02:10

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

4.8 Radiated Spurious Measurement

Specifications:	15.209(a) and 15.205(a)					
Date of Test	2009-3-9					
Test conditions:	Ambient Temperature: 15℃-35℃ Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	hopping					
Test Results:	Fix channel transmit					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3 m	--	2010-11-16	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup

The EUT was placed in an anechoic chamber. The CMU 200 was used to set the TX channel and power level. The transmitter output is connected to Spectrum analyzer through a Bilog antenna (for frequency under 1GHz) or a horn antenna (for frequency above 1GHz).

Limit:

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

Test result:

9kHz-30MHz

There is No frequency exceeds and near limit line in 20dB scope blow.

30MHz-1GHz:

Frequency [MHz]	Level [dBuV/m]	Limit [dBuV/m]	Antenna height [cm]	Turntable azimuth [degree]	Antenna polarization [V/H]
79.800000	15.8	40	100	262	VERTICAL
82.620000	18.2	40	150	225	VERTICAL
202.080000	13.6	43	100	172	VERTICAL
204.780000	14.3	43	100	135	VERTICAL
209.100000	12.5	43	100	123	VERTICAL
210.960000	12.7	43	100	117	VERTICAL

Note: --

Above 1GHz:

Channel 0:

Frequency[GHz]	Level[dBuV/m]	Limit[dBuV/m]	Antenna Polarization[V/H]	Detector
--	--	--	--	Peak
--	--	--	--	Average

Channel 39:

Frequency[GHz]	Level[dBuV/m]	Limit[dBuV/m]	Antenna Polarization[V/H]	Detector
--	--	--	--	Peak
--	--	--	--	Average

Channel 78:

Frequency[GHz]	Level[dBuV/m]	Limit[dBuV/m]	Antenna Polarization[V/H]	Detector
--	--	--	--	Peak
--	--	--	--	Average

Note:

1. Test from 1GHz up to 10th harmonic of operating frequency.
2. 2.4~2.4835GHz band is the operating frequency.

4.9 Power line Conducted Emissions

Specifications:	ANSI C63.4 voltage mains test					
Date of Test	2009-3-6					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	Hopping					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2010-01-11	Normal
7330	Artificial Mains Network	R/S	ESH2-Z5	837480/002	2011-01-08	Normal
714	Shielding Room	ETS	--	19003	2010-11-16	Normal
7330	Universal Radio Communications Tester	R&S	CMU200	100233	2009-04-29	Normal

Test Setup

The EUT was placed in a shielding room. The Universal Radio Communications Tester was used to set the TX channel and power level. The ac adapter output is connected to Spectrum analyzer through an AMN (Artificial Mains Network).

Limits of the conducted disturbance at the AC mains ports:

Frequency range	Limit(Quasi-peak)	Limit(Average)
0.15 MHz to 0.5 MHz	66 dBμV – 56 dBμV	56 dBμV – 46 dBμV
>0.5 MHz to 5MHz	56 dBμV	46 dBμV
>5 MHz to 30 MHz	60 dBμV	50 dBμV
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		


FCC Parts 15 subpart C 15.247
Equipment:
Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

Test Result:

Pass					
Detector (QP/AV)	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Line	PE
--	--	--	--	--	--
Remarks: No frequency exceeds the limit.					

Test data:

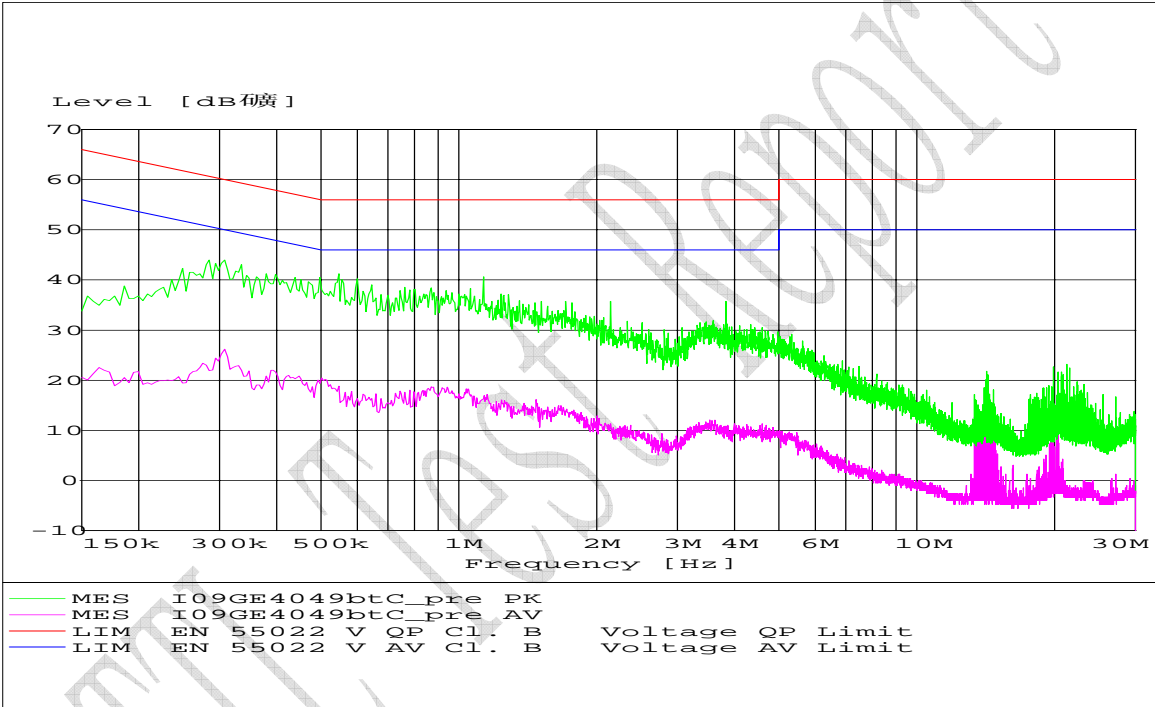

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

Annex A EUT Photos



Front view



Back view

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT



Adaptor and Cable



Battery

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT



Earphone


FCC Parts 15 subpart C 15.247

Equipment:


Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

Annex B Internal Photos

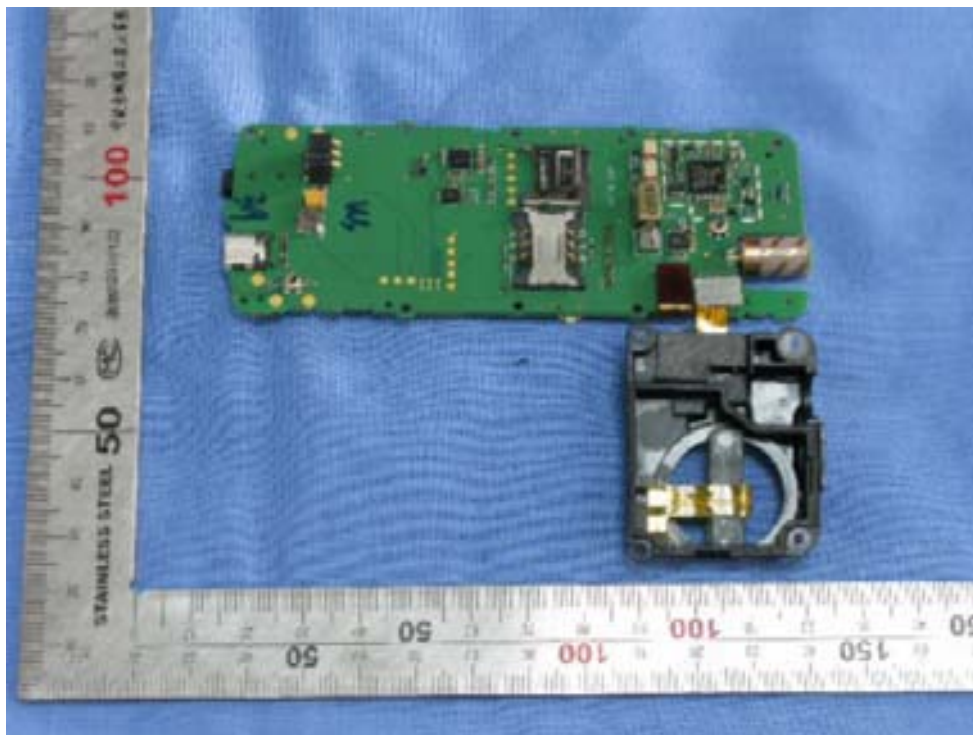

Main board (face)

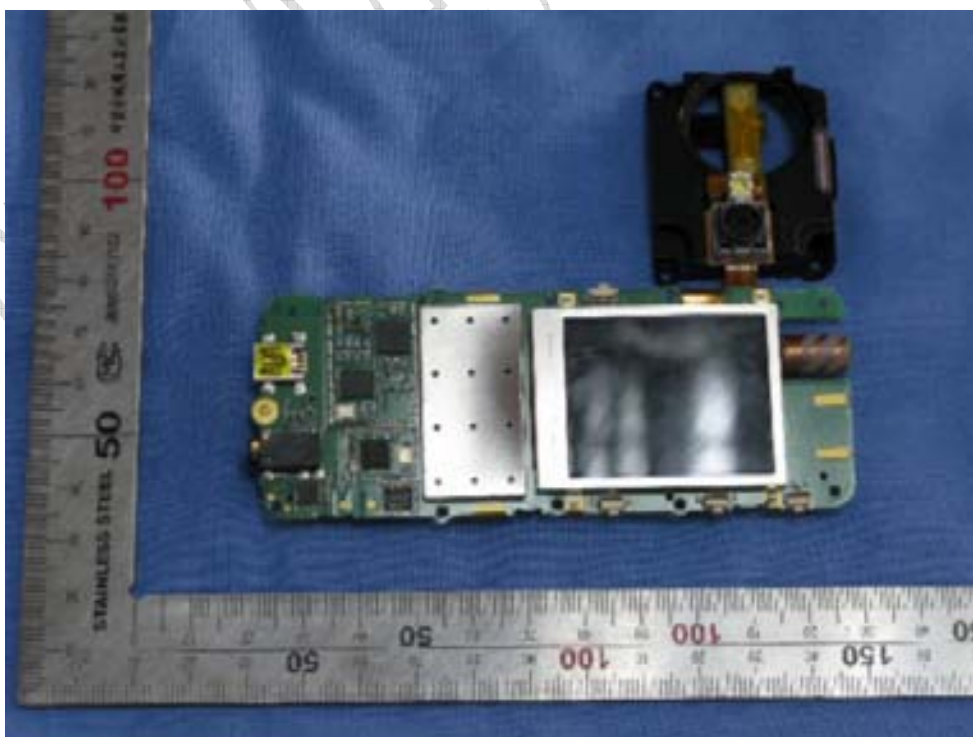


Main board (back)

FCC Parts 15 subpart C 15.247

Equipment:

Sonim XP3.20-E Quest / Land Rover S1-E by Sonim

REPORT NO.: I09GE4049-FCC-BT

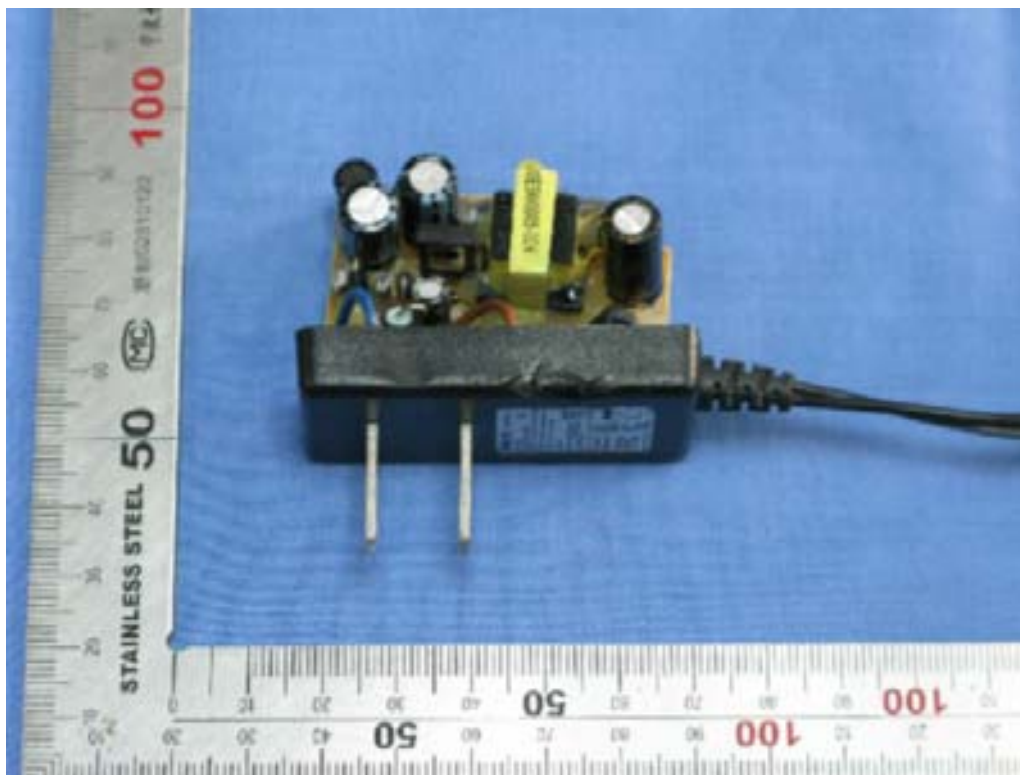

Adaptor (face)



Adaptor (back)

ANNEX B Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

———— The End of this Report ————

China Test Report