

# FCC Part 15B

## Measurement and Test Report

For

Shenzhen Top-Tech Technology Co., Ltd.

6/F, Building 2, Nankeng 1st Industrial Zone, Bantian, Longgang

District, Shenzhen, China

**FCC ID: WZXTOP528**

**Test Standards:** FCC Part 15 Subpart B

**Product Description:** TABLET PC

**Tested Model:** B736

**Report No.:** STR13078019I-2

**Tested Date:** 2013-07-02 to 2013-07-11

**Issued Date:** 2013-07-11

**Tested By:** Lebron / Engineer

**Reviewed By:** Lahm Peng / EMC Manager

**Approved & Authorized By:** Jandy so / PSQ Manager

**Prepared By:**

**SEM.Test Compliance Service Co., Ltd**

3/F, Jinbao Commerce Building, Xin'an Fanshen Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND OPERATION MODE .....	5
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. CONDUCTED EMISSIONS .....</b>	<b>7</b>
3.1 MEASUREMENT UNCERTAINTY .....	7
3.2 TEST EQUIPMENT LIST AND DETAILS .....	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS .....	8
3.6 SUMMARY OF TEST RESULTS/PLOTS .....	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>13</b>
4.1 MEASUREMENT UNCERTAINTY .....	13
4.2 TEST EQUIPMENT LIST AND DETAILS .....	13
4.3 TEST PROCEDURE.....	13
4.4 TEST RECEIVER SETUP .....	14
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
4.6 ENVIRONMENTAL CONDITIONS .....	14
4.7 SUMMARY OF TEST RESULTS/PLOTS .....	14

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Top-Tech Technology Co., Ltd.  
Address of applicant: 6/F, Building 2, Nankeng 1st Industrial Zone,  
Bantian, Longgang District, Shenzhen, China  
Manufacturer: Shenzhen Top-Tech Technology Co., Ltd.  
Address of manufacturer: 6/F, Building 2, Nankeng 1st Industrial Zone,  
Bantian, Longgang District, Shenzhen, China

General Description of EUT	
Product Name:	TABLET PC
Trade Name:	/
Model No.:	B736
Add Models:	V730, M728, T758, B113S
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model B736, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	Operating: DC 3.7V battery, Charging: DC 5V
Power Adapter Model:	SW-050150EU (Input: AC 100-240V, Output: DC 5V 1000mA)
Highest Internal Frequency:	1GHz
Lowest Internal Frequency:	32.768kHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Top-Tech Technology Co., Ltd. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	1kHz Audio & Video playing
TM2	Downloading	Test Software: WINTHRAX

### EUT Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Power Cable	1.0	Unshielded	Without Ferrite

### Special Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.5	Shielded	With Ferrite
Earphone Cable	1.5	Unshielded	Without Ferrite

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
LCD TV	DELL	U2420f	/
Notebook	Lenovo	20007	EB12648265

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.


#### 3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2013-05-07	2014-05-06
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2013-05-07	2014-05-06
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2013-05-07	2014-05-06

#### 3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.4 Basic Test Setup Block Diagram

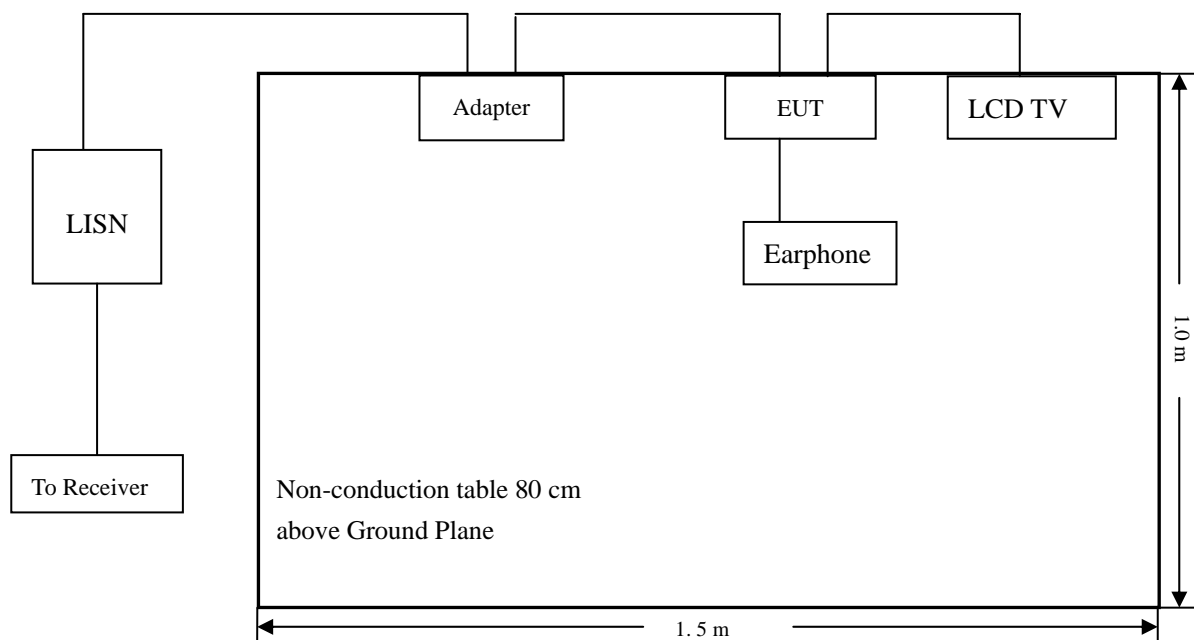

### 3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-2.54 dB at 0.578 MHz in the Line mode, Charging & Playing mode, Peak detector, 0.15-30MHz**


### 3.7 Conducted Emissions Test Data



Plot of Conducted Emissions Test Data


EUT: TABLET PC  
Tested Model: B736  
Operating Condition: Charging & Playing  
Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Neutral

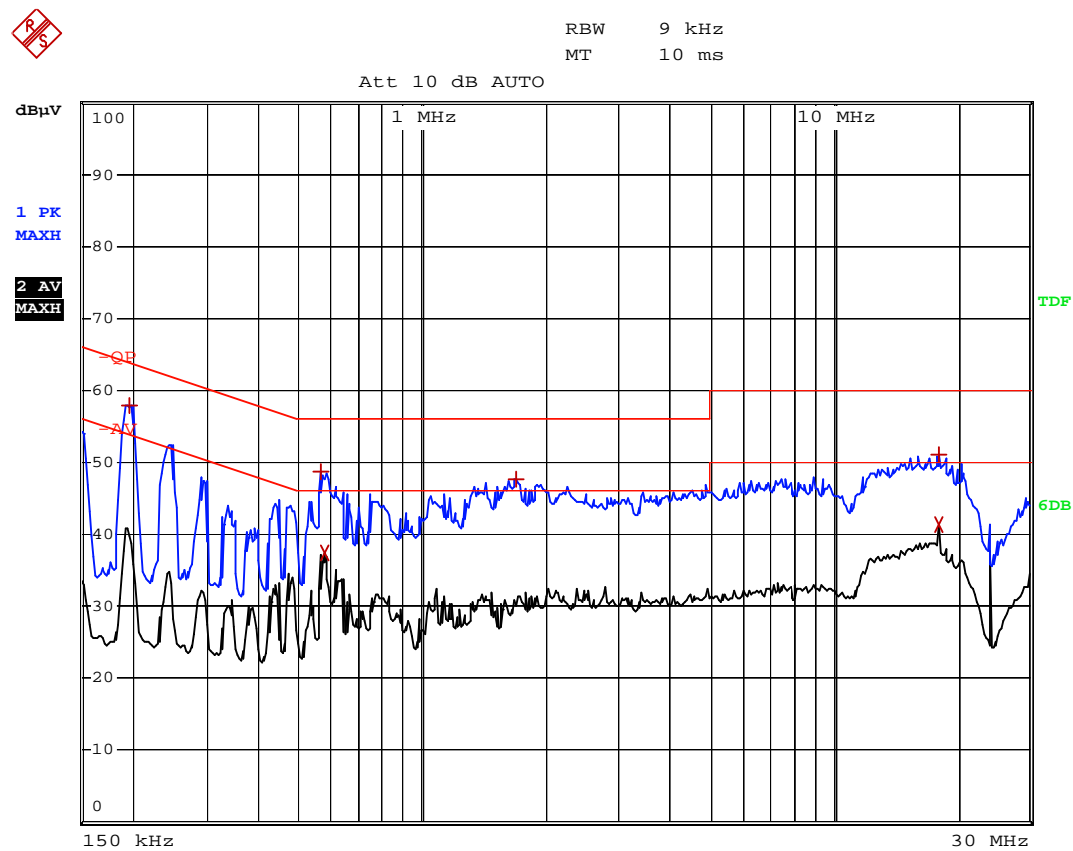

EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	198 kHz	57.82	-5.86
1 Max Peak	566 kHz	48.63	-7.36
2 Average	578 kHz	37.37	-8.62
1 Max Peak	1.702 MHz	47.74	-8.25
1 Max Peak	17.982 MHz	51.05	-8.94
2 Average	17.982 MHz	41.21	-8.78

Test Specification: Line

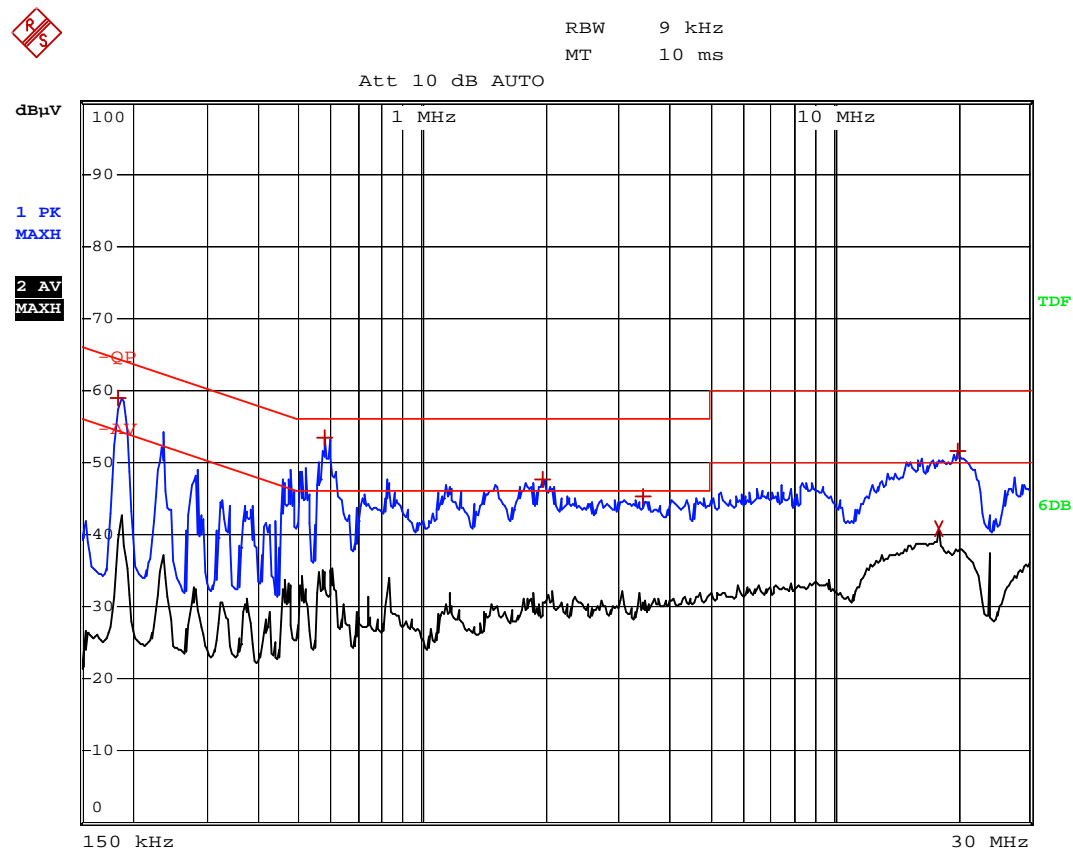


EDIT PEAK LIST (Prescan Results)				
Trace1:	-QP			
Trace2:	-AV			
Trace3:	---			
TRACE		FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Max Peak	186 kHz	58.88	-5.33
1	Max Peak	578 kHz	53.45	-2.54
1	Max Peak	1.962 MHz	47.71	-8.28
1	Max Peak	3.466 MHz	45.31	-10.68
2	Average	17.982 MHz	40.71	-9.28
1	Max Peak	20.006 MHz	51.46	-8.53

Plot of Conducted Emissions Test Data


EUT: TABLET PC  
Tested Model: B736  
Operating Condition: Downloading  
Comment: USB DC 5V

Test Specification: Neutral

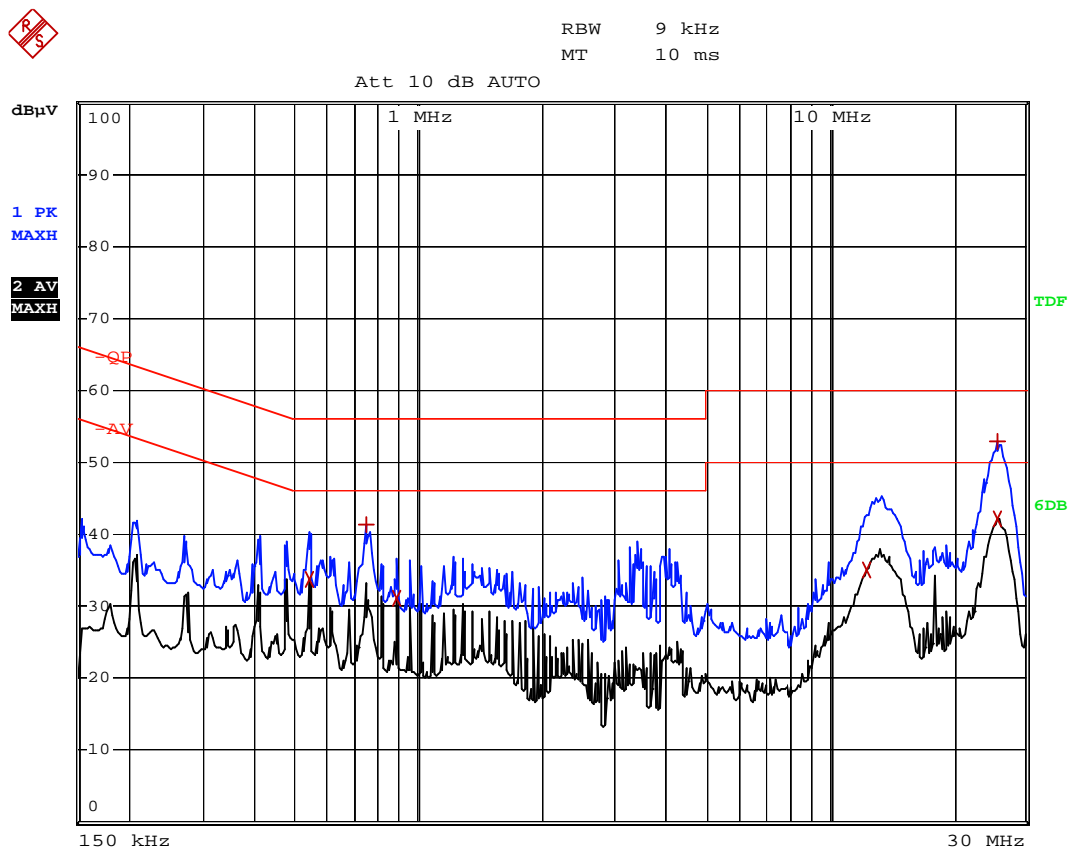

EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
2 Average	542 kHz	33.70	-12.30
1 Max Peak	750 kHz	41.41	-14.58
2 Average	882 kHz	31.10	-14.89
2 Average	12.326 MHz	34.93	-15.06
2 Average	25.49 MHz	42.06	-7.94
1 Max Peak	25.698 MHz	52.85	-7.14

Test Specification: Line

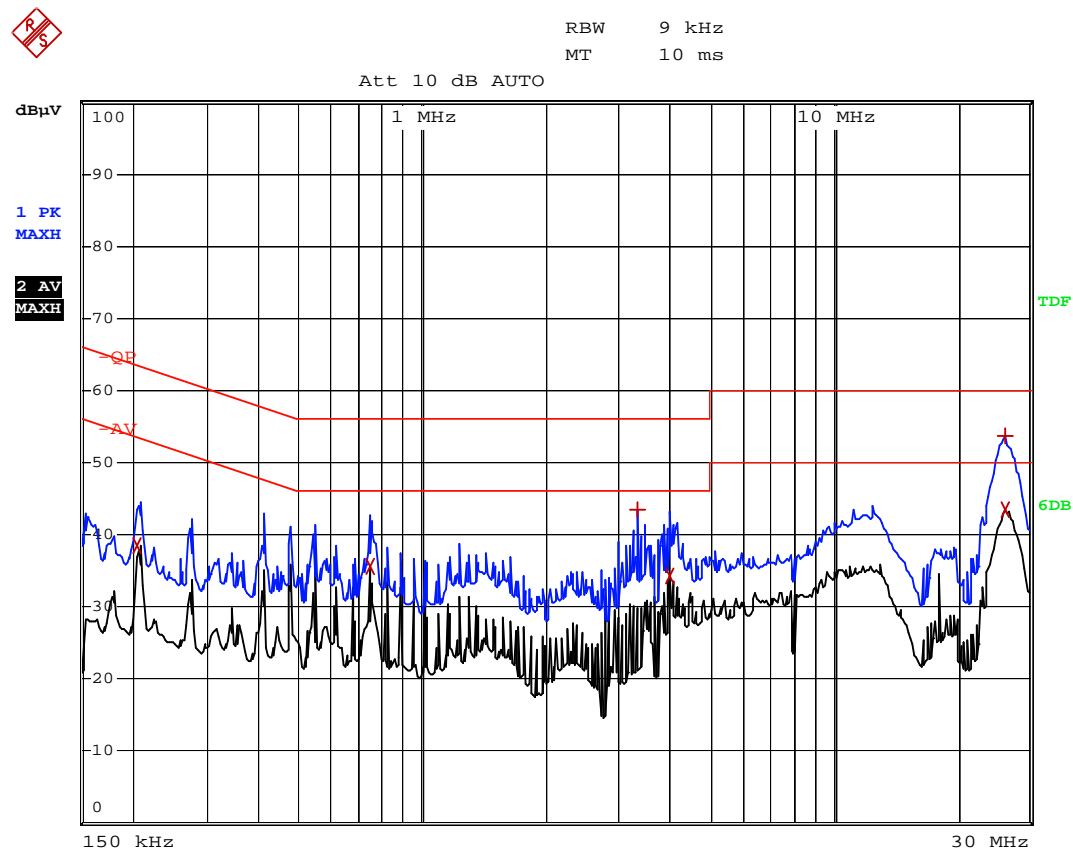

EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
2 Average	206 kHz	38.43	-14.93
2 Average	750 kHz	35.43	-10.56
1 Max Peak	3.342 MHz	43.48	-12.51
2 Average	4.022 MHz	34.16	-11.83
1 Max Peak	26.166 MHz	53.78	-6.21
2 Average	26.242 MHz	43.39	-6.61

## 4. Radiated Emissions

### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2013-04-20	2014-04-19

### 4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

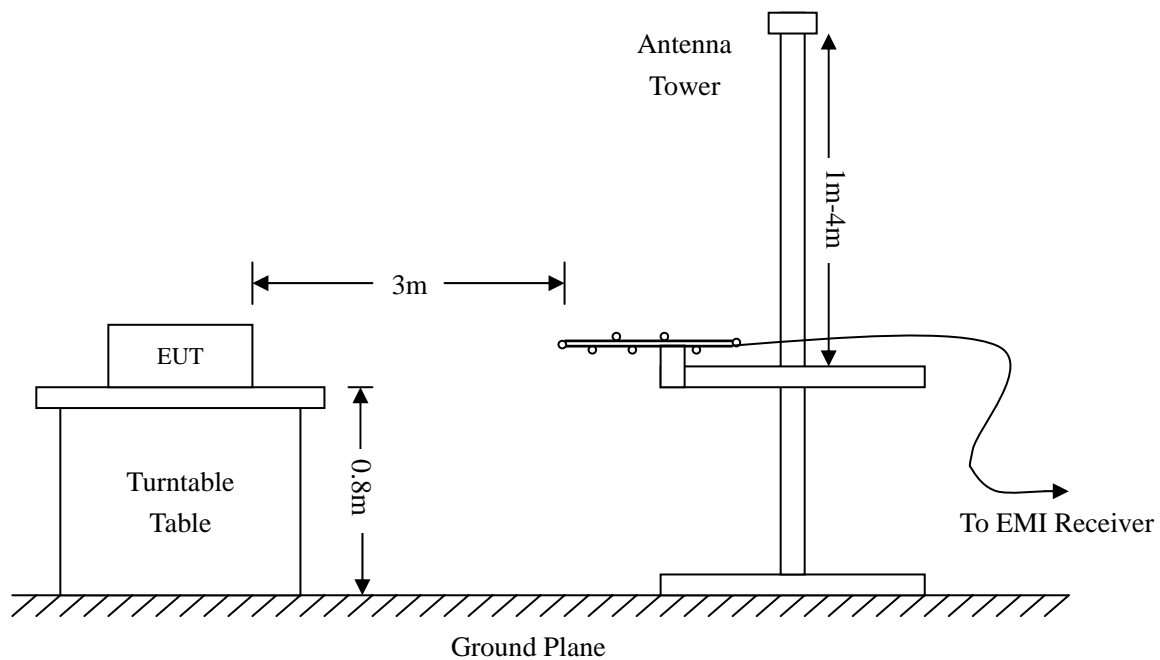

#### 4.4 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

#### 4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

#### 4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-1.98 dB at 815.9678 MHz in the Vertical polarization, Charging & Playing mode, 9 kHz to 5 GHz, 3Meters**

**Plot of Radiated Emissions Test Data (30MHz-1GHz)**


EUT: *TABLET PC*  
 Tested Model: *B736*  
 Operating Condition: *Charging & Playing*  
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Horizontal*

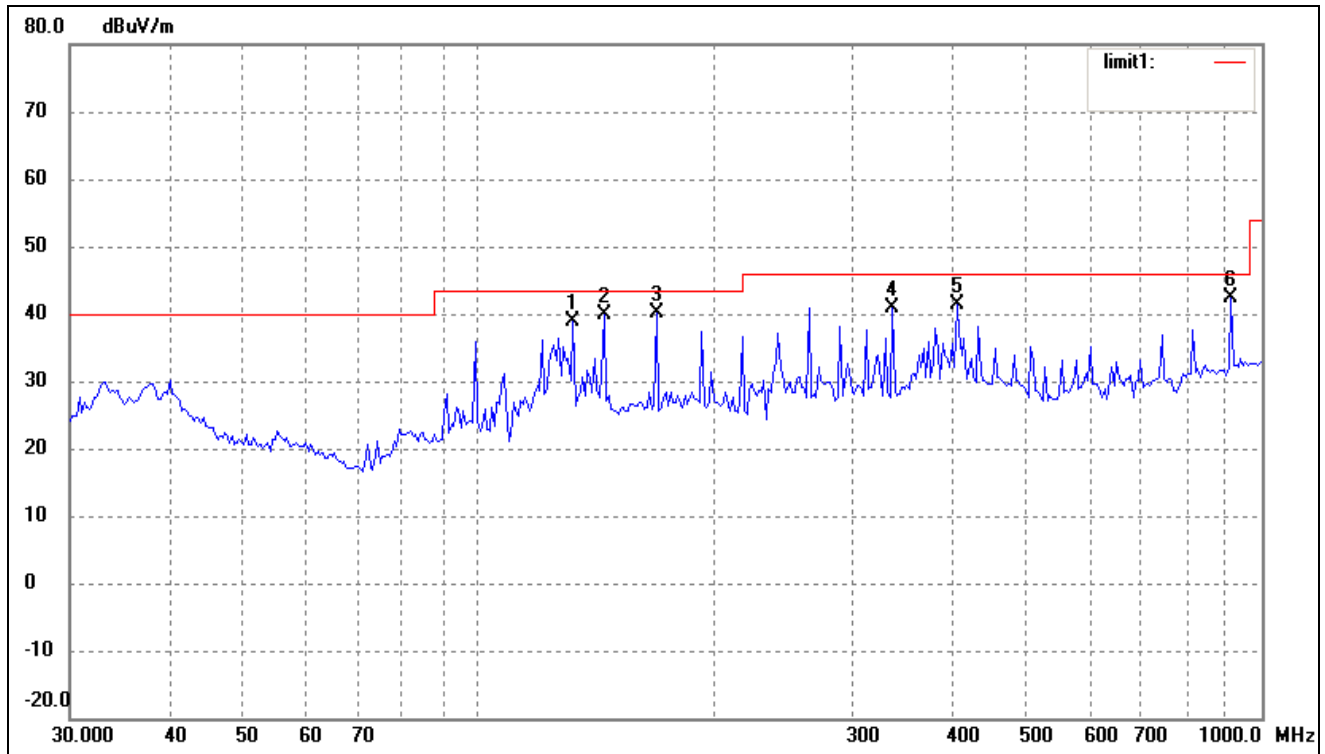

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	131.7576	34.84	4.00	38.84	43.50	-4.66	235	100	peak
2	144.3348	36.33	3.46	39.79	43.50	-3.71	44	100	peak
3	168.4138	36.50	3.69	40.19	43.50	-3.31	79	100	peak
4	337.2155	30.67	10.14	40.81	46.00	-5.19	85	100	peak
5	407.5144	30.14	11.22	41.36	46.00	-4.64	124	100	peak
6	912.8619	23.55	18.93	42.48	46.00	-3.52	292	100	peak

Test Specification: Vertical

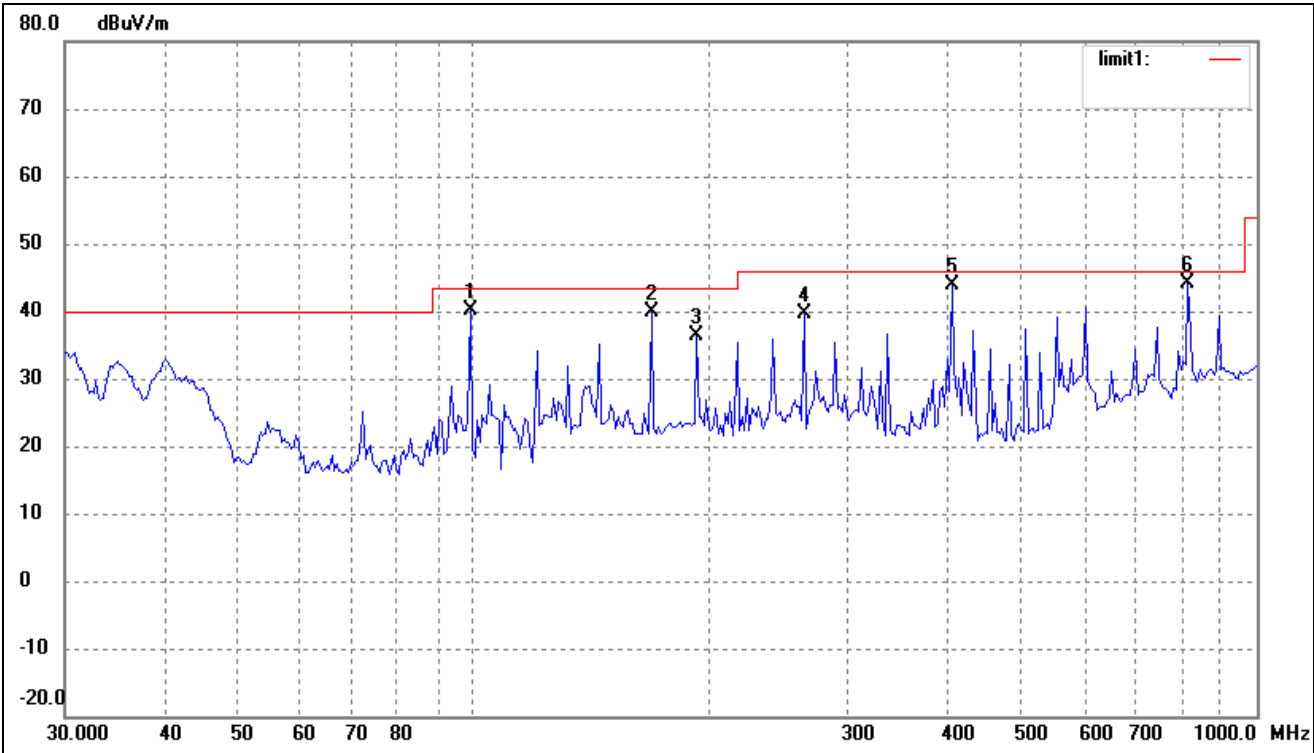


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( °)	(cm)	
1	98.8325	33.55	6.55	40.10	43.50	-3.40	306	100	peak
2	168.4138	36.22	3.69	39.91	43.50	-3.59	54	100	peak
3	192.4185	32.17	4.31	36.48	43.50	-7.02	258	100	peak
4	263.8190	31.53	8.00	39.53	46.00	-6.47	162	100	peak
5	407.5144	32.65	11.22	43.87	46.00	-2.13	57	100	peak
6	815.9678	27.32	16.70	44.02	46.00	-1.98	51	100	peak




Plot of Radiated Emissions Test Data (30MHz-1GHz)

EUT: TABLET PC  
Tested Model: B736  
Operating Condition: Downloading  
Comment: Connected to PC  
  
Test Specification: Horizontal

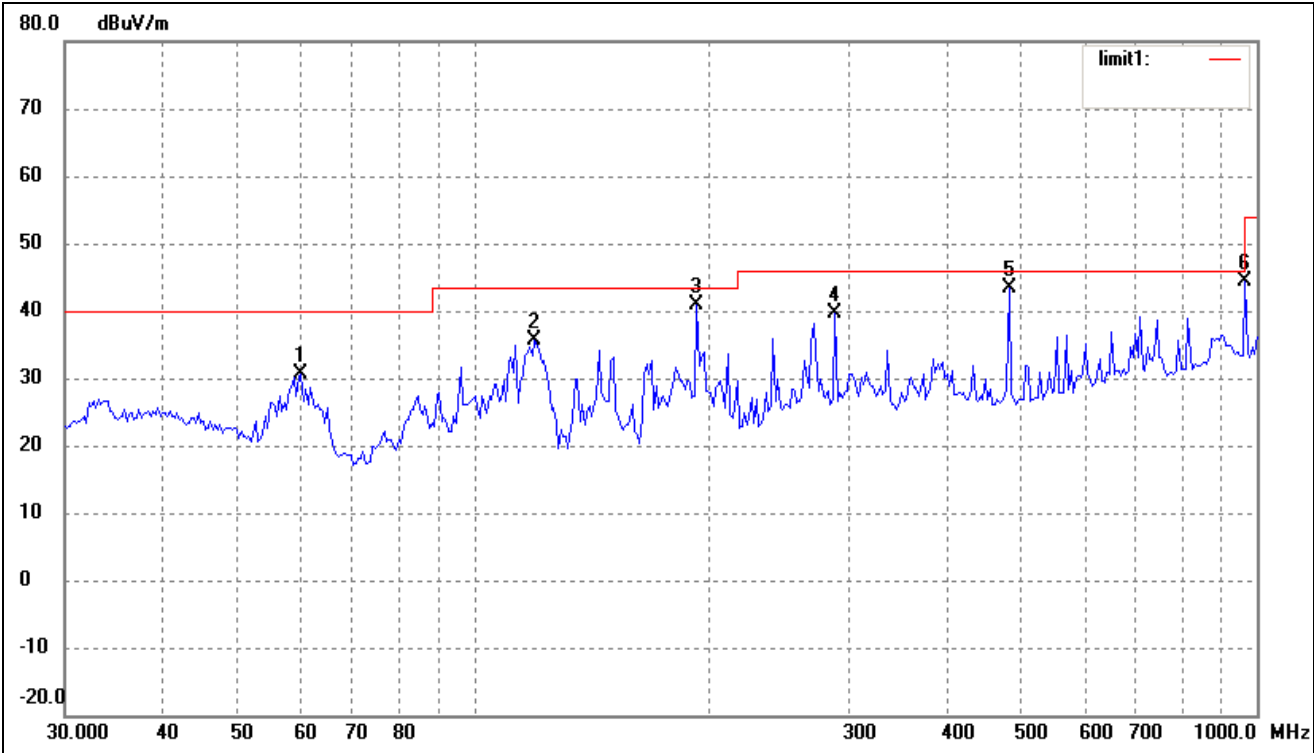

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	60.0690	25.02	5.67	30.69	40.00	-9.31	245	100	peak
2	119.4360	30.81	4.92	35.73	43.50	-7.77	15	100	peak
3	192.4185	36.51	4.31	40.82	43.50	-2.68	32	100	peak
4	289.0020	30.04	9.67	39.71	46.00	-6.29	54	100	peak
5	482.2155	31.98	11.49	43.47	46.00	-2.53	288	100	peak
6	965.5421	26.09	18.37	44.46	54.00	-9.54	231	100	peak

Test Specification: Vertical

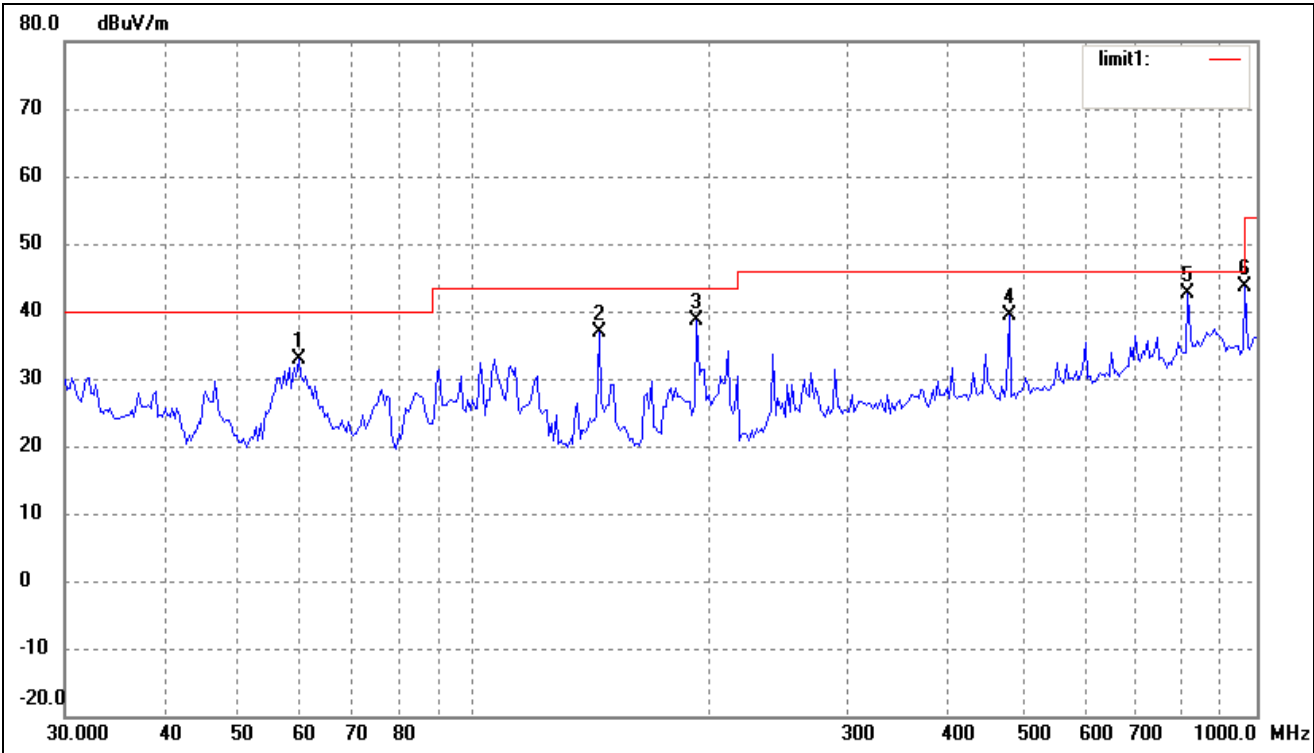


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( °)	(cm)	
1	59.6492	27.04	5.72	32.76	40.00	-7.24	0	100	peak
2	144.3348	33.30	3.46	36.76	43.50	-6.74	15	100	peak
3	192.4185	34.31	4.31	38.62	43.50	-4.88	114	100	peak
4	482.2155	27.88	11.49	39.37	46.00	-6.63	111	100	peak
5	815.9678	25.82	16.70	42.52	46.00	-3.48	254	100	peak
6	965.5421	25.24	18.37	43.61	54.00	-10.39	134	100	peak

**Plot of Radiated Emissions Test Data (Above 1GHz)**


EUT: *TABLET PC*  
 Tested Model: *B736*  
 Operating Condition: *Charging & Playing*  
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Horizontal*

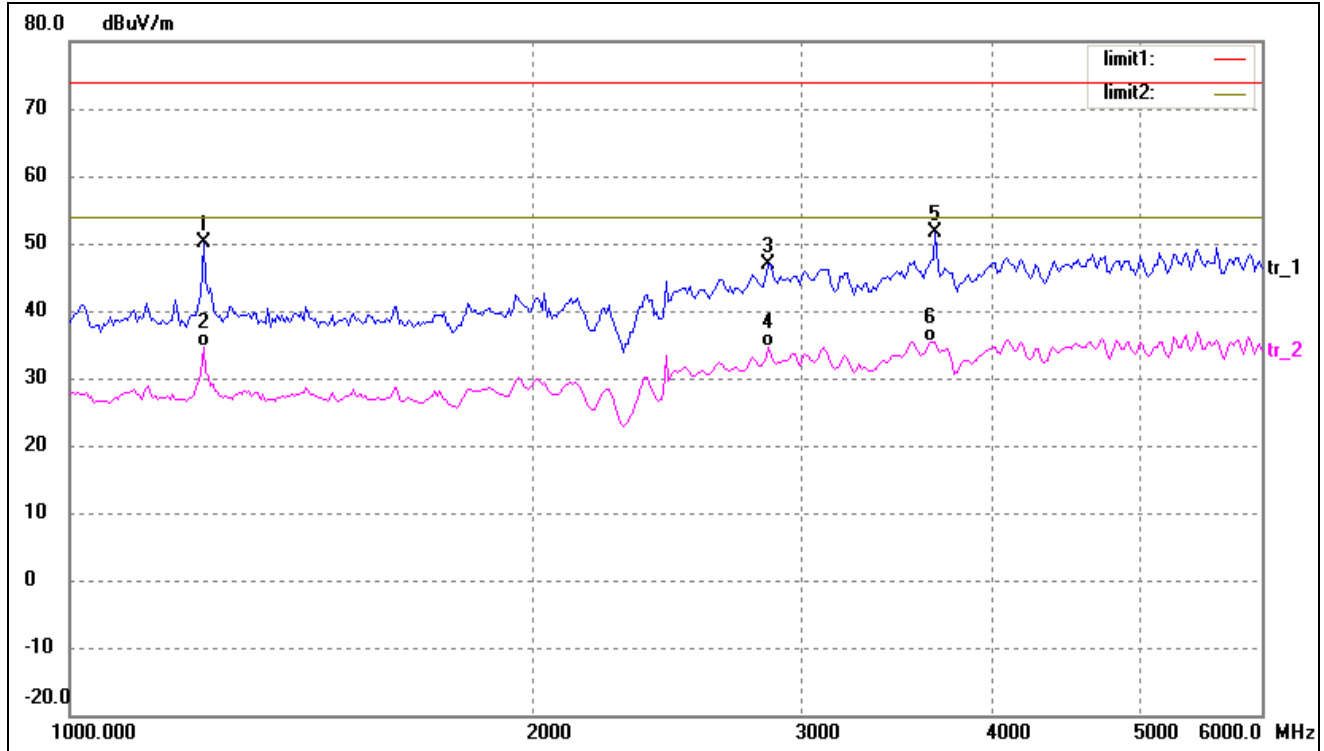

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	1222.230	58.58	-8.52	50.06	74.00	-23.94	235	100	peak
2	1222.230	43.26	-8.52	34.74	54.00	-19.26	44	100	AVG
3	2857.568	49.61	-2.75	46.86	74.00	-27.14	79	100	peak
4	2857.568	37.31	-2.75	34.56	54.00	-19.44	85	100	AVG
5	3672.297	52.87	-1.30	51.57	74.00	-22.43	124	100	peak
6	3672.297	36.73	-1.30	35.43	54.00	-18.57	292	100	AVG

Test Specification: Vertical

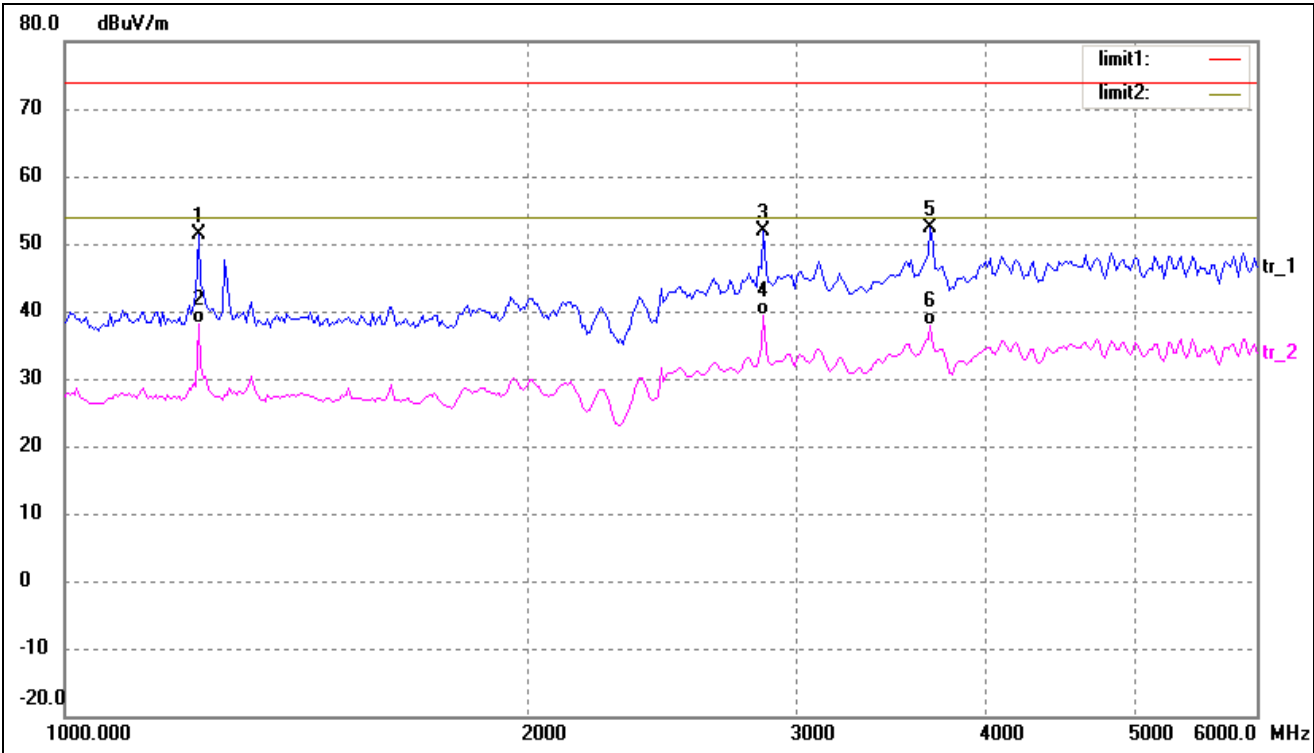


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( °)	(cm)	
1	1222.230	59.93	-8.52	51.41	74.00	-22.59	306	100	peak
2	1222.230	46.71	-8.52	38.19	54.00	-15.81	54	100	AVG
3	2857.568	54.52	-2.75	51.77	74.00	-22.23	258	100	peak
4	2857.568	42.23	-2.75	39.48	54.00	-14.52	162	100	AVG
5	3672.297	53.64	-1.30	52.34	74.00	-21.66	57	100	peak
6	3672.297	39.29	-1.30	37.99	54.00	-16.01	51	100	AVG

**Plot of Radiated Emissions Test Data (Above 1G)**


EUT: *TABLET PC*  
 Tested Model: *B736*  
 Operating Condition: *Downloading*  
 Comment: *Connected to PC*

Test Specification: *Horizontal*

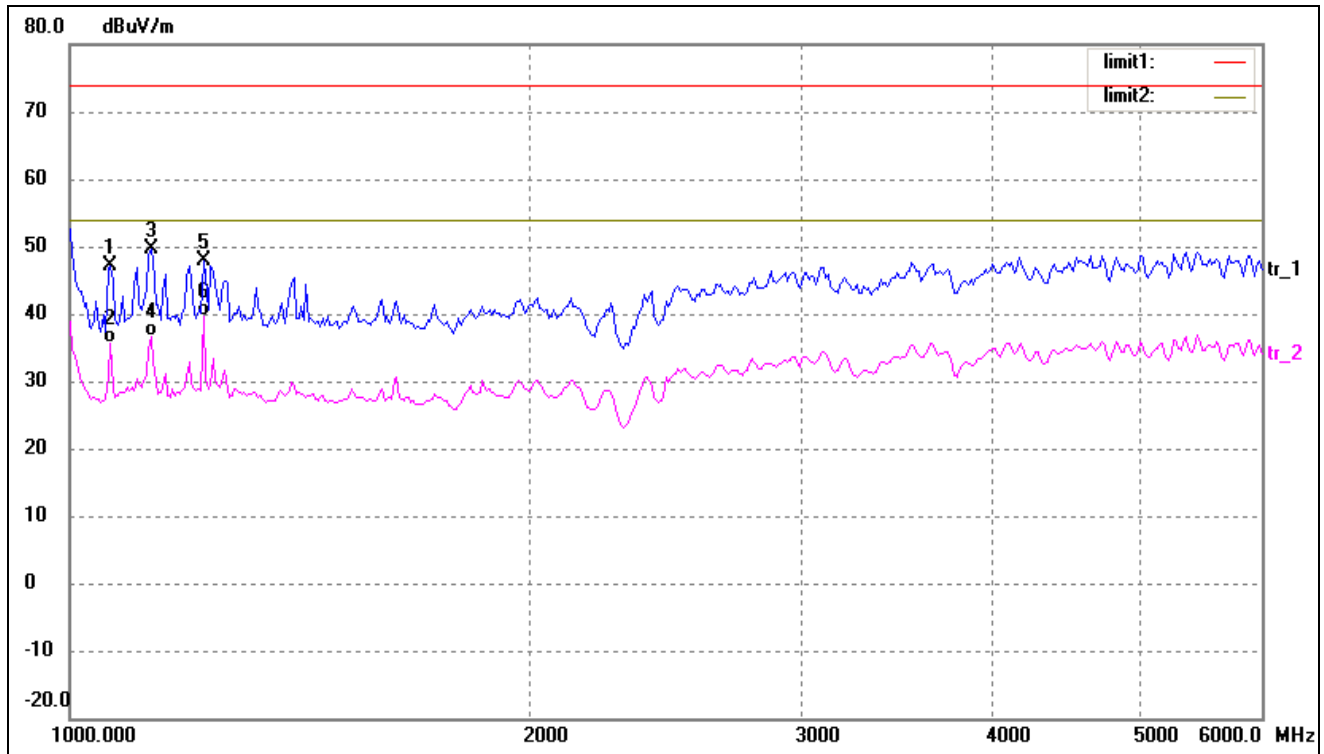

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	1062.814	55.97	-8.87	47.10	74.00	-26.90	245	100	peak
2	1062.814	44.39	-8.87	35.52	54.00	-18.48	15	100	AVG
3	1129.573	58.37	-8.71	49.66	74.00	-24.34	32	100	peak
4	1129.573	45.35	-8.71	36.64	54.00	-17.36	54	100	AVG
5	1222.230	56.44	-8.52	47.92	74.00	-26.08	288	100	peak
6	1222.230	48.12	-8.52	39.60	54.00	-14.40	231	100	AVG

Test Specification: Vertical

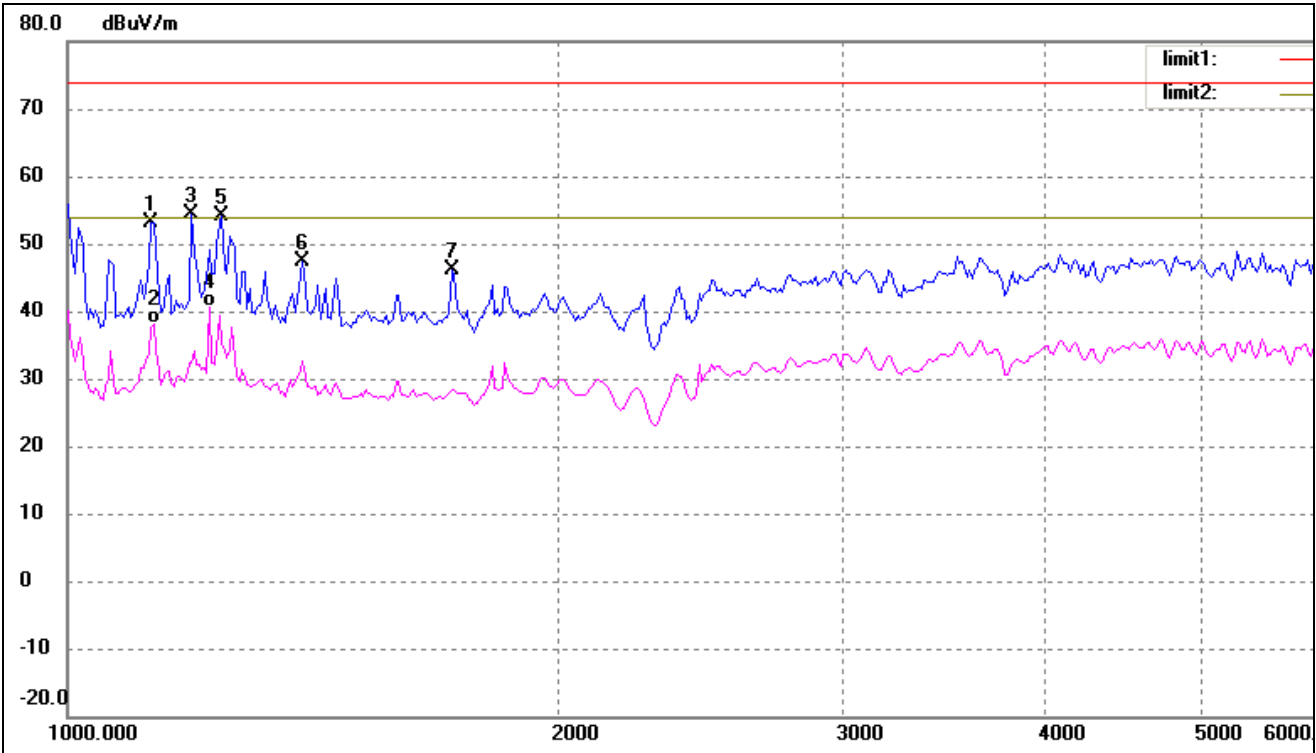

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( °)	(cm)	
1	1125.532	61.85	-8.71	53.14	74.00	-20.86	0	100	peak
2	1129.573	46.91	-8.71	38.20	54.00	-15.80	15	100	AVG
3	1191.952	62.85	-8.58	54.27	74.00	-19.73	114	100	peak
4	1222.230	49.14	-8.52	40.62	54.00	-13.38	111	100	AVG
5	1244.327	62.50	-8.47	54.03	74.00	-19.97	254	100	peak
6	1395.520	55.60	-8.12	47.48	74.00	-26.52	125	100	peak
7	1724.082	52.42	-6.34	46.08	74.00	-27.92	134	100	peak

Note: Testing is carried out with frequency rang 9kHz to the fifth harmonics,The measurements greater than 20dB below the limit from 9kHz to 30MHz.

\*\*\*\*\* END OF REPORT \*\*\*\*\*