

h/p

REF

30.0 dBm

ATTEN 40 dB

MKR Δ -147 kHz
-20.90 dB

10 dB/


DL
19.6
dBm

Transmitter operating at lowest frequency

MARKER Δ

-147 kHz

-20.90 dB

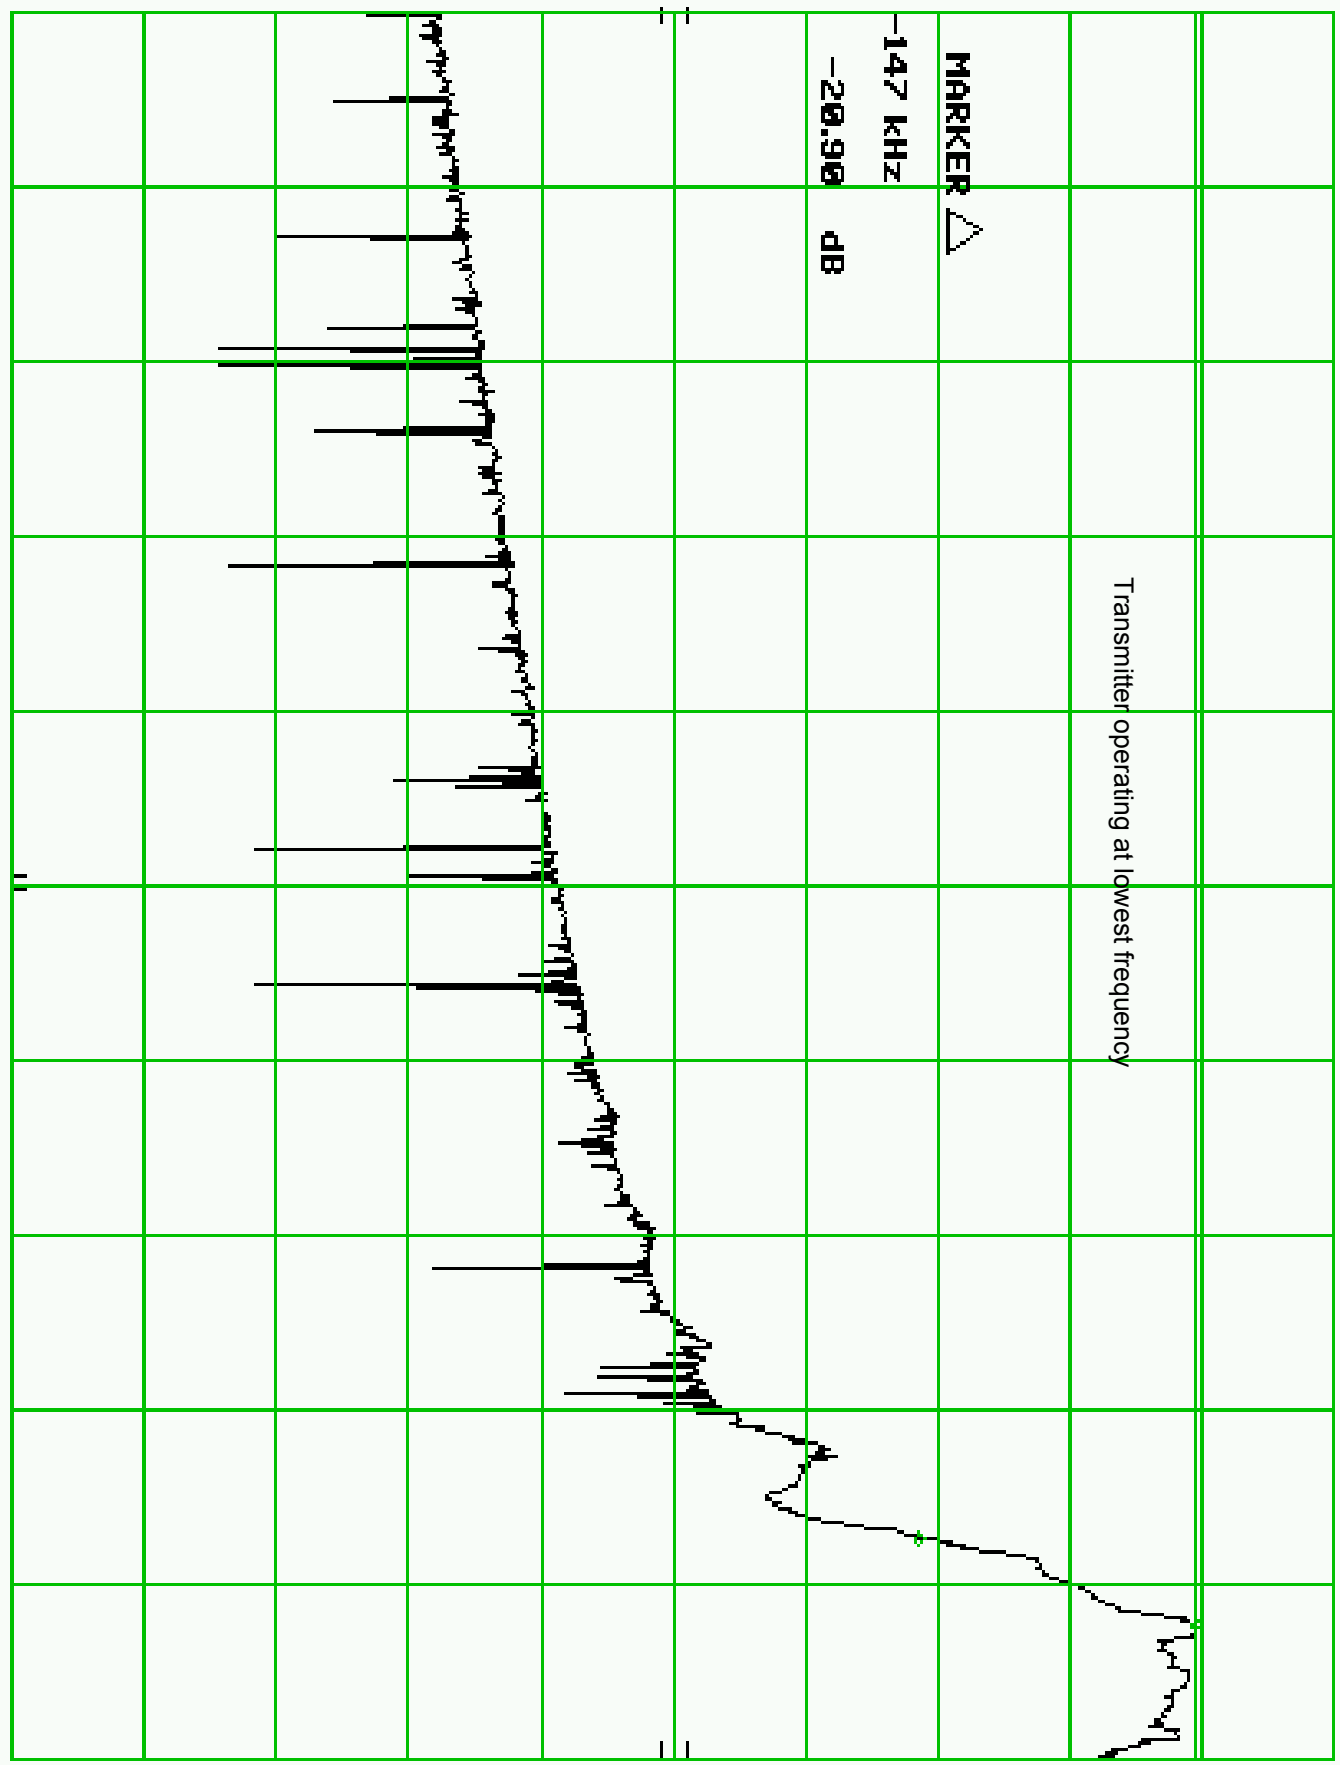

START 2.398 75 GHz

RES BW 30 kHz

VBW 30 kHz

STOP 2.401 75 GHz

SMP 100 msec

MKR 2.483 505 GHz

-34.10 dBm

470

REF

30.0 dBm

ATTEN 40 dB

10 dB/

POS PK

Transmitting at highest frequency


DISPLAY LINE

20.1 dBm

DL

20.1

dBm

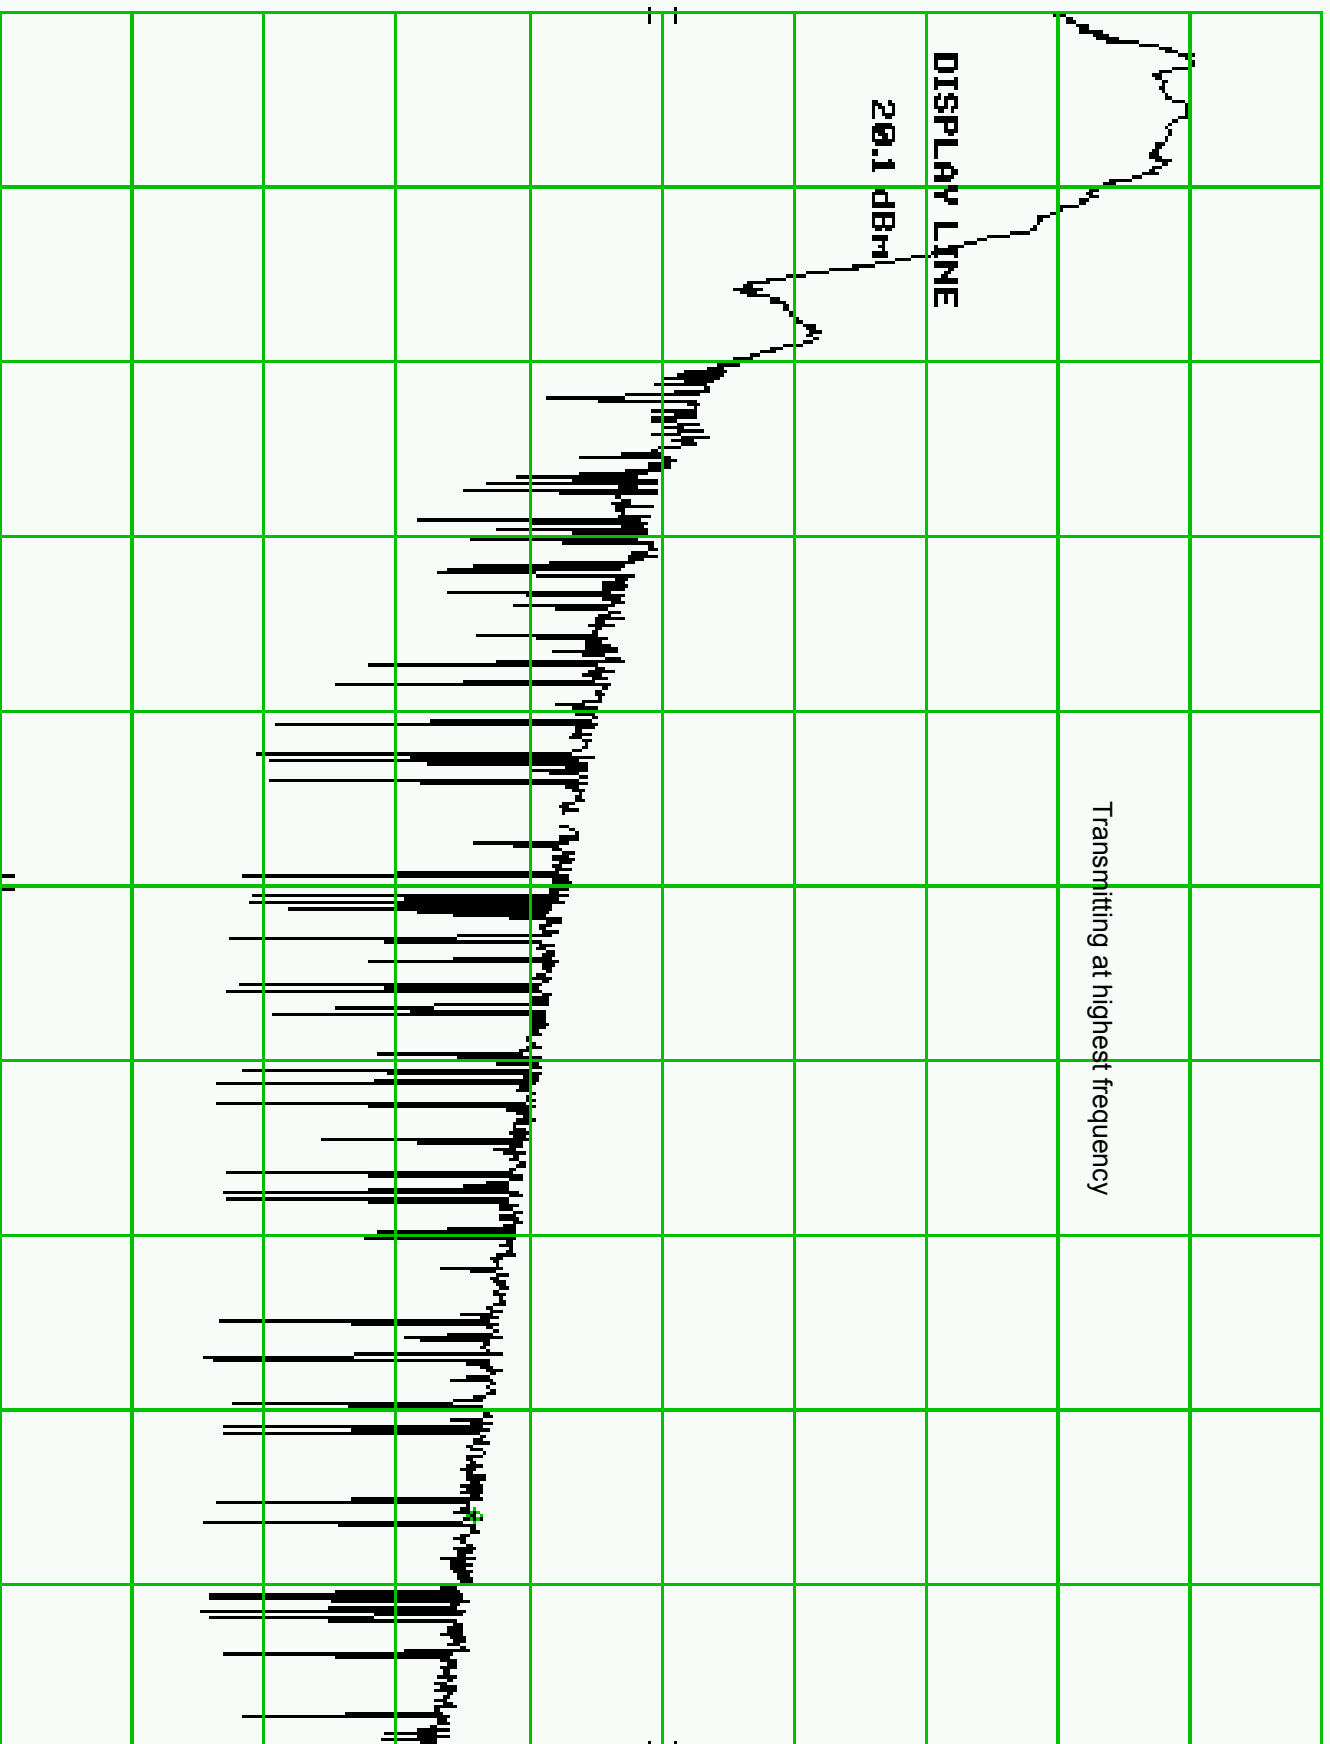

START 2.480 92 GHz

RES BW 30 KHz

VBW 30 KHz

STOP 2.483 92 GHz

SMP 100 msec