

HCT CO., LTD.

Product Compliance Division

TEL: +82 31 639 8518 FAX: +82 31 639 8535

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:

RF WINDOW Co.,Ltd.

Date of Issue: January 31, 2010

Address:

Location:

14F, Daerung Posttower3, 182-4, Guro-3dong,

HCT CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,

Guro-gu, Seoul, 152-847, South Korea

Gyeonggi-do, Korea

Test Report No.: HCTR1001FR09

HCT FRN: 0005866421

IC Recognition No.: IC 5944A-1

FCC ID

: X4O-ICS-F0837

APPLICANT

: RF WINDOW Co.,Ltd.

Model(s):

ICS-F0837

EUT Type:

ICS-Digital Relay

Uplink Frequency:

824 - 849 MHz (WCDMA/CDMA)

Downlink Frequency:

869 - 894 MHz (WCDMA/CDMA)

Max. RF Output Power:

0.5 W (Uplink), 5 W (Downlink)

Emission Designator(s):

F9W (WCDMA/CDMA)

FCC Rule Part(s):

Title 47 of CFR, Part 22

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by : Chang Seok Choi

Test engineer of RF Team

Approved by : Sang Jun Lee Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

	FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X40-ICS-F0837	



CONTENTS

1. CLIENT INFORMATION	4
2. TEST SPECIFICATIONS	5
3. STANDARDS ENVIRONMENTAL TEST CONDITIONS	5
4. TEST EQUIPMENT	6
5. RF OUTPUT POWER	7
6. OCCUPIED BANDWIDTH	23
7. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL	50
8. RADIATED SPURIOUS EMISSIONS	99
9. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS	102
10. RF EXPOSURE STATEMENT	105

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



1. CLIENT INFORMATION

The EUT has been tested by request of

Company	RF WINDOW Co.,Ltd.
Contact Point	14F, Daerung Posttower3, 182-4, Guro-3dong, Guro-gu, Seoul, 152-847, South Korea

■ EUT Type: ICS-Digital Relay

■ MODEL : ICS-F0837

■ Frequency Ranges: 824 ~ 849 MHz (Uplink_WCDMA/CDMA)

869 ~ 894 MHz (Downlink_WCDMA/CDMA)

■ RF Output Power: 0.5 W (Uplink), 5 W (Downlink)

■ FCC Rules Part(s): Title 47 of CFR, Part 22

■ Emission Designators: F9W (WCDMA/CDMA)

■ Modulation : QPSK (WCDMA/CDMA), 16QAM (HSDPA/1xEVDO)

■ Place of Tests: HCT Co., Ltd.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



2. TEST SPECIFICATIONS

2.1 Standards

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With Part 22 Subpart H.

Description	Reference (FCC)	Results
RF Power Output	\$2.1046 \$22.913	Compliant
Modulation Characteristics	§2.1047	N/A
Occupied Bandwidth	§2.1049	Compliant
Spurious Emissions at Antenna Terminals	\$2.1051 \$22.917	Compliant
Frequency Stability	§2.1055 §22.355	Compliant

3. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature :	+ 15 ℃ to + 35 ℃
Relative humidity:	30 % to 60 %
Air pressure	860 mbar to 1060 mbar

FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



4. TEST EQUIPMENT

Manufacturer	Model / Equipment	Cal Interval	Calibration Due	Serial No.
Agilent	E4438C /Signal Generator	Annual	12/15/2011	MY42082646
Agilent	E4416A /Power Meter	Annual	01/14/2011	GB41291412
WEINSCHEL	67-30-33/ATTENUATOR	Annual	01/14/2011	BR0530
Schwarzbeck	VULB 9168/ TRILOG Antenna	Annual	01/06/2011	9168-200
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
MITEQ	AMF-60-0010 1800-35-20P	Annual	04/25/2010	1200937
Schwarzbeck	BBHA 9120D/ Horn Antenna	Annual	03/26/2010	147
Agilent	N9020A/ Signal Analyzer	Annual	02/19/2010	US46220219

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



5. RF OUTPUT POWER

5.1 Test Procedure

Test Requirements:

§ 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated. § 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 22.913 Effective radiated power limits.

The effective radiated power (ERP) of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.


(a) Maximum ERP. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Test Procedures:

As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer or power meter. This test was performed in all applicable modulations.

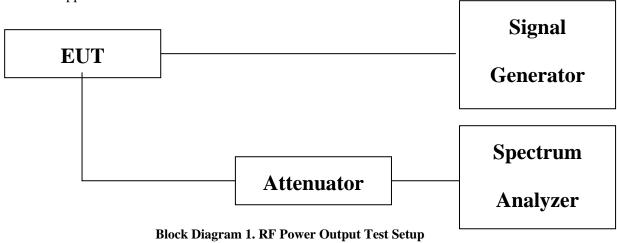

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



5.2 Test Results

(WCDMA)

CARRIER	DOWNLINK		UPLINK	
CHANNEL	Frequency (MHz)	Measured Power (dBm)	Frequency (MHz)	Measured Power (dBm)
Low	871.6	36.74	826.6	26.89
Mid	881.6	36.99	836.6	26.88
High	891.6	36.94	846.6	26.99

INPUT SIGNAL DOWNLINK		UPLINK
Source	Test Model 1 w/64 DPCH	Test Model 1 w/64 DPCH
Power Level	- 63.1 dBm	- 73.6 dBm
Amplitude offset	30.90 dB	30.49 dB

(HSDPA)

CARRIER	DOWNLINK		UPLINK	
CHANNEL	Frequency (MHz)	Measured Power (dBm)	Frequency (MHz)	Measured Power (dBm)
Low	871.6	36.87	826.6	26.77
Mid	881.6	36.98	836.6	26.87
High	891.6	36.83	846.6	26.93

INPUT SIGNAL DOWNLINK		UPLINK
Source	Test Model 5 w/64 DPCH	Test Model 5 w/64 DPCH
Power Level - 63.1 dBm		- 73.6 dBm
Amplitude offset	30.90 dB	30.49 dB

FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



(CDMA)

CARRIER	DOWNLINK		UPLINK	
CHANNEL	Frequency (MHz)	Measured Power (dBm)	Frequency (MHz)	Measured Power (dBm)
Low	869.63	36.88	824.63	27.07
Mid	881.50	36.92	836.50	26.91
High	893.37	36.57	848.37	26.86

INPUT SIGNAL DOWNLINK		UPLINK
Source	Arb CDMA2000	Arb CDMA2000
Power Level	- 62.1 dBm	- 72.3 dBm
Amplitude offset	30.90 dB	30.49 dB

(EVDO)

CARRIER	DOWNLINK		UPLINK	
CHANNEL	Frequency (MHz)	Measured Power (dBm)	Frequency (MHz)	Measured Power (dBm)
Low	869.63	36.56	824.63	27.03
Mid	881.50	36.08	836.50	26.93
High	893.37	36.24	848.37	26.88


INPUT SIGNAL DOWNLINK		UPLINK
Source	Arb 1xEVDO	Arb 1xEVDO
Power Level - 62.1 dBm		- 72.3 dBm
Amplitude offset	30.90 dB	30.49 dB

FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Plots of RF Output Power

Downlink Low CH (WCDMA)

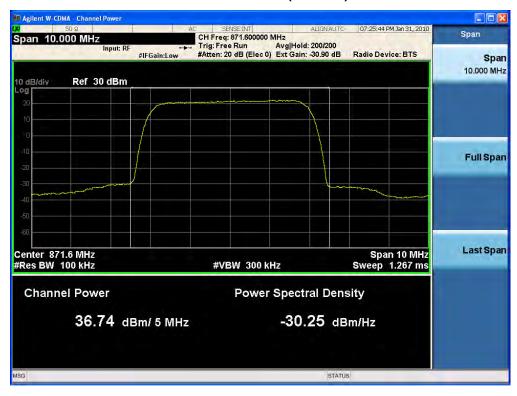

Downlink Middle CH (WCDMA)



FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Downlink High CH (WCDMA)



Uplink Low CH (WCDMA)



FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Uplink Middle CH (WCDMA)



Uplink High CH (WCDMA)



FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Downlink Low CH (WCDMA HSDPA)




Downlink Middle CH (WCDMA HSDPA)




FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Downlink High CH (WCDMA HSDPA)

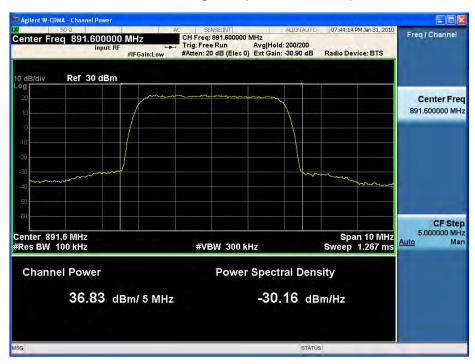

Uplink Low CH (WCDMA HSDPA)

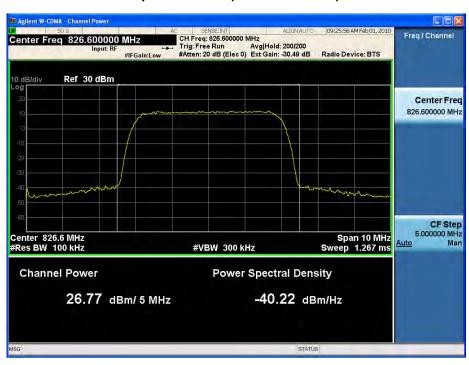

FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Uplink Middle CH (WCDMA HSDPA)




Uplink High CH (WCDMA HSDPA)



FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Downlink Low CH (CDMA)

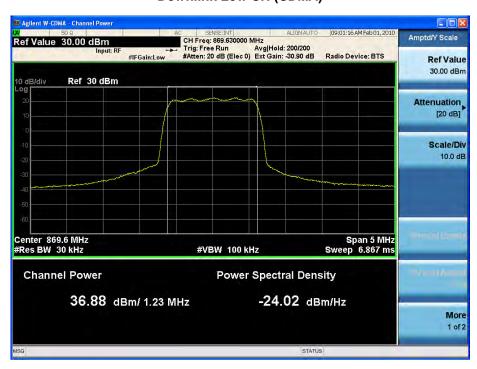

Downlink Middle CH (CDMA)




FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Downlink High CH (CDMA)



Uplink Low CH (CDMA)

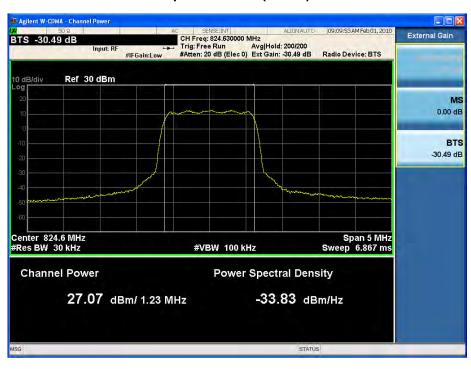

FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Uplink Middle CH (CDMA)




Uplink High CH (CDMA)




FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Downlink Low CH (CDMA EVDO)

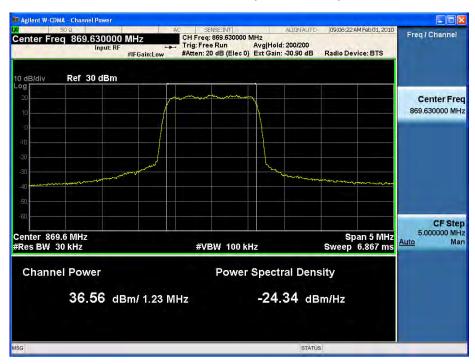

Downlink Middle CH (CDMA EVDO)

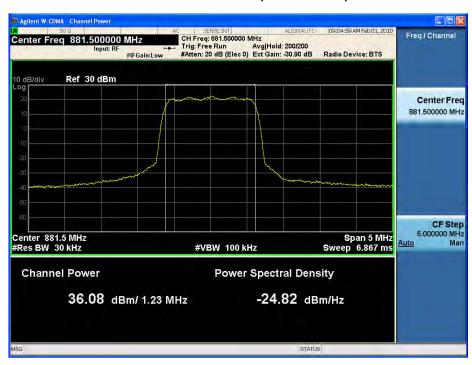

FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Downlink High CH (CDMA EVDO)



Uplink Low CH (CDMA EVDO)



FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



Uplink Middle CH (CDMA EVDO)



Uplink High CH (CDMA EVDO)



FCC CERTIFICATION REPORT				
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837	



6. OCCUPIED BANDWIDTH

6.1 Test Procedure

Test Requirement(s): § 2.1049 Measurements required: Occupied bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures: As required by 47 CFR 2.1049, occupied bandwidth measurements were made with a

Spectrum Analyzer connected to the RF ports for both Uplink and Downlink

The modulation characteristics of signal generator's carrier was measured first at a maximum RF level prescribed by the OEM. The signal generator was then connected to

either the Uplink or Downlink input at the appropriate RF level. The resulting

modulated signal through the EUT was measured and compared against the original

signal.

FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Test Results: The EUT complies with the requirements of this section.

(WCDMA)

CARRIER	DOWNLINK			UPLINK		
CHANNEL	Frequency	Measured Bandwidth (MHz)		Frequency	Measured Bandwidth (MHz)	
	(MHz)	99 %	26 dB	(MHz)	99 %	26 dB
Low	871.6	4.0186	4.524	826.6	4.0127	4.429
Mid	881.6	4.0229	4.550	836.6	4.0193	4.472
High	891.6	4.0260	4.533	846.6	4.0116	4.482

(WCDMA HSDPA)

CARRIER	DOWNLINK			UPLINK		
CHANNEL	Frequency	Measured Bandwidth (MHz)		Frequency	Measured Bandwidth (MHz)	
	(MHz)	99 %	26 dB	(MHz)	99 %	26 dB
Low	871.6	4.0205	4.525	826.6	4.0011	4.447
Mid	881.6	4.0222	4.529	836.6	4.0095	4.469
High	891.6	4.0237	4.531	846.6	4.0039	4.445

FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



(CDMA)

CARRIER	DOWNLINK			UPLINK		
CHANNEL	Frequency Measured Bandwidth (MHz) Frequency		Measured Bandwidth (MHz)			
	(MHz)	99 %	26 dB	(MHz)	99 %	26 dB
Low	869.63	1.2482	1.393	824.63	1.2435	1.383
Mid	881.50	1.2445	1.384	836.50	1.2424	1.391
High	893.37	1.2459	1.378	848.37	1.2538	1.386

(CDMA EVDO)


CARRIER	D	DOWNLINK			UPLINK		
CHANNEL	Frequency	Measured Bandwidth (MHz)		Frequency	Measured Bandwidth (MHz)		
	(MHz)	99 %	26 dB	(MHz)	99 %	26 dB	
Low	869.63	1.2449	1.384	824.63	1.2460	1.382	
Mid	881.50	1.2463	1.377	836.50	1.2527	1.384	
High	893.37	1.2399	1.383	848.37	1.2413	1.385	

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837




Plots of Occupied Bandwidth

Downlink Low CH (WCDMA) Input Signal

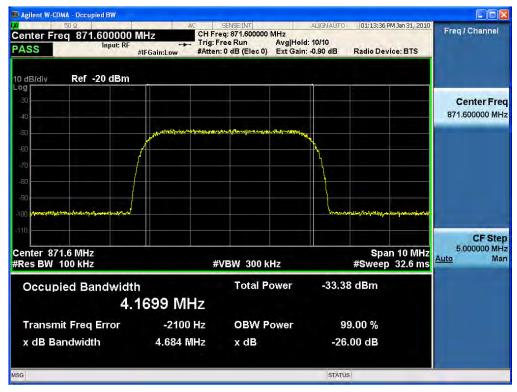


Downlink Mid CH (WCDMA) Input Signal

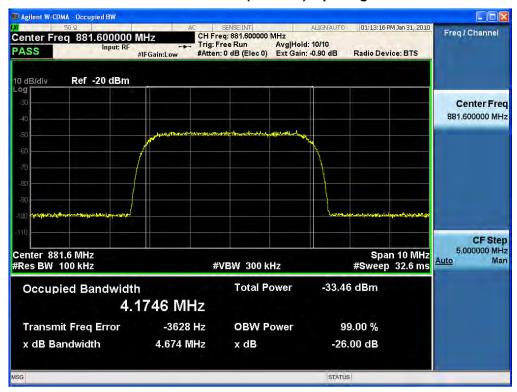


FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: ICS-Digital Relay	FCC ID:
HCTR1001FR09	January 31, 2010		X4O-ICS-F0837



Downlink High CH (WCDMA) Input Signal

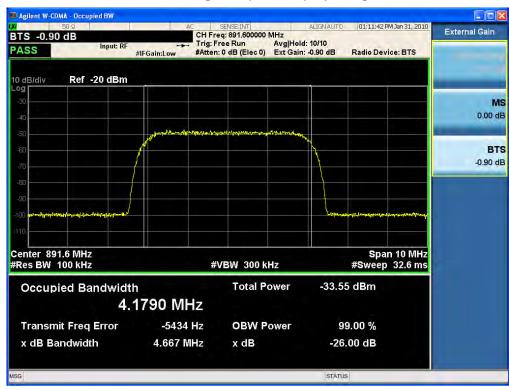


Uplink Low CH (WCDMA) Input Signal

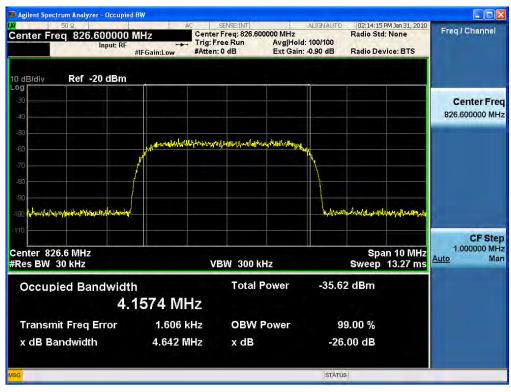


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Uplink Mid CH (WCDMA) Input Signal

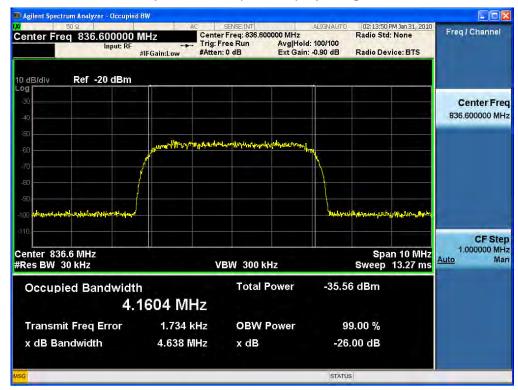


Uplink High CH (WCDMA) Input Signal

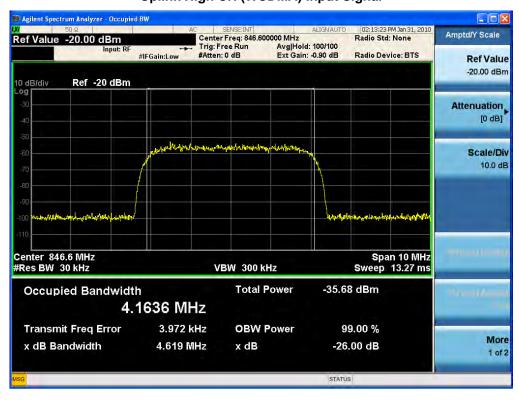


FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Downlink Low CH (WCDMA HSDPA) Input Signal

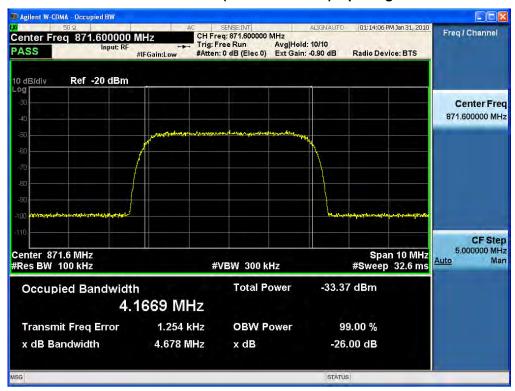


Downlink Mid CH (WCDMA HSDPA) Input Signal

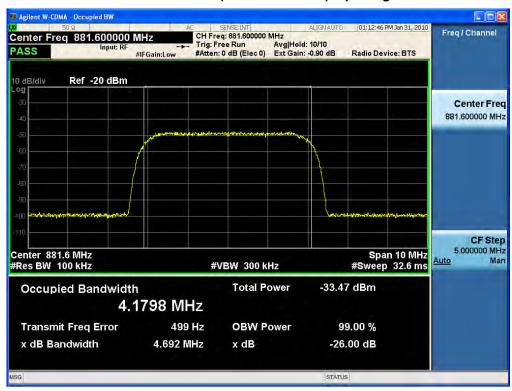


FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: ICS-Digital Relay	FCC ID:
HCTR1001FR09	January 31, 2010		X4O-ICS-F0837



Downlink High CH (WCDMA HSDPA) Input Signal

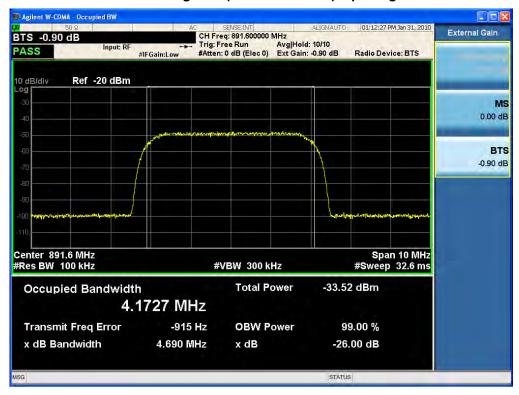


Uplink Low CH (WCDMA HSDPA) Input Signal

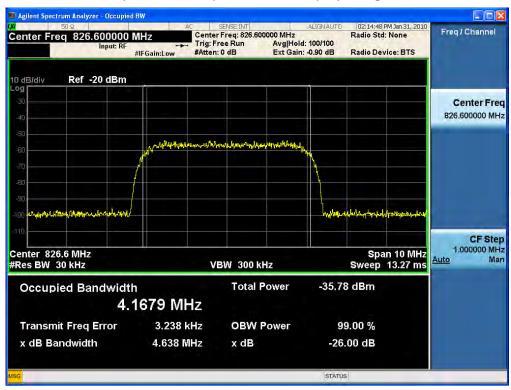


FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type:	FCC ID:
HCTR1001FR09	January 31, 2010	ICS-Digital Relay	X4O-ICS-F0837



Uplink Mid CH (WCDMA HSDPA) Input Signal

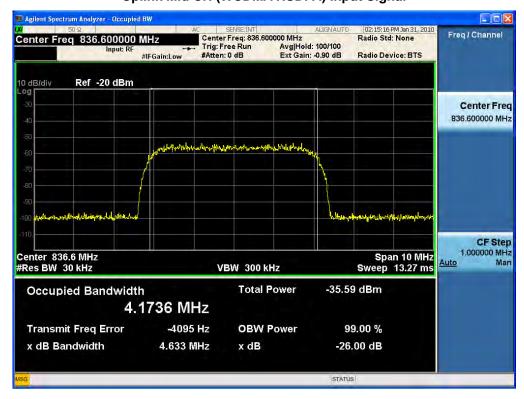

Uplink High CH (WCDMA HSDPA) Input Signal

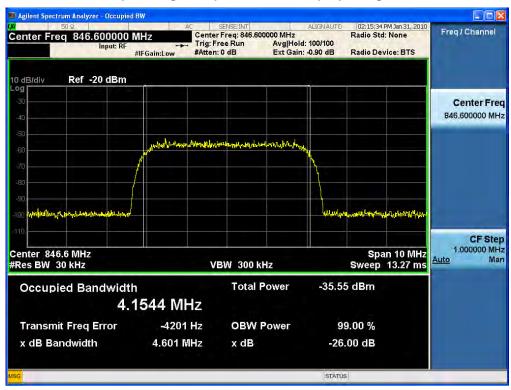

FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: ICS-Digital Relay	FCC ID:
HCTR1001FR09	January 31, 2010		X4O-ICS-F0837