

# FCC PART 15.247 **TEST REPORT**

For

# ZIONCOM ELECTRONICS (SHENZHEN) LTD.

Building A1-A2, Lantian Science and Technology Park, Xinyu Road, Xinqiao Henggang Block Shajing Street, Baoan District, Shenzhen, Guangdong, China

> Test Model: N600R **FCC ID: X7DIP04291**

Report Type: **Product Name:** Original Report 600Mbps Wireless N Router **Report Number:** RDG170719001-00B **Report Date:** 2017-08-23 Jerry Zhang Jerry Zhang **EMC Manager** Reviewed By: Bay Area Compliance Laboratories Corp. (Dongguan) **Test Laboratory:** 

No.69 Pulongcun, Puxinhu Industry Area,

Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

# **TABLE OF CONTENTS**

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EUT EXERCISE SOFTWARE	
EQUIPMENT MODIFICATIONS  LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	
SUPPORT CABLE LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
APPLICABLE STANDARD	
FCC §15.203 - ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	
FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	
EUT Setup	
EMI Test Receiver Setup	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	20
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH	27
APPLICABLE STANDARD	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS	
Test Data	
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER	
APPLICABLE STANDARD	
TEST PROCEDURE TEST EQUIPMENT LIST AND DETAILS	
TEST EQUITMENT LIST AND DETAILS	33

Report No.: RDG170719001-00B

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The **ZIONCOM ELECTRONICS** (**SHENZHEN**) **LTD**.'s product, model number: **N600R** (**FCC ID: X7DIP04291**) (the "EUT") in this report was a **600Mbps Wireless N Router**. Rated input voltage: DC 9V from adapter.

Report No.: RDG170719001-00B

Adapter Information: Model:DCP005C09080U

Input: AC100-240V 50/60Hz 0.2A

Output: DC9V 0.8A

\*All measurement and test data in this report was gathered from final production sample, serial number: 170719001 (assigned by the BACL, Dongguan). The EUT was received on 2017-07-21.

#### **Objective**

This report is prepared on behalf of *ZIONCOM ELECTRONICS (SHENZHEN) LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

#### Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

#### **Measurement Uncertainty**

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions	±1.5 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

FCC Part 15.247 Page 4 of 80

#### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Report No.: RDG170719001-00B

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO 17025 by CNAS(Lab code: L5662). And accredited to ISO 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

FCC Part 15.247 Page 5 of 80

#### SYSTEM TEST CONFIGURATION

#### **Description of Test Configuration**

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

Report No.: RDG170719001-00B

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11 n20 modes were test with channel 1,6,11.

For 802.11 n40 mode was test with channel 3,6, 9.

The devices have 4 external antennas. For 802.11 b/g mode, the device supports SISO only, for 802.11n mode, the device supports MIMO and SISO modes, MIMO mode supports 2TX and 3TX mode, antenna chain 0 can't transmission in MIMO modes. Per pretest, MIMO modes 3TX mode was the worst and reported in the report.

#### **EUT Exercise Software**

The software "MP\_TEST" was used for testing, which was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all date rates bandwidths, and modulations.

The maximum power level was configured as below table, that provided by the manufacturer:

FCC Part 15.247 Page 6 of 80

Report No.: RDG170719001-00B

41

41

41

The duty cycle as below:

n40

Chain 1 Chain 2

Chain 3

Mode	Ton (ms)	$T_{on+off}$ (ms)	Duty Cycle (%)
802.11b	2	2	100
802.11g	10	10	100
802.11 n20	50	50	100
802.11 n40	50	50	100

41

41

41

41

41

41

FCC Part 15.247 Page 7 of 80


Ref Lvl


30 dBm

0.5 dB Offse



Report No.: RDG170719001-00B



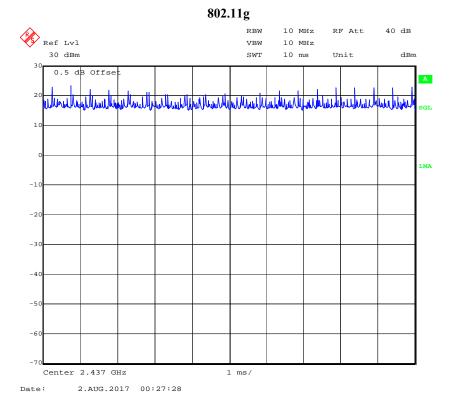


200 **\**s/


FCC Part 15.247 Page 8 of 80



Report No.: RDG170719001-00B

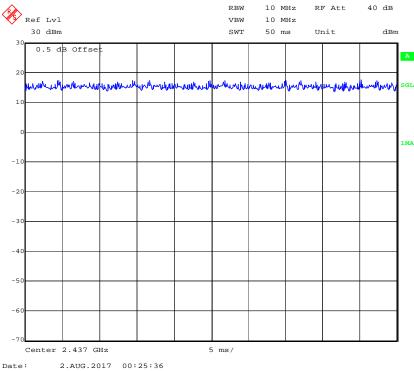

#### 802.11 n40

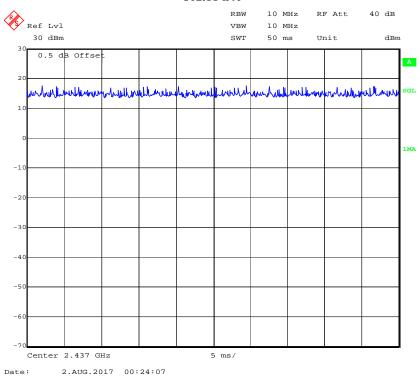

FCC Part 15.247 Page 9 of 80

### **Equipment Modifications**

No modification was made to the EUT.

# **Local Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017

Report No.: RDG170719001-00B

# **Support Cable List and Details**

Cable Description	<b>Shielding Type</b>	Ferrite Core	Length (m)	From Port	То
RJ45 cable	No	No	10	EUT	Laptop
RJ45 cable*4	No	No	10	EUT	Load
Adapter Cable	No	No	1.25	Adapter	EUT

# **Block Diagram of Test Setup**

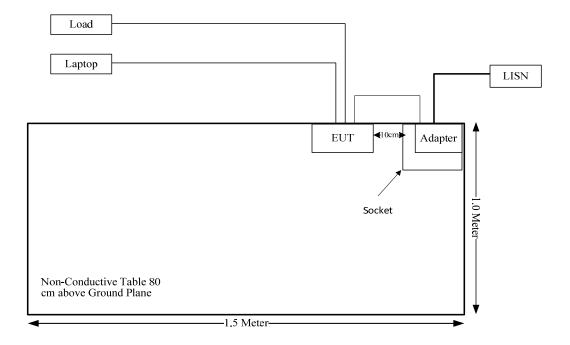

FCC Part 15.247 Page 10 of 80

# SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissable Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
\$15.205, \$15.209, \$15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Report No.: RDG170719001-00B

FCC Part 15.247 Page 11 of 80

# FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE **EXPOSURE (MPE)**

#### **Applicable Standard**

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Report No.: RDG170719001-00B

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

	(B) Limits for General Population/Uncontrolled Exposure					
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)		
0.3-1.34	614	1.63	*(100)	30		
1.34–30	824/f	2.19/f	*(180/f²)	30		
30–300	27.5	0.073	0.2	30		
300–1500	/	/	f/1500	30		
1500-100,000	/	/	1.0	30		

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

#### **Calculation formula:**

Prediction of power density at the distance of the applicable MPE limit

 $S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>); P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

#### **Calculated Data:**

Frequency (MHz)	Antenna Gain		Conducted output power including Tune- up Tolerance		output power including Tune-		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)					
2412-2462	5	3.16	24	251.19	20.00	0.1581	1.0		

Result: The device meet FCC MPE at 20 cm distance

FCC Part 15.247 Page 12 of 80

# FCC §15.203 - ANTENNA REQUIREMENT

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RDG170719001-00B

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

#### **Antenna Connector Construction**

The EUT has 4 external antennas permanently attached to the EUT. All antenna gains are 5.0 dBi. Please refer to the EUT photos.

Result: Compliance.


FCC Part 15.247 Page 13 of 80

# FCC §15.207 (a)-AC LINE CONDUCTED EMISSIONS

#### **Applicable Standard**

FCC§15.207(a)

#### **EUT Setup**

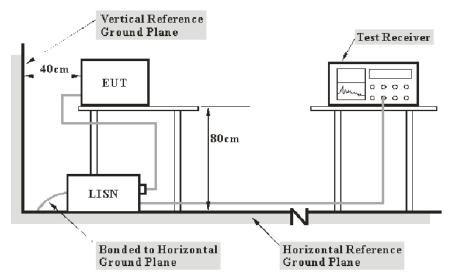

Report No.: RDG170719001-00B

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

#### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

FCC Part 15.247 Page 14 of 80

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

#### **Corrected Amplitude & Margin Calculation**

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$
$$C_f = A_C + VDF$$

Herein,

V<sub>C</sub> (cord. Reading): corrected voltage amplitude

V<sub>R</sub>: reading voltage amplitude A<sub>c</sub>: attenuation caused by cable loss VDF: voltage division factor of AMN

C<sub>f</sub>: Correction Factor

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Report No.: RDG170719001-00B

Margin = Limit – Corrected Amplitude

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2016-12-08	2017-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2016-09-01	2017-09-01
R&S	Two-line V-network	ENV 216	3560.6550.12	2016-12-08	2017-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
Unknown	Coaxial Cable	2m	Con-1	2016-09-01	2017-09-01

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 15 of 80


**Test Data** 

#### **Environmental Conditions**

Temperature:	27.1 °C
Relative Humidity:	63 %
ATM Pressure:	99.8 kPa

The testing was performed by Gaochao Gong on 2017-07-26.

Test Mode: Transmitting AC120 V, 60 Hz, Line:

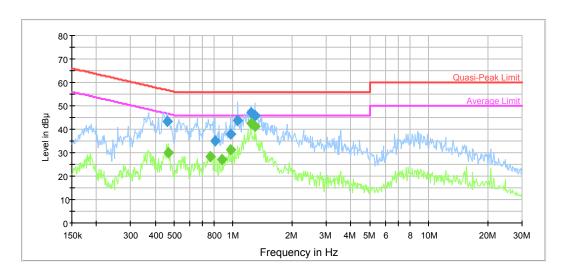


Report No.: RDG170719001-00B

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.461346	43.3	9.000	L1	9.9	13.4	56.7	Compliance
0.805868	35.1	9.000	L1	9.8	20.9	56.0	Compliance
0.975701	38.1	9.000	L1	9.8	17.9	56.0	Compliance
1.056628	43.6	9.000	L1	9.8	12.4	56.0	Compliance
1.239175	47.2	9.000	L1	9.7	8.8	56.0	Compliance
1.289541	46.0	9.000	L1	9.7	10.0	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment	
0.465037	30.0	9.000	L1	9.9	16.6	46.6	Compliance	
0.762149	28.3	9.000	L1	9.8	17.7	46.0	Compliance	
0.879690	26.9	9.000	L1	9.8	19.1	46.0	Compliance	
0.975701	31.2	9.000	L1	9.8	14.8	46.0	Compliance	
1.239175	42.5	9.000	L1	9.7	3.5	46.0	Compliance	
1.289541	41.3	9.000	L1	9.7	4.7	46.0	Compliance	

FCC Part 15.247 Page 16 of 80

# AC120 V, 60 Hz, Neutral:

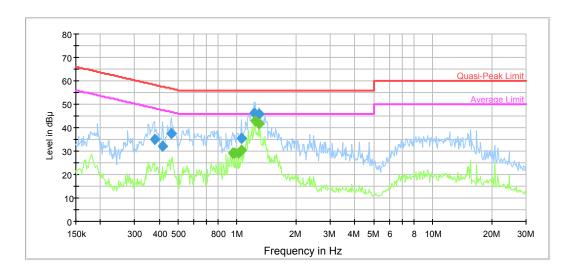

Report No.: RDG170719001-00B

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.378019	34.9	9.000	N	10.0	23.4	58.3	Compliance
0.415949	32.2	9.000	N	9.9	25.3	57.5	Compliance
0.461346	37.7	9.000	N	9.9	19.0	56.7	Compliance
1.048242	35.3	9.000	N	9.7	20.7	56.0	Compliance
1.219583	46.1	9.000	N	9.7	9.9	56.0	Compliance
1.289541	45.9	9.000	N	9.7	10.1	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.952654	29.1	9.000	N	9.8	16.9	46.0	Compliance
0.975701	29.4	9.000	N	9.8	16.6	46.0	Compliance
1.023481	29.3	9.000	N	9.7	16.7	46.0	Compliance
1.048242	30.4	9.000	N	9.7	15.6	46.0	Compliance
1.239175	42.9	9.000	N	9.7	3.1	46.0	Compliance
1.289541	41.5	9.000	N	9.7	4.5	46.0	Compliance

FCC Part 15.247 Page 17 of 80


# FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

#### **Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

#### **EUT Setup**

#### **Below 1GHz:**

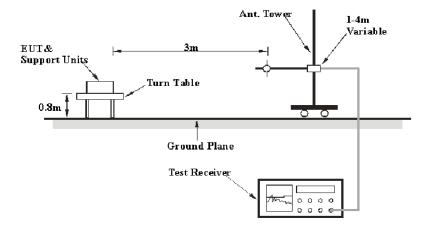

Report No.: RDG170719001-00B

#### **Above 1GHz:**



The radiated emission tests were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

FCC Part 15.247 Page 18 of 80

#### **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Detector	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

Report No.: RDG170719001-00B

1GHz-25GHz:

Detector	Duty cycle	RBW	Video B/W	
PK	Any	1MHz	3 MHz	
Ave.	>98%	1MHz	10 Hz	
	<98%	1MHz	1/T	

Note: T is minimum transmission duration

#### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

#### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 19 of 80

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2016-09-01	2017-08-31
Sunol Sciences	Antenna	JB3	A060611-1	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2016-09-01	2017-09-01
R&S	Spectrum Analyzer	FSU 26	200256	2016-12-08	2017-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technolagies	Horn Antenna	ARH-4223-02	1007726-02 1304	2017-06-16	2020-06-15
Mini-Circuit	Amplifier	ZVA-213-S+	SN054201245	2017-02-19	2018-02-19
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2016-09-06	2017-09-06
Unknown	Coaxial Cable	Chamber A-1	4m	2016-09-01	2017-09-01
Unknown	Coaxial Cable	Chamber B-1	0.75m	2016-09-01	2017-09-01
Unknown	Coaxial Cable	Chamber A-2	10m	2016-09-01	2017-09-01
Unknown	Coaxial Cable	Chamber B-2	8m	2016-09-01	2017-09-01
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

Report No.: RDG170719001-00B

#### **Test Data**

#### **Environmental Conditions**

Temperature:	28~29.1 °C
Relative Humidity:	29~32 %
ATM Pressure:	99.9 ~100.5 kPa

The testing was performed by Tony Zeng on 2017-08-18 and 2017-08-21.

Test Result: Compliance, please Refer to the following data


Test Mode: Transmitting

FCC Part 15.247 Page 20 of 80

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### 1) 30MHz-1GHz(802.11b mode chain 0 Middle channel was the worst):

#### **Horizontal:**

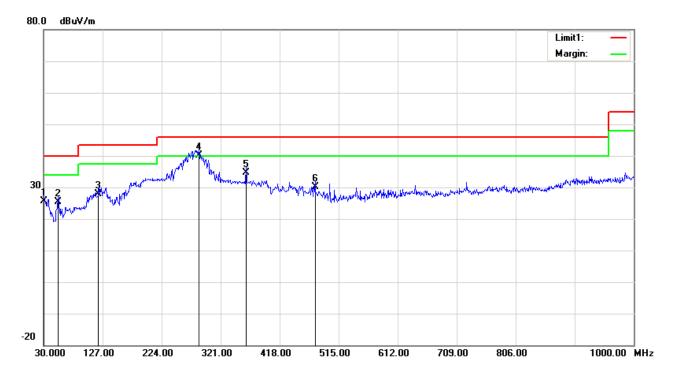


Report No.: RDG170719001-00B

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	25.25	QP	0.35	25.60	40.00	14.40
54.2500	37.69	QP	-12.39	25.30	40.00	14.70
120.2100	32.82	QP	-4.92	27.90	43.50	15.60
285.1100	44.08	QP	-3.98	40.10	46.00	5.90
362.7100	37.76	QP	-3.06	34.70	46.00	11.30
476.2000	31.12	QP	-1.02	30.10	46.00	15.90

FCC Part 15.247 Page 21 of 80

#### Vertical:

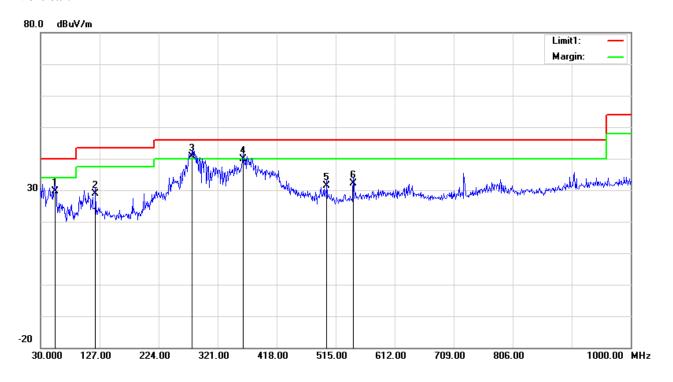

Report No.: RDG170719001-00B

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
53.2800	42.00	QP	-12.30	29.70	40.00	10.30
120.2100	33.82	QP	-4.92	28.90	43.50	14.60
279.2900	44.50	QP	-3.80	40.70	46.00	5.30
362.7100	42.86	QP	-3.06	39.80	46.00	6.20
500.4500	32.61	QP	-1.11	31.50	46.00	14.50
544.1000	32.56	QP	-0.36	32.20	46.00	13.80

FCC Part 15.247 Page 22 of 80

### 2) 1-25GHz:

802.11b(Chain 0 was the worst):

	Re	eceiver	Rx A	ntenna	Cable	Amplifier	Corrected	T	
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBµV/m)	Limit (dBμV/m)	Margin (dB)
			Lo	w Channe	1: 2412 M	Hz			
2412	68.66	PK	Н	28.12	3.11	0.00	99.89	N/A	N/A
2412	64.56	AV	Н	28.12	3.11	0.00	95.79	N/A	N/A
2412	83.01	PK	V	28.12	3.11	0.00	114.24	N/A	N/A
2412	79.59	AV	V	28.12	3.11	0.00	110.82	N/A	N/A
2390	29.59	PK	V	28.08	3.10	0.00	60.77	74.00	13.23
2390	17.77	AV	V	28.08	3.10	0.00	48.95	54.00	5.05
4824	54.07	PK	V	32.95	4.33	35.49	55.86	74.00	18.14
4824	46.84	AV	V	32.95	4.33	35.49	48.63	54.00	5.37
7236	46.38	PK	V	35.81	5.47	35.97	51.69	74.00	22.31
7236	33.09	AV	V	35.81	5.47	35.97	38.40	54.00	15.60
6224	46.12	PK	V	34.26	4.94	35.80	49.52	74.00	24.48
6224	32.55	AV	V	34.26	4.94	35.80	35.95	54.00	18.05
	•		Mid	ldle Chann	el: 2437 ]	MHz			•
2437	66.21	PK	Н	28.17	3.11	0.00	97.49	N/A	N/A
2437	61.11	AV	Н	28.17	3.11	0.00	92.39	N/A	N/A
2437	82.59	PK	V	28.17	3.11	0.00	113.87	N/A	N/A
2437	78.58	AV	V	28.17	3.11	0.00	109.86	N/A	N/A
4874	50.29	PK	V	33.05	4.39	35.53	52.20	74.00	21.80
4874	42.93	AV	V	33.05	4.39	35.53	44.84	54.00	9.16
7311	45.58	PK	V	36.01	5.52	35.97	51.14	74.00	22.86
7311	32.25	AV	V	36.01	5.52	35.97	37.81	54.00	16.19
5814	45.17	PK	V	34.23	4.70	35.85	48.25	74.00	25.75
5814	32.33	AV	V	34.23	4.70	35.85	35.41	54.00	18.59
5687	45.16	PK	V	34.17	4.64	35.85	48.12	74.00	25.88
5687	32.89	AV	V	34.17	4.64	35.85	35.85	54.00	18.15
				gh Channe					
2462	66.64	PK	Н	28.22	3.10	0.00	97.96	N/A	N/A
2462	63.07	AV	Н	28.22	3.10	0.00	94.39	N/A	N/A
2462	79.21	PK	V	28.22	3.10	0.00	110.53	N/A	N/A
2462	75.49	AV	V	28.22	3.10	0.00	106.81	N/A	N/A
2483.5	25.44	PK	V	28.27	3.10	0.00	56.81	74.00	17.19
2483.5	14.15	AV	V	28.27	3.10	0.00	45.52	54.00	8.48
4924	46.66	PK	V	33.15	4.42	35.57	48.66	74.00	25.34
4924	32.52	AV	V	33.15	4.42	35.57	34.52	54.00	19.48
7386	46.32	PK	V	36.20	5.57	35.98	52.11	74.00	21.89
7386	32.23	AV	V	36.20	5.57	35.98	38.02	54.00	15.98
4996	53.05	PK	V	33.29	4.42	35.63	55.13	74.00	18.87
4996	47.44	AV	V	33.29	4.42	35.63	49.52	54.00	4.48

Report No.: RDG170719001-00B

FCC Part 15.247 Page 23 of 80

802.11g(Chain 0 was the worst):

602.11g(C		the worst):				Г				
Frequency	Re	eceiver	Rx A	ntenna	Cable	Amplifier	Corrected	Limit	Margin	
(MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	(dBµV/m)	(dB)	
			Lo	w Channe	1: 2412 M	ΙΗz				
2412	66.93	PK	Н	28.12	3.11	0.00	98.16	N/A	N/A	
2412	57.36	AV	Н	28.12	3.11	0.00	88.59	N/A	N/A	
2412	81.76	PK	V	28.12	3.11	0.00	112.99	N/A	N/A	
2412	71.59	AV	V	28.12	3.11	0.00	102.82	N/A	N/A	
2390	34.24	PK	V	28.08	3.10	0.00	65.42	74.00	8.58	
2390	17.45	AV	V	28.08	3.10	0.00	48.63	54.00	5.37	
4824	54.23	PK	V	32.95	4.33	35.49	56.02	74.00	17.98	
4824	46.91	AV	V	32.95	4.33	35.49	48.70	54.00	5.30	
7236	46.22	PK	V	35.81	5.47	35.97	51.53	74.00	22.47	
7236	32.18	AV	V	35.81	5.47	35.97	37.49	54.00	16.51	
4996	52.89	PK	V	33.29	4.42	35.63	54.97	74.00	19.03	
4996	47.95	AV	V	33.29	4.42	35.63	50.03	54.00	3.97	
	Middle Channel: 2437 MHz									
2437	66.51	PK	Н	28.17	3.11	0.00	97.79	N/A	N/A	
2437	56.17	AV	Н	28.17	3.11	0.00	87.45	N/A	N/A	
2437	82.91	PK	V	28.17	3.11	0.00	114.19	N/A	N/A	
2437	74.05	AV	V	28.17	3.11	0.00	105.33	N/A	N/A	
4874	48.51	PK	V	33.05	4.39	35.53	50.42	74.00	23.58	
4874	36.06	AV	V	33.05	4.39	35.53	37.97	54.00	16.03	
7311	46.65	PK	V	36.01	5.52	35.97	52.21	74.00	21.79	
7311	33.38	AV	V	36.01	5.52	35.97	38.94	54.00	15.06	
4996	52.98	PK	V	33.29	4.42	35.63	55.06	74.00	18.94	
4996	48.65	AV	V	33.29	4.42	35.63	50.73	54.00	3.27	
6237	46.52	PK	V	34.25	4.95	35.80	49.92	74.00	24.08	
6237	32.26	AV	V	34.25	4.95	35.80	35.66	54.00	18.34	
			Hi	gh Channe	1: 2462 N	ſНz				
2462	66.16	PK	Н	28.22	3.10	0.00	97.48	N/A	N/A	
2462	56.81	AV	Н	28.22	3.10	0.00	88.13	N/A	N/A	
2462	81.82	PK	V	28.22	3.10	0.00	113.14	N/A	N/A	
2462	73.31	AV	V	28.22	3.10	0.00	104.63	N/A	N/A	
2483.5	34.18	PK	V	28.27	3.10	0.00	65.55	74.00	8.45	
2483.5	19.66	AV	V	28.27	3.10	0.00	51.03	54.00	2.97	
4924	50.62	PK	V	33.15	4.42	35.57	52.62	74.00	21.38	
4924	47.43	AV	V	33.15	4.42	35.57	49.43	54.00	4.57	
7386	51.37	PK	V	36.20	5.57	35.98	57.16	74.00	16.84	
7386	36.54	AV	V	36.20	5.57	35.98	42.33	54.00	11.67	
5698	46.58	PK	V	34.18	4.65	35.85	49.56	74.00	24.44	
5698	32.45	AV	V	34.18	4.65	35.85	35.43	54.00	18.57	

Report No.: RDG170719001-00B

FCC Part 15.247 Page 24 of 80

802.11 n20(MIMO mode 3TX was the worst)

802.11 n2	802.11 n20(MIMO mode 3TX was the worst)									
T.	Re	eceiver	Rx A	ntenna	Cable	Amplifier	Corrected	T,	3.5	
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	
			Lo	w Channe	1: 2412 M	[Hz				
2412	64.13	PK	Н	28.12	3.11	0.00	95.36	N/A	N/A	
2412	54.11	AV	Н	28.12	3.11	0.00	85.34	N/A	N/A	
2412	81.89	PK	V	28.12	3.11	0.00	113.12	N/A	N/A	
2412	72.29	AV	V	28.12	3.11	0.00	103.52	N/A	N/A	
2390	32.41	PK	V	28.08	3.10	0.00	63.59	74.00	10.41	
2390	16.34	AV	V	28.08	3.10	0.00	47.52	54.00	6.48	
4824	50.47	PK	V	32.95	4.33	35.49	52.26	74.00	21.74	
4824	36.28	AV	V	32.95	4.33	35.49	38.07	54.00	15.93	
7236	46.25	PK	V	35.81	5.47	35.97	51.56	74.00	22.44	
7236	32.51	AV	V	35.81	5.47	35.97	37.82	54.00	16.18	
4996	52.73	PK	V	33.29	4.42	35.63	54.81	74.00	19.19	
4996	45.53	AV	V	33.29	4.42	35.63	47.61	54.00	6.39	
	Middle Channel: 2437 MHz									
2437	64.09	PK	Н	28.17	3.11	0.00	95.37	N/A	N/A	
2437	54.23	AV	Н	28.17	3.11	0.00	85.51	N/A	N/A	
2437	81.28	PK	V	28.17	3.11	0.00	112.56	N/A	N/A	
2437	72.07	AV	V	28.17	3.11	0.00	103.35	N/A	N/A	
4874	50.19	PK	V	33.05	4.39	35.53	52.10	74.00	21.90	
4874	36.16	AV	V	33.05	4.39	35.53	38.07	54.00	15.93	
7311	47.29	PK	V	36.01	5.52	35.97	52.85	74.00	21.15	
7311	33.58	AV	V	36.01	5.52	35.97	39.14	54.00	14.86	
4996	52.76	PK	V	33.29	4.42	35.63	54.84	74.00	19.16	
4996	45.36	AV	V	33.29	4.42	35.63	47.44	54.00	6.56	
5423	46.38	PK	V	33.98	4.53	35.82	49.07	74.00	24.93	
5423	33.37	AV	V	33.98	4.53	35.82	36.06	54.00	17.94	
				gh Channe						
2462	64.27	PK	Н	28.22	3.10	0.00	95.59	N/A	N/A	
2462	54.31	AV	Н	28.22	3.10	0.00	85.63	N/A	N/A	
2462	81.64	PK	V	28.22	3.10	0.00	112.96	N/A	N/A	
2462	72.49	AV	V	28.22	3.10	0.00	103.81	N/A	N/A	
2483.5	32.11	PK	V	28.27	3.10	0.00	63.48	74.00	10.52	
2483.5	17.65	AV	V	28.27	3.10	0.00	49.02	54.00	4.98	
4924	50.44	PK	V	33.15	4.42	35.57	52.44	74.00	21.56	
4924	36.21	AV	V	33.15	4.42	35.57	38.21	54.00	15.79	
7386	46.77	PK	V	36.20	5.57	35.98	52.56	74.00	21.44	
7386	32.54	AV	V	36.20	5.57	35.98	38.33	54.00	15.67	
4996	51.24	PK	V	33.29	4.42	35.63	53.32	74.00	20.68	
4996	44.98	AV	V	33.29	4.42	35.63	47.06	54.00	6.94	

Report No.: RDG170719001-00B

FCC Part 15.247 Page 25 of 80

802.11 n40(MIMO mode 3TX was the worst)

802.11 n4	802.11 n40(MIMO mode 3TX was the worst)									
T	Re	eceiver	Rx A	ntenna	Cable	Amplifier	Corrected	T **4	M	
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBµV/m)	Limit (dBμV/m)	Margin (dB)	
			Lo	w Channe	1: 2422 M	[Hz				
2422	68.29	PK	Н	28.14	3.11	0.00	99.54	N/A	N/A	
2422	58.76	AV	Н	28.14	3.11	0.00	90.01	N/A	N/A	
2422	84.37	PK	V	28.14	3.11	0.00	115.62	N/A	N/A	
2422	75.02	AV	V	28.14	3.11	0.00	106.27	N/A	N/A	
2390	28.26	PK	V	28.08	3.10	0.00	59.44	74.00	14.56	
2390	16.75	AV	V	28.08	3.10	0.00	47.93	54.00	6.07	
4844	52.86	PK	V	32.99	4.35	35.51	54.69	74.00	19.31	
4844	40.32	AV	V	32.99	4.35	35.51	42.15	54.00	11.85	
7266	47.79	PK	V	35.89	5.49	35.97	53.20	74.00	20.80	
7266	34.15	AV	V	35.89	5.49	35.97	39.56	54.00	14.44	
4996	52.27	PK	V	33.29	4.42	35.63	54.35	74.00	19.65	
4996	47.86	AV	V	33.29	4.42	35.63	49.94	54.00	4.06	
			Mic	ldle Chann		MHz				
2437	68.15	PK	Н	28.17	3.11	0.00	99.43	N/A	N/A	
2437	58.64	AV	Н	28.17	3.11	0.00	89.92	N/A	N/A	
2437	83.92	PK	V	28.17	3.11	0.00	115.20	N/A	N/A	
2437	74.87	AV	V	28.17	3.11	0.00	106.15	N/A	N/A	
4874	53.14	PK	V	33.05	4.39	35.53	55.05	74.00	18.95	
4874	39.76	AV	V	33.05	4.39	35.53	41.67	54.00	12.33	
7311	45.99	PK	V	36.01	5.52	35.97	51.55	74.00	22.45	
7311	32.26	AV	V	36.01	5.52	35.97	37.82	54.00	16.18	
4996	52.21	PK	V	33.29	4.42	35.63	54.29	74.00	19.71	
4996	46.36	AV	V	33.29	4.42	35.63	48.44	54.00	5.56	
5287	45.51	PK	V	33.76	4.54	35.76	48.05	74.00	25.95	
5287	32.26	AV	V	33.76	4.54	35.76	34.80	54.00	19.20	
				gh Channe						
2452	67.39	PK	Н	28.20	3.10	0.00	98.69	N/A	N/A	
2452	57.11	AV	Н	28.20	3.10	0.00	88.41	N/A	N/A	
2452	83.27	PK	V	28.20	3.10	0.00	114.57	N/A	N/A	
2452	74.69	AV	V	28.20	3.10	0.00	105.99	N/A	N/A	
2483.5	27.54	PK	V	28.27	3.10	0.00	58.91	74.00	15.09	
2483.5	15.68	AV	V	28.27	3.10	0.00	47.05	54.00	6.95	
4904	53.24	PK	V	33.11	4.42	35.56	55.21	74.00	18.79	
4904	40.15	AV	V	33.11	4.42	35.56	42.12	54.00	11.88	
7356	46.62	PK	V	36.13	5.55	35.98	52.32	74.00	21.68	
7356	32.85	AV	V	36.13	5.55	35.98	38.55	54.00	15.45	
4996	52.21	PK	V	33.29	4.42	35.63	54.29	74.00	19.71	
4996	47.48	AV	V	33.29	4.42	35.63	49.56	54.00	4.44	

Report No.: RDG170719001-00B

FCC Part 15.247 Page 26 of 80

# FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH

#### **Applicable Standard**


According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Report No.: RDG170719001-00B

#### **Test Procedure**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times RBW$ .
- c) Detector = Peak.
- d) Trace mode =  $\max$  hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



#### **Test Equipment List and Details**

Manufacturer	anufacturer Description Model S		Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2016-12-08	2017-12-08
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	51 %
ATM Pressure:	99.6 kPa

The testing was performed by Sun Zhong on 2017-08-01.

FCC Part 15.247 Page 27 of 80

Test Mode: Transmitting(Test performed at chain 0)

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
	Low	2412	10.16	≥0.5
802.11b	Middle	2437	10.16	≥0.5
	High	2462	10.24	≥0.5
	Low	2412	16.64	≥0.5
802.11g	Middle	2437	16.56	≥0.5
	High	2462	16.64	≥0.5
	Low	2412	17.80	≥0.5
802.11 n20	Middle	2437	17.80	≥0.5
	High	2462	17.72	≥0.5
802.11 n40	Low	2422	36.55	≥0.5
	Middle	2437	36.39	≥0.5
	High	2452	36.55	≥0.5


Report No.: RDG170719001-00B

FCC Part 15.247 Page 28 of 80

#### 6dB Bandwidth:


#### 802.11b Low Channel

Report No.: RDG170719001-00B

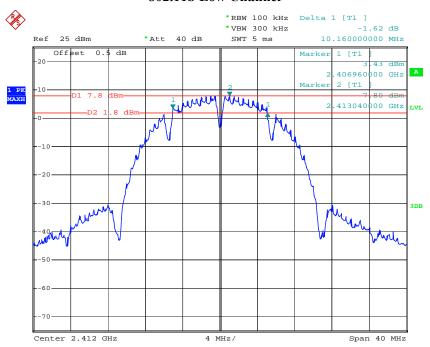

Date: 1.AUG.2017 21:39:49

# 802.11b Middle Channel

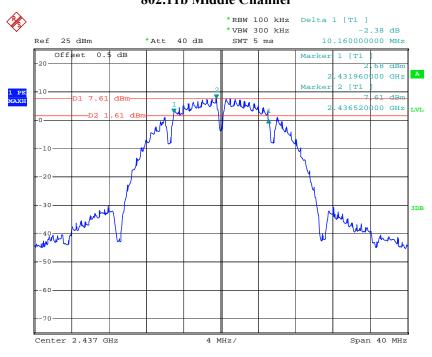


Date: 1.AUG.2017 21:37:11

FCC Part 15.247 Page 29 of 80


#### 802.11b High Channel

Report No.: RDG170719001-00B

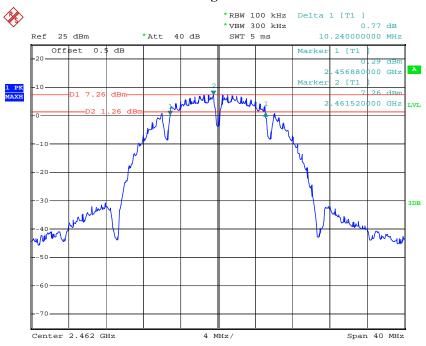

Date: 1.AUG.2017 21:41:50

#### 802.11g Low Channel

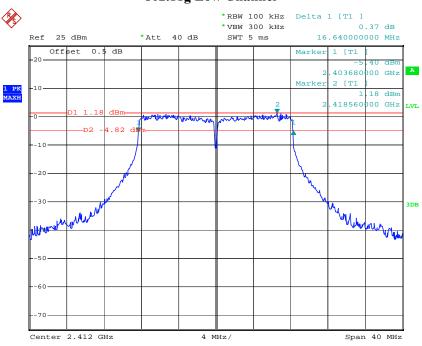


Date: 1.AUG.2017 21:44:14

FCC Part 15.247 Page 30 of 80


#### 802.11g Middle Channel

Report No.: RDG170719001-00B

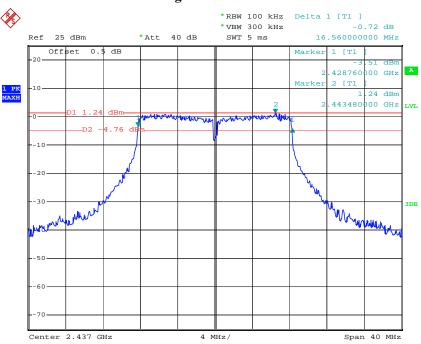

Date: 1.AUG.2017 21:48:16

#### 802.11g High Channel

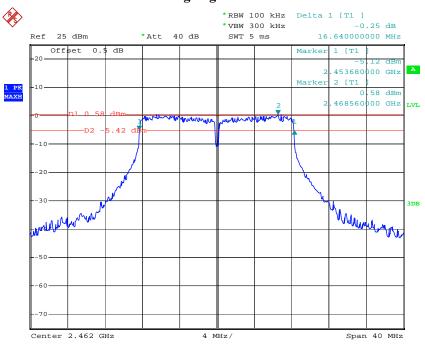


Date: 1.AUG.2017 22:05:59


FCC Part 15.247 Page 31 of 80

#### **802.11 n20 Low Channel**

Report No.: RDG170719001-00B

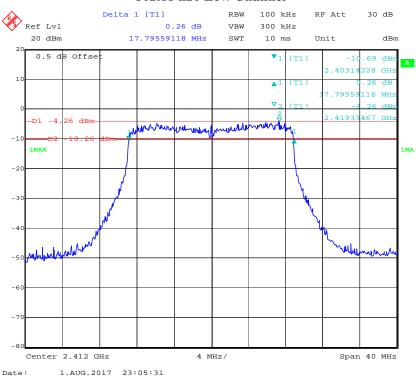


#### 802.11 n20 Middle Channel

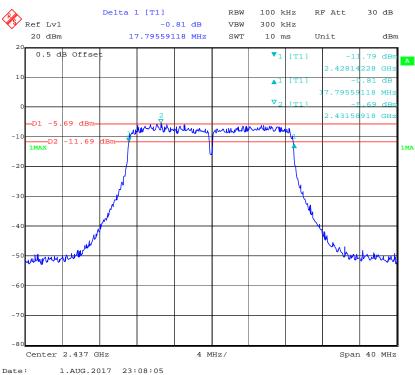


FCC Part 15.247 Page 32 of 80

#### 802.11 n20 High Channel

Report No.: RDG170719001-00B

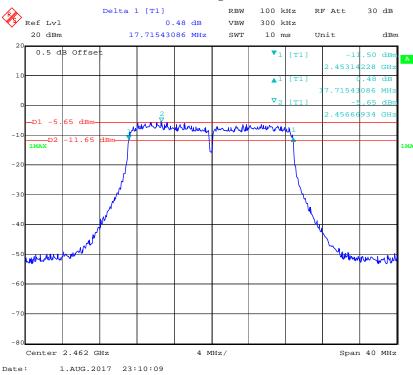


#### 802.11 n40 Low Channel

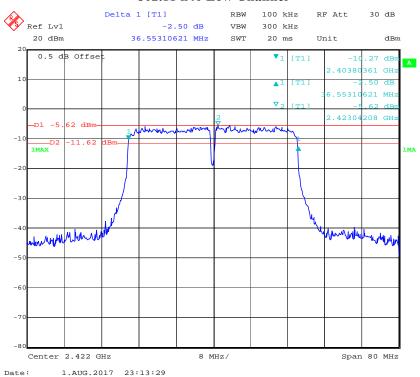


FCC Part 15.247 Page 33 of 80

#### 802.11 n40 Middle Channel

Report No.: RDG170719001-00B

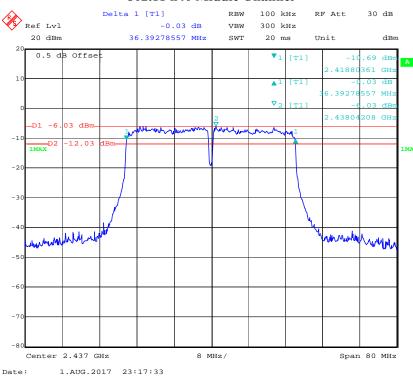

#### 802.11 n40 High Channel

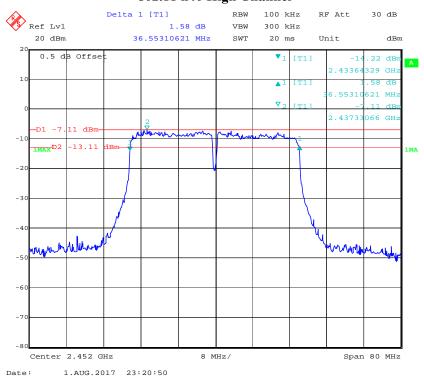

FCC Part 15.247 Page 34 of 80

# FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER


Report No.: RDG170719001-00B

#### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

#### **Test Procedure**

- 1. Place the EUT on a bench and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- 3. Add a correction factor to the display.
- 4. Set the power Meter to test Peak output power, record the result as peak power.
- 5. Set the power meter to test average output power, record the result as average power.



#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2016-11-03	2017-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2016-11-03	2017-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2016-11-03	2017-11-03
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2016-09-10	2017-09-09
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 35 of 80

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	51 %
ATM Pressure:	99.6 kPa

The testing was performed by Sun Zhong on 2017-08-01.

Test Mode: Transmitting

#### SISO mode:

Test mode	Channel	Frequency	Max P	Max Peak Conducted Output Power (dBm)				
		(MHz)	Chain 0	Chain 1	Chain 2	Chain 3	(dBm)	
	Low	2412	21.58	20.6	20.76	20.63	30	
802.11b	Middle	2437	21.25	20.01	20.93	20.73	30	
	High	2462	21.09	20.3	20.75	20.64	30	
	Low	2412	23.06	21.74	20.75	21.15	30	
802.11g	Middle	2437	23.12	22.49	20.59	20.9	30	
	High	2462	22.51	22.19	20.75	20.68	30	
	Low	2412	16.99	16.89	15.97	16.54	30	
802.11 n20	Middle	2437	15.45	15.45	15.99	16.96	30	
	High	2462	15.46	15.26	15.87	15.87	30	
	Low	2422	18.65	18.46	17.93	18.98	30	
802.11 n40	Middle	2437	18.54	18.27	17.99	18.87	30	
	High	2452	16.87	16.95	17.89	17.99	30	

Report No.: RDG170719001-00B

Note: the antenna gain is 5dBi.

#### MIMO mode:

Test mode	Channel	Frequency (MHz)	Max Pea	k Conducte Power (dBm)	d Output	Total (dBm)	Limit (dBm)
		,	Chain 1	Chain 2	Chain 3	()	
	Low	2412	16.73	15.81	16.22	21.04	30
802.11 n20	Middle	2437	15.32	15.87	16.41	20.66	30
	High	2462	15.15	15.61	15.53	20.21	30
	Low	2422	18.38	17.87	18.69	23.1	30
802.11 n40	Middle	2437	18.01	17.94	18.43	22.9	30
	High	2452	16.71	17.22	17.92	22.08	30

Note: the antenna gains are 5.0 dBi in 2.4GHz band, the device employed Cyclic Delay Diversity (CDD), per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \le 4$ ;

So:

Directional gain =  $G_{ANT}$  + Array Gain = 5.0 dBi < 6dBi

FCC Part 15.247 Page 36 of 80

# FCC §15.247(d)- 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Report No.: RDG170719001-00B

# **Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-12-08	2017-12-08
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 37 of 80

# **Test Data**

### **Environmental Conditions**

Temperature:	26.1 ~25.6°C
Relative Humidity:	49~51 %
ATM Pressure:	99.6 kPa

The testing was performed by Sun Zhong on 2017-08-01 and 2017-08-02.

Test mode: Transmitting (SISO mode was test, since the maximum power at each chain)


Report No.: RDG170719001-00B

Test Result: Compliant. Please refer to following plots.

FCC Part 15.247 Page 38 of 80


# Chain 0, 802.11b: Band Edge, Left Side

Report No.: RDG170719001-00B

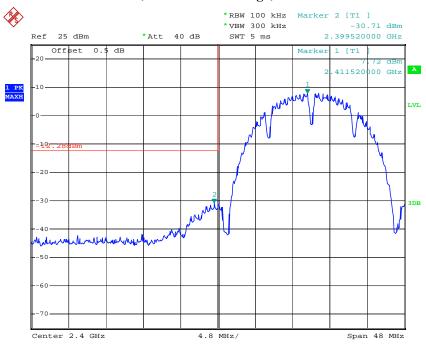

Date: 1.AUG.2017 21:40:52

### Chain 0, 802.11b: Band Edge, Right Side

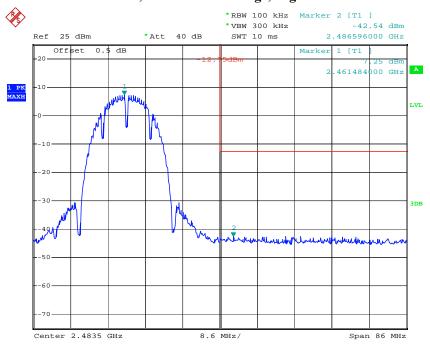


Date: 1.AUG.2017 21:43:01

FCC Part 15.247 Page 39 of 80


# Chain 0, 802.11g: Band Edge, Left Side

Report No.: RDG170719001-00B

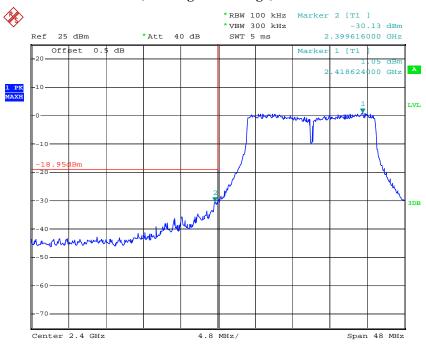

Date: 1.AUG.2017 21:45:31

# Chain 0, 802.11g: Band Edge, Right Side

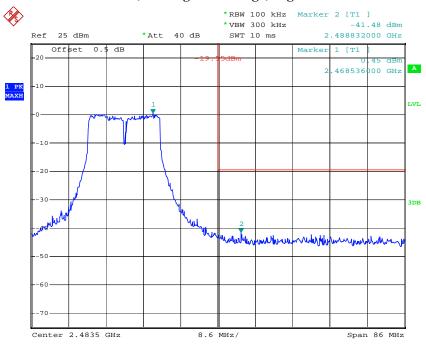


Date: 1.AUG.2017 22:06:58


FCC Part 15.247 Page 40 of 80

### Chain 0, 802.11 n20 Band Edge, Left Side

Report No.: RDG170719001-00B

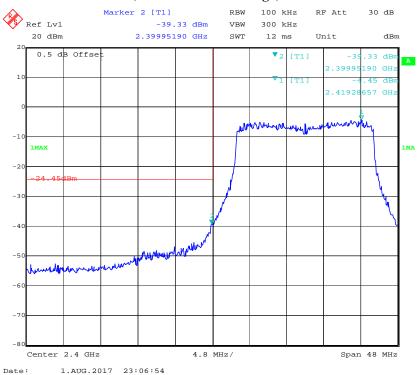


### Chain 0, 802.11 n20 Band Edge, Right Side

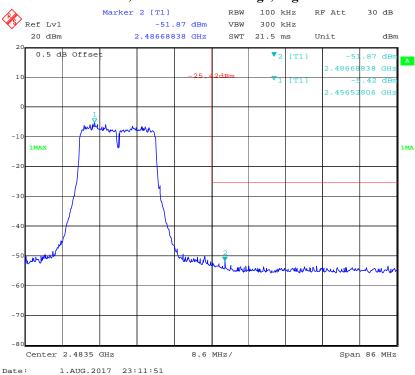


FCC Part 15.247 Page 41 of 80

### Chain 0, 802.11 n40 Band Edge, Left Side

Report No.: RDG170719001-00B

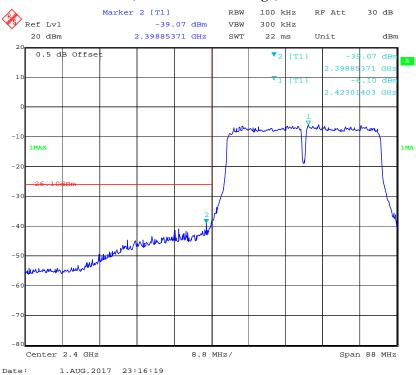


### Chain 0, 802.11 n40 Band Edge, Right Side

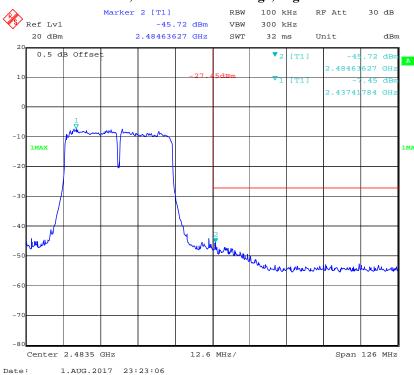

FCC Part 15.247 Page 42 of 80


# Chain 1, 802.11b: Band Edge, Left Side

Report No.: RDG170719001-00B

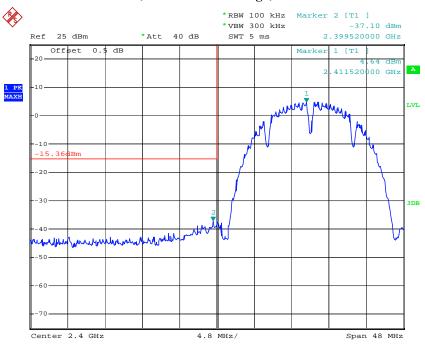

Date: 1.AUG.2017 22:13:06

### Chain 1, 802.11b: Band Edge, Right Side

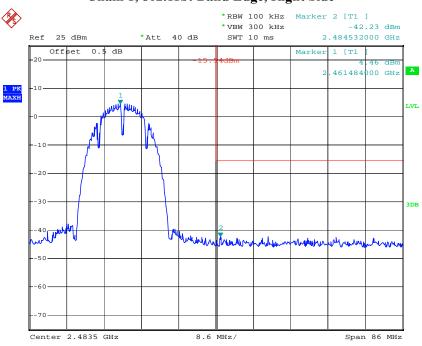


Date: 1.AUG.2017 22:16:33

FCC Part 15.247 Page 43 of 80


# Chain 1, 802.11g: Band Edge, Left Side

Report No.: RDG170719001-00B

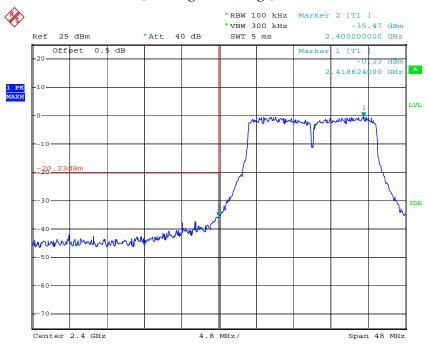

Date: 1.AUG.2017 22:18:30

# Chain 1, 802.11g: Band Edge, Right Side

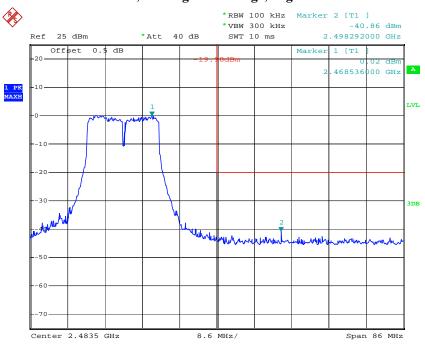


Date: 1.AUG.2017 22:22:21


FCC Part 15.247 Page 44 of 80

### Chain 1, 802.11 n20 Band Edge, Left Side

Report No.: RDG170719001-00B

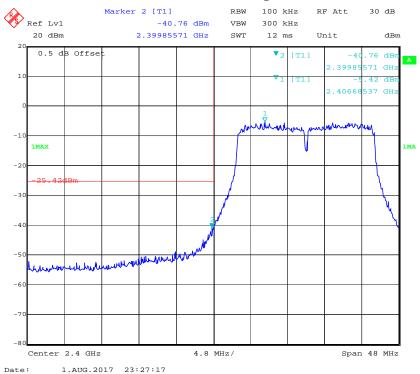


### Chain 1, 802.11 n20 Band Edge, Right Side

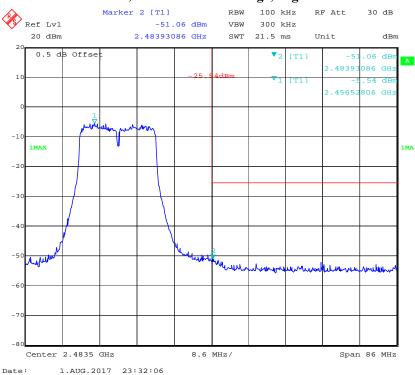


FCC Part 15.247 Page 45 of 80

### Chain 1, 802.11 n40 Band Edge, Left Side

Report No.: RDG170719001-00B

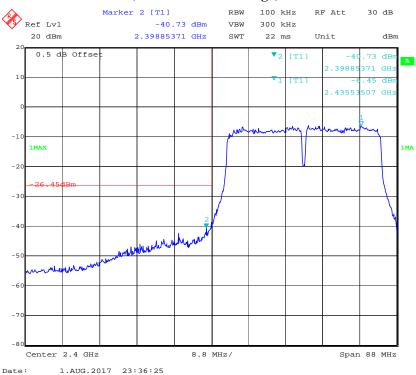


### Chain 1, 802.11 n40 Band Edge, Right Side

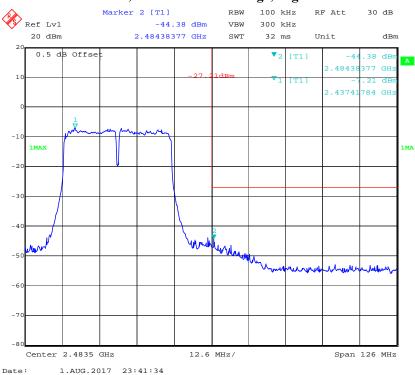

FCC Part 15.247 Page 46 of 80


# Chain 2, 802.11b: Band Edge, Left Side

Report No.: RDG170719001-00B

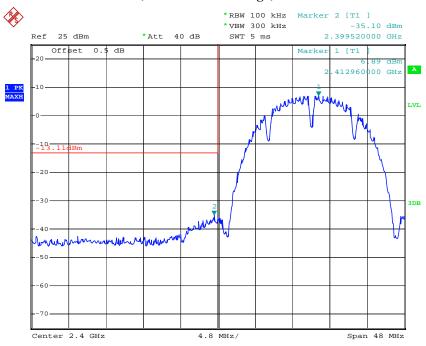

Date: 1.AUG.2017 22:43:05

### Chain 2, 802.11b: Band Edge, Right Side

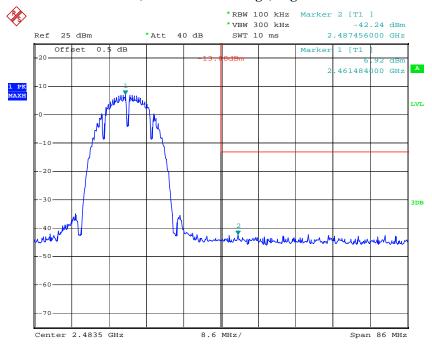


Date: 1.AUG.2017 22:46:08

FCC Part 15.247 Page 47 of 80


# Chain 2, 802.11g: Band Edge, Left Side

Report No.: RDG170719001-00B

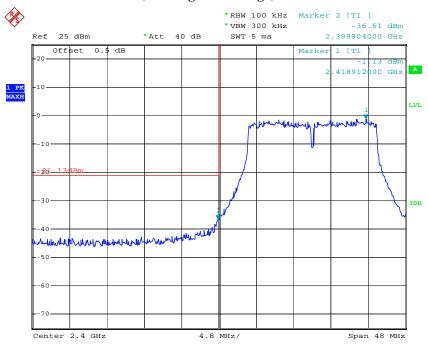

Date: 1.AUG.2017 22:48:27

# Chain 2, 802.11g: Band Edge, Right Side

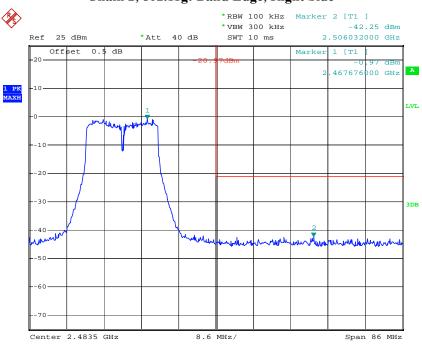


Date: 1.AUG.2017 22:51:53


FCC Part 15.247 Page 48 of 80

### Chain 2, 802.11 n20 Band Edge, Left Side

Report No.: RDG170719001-00B

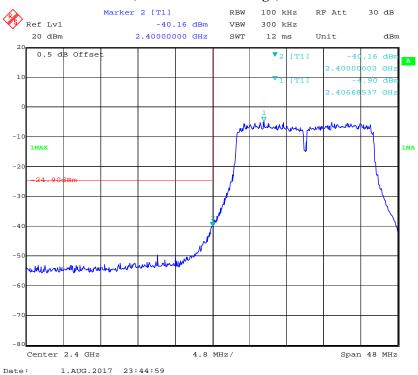


### Chain 2, 802.11 n20 Band Edge, Right Side

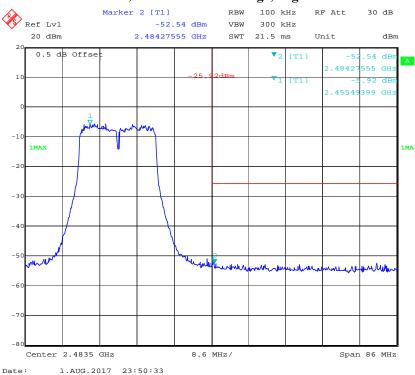


FCC Part 15.247 Page 49 of 80

# Chain 2, 802.11 n40 Band Edge, Left Side

Report No.: RDG170719001-00B

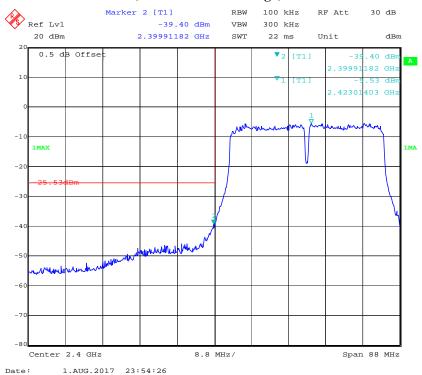


### Chain 2, 802.11 n40 Band Edge, Right Side

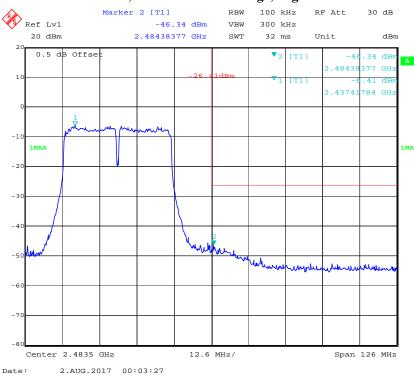

FCC Part 15.247 Page 50 of 80


# Chain 3, 802.11b: Band Edge, Left Side

Report No.: RDG170719001-00B

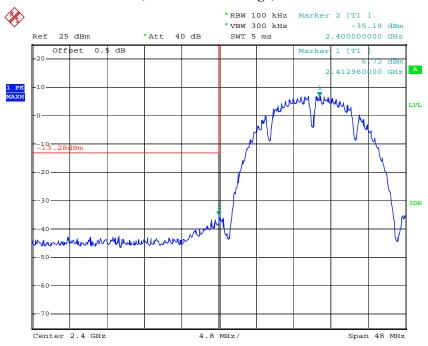

Date: 1.AUG.2017 23:26:10

### Chain 3, 802.11b: Band Edge, Right Side

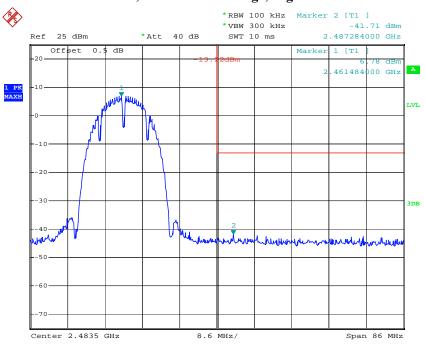


Date: 1.AUG.2017 23:29:44

FCC Part 15.247 Page 51 of 80


# Chain 3, 802.11g: Band Edge, Left Side

Report No.: RDG170719001-00B

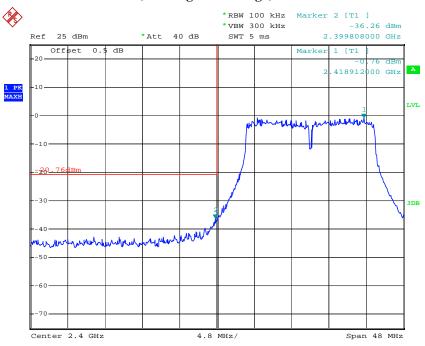

Date: 1.AUG.2017 23:32:01

# Chain 3, 802.11g: Band Edge, Right Side

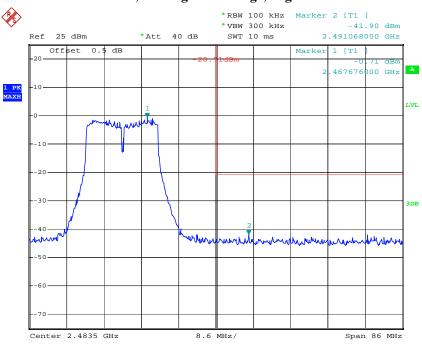


Date: 1.AUG.2017 23:35:47

FCC Part 15.247 Page 52 of 80


### Chain 3, 802.11 n20 Band Edge, Left Side

Report No.: RDG170719001-00B

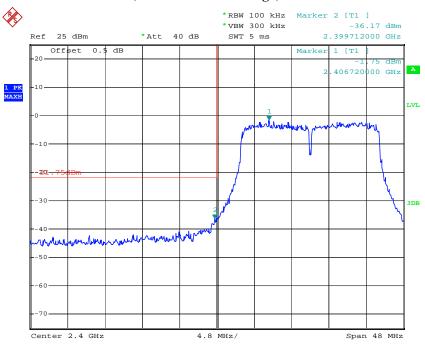

Date: 1.AUG.2017 22:55:59

### Chain 3, 802.11 n20 Band Edge, Right Side

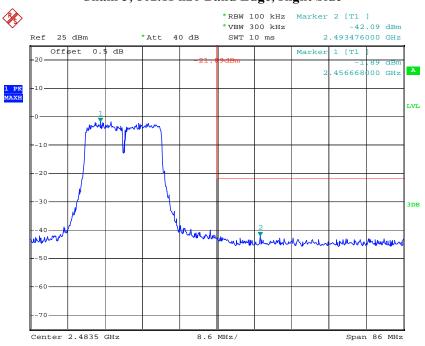


Date: 1.AUG.2017 22:59:31

FCC Part 15.247 Page 53 of 80


### Chain 3, 802.11 n40 Band Edge, Left Side

Report No.: RDG170719001-00B

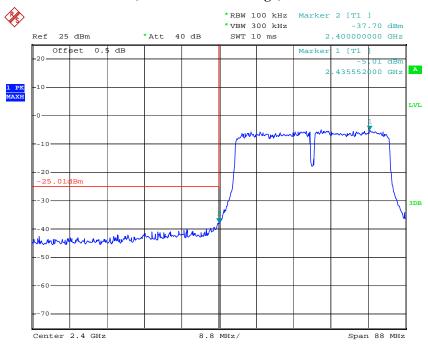

Date: 1.AUG.2017 23:02:14

### Chain 3, 802.11 n40 Band Edge, Right Side

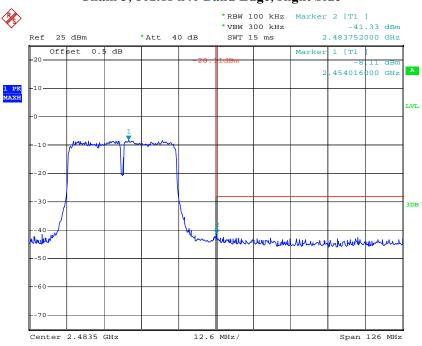

Date: 1.AUG.2017 23:06:31

FCC Part 15.247 Page 54 of 80

# FCC §15.247(e) - POWER SPECTRAL DENSITY

# **Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Report No.: RDG170719001-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
- 4. Use the peak marker function to determine the maximum amplitude level.

# **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Calibration Date Due Date	
R&S	Spectrum Analyzer	FSP 38	100478	2016-12-08	2017-12-08
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	26.1 ~25.6°C
Relative Humidity:	49~51 %
ATM Pressure:	99.6 kPa

The testing was performed by Sun Zhong on 2017-08-01 and 2017-08-02.

FCC Part 15.247 Page 55 of 80

**Test Result:** Compliance(the PSD test at SISO mode, for 802.11n modes, combined(Chain 1+2+3) the result is more than MIMO mode since the SISO mode output power is more than MIMO mode)

Test Mode: Transmitting

Test mode	Channel	Frequency (MHz)		Limit (dBm/3kHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	(ubiii/3KHZ)
802.11b	Low	2412	-12.35	-15.28	-13.1	-13.24	≤8
	Middle	2437	-12.66	-15.85	-12.93	-13.15	≤8
	High	2462	-12.79	-15.56	-13.12	-13.19	≤8
802.11g	Low	2412	-13.22	-15.13	-15.68	-15.73	≤8
	Middle	2437	-13.13	-13.97	-15.86	-16.2	≤8
	High	2462	-14.32	-14.68	-15.45	-16.14	≤8

Note: the antenna gain is 5dBi

Test	Channel	Frequency (MHz)	PSD (dBm/3kHz)				Total (Chain	Limit
mode			Chain 0	Chain 1	Chain 2	Chain 3	1+2+3) (dBm/3kHz)	(dBm/3kHz)
802.11 n20	Low	2412	-14.69	-17.74	-19.15	-18.62	-13.69	≤4.23
	Middle	2437	-14.92	-19.32	-19.22	-18.35	-14.17	≤4.23
	High	2462	-16.07	-19.34	-18.96	-19.26	-14.41	≤4.23
802.11 n40	Low	2422	-17.98	-18.25	-18.42	-18.09	-13.48	≤4.23
	Middle	2437	-16.02	-18.35	-18.64	-17.63	-13.41	≤4.23
	High	2452	-18.46	-19.4	-19.04	-18.35	-14.14	≤4.23

Note: the antenna maximum gain are 5.0dBi in 2.4GHz band, and employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain =  $10 \log(N_{ANT}/N_{SS}) dB$ .

So:

Directional gain =  $G_{ANT}$  + Array  $G_{ANT}$  + Array  $G_{ANT}$  = 5+10\*log(3) = 9.77 dBi


Please refer to the following plots

FCC Part 15.247 Page 56 of 80

#### Chain 0:


# Power Spectral Density, 802.11b Low Channel

Report No.: RDG170719001-00B

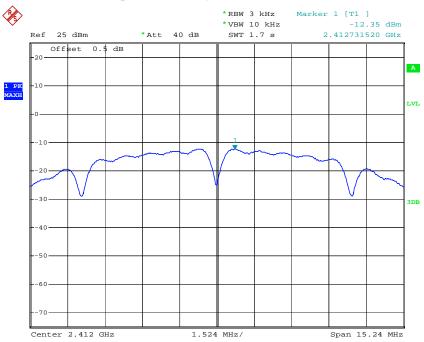

Date: 1.AUG.2017 21:40:30

# Power Spectral Density, 802.11b Middle Channel

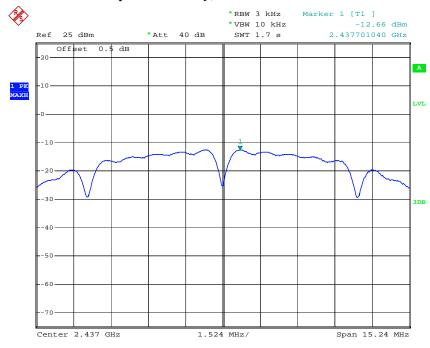


Date: 1.AUG.2017 21:37:53

FCC Part 15.247 Page 57 of 80


# Power Spectral Density, 802.11b High Channel

Report No.: RDG170719001-00B

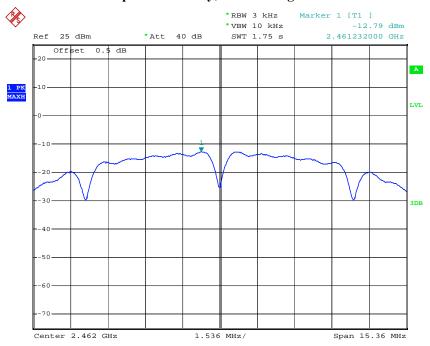

Date: 1.AUG.2017 21:42:33

### Power Spectral Density, 802.11g Low Channel

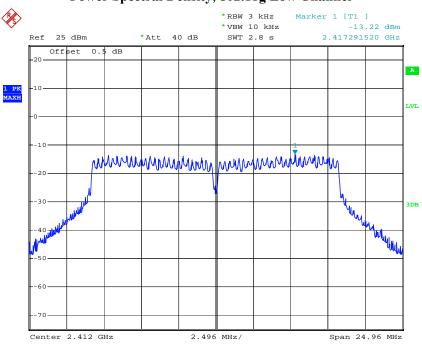


Date: 1.AUG.2017 21:45:07

FCC Part 15.247 Page 58 of 80


### Power Spectral Density, 802.11g Middle Channel

Report No.: RDG170719001-00B

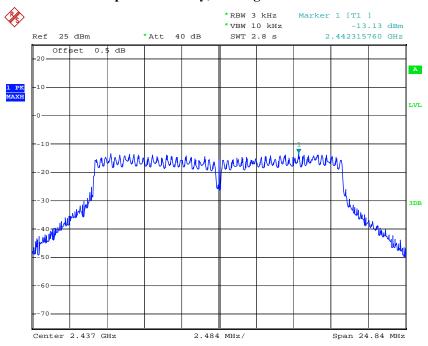

Date: 1.AUG.2017 21:49:03

### Power Spectral Density, 802.11g High Channel

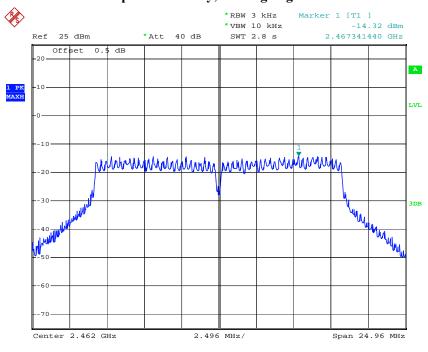


Date: 1.AUG.2017 22:06:41

FCC Part 15.247 Page 59 of 80


# Power Spectral Density, 802.11 n20 Low Channel

Report No.: RDG170719001-00B

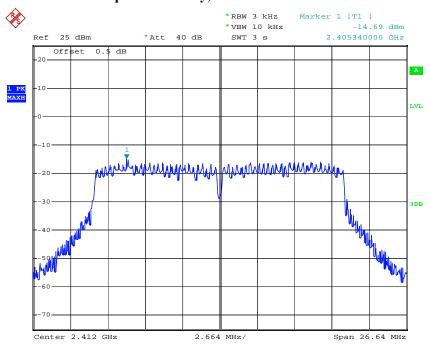

Date: 1.AUG.2017 22:24:54

### Power Spectral Density, 802.11 n20 Middle Channel

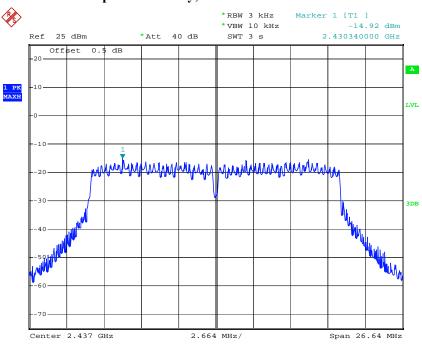


Date: 1.AUG.2017 22:27:13

FCC Part 15.247 Page 60 of 80


# Power Spectral Density, 802.11 n20 High Channel

Report No.: RDG170719001-00B

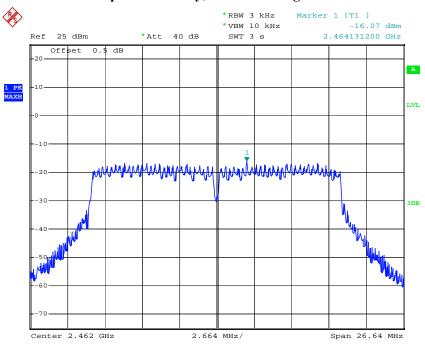

Date: 1.AUG.2017 22:28:55

# Power Spectral Density, 802.11 n40 Low Channel

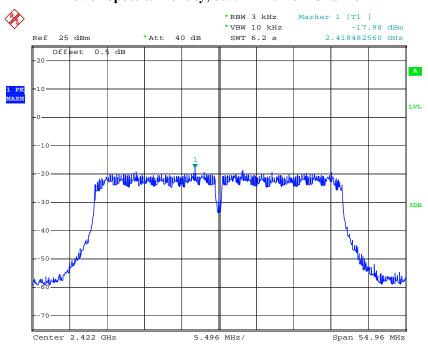


Date: 1.AUG.2017 22:31:40

FCC Part 15.247 Page 61 of 80


# Power Spectral Density, 802.11 n40 Middle Channel

Report No.: RDG170719001-00B

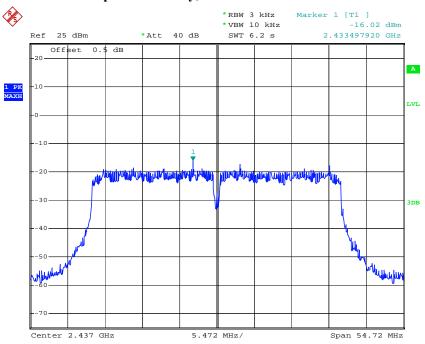

Date: 1.AUG.2017 22:34:19

# Power Spectral Density, 802.11 n40 High Channel

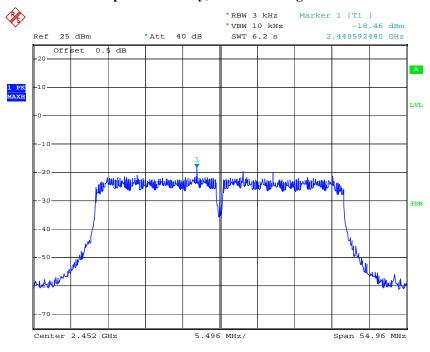


Date: 1.AUG.2017 22:36:40

FCC Part 15.247 Page 62 of 80

Chain 1:


# Power Spectral Density, 802.11b Low Channel

Report No.: RDG170719001-00B

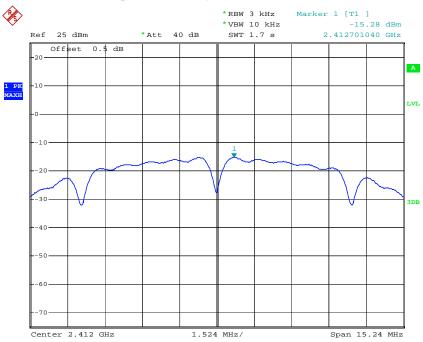

Date: 1.AUG.2017 22:12:44

# Power Spectral Density, 802.11b Middle Channel

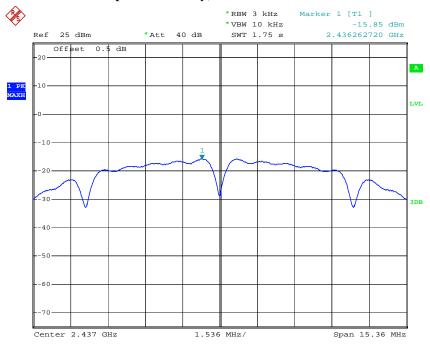


Date: 1.AUG.2017 22:14:36

FCC Part 15.247 Page 63 of 80


# Power Spectral Density, 802.11b High Channel

Report No.: RDG170719001-00B

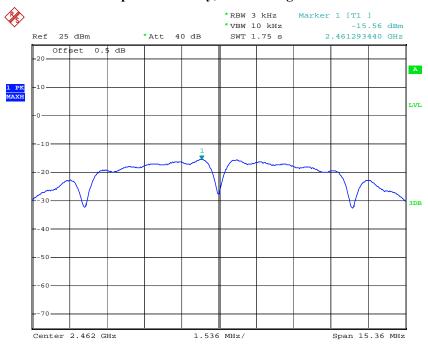

Date: 1.AUG.2017 22:16:16

### Power Spectral Density, 802.11g Low Channel

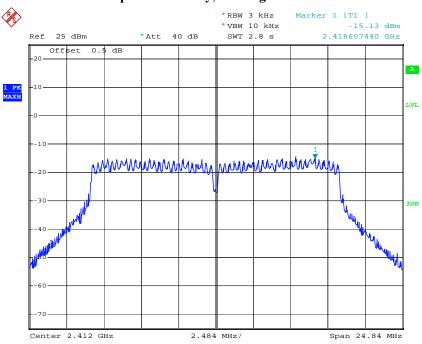


Date: 1.AUG.2017 22:18:11

FCC Part 15.247 Page 64 of 80


### Power Spectral Density, 802.11g Middle Channel

Report No.: RDG170719001-00B

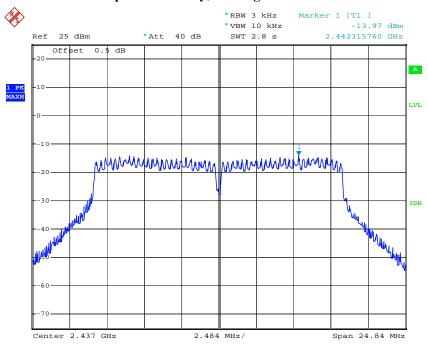

Date: 1.AUG.2017 22:20:23

### Power Spectral Density, 802.11g High Channel

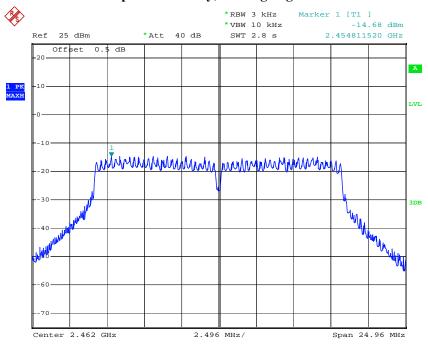


Date: 1.AUG.2017 22:21:56


FCC Part 15.247 Page 65 of 80

# Power Spectral Density, 802.11 n20 Low Channel

Report No.: RDG170719001-00B

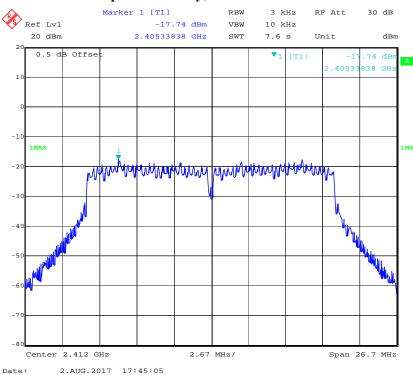


### Power Spectral Density, 802.11 n20 Middle Channel

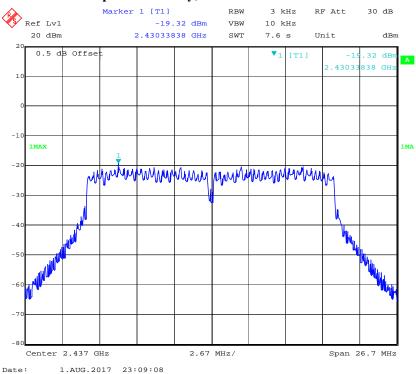


FCC Part 15.247 Page 66 of 80

# Power Spectral Density, 802.11 n20 High Channel

Report No.: RDG170719001-00B

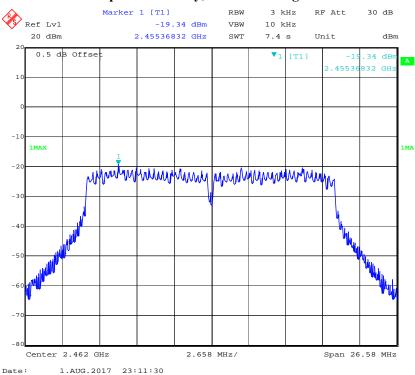


### Power Spectral Density, 802.11 n40 Low Channel

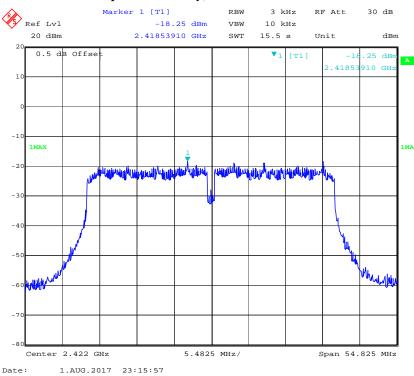


FCC Part 15.247 Page 67 of 80

# Power Spectral Density, 802.11 n40 Middle Channel

Report No.: RDG170719001-00B

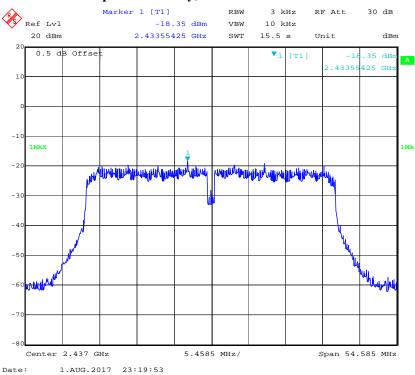


### Power Spectral Density, 802.11 n40 High Channel

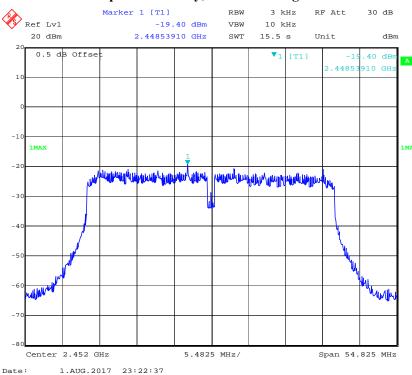

FCC Part 15.247 Page 68 of 80


# Power Spectral Density, 802.11b Low Channel

Report No.: RDG170719001-00B

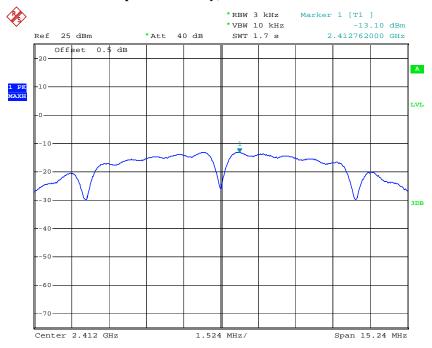

Date: 1.AUG.2017 22:42:42

# Power Spectral Density, 802.11b Middle Channel

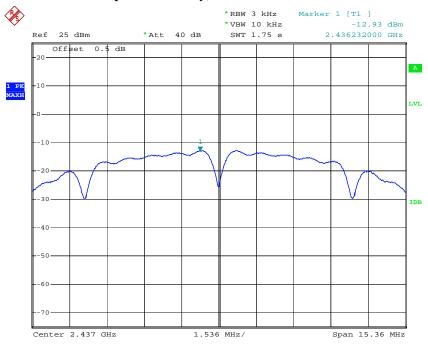


Date: 1.AUG.2017 22:44:22

FCC Part 15.247 Page 69 of 80


# Power Spectral Density, 802.11b High Channel

Report No.: RDG170719001-00B

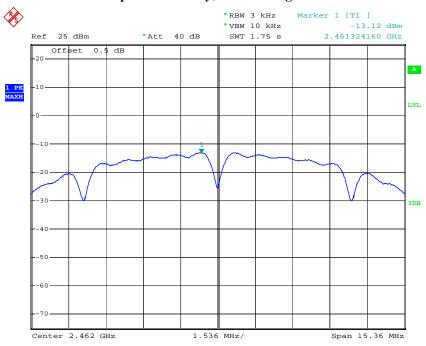

Date: 1.AUG.2017 22:45:49

### Power Spectral Density, 802.11g Low Channel

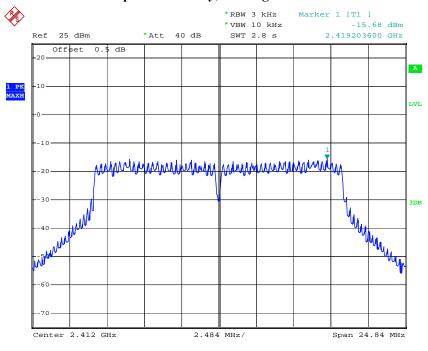


Date: 1.AUG.2017 22:48:03

FCC Part 15.247 Page 70 of 80


# Power Spectral Density, 802.11g Middle Channel

Report No.: RDG170719001-00B

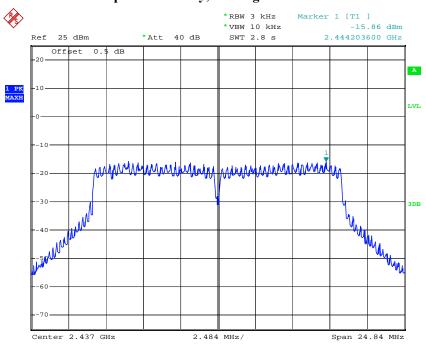

Date: 1.AUG.2017 22:49:53

### Power Spectral Density, 802.11g High Channel

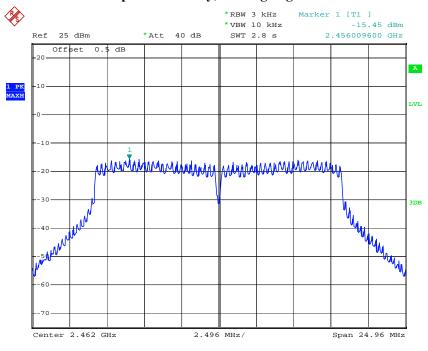


Date: 1.AUG.2017 22:51:30


FCC Part 15.247 Page 71 of 80

# Power Spectral Density, 802.11 n20 Low Channel

Report No.: RDG170719001-00B

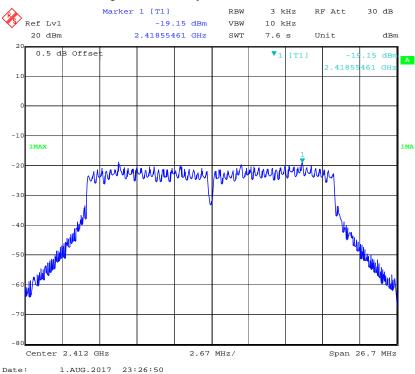


### Power Spectral Density, 802.11 n20 Middle Channel

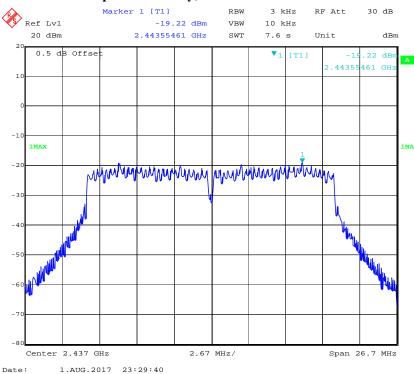


FCC Part 15.247 Page 72 of 80

# Power Spectral Density, 802.11 n20 High Channel

Report No.: RDG170719001-00B

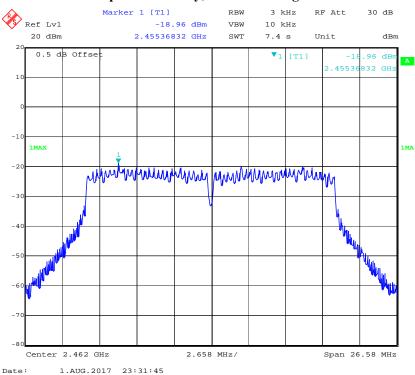


### Power Spectral Density, 802.11 n40 Low Channel

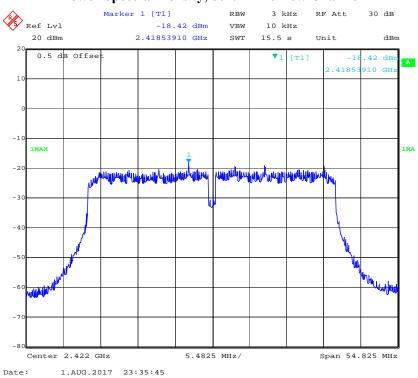


FCC Part 15.247 Page 73 of 80

# Power Spectral Density, 802.11 n40 Middle Channel

Report No.: RDG170719001-00B

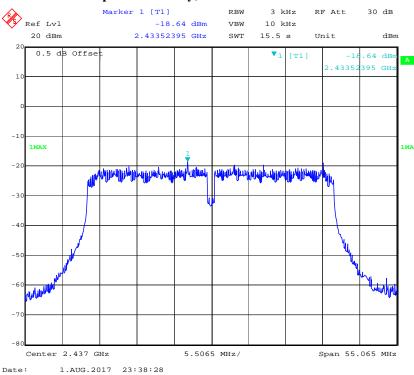

### Power Spectral Density, 802.11 n40 High Channel

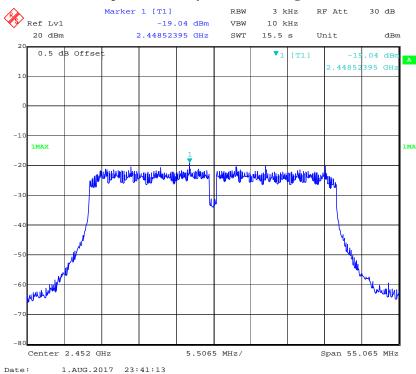


FCC Part 15.247 Page 74 of 80

#### Chain 3:


# Power Spectral Density, 802.11b Low Channel

Report No.: RDG170719001-00B

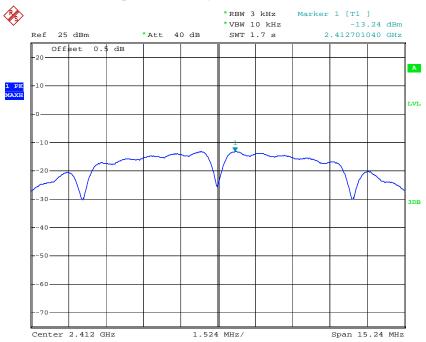

Date: 1.AUG.2017 23:25:51

# Power Spectral Density, 802.11b Middle Channel

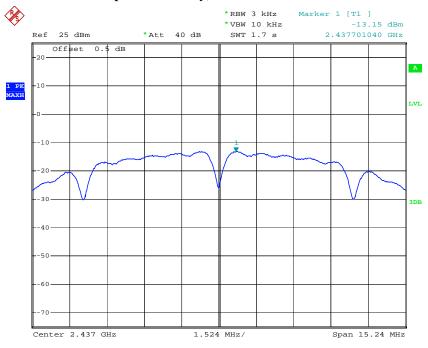


Date: 1.AUG.2017 23:28:00

FCC Part 15.247 Page 75 of 80


# Power Spectral Density, 802.11b High Channel

Report No.: RDG170719001-00B

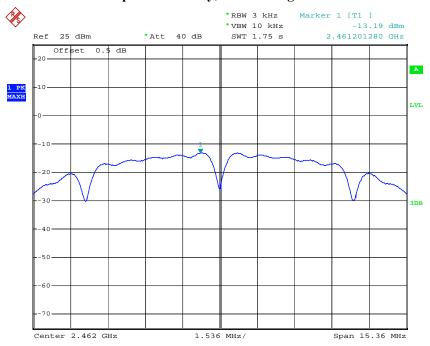

Date: 1.AUG.2017 23:29:26

### Power Spectral Density, 802.11g Low Channel

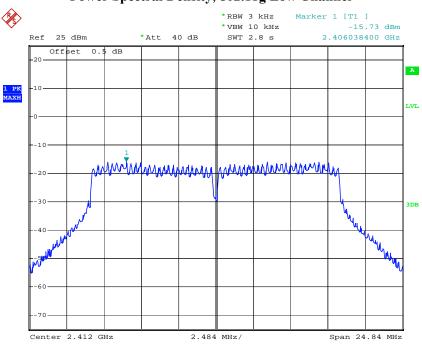


Date: 1.AUG.2017 23:31:44

FCC Part 15.247 Page 76 of 80


# Power Spectral Density, 802.11g Middle Channel

Report No.: RDG170719001-00B

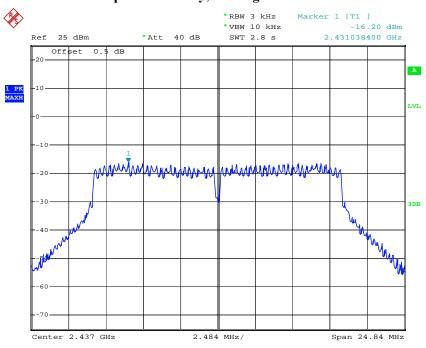

Date: 1.AUG.2017 23:33:25

### Power Spectral Density, 802.11g High Channel

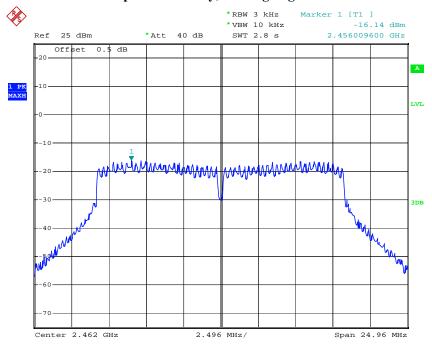


Date: 1.AUG.2017 23:35:24


FCC Part 15.247 Page 77 of 80

# Power Spectral Density, 802.11 n20 Low Channel

Report No.: RDG170719001-00B

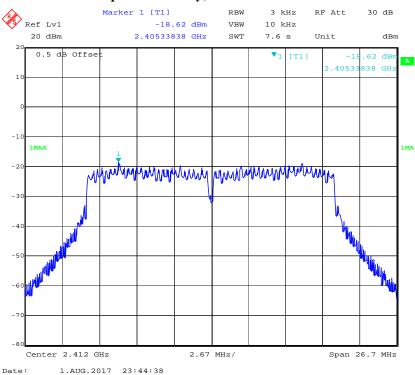


### Power Spectral Density, 802.11 n20 Middle Channel

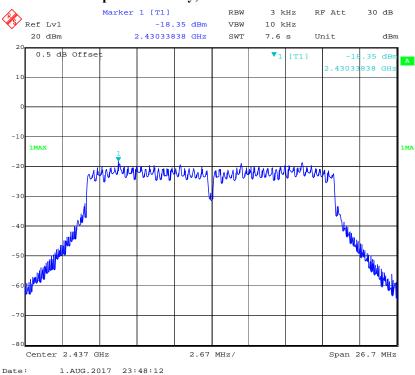


FCC Part 15.247 Page 78 of 80

# Power Spectral Density, 802.11 n20 High Channel

Report No.: RDG170719001-00B

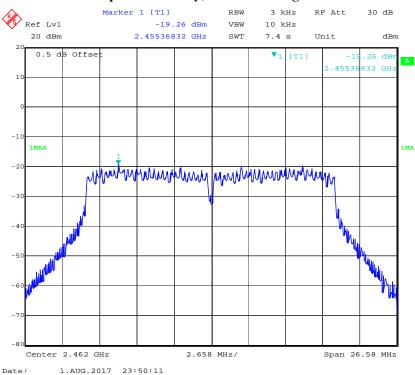


### Power Spectral Density, 802.11 n40 Low Channel

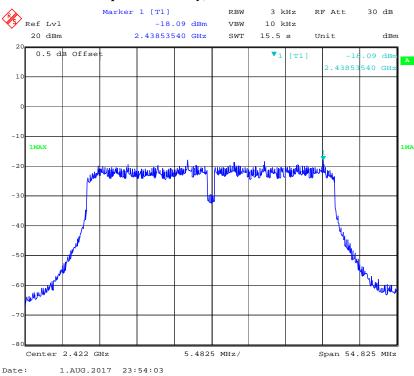


FCC Part 15.247 Page 79 of 80

# Power Spectral Density, 802.11 n40 Middle Channel

Report No.: RDG170719001-00B

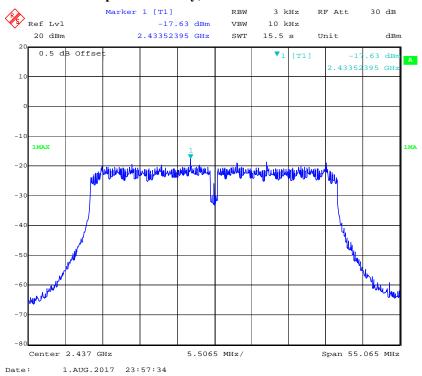

### Power Spectral Density, 802.11 n40 High Channel

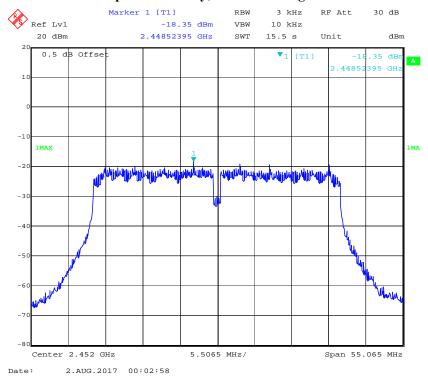

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.247 Page 80 of 80